


**KITCHEN SINK FAUCET
K-6333**

ALSO K-6334, K-6335, K-6336

ADA

Features

- Metal construction
- One-piece, self-contained ceramic disc valve allows both volume and temperature control
- Temperature memory allows faucet to be turned on and off at any temperature setting
- High-temperature limit setting for added safety
- Integral backflow protection
- ADA compliant lever handle
- Lower flow aerator options are available (refer to the Kohler Price Book)
- 2.2 gallons (8.3 L) per minute maximum flow rate
- 360° swing spout
- Promotion™ technology with ball joint for easy operation
- Two function sidespray with spray and aerated stream functions [K-6334, K-6336]
- Contemporary styling

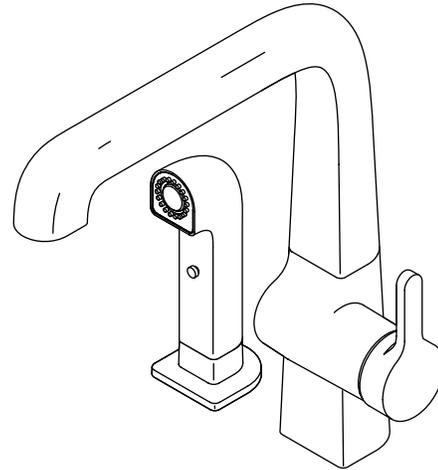

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ADA
- IAPMO/cUPC
- ASME A112.18.1/CSA B125.1
- NSF 61
- Energy Policy Act of 1992

Colors/Finishes

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-6333	Primary kitchen sink faucet less sidespray – 9” (22.9 cm) spout reach	<input type="checkbox"/> CP	<input type="checkbox"/> Other ____
K-6334	Primary kitchen sink faucet with sidespray – 9” (22.9 cm) spout reach (shown)	<input type="checkbox"/> CP	<input type="checkbox"/> Other ____
K-6335	Secondary kitchen sink faucet less sidespray – 7” (17.8 cm) spout reach	<input type="checkbox"/> CP	<input type="checkbox"/> Other ____
K-6336	Secondary kitchen sink faucet with sidespray – 7” (17.8 cm) spout reach	<input type="checkbox"/> CP	<input type="checkbox"/> Other ____


Product Specification

The contemporary pull-out kitchen sink faucet shall be of metal construction. Valve shall be a one-piece, self-contained ceramic disc valve, allowing both volume and temperature control. Valve shall feature temperature memory, allowing the faucet to be turned on and off at any temperature setting. Product shall feature a high-temperature limit stop for added safety. Product shall feature a 360° swing spout. Product shall feature a two-function sidespray with spray and aerated stream functions [K-6334, K-6336]. Product shall include integral backflow protection, ADA compliant lever handle, and a 2.2 gallon (8.3 L) per minute maximum flow rate. Product shall feature Promotion technology with ball joint for easy operation. Product shall be available with lower flow aerator options (refer to the Kohler Price Book). Kitchen faucet shall be Kohler Model K-_____-_____.

EVOKE™

Installation Notes

Install this product according to the installation guide.

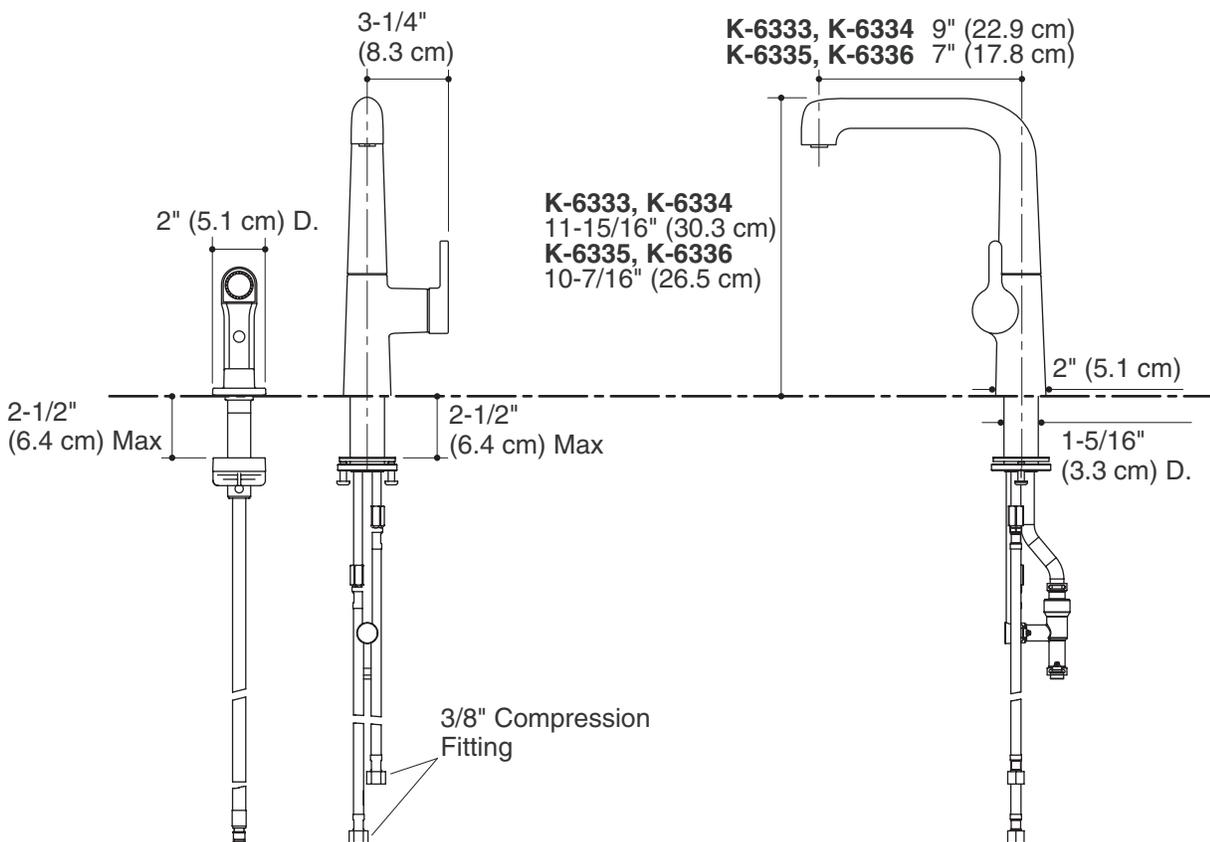

Product Diagram