


Features

- Acrylic
- Left or right drain
- Pump with air switch and grounding-type plug-in cord
- 6 individually adjustable multi-directional hydro-massage jets
- Textured bottom surface
- Optional K-1283 removable apron
- Optional K-1491 removable bath pillow
- Drop-in [K-1257] or 3-side integral flange [K-1257-L, K-1257-R]
- 72" (1829 mm) x 36" (914 mm) x 20" (508 mm)

BATH WHIRLPOOL K-1257 ALSO K-1257-L, K-1257-R

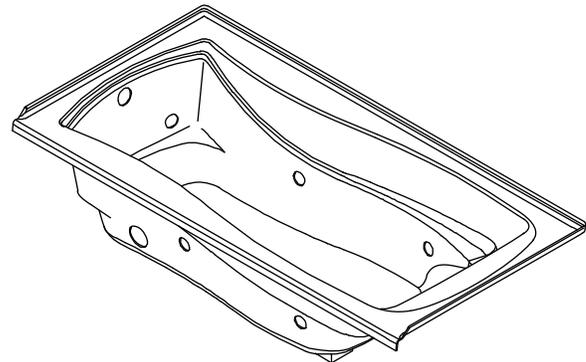

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.1.2
- ASME A112.19.7
- UL 1795
- ASTM E162
- ASTM E662

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-1257	Bath whirlpool – drop-in	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
K-1257-L	Bath whirlpool – 3-side integral flange, left drain (shown)	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
K-1257-R	Bath whirlpool – 3-side integral flange, right drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____

Recommended Accessories

K-7166-AF	Adjustable pop-up drain – above or through-the-floor installation	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other _____
-----------	---	-----------------------------	-----------------------------	--------------------------------------

Optional Accessories

K-1283	Removable apron	<input type="checkbox"/> 0		<input type="checkbox"/> Other _____
K-1491	Removable bath pillow	<input type="checkbox"/> 0		<input type="checkbox"/> Other _____
K-9696	Jet trim kit – metal finishes		<input type="checkbox"/> CP <input type="checkbox"/> PB	<input type="checkbox"/> Other _____

Product Specification

The acrylic bath whirlpool shall be 72" (1829 mm) in length, 36" (914 mm) in width, and 20" (508 mm) in height. Product shall be drop-in [K-1257] or 3-side integral flange [K-1257-L, K-1257-R]. Product shall be left or right drain. Product shall feature 6 individually adjustable multi-directional hydro-massage jets, textured bottom surface, and pump with air switch and grounding-type plug-in cord. Product shall have an optional K-1283 removable apron, and an optional K-1491 removable pillow. Bath whirlpool shall be Kohler Model K-1257-____ or K-1257-____-____.

MARIPOSA®

Technical Information

Fixture*:			
Bathing well:			
Basin area, bottom	50" (1270 mm) x 24" (610 mm)		
Basin area, top	65" (1651 mm) x 27" (686 mm)		
Weight	110 lbs (50 kg)		
To overflow:			
Water depth	14" (356 mm)		
Capacity	72 gal (272.5 L)		
* Approximate measurements for comparison only.			
Drop-in cut-out			
		70" (1778 mm) x 34" (864 mm)	
Pump:			
	V	Hz	A
1-speed	120	60	7.5

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI):	
Pump/control	120 VAC, 15 A, 60 Hz
Locate the outlet behind the whirlpool and within 24" (610 mm) of the pump.	

Installation Notes


Install this product according to the installation guide.

Floor support under whirlpool must provide for a minimum of 41 lbs/square foot (200 kg/square meter) loading.

The apron must be installed before the finished floor and wall materials are installed.


If installing a rim-mount faucet, make sure there is no interference with drain overflow and circulating system before drilling any holes. Consult local and national codes for minimum air gap requirements if installing a spout on the faucet deck.

Pump/Control Access (If Apron Is Not Used):
20" (508 mm) W x 15" (381 mm) H

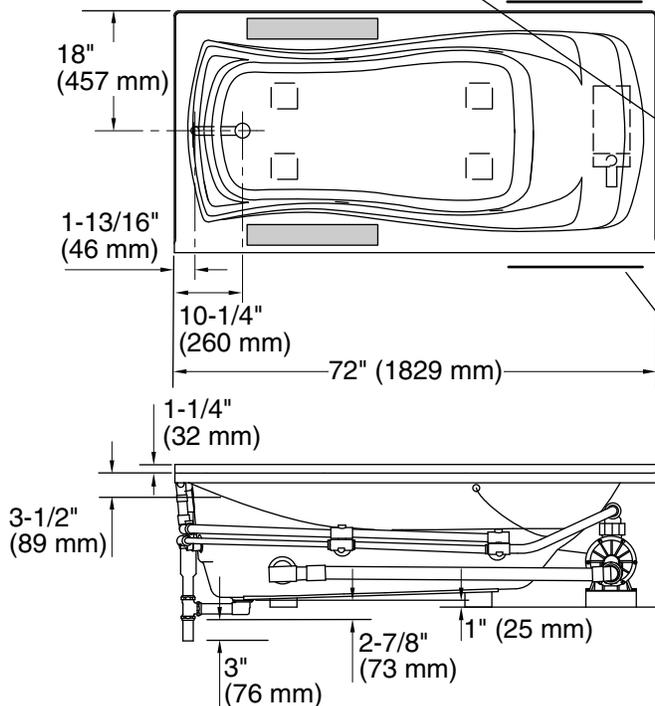


No change in measurements if connected with drain illustrated. (K-11677 or K-11677M)

Recommended Faucet Area




Integral Flange Detail



Drop-In Rim Detail

Pump/Control Access
(If Apron Is Not Used):
20" (508 mm) W x
15" (381 mm) H

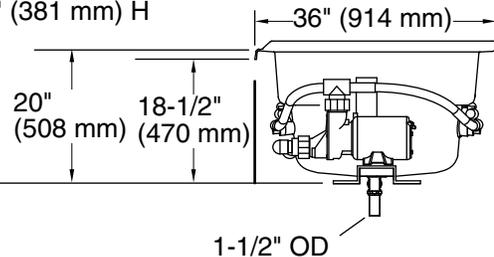

Product Diagram