


Wall Light Instruction

1. Shut off the power at the circuit breaker and remove old fixture, including the crossbar.

2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.

3. Attach the Mounting Plate to the Outlet Box (not supplied) by using 2 Outlet Box Screws. Make sure the Screws for holding the Canopy are facing outside the Outlet Box. As the picture shown.

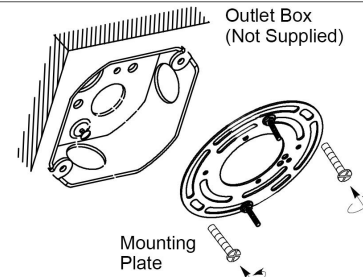

4. Now connect the electrical wires as follows:

(1) Connect the Black Fixture Wire (Live Wire) to the Black House Wire (Live Wire, also calls Hot Wire) and fix the bare parts with the Wire Connector.

(2) Connect the White Fixture Wire (Neutral Wire) to the White House Wire (Neutral Wire) and fix the bare parts with the Wire Connector.

(3) Connect the Middle Point of the Fixture Ground Wire (Bare Copper Wire) to the Green Screw on the Mounting Plate (to make a circle on the middle point of the Fixture Ground Wire and put the circle into the green screw and finally tighten the Green Screw), then connect the end point of the Fixture Ground Wire to the House Ground Wire (Green Insulated or Bare Copper Wire) and fix the bare parts with the Wire Connector.



(4) Make sure all Wire Connectors are secured. You may wrap the connections with electrical tape. Tuck the wire connections neatly into the Outlet box.

5. Attach the Fixture to the Mounting Plate and align the holes of the canopy to the 2 Mounting Screws and get them tighten and secured by the Ball Nuts.

6. Attach E26 Medium Base Light Bulbs. Then turn on the power at the circuit breaker and test the light to check if it is working.
Note: Bulbs are not included.

