

Features


- *ExoCrylic™*
- *Drop-in or corner alcove*
- *Molded lumbar support and armrests for comfort*
- *Optional K-1491 removable bath pillow*
- *Optional K-1601 removable footstop*
- *54" (1372 mm) x 54" (1372 mm) x 20" (508 mm)*

Codes/Standards Applicable

Specified model meets or exceeds the following:

- *CSA B45.5/IAPMO Z124*

BATH
K-1155
ALSO K-1155-F

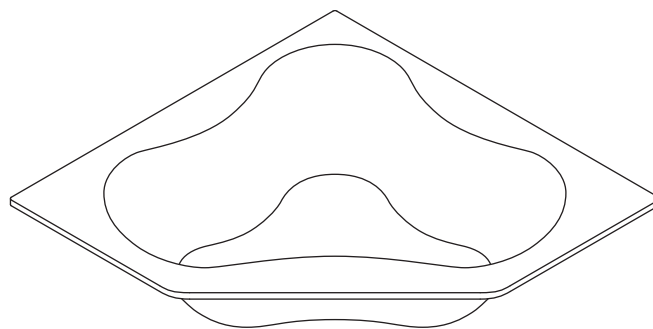

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- 0: White
- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-1155	Bath, drop-in (shown)	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-1155-F	Bath, tile flange	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

Recommended Accessories

K-7213	Cable drain with PVC tubing	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
K-7214	Cable drain without PVC tubing	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
K-11677	Trip lever drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB	

Optional Accessories

K-1491	Removable bath pillow	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-1601	Removable footstop	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

Product Specification

The ExoCrylic bath shall be 54" (1372 mm) in length, 54" (1372 mm) in width, and 20" (508 mm) in height. Bath shall be for drop-in or corner alcove installation. Bath shall have molded lumbar support and armrests for comfort. Bath shall feature optional K-1491 removable bath pillow and K-1601 removable footstop. Bath shall be Kohler Model K-1155-_____ or K-1155-F-_____.

PROFLEX® 5454


Technical Information

Fixture*:	
Bathing well:	
Basin, bottom area	44" (1118 mm) x 36" (914 mm)
Basin, top area	56" (1422 mm) x 43" (1092 mm)
To overflow:	
Water depth	15" (381 mm)
Capacity	76 gal (288 L)
Weight	51 lbs (23.1 kg)
* Approximate measurements for comparison only.	



Installation Notes

Install this product according to the installation guide.

Floor support under bath must provide for a minimum of 35 lbs/square foot (171 kg/square meter) loading.

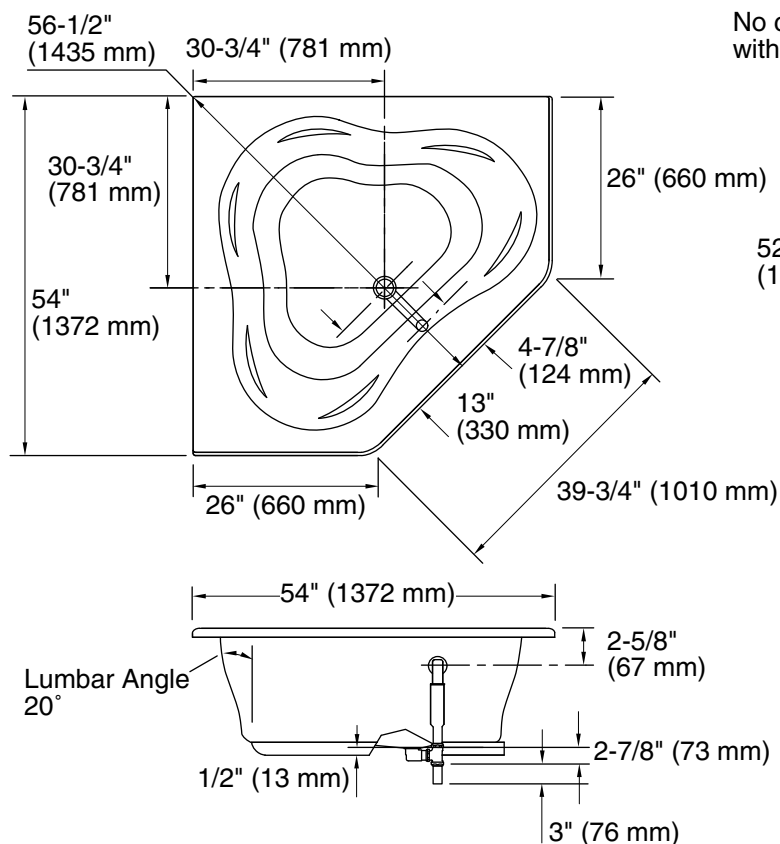

No change in measurements if connected with drain illustrated. (K-11677)

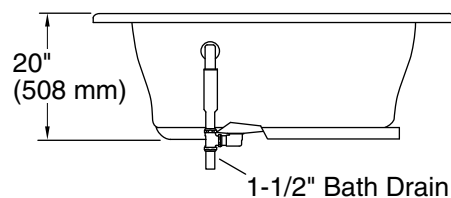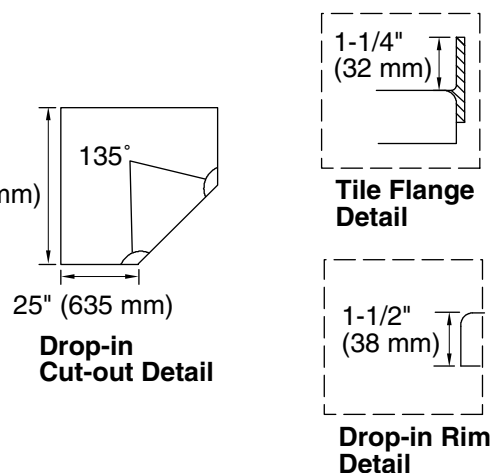

Product Diagram