

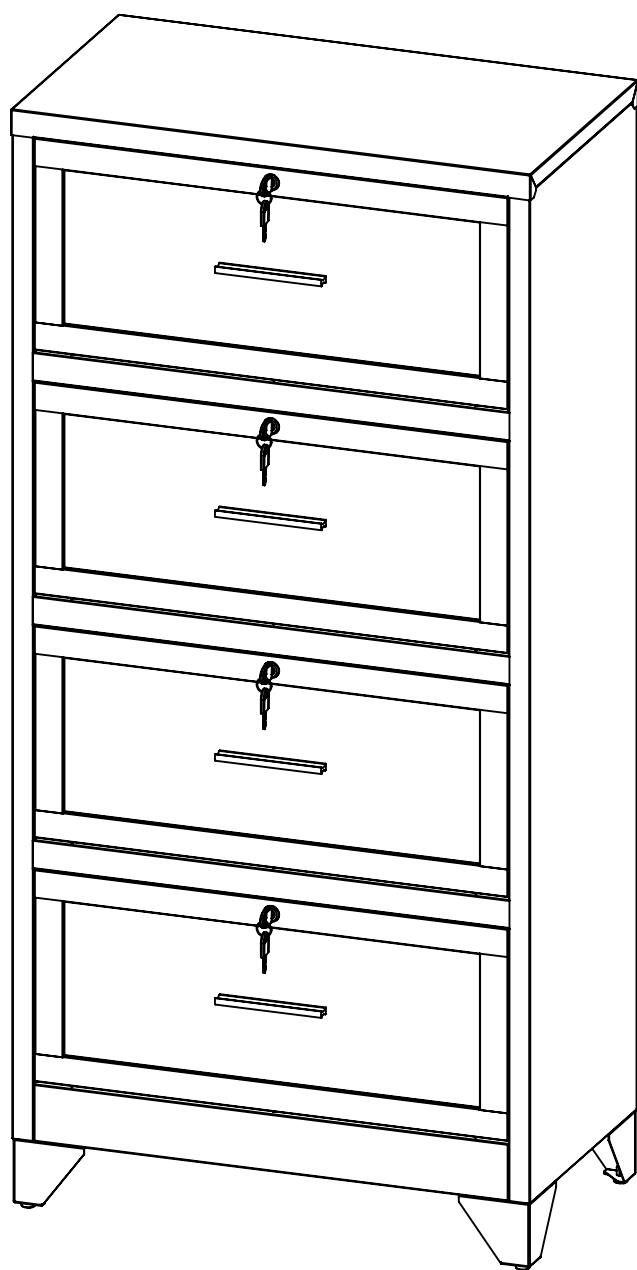
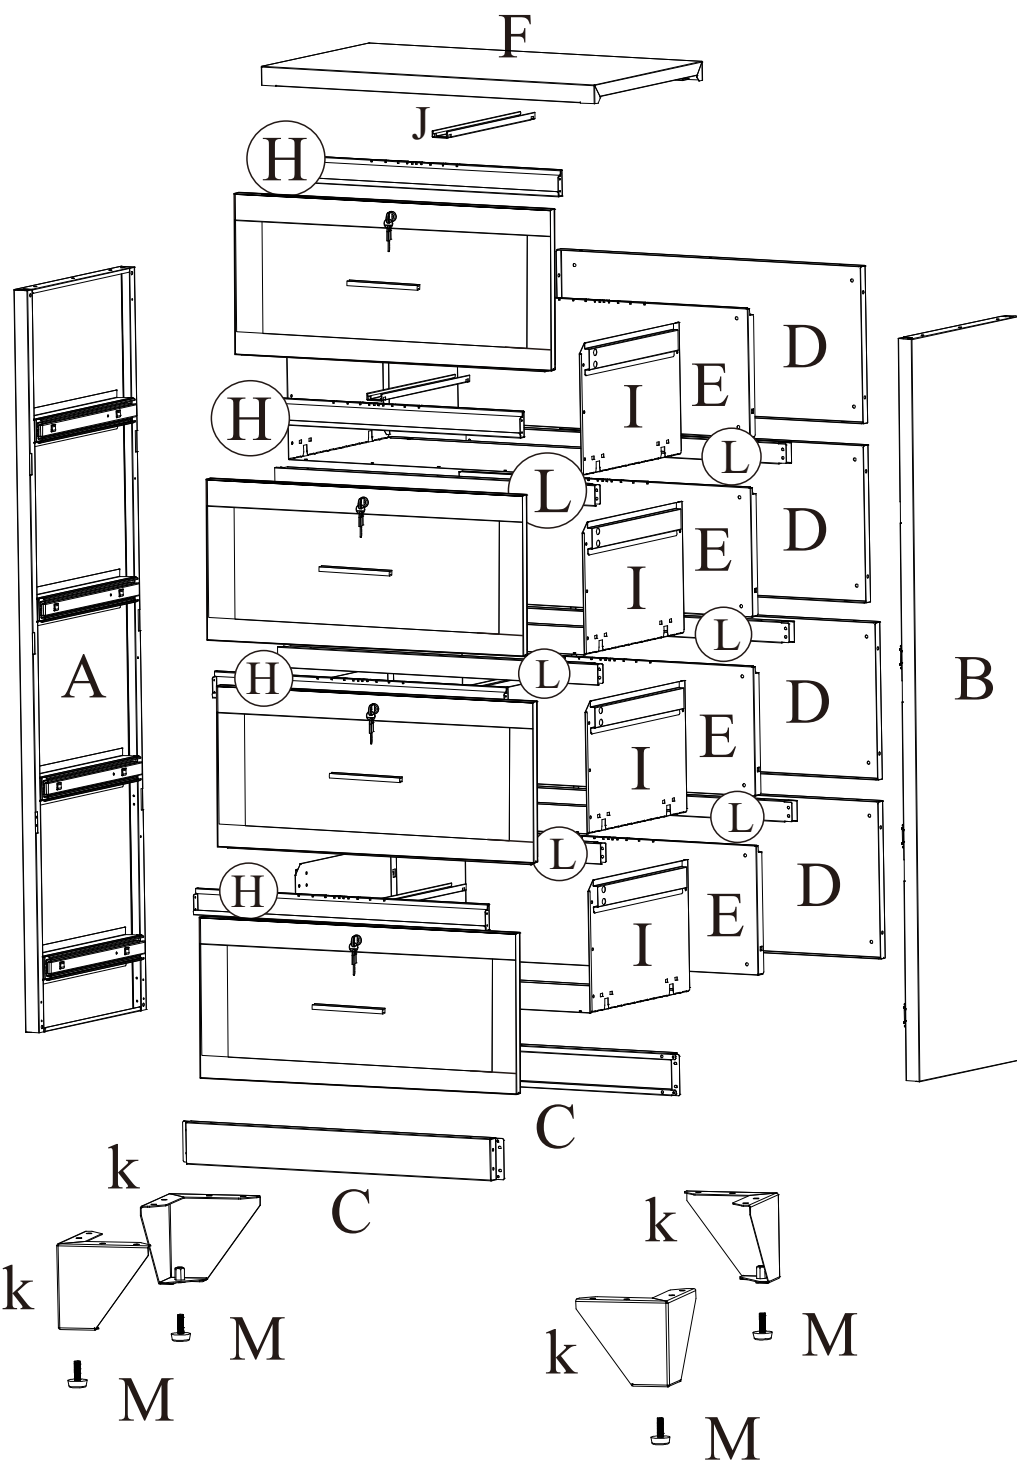















A-Left Side Panel 1PC 	B-Right Side Panel 1PC 	C-Kick Plate 2PCS 	D-Back Panel 4PCS 
E-Drawer Back Panel 4PCS 	F-Top Panel 1PC 	G-Drawer Front Panel 4PCS 	H-Long Hanging Bar 4PCS  
I-Drawer Bucket 4PCS 	J-Short Hanging Bar 4PCS 	K-Leg 4PCS 	L-Middle plate 6PCS 
M-Foot 4PCS 	a-M5*10 Screw 162PCS 	b-Expansion Screw 2PCS 	e-Anti-tipping Strap 2PCS 
f-Flat Head Screw 2PCS 	j-Nut 2PCS  M6	h-Lock 4PCS 	L-Middle plate 4PCS 


Step 1

Install 6 middle plates L on side panels A and B with 24 screws a

a



24PCS

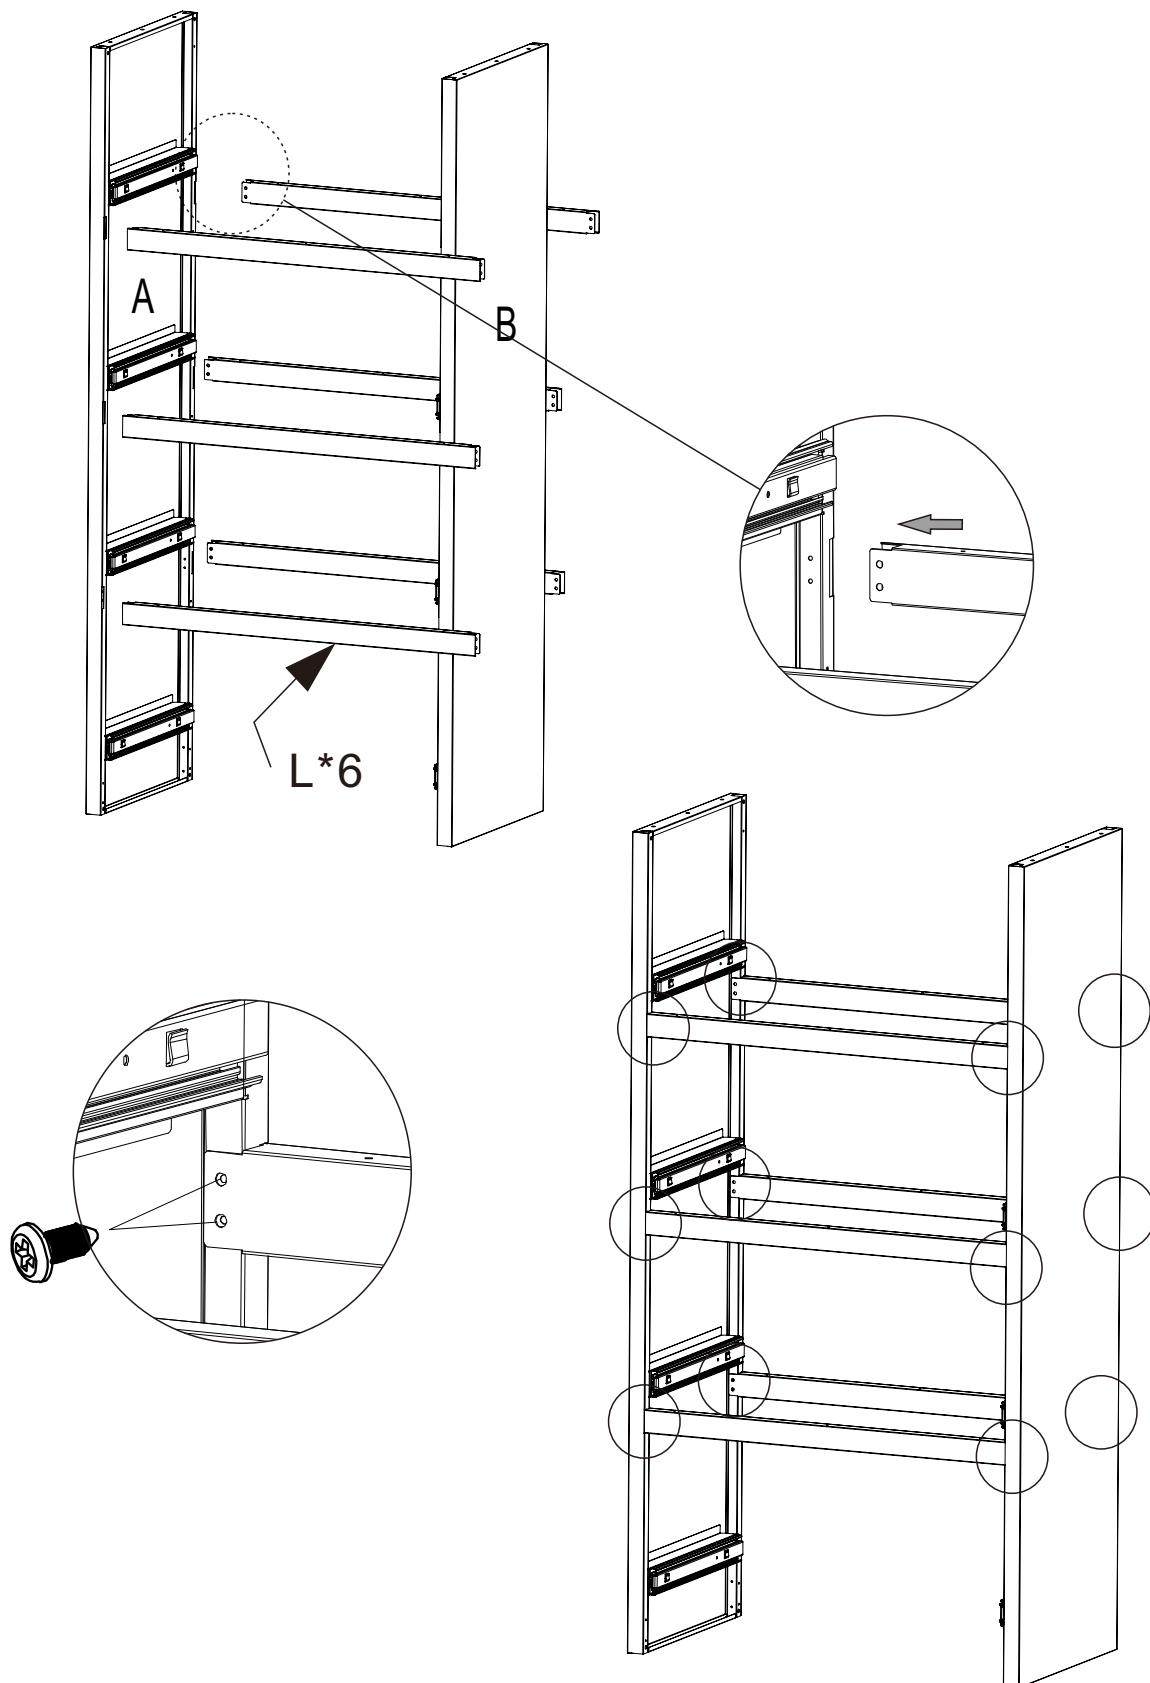




Step 2

Connect 2 kick plates C with side panels A and B, then fix them with 16 screws a

a



16PCS

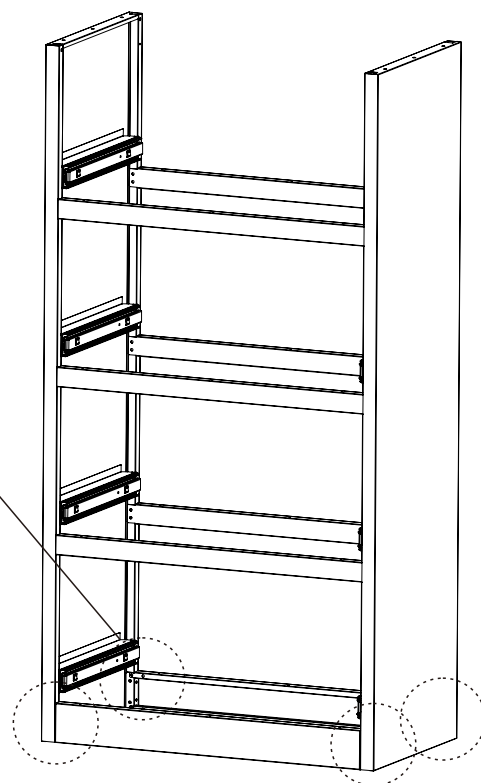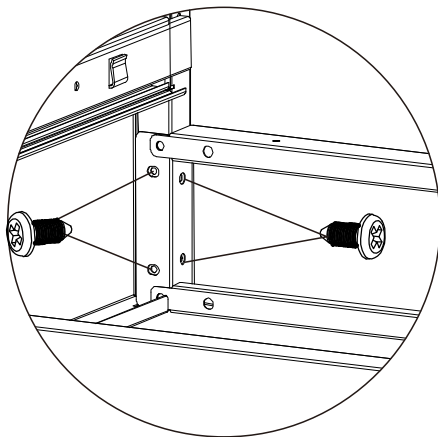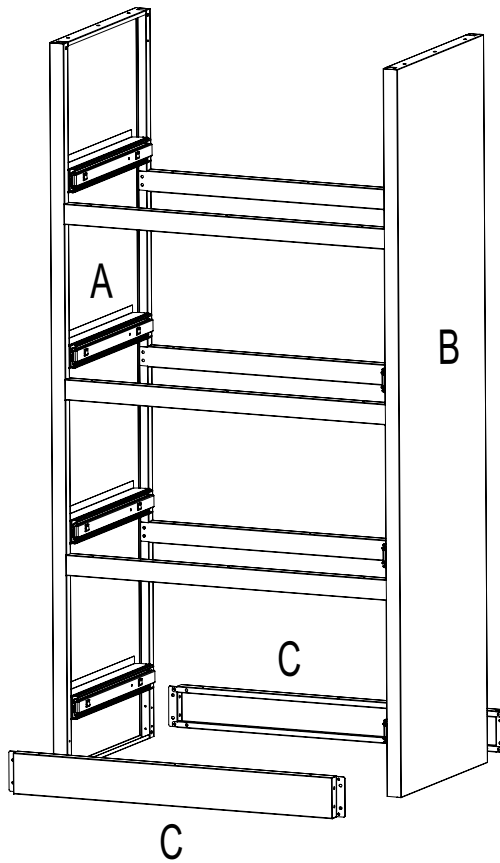


Step 3

Install 2 legs K at the bottom, then fix them with kick plates and side panels by 16 screws a

a




16PCS

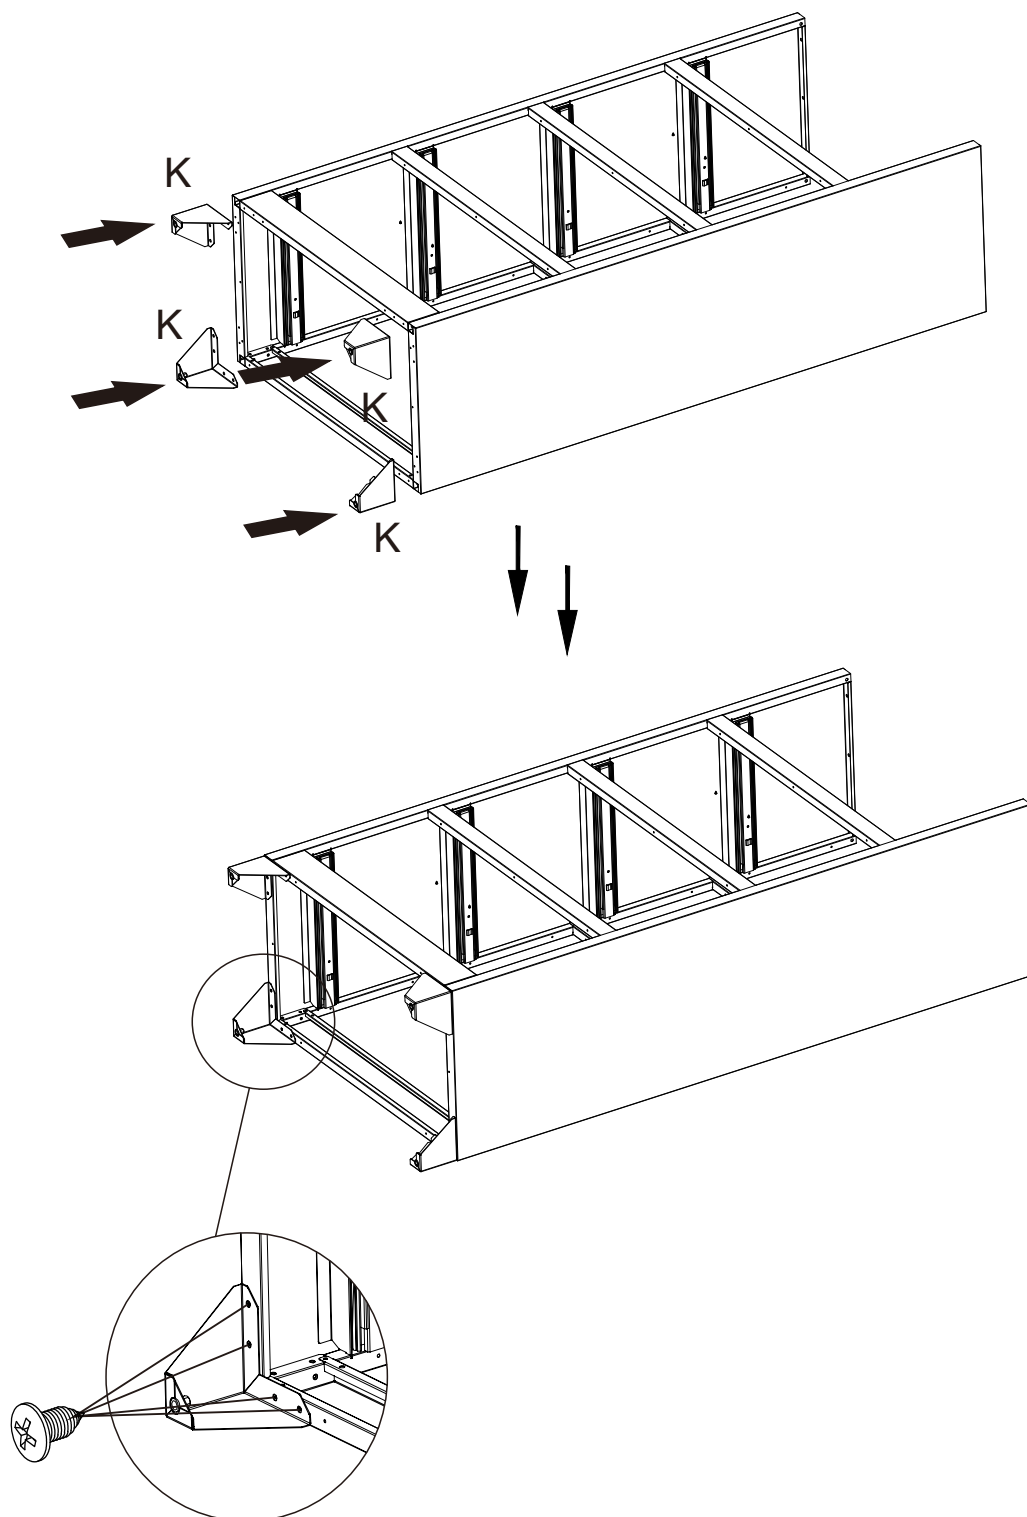

Step 4

Rotate and install 4 feet M on the bases K (If the ground is uneven, it can be adjusted by rotating the screw. This will fix the situation where the drawer is not easily opened or closed.)

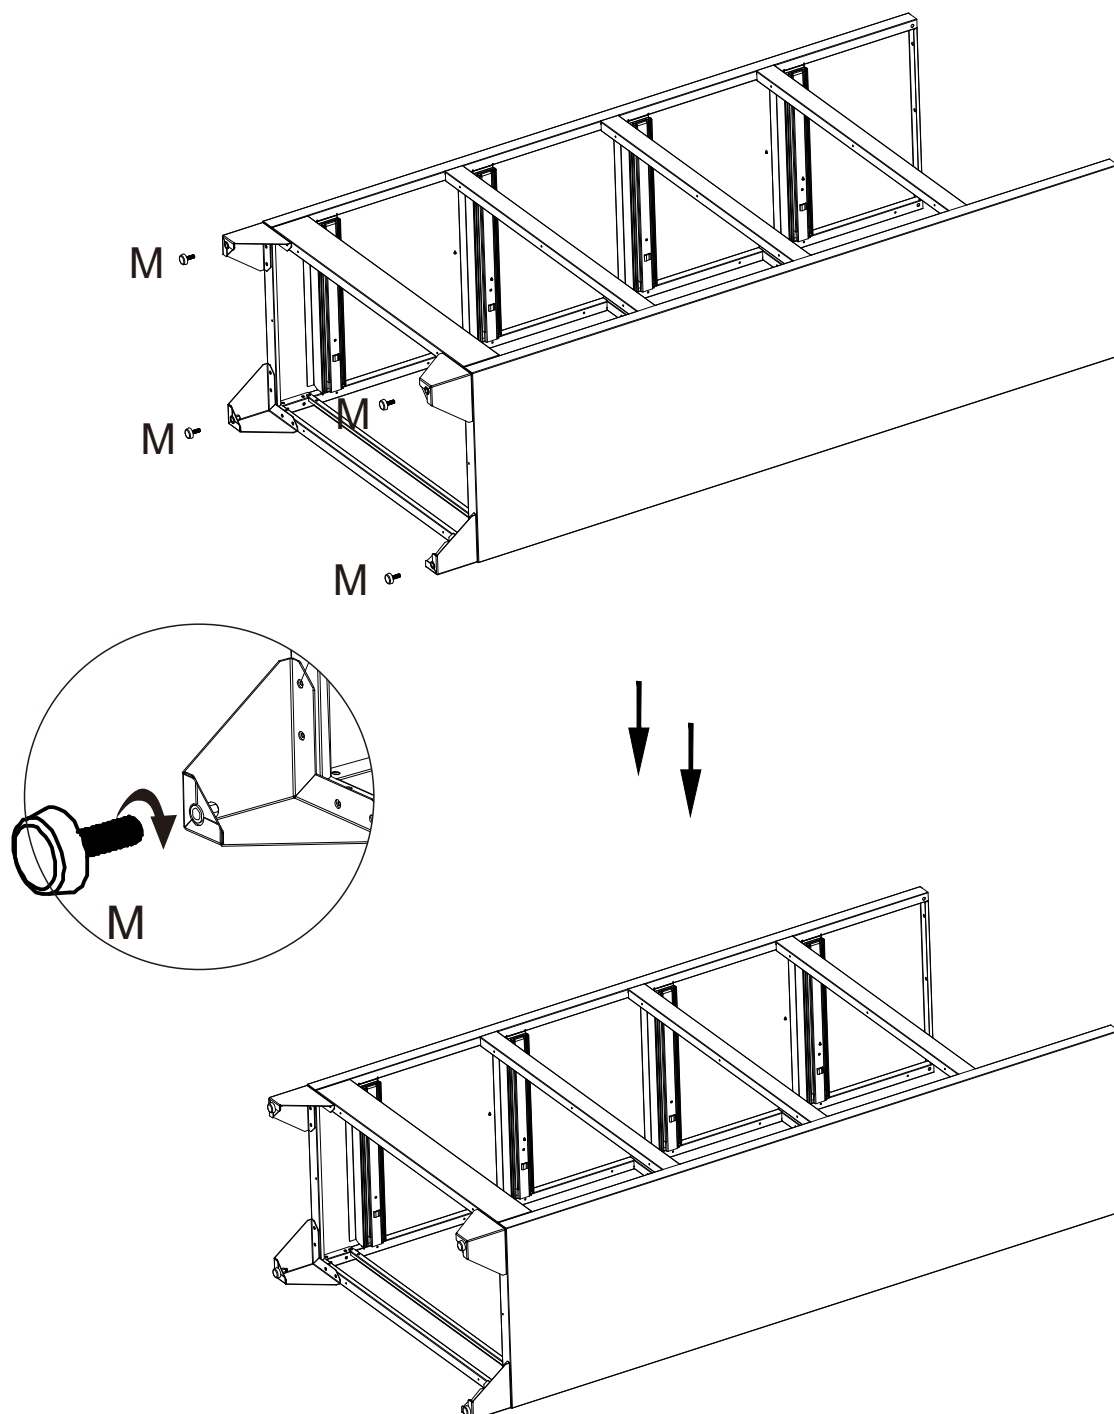





Step 5

Install 4 back panels D and fix them with other parts by 37 screws a

a



37PCS

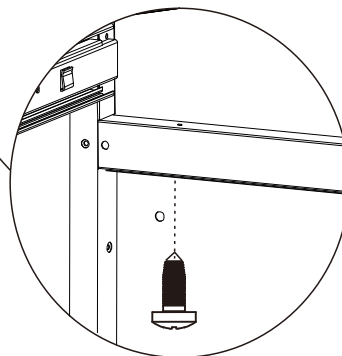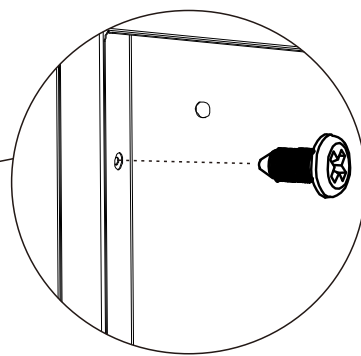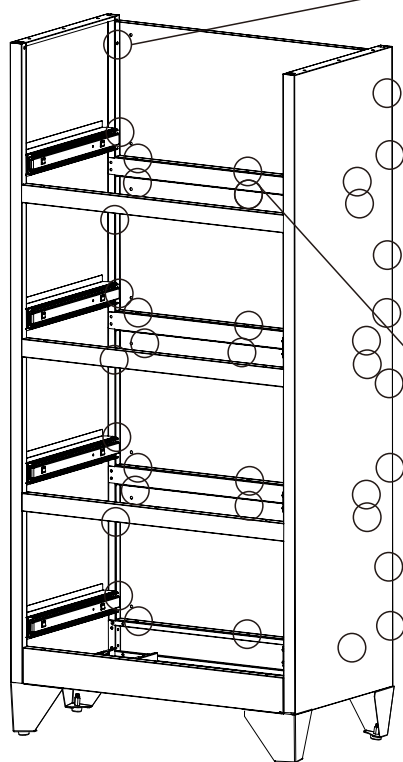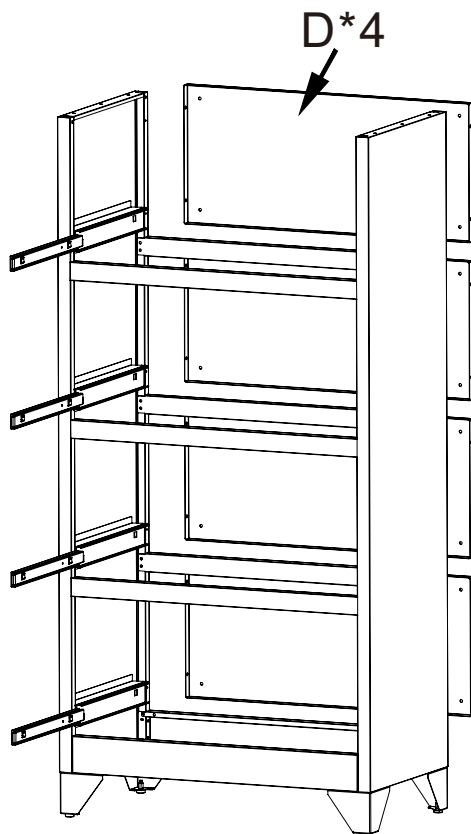



Step 6

Install the top panel F and fix it with other parts by 9 screws a

a






9PCS

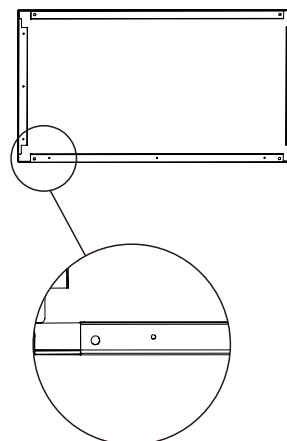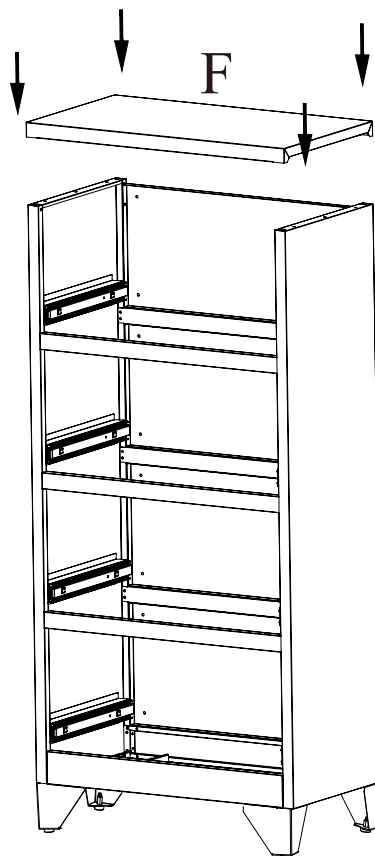


There are screw holes at the back.

Please ensure that all four corners of top panel F are in the correct positions (As shown below)

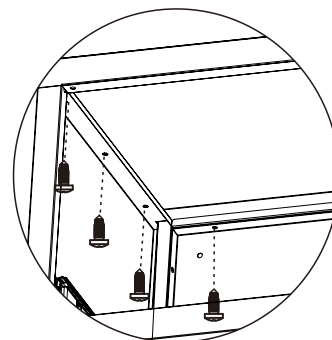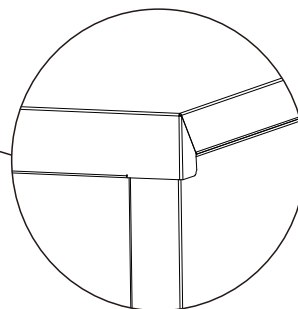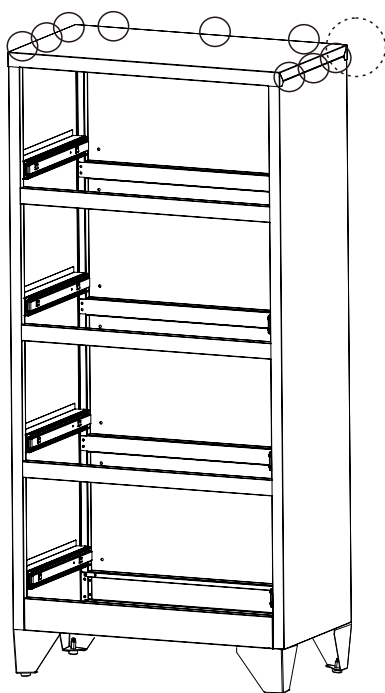


Step 7




First, insert the lock body through the pre-drilled hole on the panel with the numerical code facing upwards. Then, tighten the nut clockwise to secure the lock body in place.

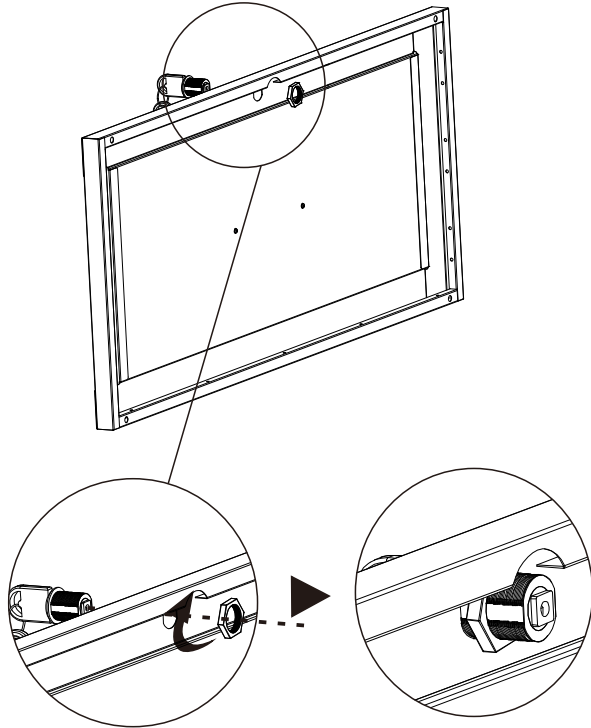

Before installing the strike plate, remove the fixing screw of the lock cylinder. Place the strike plate upward and clip it onto the protruding part of the lock cylinder, then secure it with screws.

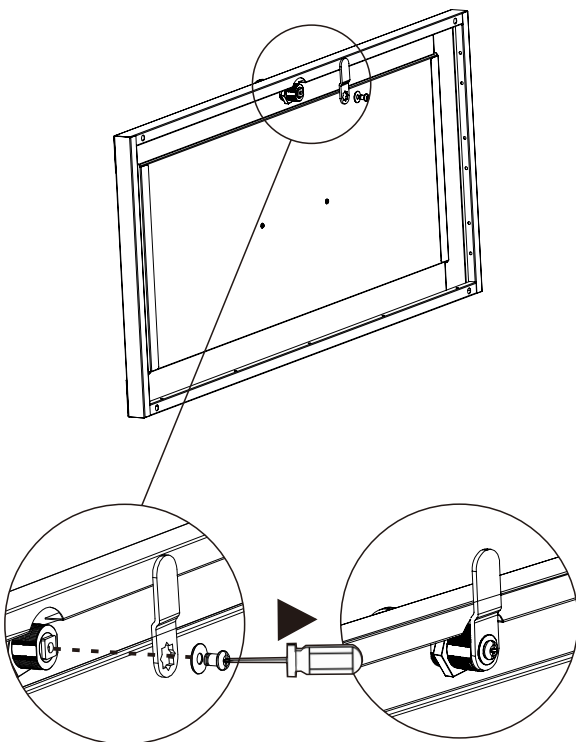


Install the handle m.

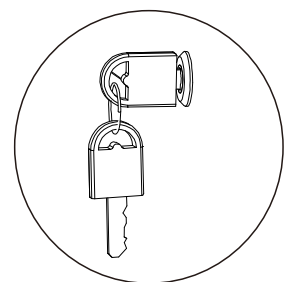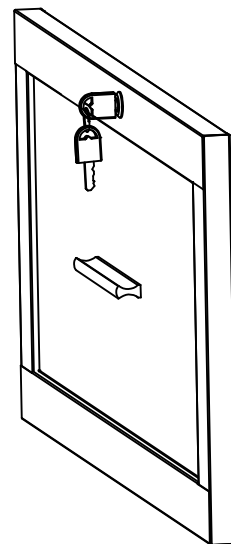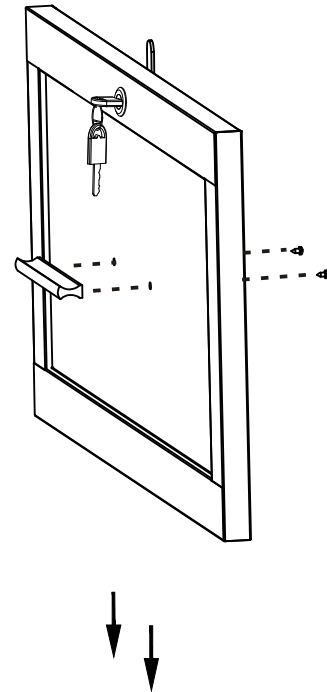



Turn the key to the unlocked position.

Step 8


Fold the drawer bucket I inward 90° and insert it into the drawer front panel G, then fix them with 11 screws a

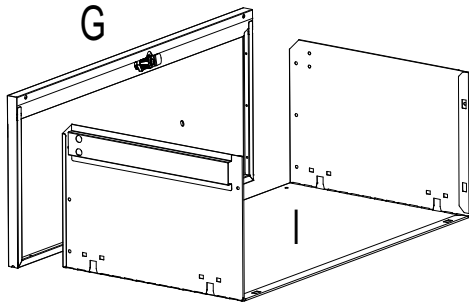



Do not fold I more than 2 times

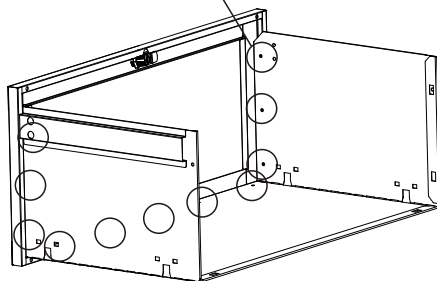


Insert the drawer back panel into the drawer bucket and press the small pieces down to fix them

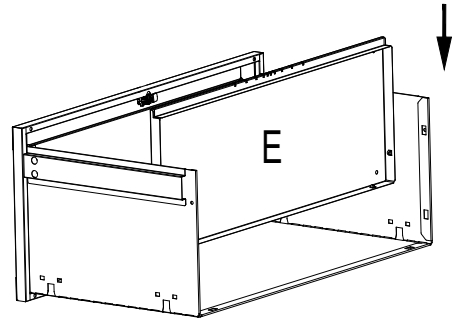

Then assemble another drawer in the same way

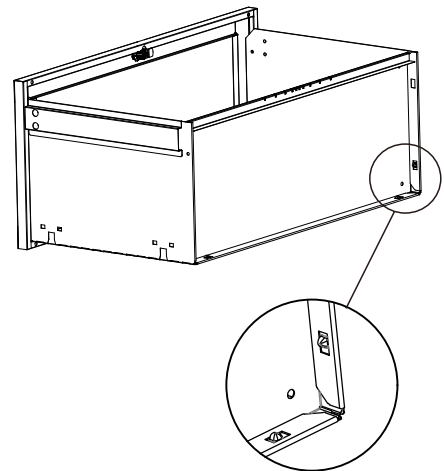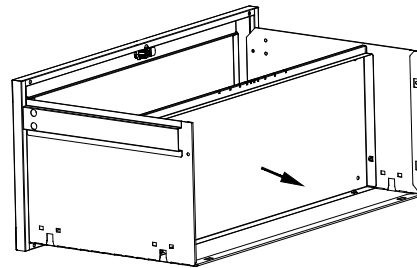


a




44PCS

Step 9


Install the long hanging bar H in the drawer with 4 screws a

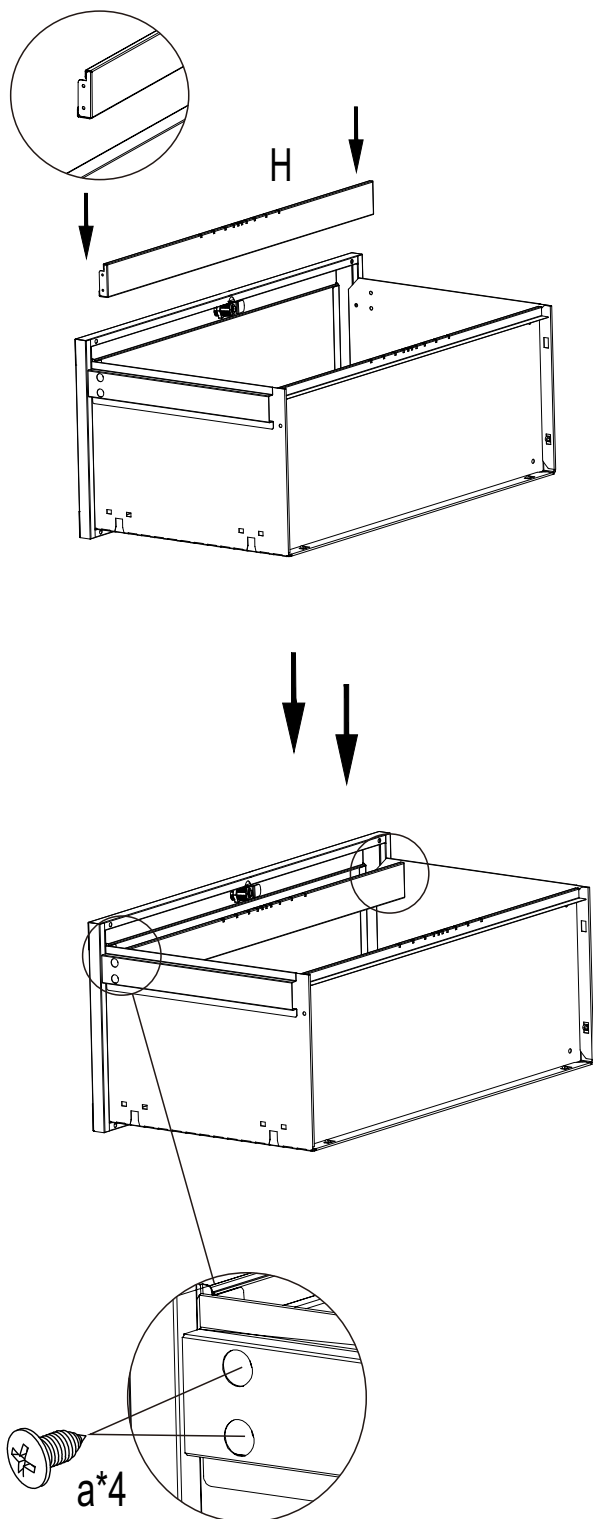

Install 1 short hanging bars J in the drawer

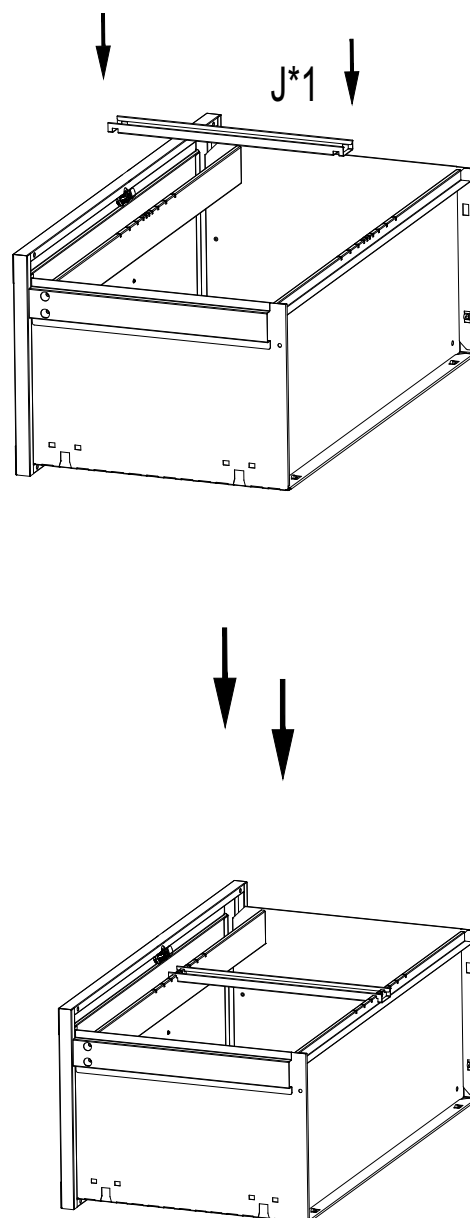

a



16PCS

Step 10

Install 2 anti-tipping straps e on the back panel D with 2 screws f and nuts j

f






2PCS

j




2PCS

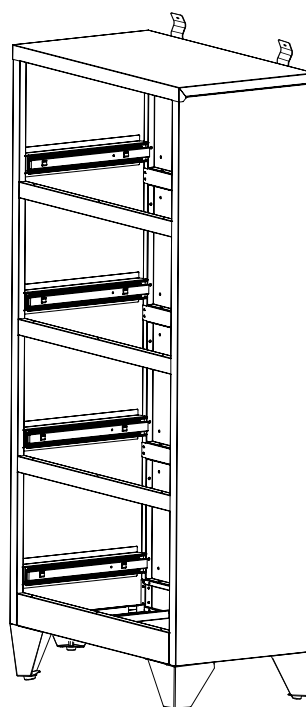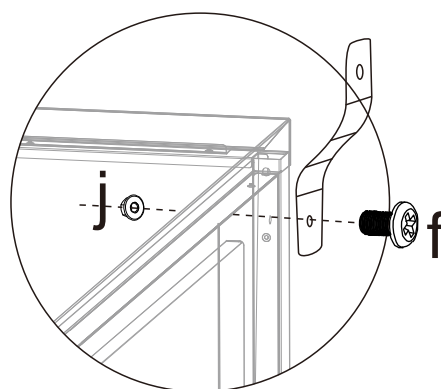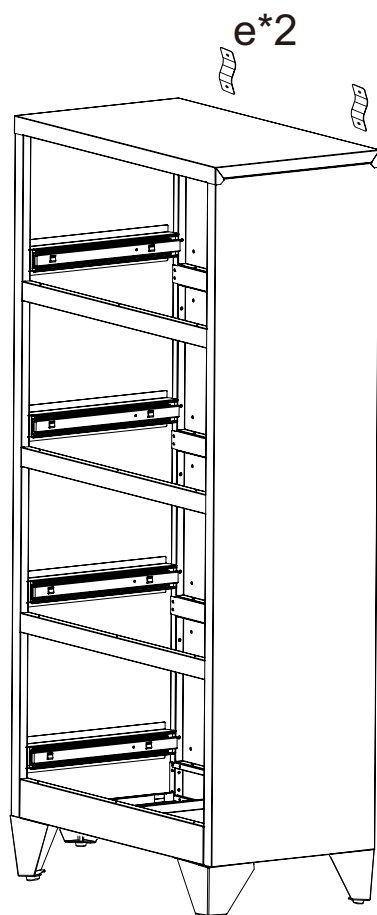




Step 11

Pull out the drawer twice slowly and the lubricating oil inside the slide rails will come out and the drawer will work.

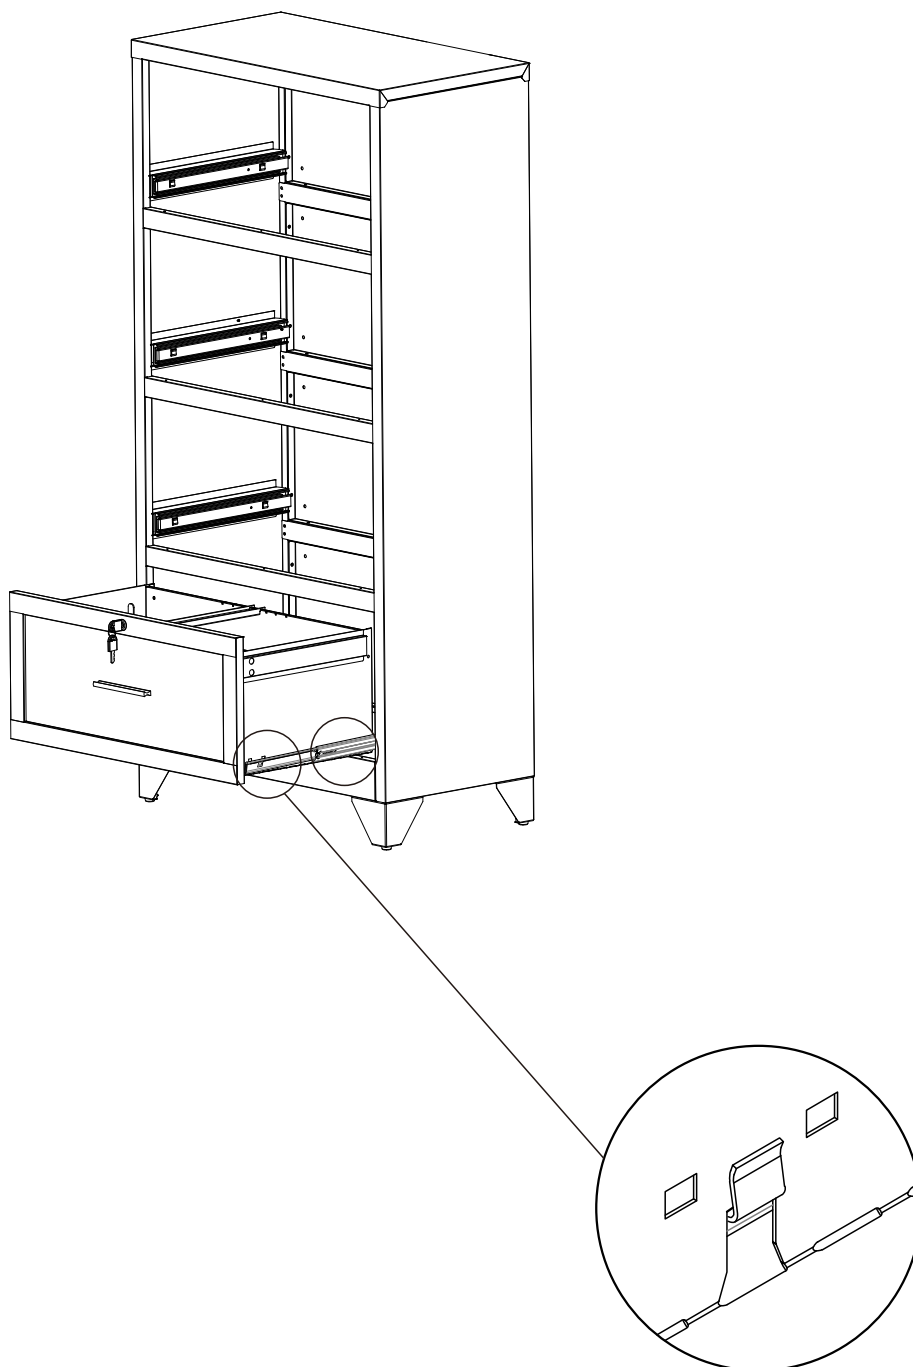

Step 12


Install other two drawers on the cabinet in the same ways

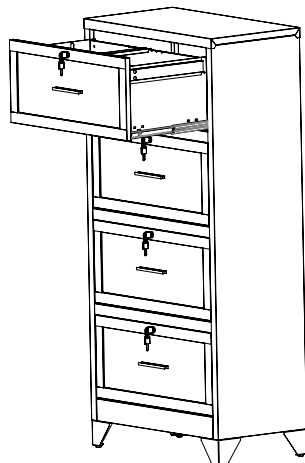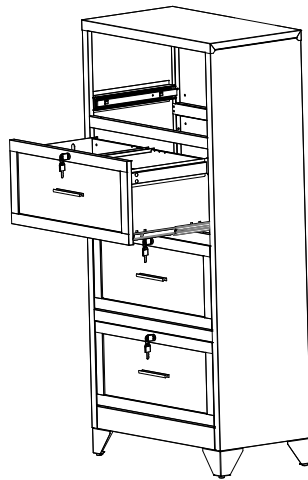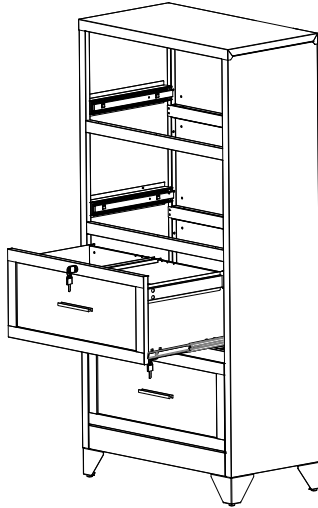

Step 13

Fix the cabinet on the wall with 2 expansion screws
d to prevent tipping

b



2PCS

