


Duetta® - Technical Specifications for 7242 Models


Letter	Description	SOAKING	PURE AIR® BATH	WHIRLPOOL	SALON® SPA	Each component requires a sepearte, dedicated GFCI protected circuit				
-	Drain/Motor Location	Center Drain/Right Side Motor And/Or Blower				Model with components		GFCI Outlet (60Hz)		
-	Cutout Location	Template Provided P/N DA06000								
-	Total Weight	1250 lbs (567 kg)	1300 lbs (590 kg)	1293 lbs (536 kg)	1320 lbs (599 kg)	SOAKING	Soaker only	None		
-	Floor Loading	60 lb/ft² (291 kg/m²)	62 lb/ft² (302 kg/m²)		63 lb/ft² (307 kg/m²)		Soaker w/ Chromatherapy	120V 15A		
-	Operating Gallons (Max)	108 gallons (408.8 liters)				PURE AIR®	Blower			
-	Product Weight	100 lbs (45 kg)	150 lbs (68 kg)	143 lbs (65 kg)	170 lbs (77 kg)		Chromatherapy (if available)			
-	Soaking Depth	17.5" (444.50 mm)					WHIRLPOOL		Motor/Pump	120V 20A
L	Outer Length	72" (1829 mm)						Heater (if available*) *Heater circuit not required on units equipped with Whisper+ Technology™		
W	Outer Width	42" (1067 mm)								
H	Overall Height	26" (660 mm)								
A	Overflow Height	17.9" (455 mm)								
B	Long Edge to Drain Center	11" (279 mm)								
C	Short Edge to Drain Center	36" (914 mm)				Salon® Spa	Motor/Pump/ Heater		240V 20A	
D	Drain Shoe Length	7.25" (184 mm)						Blower		120V 15A
E	Deck Height	0.50" (13 mm)								
F	Deck Width	3.875" (98 mm)								
G	Service Access Dimensions	12" x 18" (305 mm x 457 mm)				Salon® Spa	Blower	120V 15A		
I	Floor Cutout for Drain	12" x 6" (305 mm x 152 mm)								
J	Interior Dimensions (bottom of bath) L x W	49" x 28" (1245 mm x 711 mm)								

Key Dimensions


Duetta® Soaking And Pure Air® Bath Models
(Soaking Bath Shown)

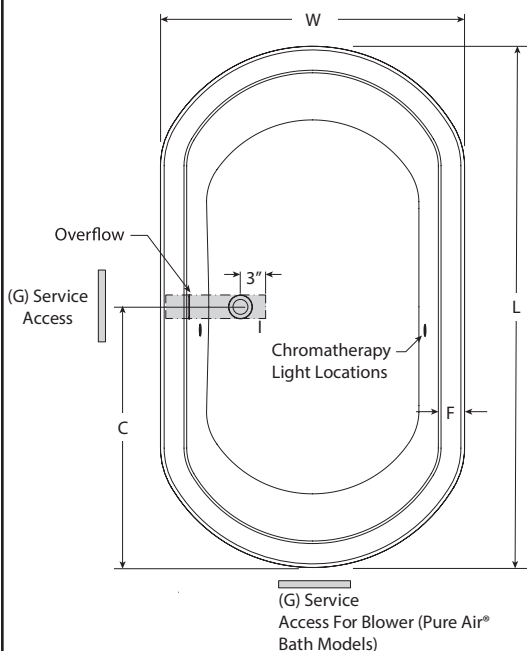

Duetta® Whirlpool And Salon® Spa Models
(Salon® Spa Shown)

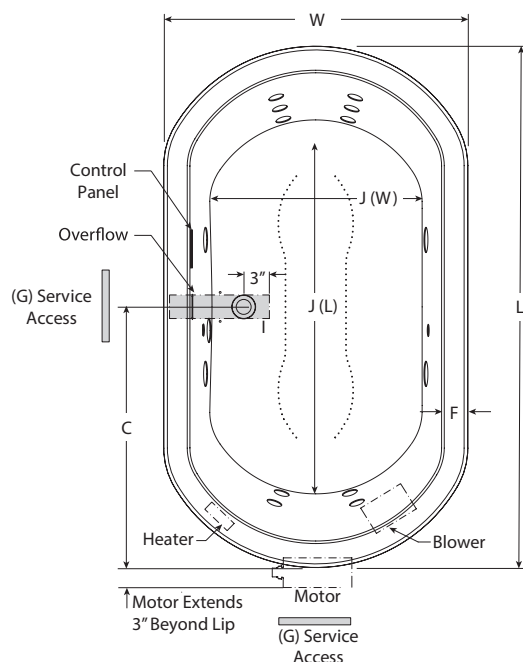

All Models

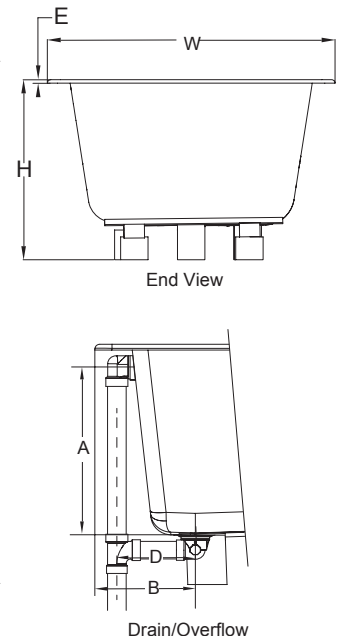

©2017 Jacuzzi Luxury Bath • For additional information call Customer Service 800-288-4002 • www.jacuzzi.com/baths/
Refer to installation instructions included with fixture before beginning installation. Please confirm product availability and specifications before commencing with any installation work.
PRODUCT SPECIFICATIONS AND AVAILABILITY ARE SUBJECT TO CHANGE WITHOUT NOTICE.