

# Single Control Widespread Faucet

TECK®



**Specification: (example)**

- Widespread single control faucet
  - 102 to 406mm (4" to 16") adjustable centers
  - Polished chrome plated finish
  - **DELTA** washerless stainless steel ball
  - High temperature limit stop
  - 3/8" IPS **BRASS PIPE** Rigid/Swivel Gooseneck spout
  - Metal trim, colour indexed vandal resistant lever blade handle and ...
- with ... (add product variation required)  
 with ... (add outlet required)  
 with ... (add handle required)  
 with ... (add suffix **-LS** if required – See Back Page)



24T2643

**Engineer/Architect Approval**

Model Specified: \_\_\_\_\_

Approval: \_\_\_\_\_ Date: \_\_\_\_\_

DESCRIPTION	PRODUCT NO.		
Single Control Widespread Faucet	24T2	6	



PRODUCT VARIATION	OUTLET	HANDLE
0 <input type="checkbox"/>	0 <input type="checkbox"/>	0 <input type="checkbox"/>
1 <input type="checkbox"/>	1 <input type="checkbox"/>	1 70mm (2.75") Lever Blade Handle  <input type="checkbox"/>
2 <input type="checkbox"/>	2 Vandal Resistant 1.5 USGPM (5.7 L/min.) Laminar w/Antimicrobial By AgION™  <input type="checkbox"/>	2 <input type="checkbox"/>
3 <input type="checkbox"/>	3 Vandal Resistant 1.5 USGPM (5.7 L/min.) Flow Control Aerator  <input type="checkbox"/>	3 152mm (6") Lever Blade Handle  <input type="checkbox"/>
4 <input type="checkbox"/>	4 Standard 1.5 USGPM (5.7 L/min.) Flow Control Aerator  <input type="checkbox"/>	4 <input type="checkbox"/>
5 <input type="checkbox"/>	5 Vandal Resistant 0.5 USGPM (1.9 L/min) Flow Control Non-Aerating Spray Outlet  <input type="checkbox"/>	5 <input type="checkbox"/>
6 <b>Heavy Duty (R2) Rigid/Swivel Gooseneck Spout (1) (2)</b>  <input checked="" type="checkbox"/>	6 <input type="checkbox"/>	6 <input type="checkbox"/>
7 <input type="checkbox"/>	7 Smooth End, Laminar Flow Control in Base of Gooseneck Spout 1.1 USGPM (4.2L/min.)  <input type="checkbox"/>	7 <input type="checkbox"/>
8 <input type="checkbox"/>	8 <input type="checkbox"/>	8 <input type="checkbox"/>
9 <input type="checkbox"/>	9 <input type="checkbox"/>	9 <input type="checkbox"/>

(1) See Page 9.C.1 for **Optional Rigid/Swivel Spouts.**  
 (2) 120° Limited Swing Spout Available. Add Suffix **-LS.**  
 Refer to [www.specselectonline.com](http://www.specselectonline.com) for individual models.

See Page 5.C.3 for 24T3003

Flowrates are at 60 PSI.

Note: Use this page front and back as a product submittal sheet


Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or [www.specselectonline.com](http://www.specselectonline.com) for finish options and product availability.

**Approvals:**


- CSA certified
- Complies to ASME A112.18.1
- ADA Compliant and meets Handicapped Accessibility Standard ASME A117.1 of less than 5 lbs. handle operating force.
- IAPMO listed

(Contact Delta Representative for State and/or Local Approvals.)


**GOOSENECK**

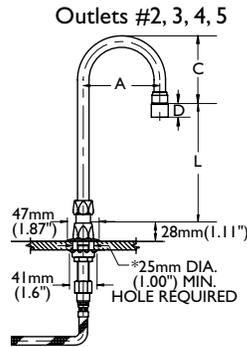

**CONTROL UNIT**

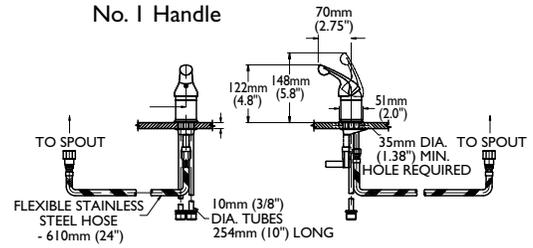


**No. 3 Handle**

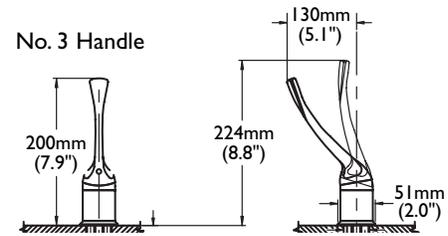


(Extension Kit Available for up to 1 1/4" Thick Decks)

\*\*Spout hole 38mm (1.5") maximum diameter.

**HANDICAP INSTALLATION**

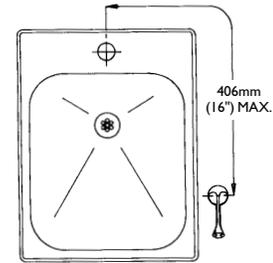


**Outlet #7**

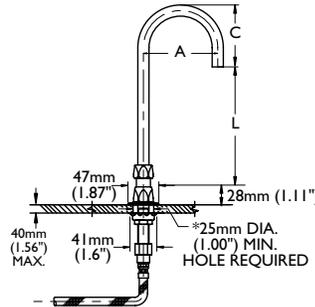

**LIMITED SWING GOOSENECK**  
 Add suffix "- LS" to Product Number for 120° Limited Swing

**FLOWRATE vs PRESSURE**

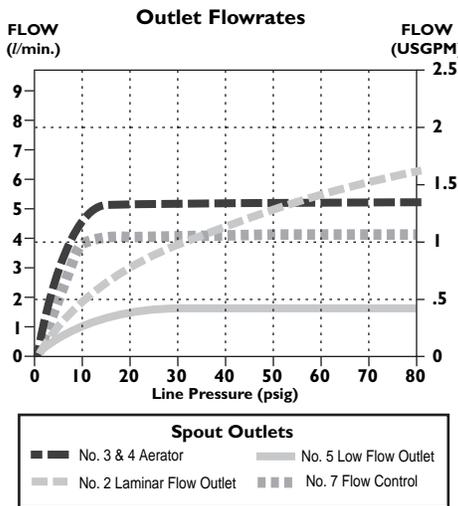

GOOSENECK SPOUT OUTLET NO.	"D"	
	mm	in.
2	18	0.69
3	18	0.69
4	17	0.67
5	18	0.69

- 24T0001**  
Control Unit Only with 2.75" Handle
- 24T0003**  
Control Unit Only with 6" Handle

**INLETS - 1/2" MIP/Coupling Nuts**  
 Note: Measurements may vary ± 6mm (0.25")

See Page 9.C.1 for additional optional spouts.

**GOOSENECK SPOUT ASSEMBLIES**

SPOUT/OUTLET	"A"		"C"		"L"	
	mm	in.	mm	in.	mm	in.
Gooseneck-Standard (R2) for outlets #2, 3, 4, 5	114	4.5	104	4.1	170	6.7
Gooseneck-Standard (R2) for outlet #7	114	4.5	97	3.8	178	7.0

Refer to [www.specselectonline.com](http://www.specselectonline.com) for individual models.

Note: Use this page front and back as a product submittal sheet.