




LED BACKLIT PANEL

5 CCT and 3 Wattage Selectable

Project: _____ Location: _____

Date: _____ Part #: _____

Notes: _____

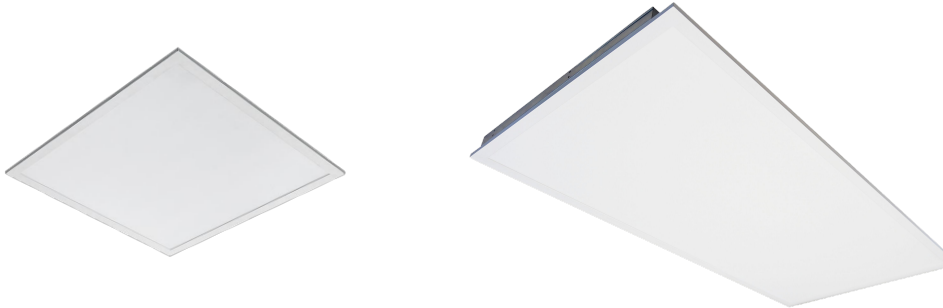

Performance & Features

Product Highlights

5-CCT Color Selectable
3000K/3500K/4000K/5000K/6500K

Energy-saving, long lifespan

NO Flicker, NO Humming

Detail Specification:

Finish: Durable cold-rolled steel and extruded aluminum housing

IP: Damp Location Rated

CRI: >80

Lens: Frosted

Life: L70 of 54,000 hours
Rated Life: 1,00,000

Certifications

ETL Listed

5 Year Limited Warranty

LED Driver

0-10V Dimmable


120-277V

High-efficacy, micro-power LEDs

Quick Order

Model No.	Power (W)	Lumens (lm)	CCT (K)	LPW	Finish
2x2 Ft.-18W-24W-30W - Selectable DPS-22-U-P-30-5CCT-4	18W/24W/30W	2250/3000/3750	5CCT 3000K/3500K/4000K/ 5000K/6500K	125	White
2x4Ft.-30W-40W-50W - Selectable DPS-24-U-P-50-5CCT-4	30W/40W/50W	3750/5000/6250	5CCT 3000K/3500K/4000K/ 5000K/6500K	125	White


Contact for custom configuration & specifications



White finish available


Dimensions

DPS-24-U-P-50-5CCT

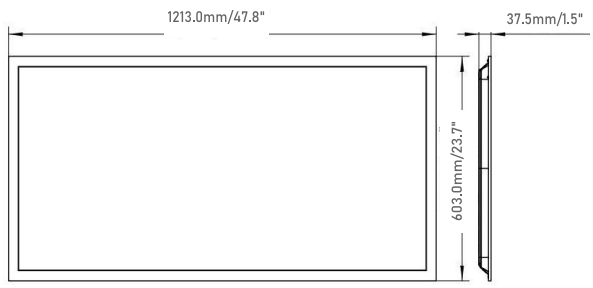

Product Weight : 4.18Kg/9.22lb

DPS-22-U-P-30-5CCT

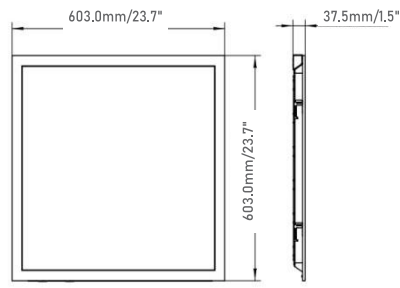



Product Weight : 2.62Kg/5.78lb

Packaging Dimensions

SKU#	Master Carton	Qty
DPS-22-U-P-30-5CCT	25.2x25.2x5.9 in.	4
DPS-24-U-P-50-5CCT	49.1x25.2x5.9 in.	4

Photometry

DPS-22-U-P-30-5CCT

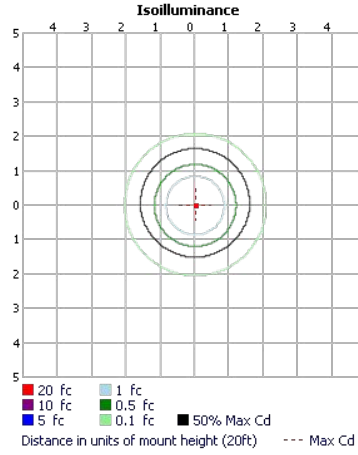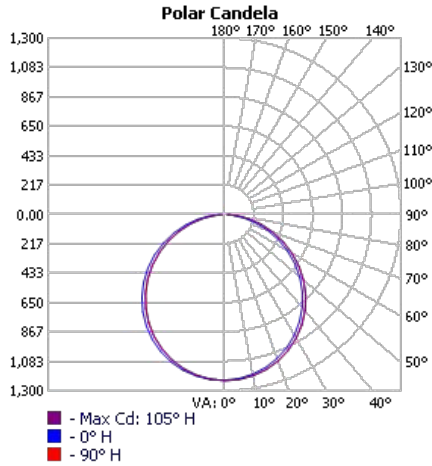

Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	953.8	26.2%
0-40	1,568.3	43%
0-60	2,800.9	76.8%
60-90	844.1	23.2%
0-90	3,645.0	100%

BUG Rating	B1 - Ux - G1	
Forward Light	Lumens	Lumens %
Low (0-30):	474.0	13%
Medium(30-60):	906.3	24.9%
High(60-80):	353.2	9.7%
Very High(80-90):	43.0	1.2%
Back Light		
Low(0-30):	480.2	13.2%
Medium(30-60):	941.5	25.8%
High(60-80):	390.4	10.7%
Very High(80-90):	57.8	1.6%
Trapped Light:	0.000	0%

Note: Additional Photometry available on request

Accessories



Surface mounting kit for panel



Cable kit for panel