


# 8236PL-01GD-US

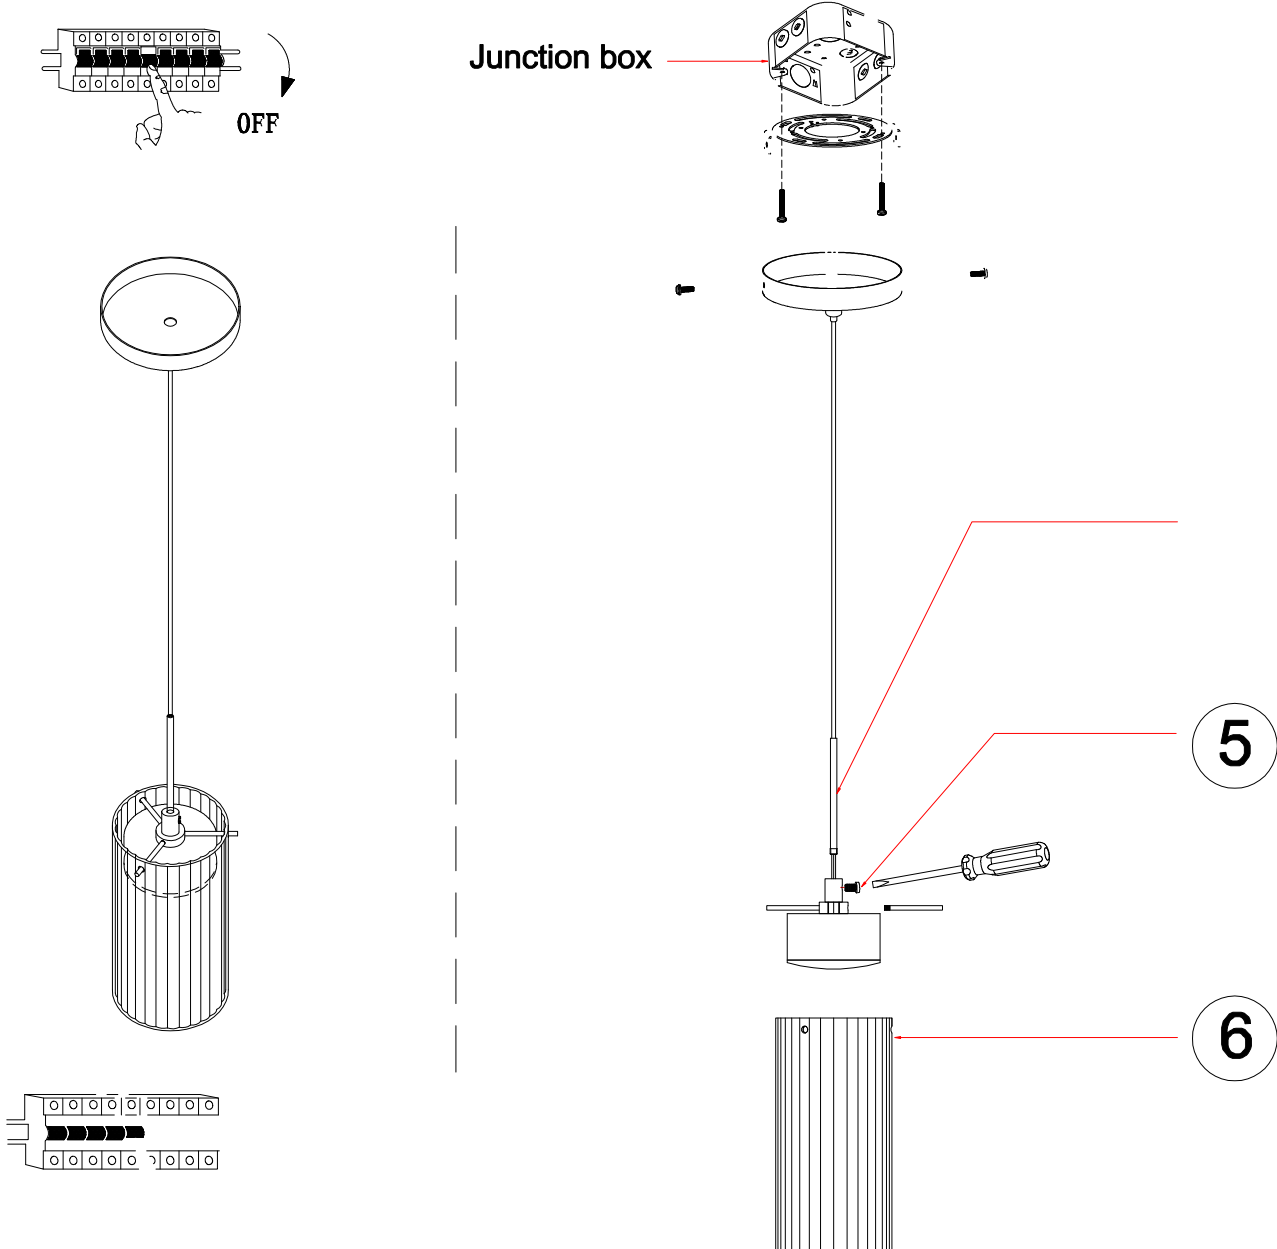

3 :

4: Insert a toothed thin tube into the cylindrical iron piece.

5: Use a single-head screwdriver to insert the plastic screw into the cylindrical iron piece and secure the wire.

6: Insert the striped glass into the LED lamp head.

7: Insert a thin iron rod with teeth through the grooves of the glass, then screw it into the iron piece hole, and secure the glass with the grooves.

8: Turn on the main power supply, and the lights will come on.