

CARE AND MAINTENANCE

Unplug Lamp before using any cleaning solutions. Dust with a feather duster as with an appropriate vacuum-brush attachment. Wipe with a soft, dry cloth and clean lamp with methods appropriate to the material. Avoid the use of chemicals and household cleaners as they may damage the finish.

NOTICE & IMPORTANT SAFETY INSTRUCTIONS

Please make sure that you have all parts indicated before you begin assembly of this item

*This item should be assembled on a soft surface to prevent scratching the finish during assembly.

*To reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation.


*The external flexible cable or cord of this luminaire cannot be replaced; If the cord is damaged, the luminaire shall be destroyed.




Model # PND2000A

Product Dimensions:

20.5"LX20.5"WX41"H

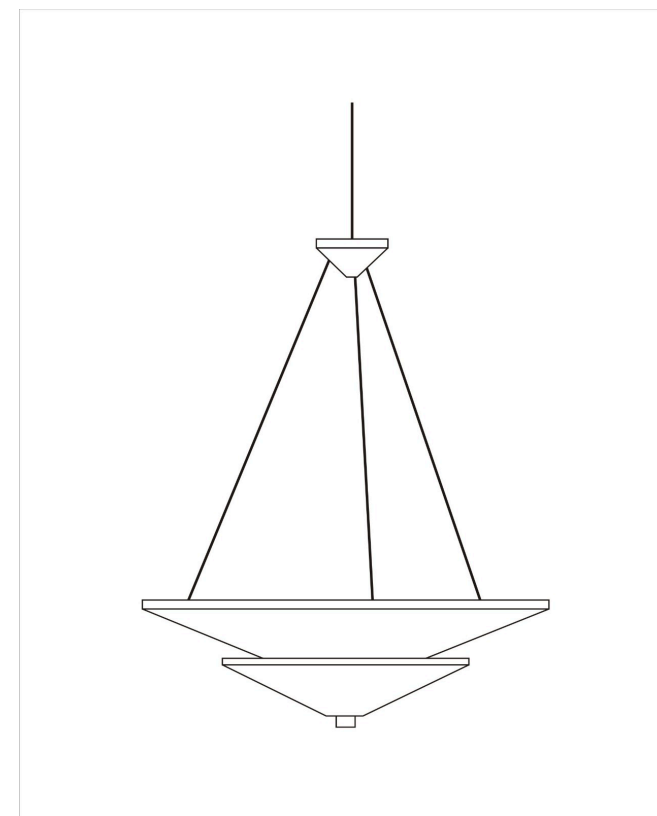

Component List

LABEL	COMPONENT	DESCRIPTION	QTY
A		CEILING CAP	1
B		BULB (Type A)	Not included
C		BRACKET	1
D		LIGHT FIXTURE	1

Hardware List


LABEL	COMPONENT	DESCRIPTION	QTY
H-1		LARGE SCREW M4 x 40mm	2
H-2		SMALL SCREW M4 x 13mm	2
H-3		PLASTIC WIRE CAP CONNECTOR	3

Tool List

LABEL	COMPONENT	DESCRIPTION	QTY
T-1		PHILLIPS SCREWDRIVER	Not included


PREPARATION

Before beginning assembly of product make sure all parts are present. Compare part with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product. Estimated Assembly Time: 5 minutes. PLEASE USE TYPE "G9" BULB MAX 9WT.

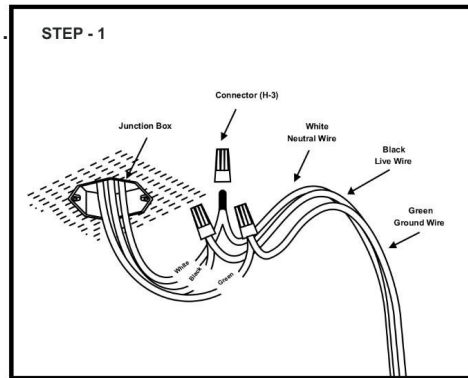


STEP-1

Connect the White Wire with the fixture's White Neutral Wire. Connect the Green/Yellow or Copper Ground Wire to the fixture's Green Ground Wire. Connect the Black/Brown Wire with the fixture's Black-Live Wire. Fasten each connection together with a Plastic Wire Cap Connector (H-3) and wrap the connectors with electrical tape. Be sure that no wire strands are exposed.

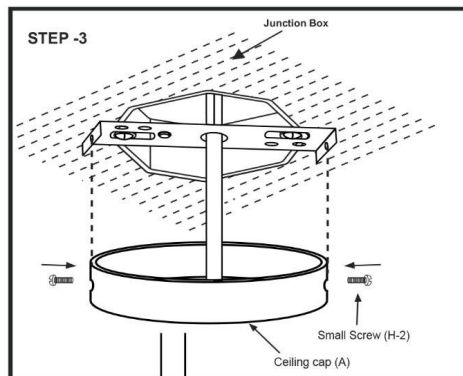


STEP -3

Place Ceiling Cap (A) over Bracket (C) such that side holes of Ceiling Cap (A) & Bracket (C) are aligned. Insert Small Screw (H-2) through side holes and tighten with the screwdriver (T-1).

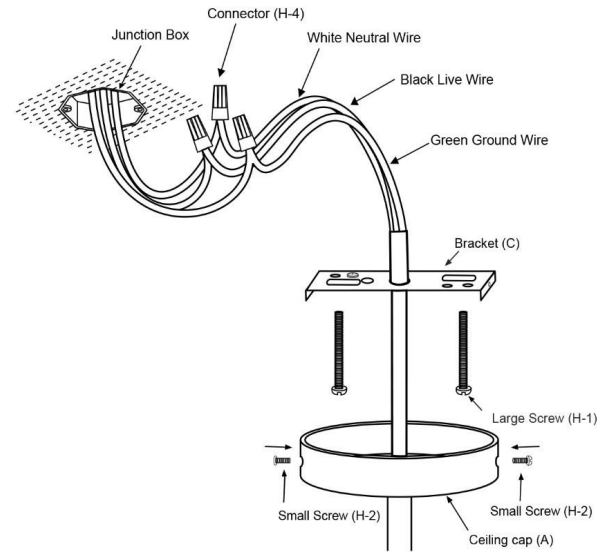

STEP -2

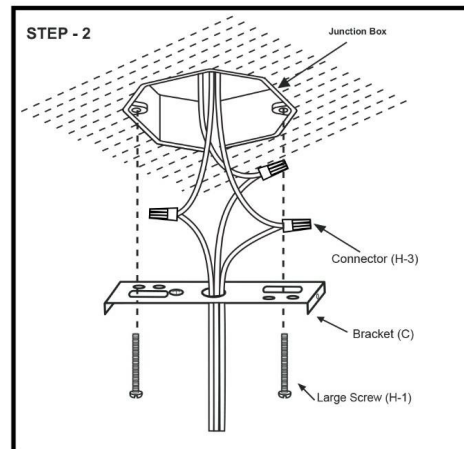

STEP-2

Align holes on the Bracket (C) over junction box and secure with Large Screw (H-1).