Knock-Down Door & Frame Kit

Not Pre-Hung / Not Pre-Assembled. Assembly required before installation.

Single Door with Two Sidelites

One operating door + two fixed sidelites

1. Match the complete unit to your opening

Nominal size	Finished unit (W x H)	Rough opening (W x H)
64 x 80 in.	64-1/2 x 81-5/8 in.	65-1/2 x 82-1/8 in.
68 x 80 in.	68-1/2 x 81-5/8 in.	69-1/2 x 82-1/8 in.
68 x 96 in.	68-1/2 x 97-5/8 in.	69-1/2 x 98-3/8 in.

All dimensions are in inches. Finished unit dimensions cover the assembled door-and-frame set, including sidelites where shown. Use the rough opening dimensions for the selected size.


2. Choose the handing - viewed from outside

Stand outside the home, facing the door. Inswing means the door opens into the home.



Left-Hand Inswing

Hinges on the left; handle on the right.

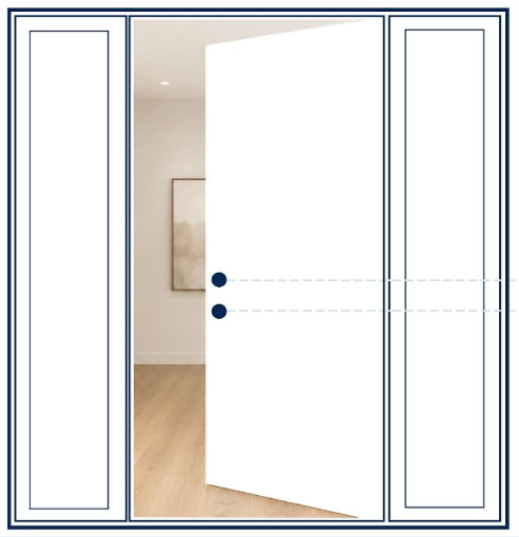

Right-Hand Inswing

Hinges on the right; handle on the left.

Both sidelites are fixed. Determine handing from the operating door in the center.

Knock-Down Door & Frame Kit

Not Pre-Hung / Not Pre-Assembled. Assembly required before installation.

Single Door with One Sidelite

One operating door + one fixed sidelite

1. Match the complete unit to your opening

Nominal size	Finished unit (W x H)	Rough opening (W x H)
51 x 80 in.	50-7/8 x 81-5/8 in.	51-7/8 x 82-1/8 in.
53 x 80 in.	52-7/8 x 81-5/8 in.	53-7/8 x 82-1/8 in.

All dimensions are in inches. Finished unit dimensions cover the assembled door-and-frame set, including sidelites where shown. Use the rough opening dimensions for the selected size.

2. Choose the handing - viewed from outside

Stand outside the home, facing the door. Inswing means the door opens into the home.



Left-Hand Inswing

Hinges on the left; handle on the right.



Right-Hand Inswing

Hinges on the right; handle on the left.

The sidelite position is separate from door handing. Match the sidelite location to the selected product option, as viewed from outside.

Brickmould and Lockset not included

Knock-Down Door & Frame Kit

Not Pre-Hung / Not Pre-Assembled. Assembly required before installation.

Double Entry Door

One active door + one inactive door

1. Match the complete unit to your opening

Nominal size	Finished unit (W x H)	Rough opening (W x H)
72 x 80 in.	74-1/8 x 81-5/8 in.	75-1/8 x 82-1/8 in.
72 x 96 in.	74-1/8 x 97-5/8 in.	75-1/8 x 98-3/8 in.

All dimensions are in inches. Finished unit dimensions cover the assembled door-and-frame set, including sidelites where shown. Use the rough opening dimensions for the selected size.

2. Choose the handing - viewed from outside

Stand outside the home, facing the door. Inswing means the door opens into the home.



Left-Hand Inswing

Active door on the left; hinges on the left.



Right-Hand Inswing

Active door on the right; hinges on the right.

Active door: the everyday operating leaf with lock bores. Inactive door: the secondary leaf. Determine handing from the active door.

Brickmould and Lockset not included

Measure Before You Order

For single doors with sidelites and double entry doors

Dimension reference

Measurement	What to measure / compare
Rough opening width	Measure between the structural framing at the top, middle and bottom. Record the smallest width and compare it with the selected size.
Rough opening height	Measure from the prepared sill support surface to the underside of the header at both sides. Record the smallest height. Account for sill preparation and flooring.
Finished unit size	The outside dimensions of the assembled frame and threshold. Include the entire sidelite assembly or both door leaves. Do not measure only the door slab.
Jamb depth	Check the finished wall depth, including wall finishes. Match the jamb depth to the wall and planned installation.
Nominal size	The product size name. It can differ from the finished unit and rough opening dimensions.

Jamb size reference

Jamb depth	Typical wall framing
4-9/16 in.	2 x 4 wall
6-9/16 in.	2 x 6 wall

Before ordering

1. Match the complete unit width and height to the rough opening.
2. Confirm left-hand or right-hand inswing from outside the home.
3. For one sidelite, also confirm whether it is on the left or right.
4. For double doors, confirm which leaf is the active door.
5. Confirm jamb depth and allow clear space for the door to swing inward.

Knock-Down (KD) kit: Not Pre-Hung / Not Pre-Assembled. Assembly is required before installation.

Illustrations show handing only. Door designs and finishes vary by product.