

ASSEMBLY INSTRUCTION



Rocking Chair

BEFORE ASSEMBLY

Please save this manual for future reference if necessary. The following contains instructions for assembly as well as care and maintenance instructions. Please take a moment to completely read and familiarize yourself with this information. You will then be ready to assemble your furniture. If you have any questions regarding your purchase, please contact us

! IMPORTANT NOTE

- Place all parts on a clean and smooth surface such as a rug or carpet to avoid the parts from being scratched.
- Remove all wrapping material, including packing straps before you start to assemble.
- Do not completely tighten any bolts until the unit is fully assembled and sitting on a level surface.
- Tighten each bolt nuts firmly.
- DO NOT over tighten any of the bolt nuts as this may strip the screws.
- Keep all hardware parts out of reach of children.


CARE & MAINTENANCE

products are constructed from HDPE (High Density Polyethelene), primarily a recycled material. UV inhibitors are also added to resist fading. Simply maintain your furniture by cleaning with soap and warm water to ensure its long lasting beauty. A soft bristle brush can be used on any tough to clean stains. Stainless steel hardware is used in the assembly of these products and should be rinsed regularly with fresh water if being used in a coastal environment. Very little maintenance is required for your furniture. Periodically check all fasteners to make sure they are properly secured. Re tighten if necessary.

PART AND HARDWARE LIST

1 M6x85mm SCREW  8 PCS	2 M6x80mm BOLT  2 PCS	3 M6x60mm BOLT  2 PCS	4 M6x50mm BOLT  8 PCS	5 M6x40mm BOLT  6 PCS
6 M6 NUT  12 PCS	7 M6 WASHER  12 PCS	8 ALLEN WRENCH  1 PCS	9 WRENCH  1 PCS	

PARTS LIST

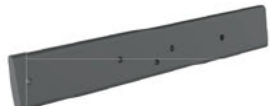A CHAIR SEAT  1 PC	B FRONT LEGS  2 PCS	C REAR LEGS  2 PCS
D LEFT CHAIR LEG  1 PC	E RIGHT CHAIR LEG  1 PC	F ROCKING BAR  2 PCS

PARTS LIST

G

BACKREST



1 PCS

H


RAILS



2 PCS

ASSEMBLY INSTRUCTION


Look at the following overall view of the rocking chair and learn how to assemble the exact position of each part.

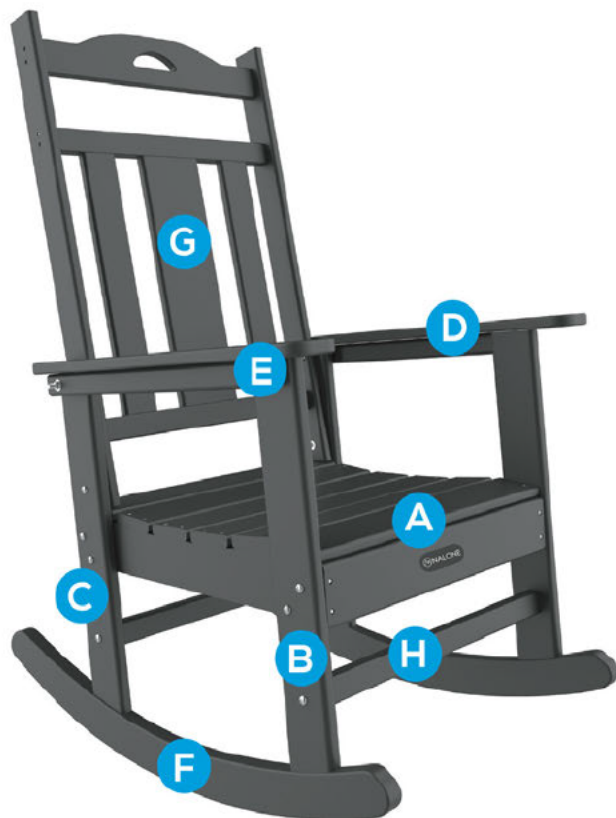

1

Attached Rear Chair Leg(B) and Front Chair Leg(B) to Sitting Board(A) by 4 pcs bolts(4), nuts(6) and washers(7) using Allen Wrench(8) and Wrench(9).


Do same to another Rear Chair Leg(C) and Front Chair Leg(B) to Sitting Board(A).

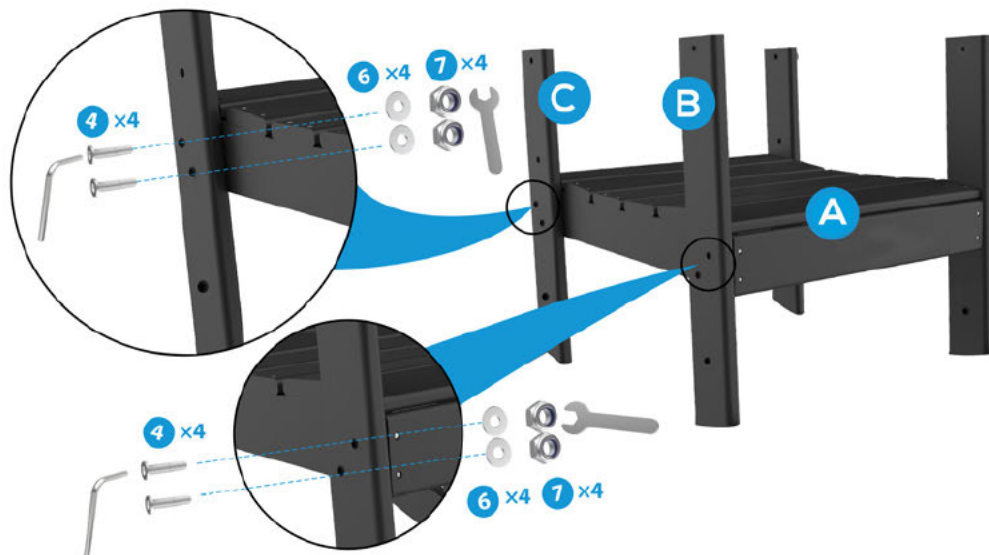

2


Attached Rear Chair Leg(C) to Backrest(G) by 1pc bolt (5) M6x40, using Allen Wrench(8).

Do same to connect Back rest (G) with Left Arm (D) and Rear Chair Leg (C).

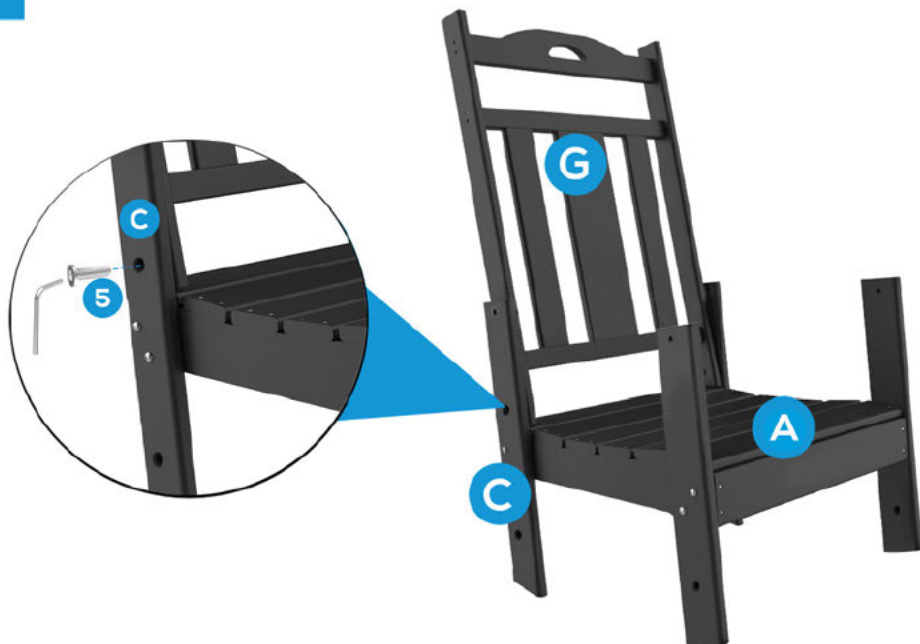

3


Attached Right Arm (E) to Front Chair Leg (B) , Rear Chair Leg (C) and Backrest (G) by 1 pc bolt (2) and 1pc bolt (3) ,nut (6) and washer (7) using Allen Wrench and Wrench (9).
Do same to Left Arm(D) and Front Chair Leg(B).

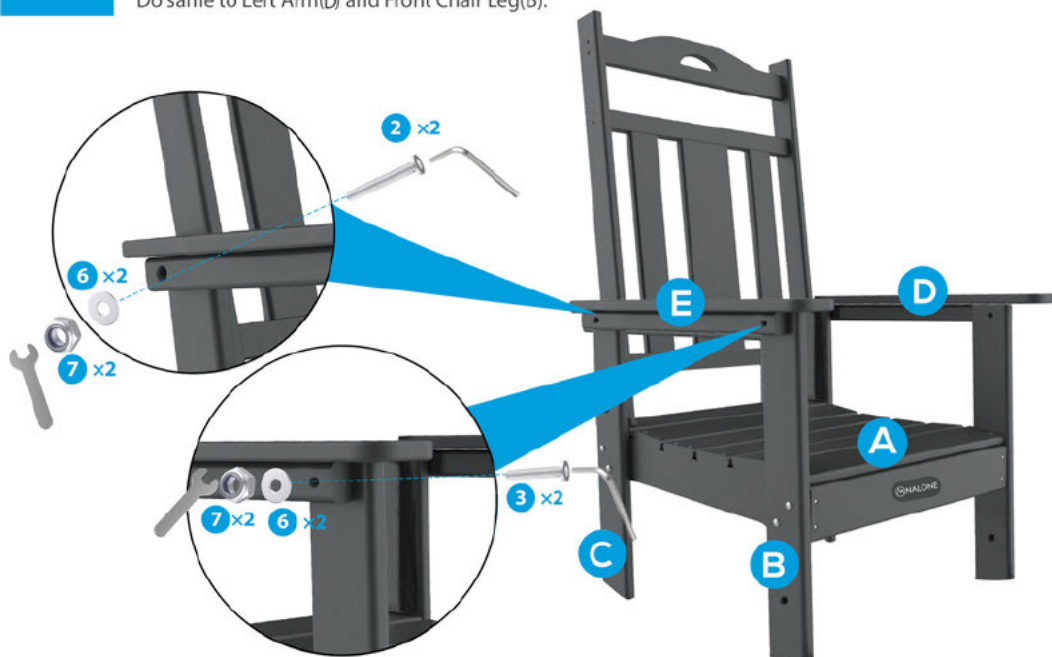

4

Attached Rear Chair Leg(C) to Rocking Bar(A) by 2 pcs screws(1) using Allen Wrench(8), then attached Front Chair Leg(B) to Rocking Bar(A) by 2 pcs screws(1) using Allen Wrench(8).
Do same to connect another Rear Chair Leg(C) and Front Chair Leg(B) with Rocking Bar(F) .

⚠ Do not tighten screws too much at this stage.

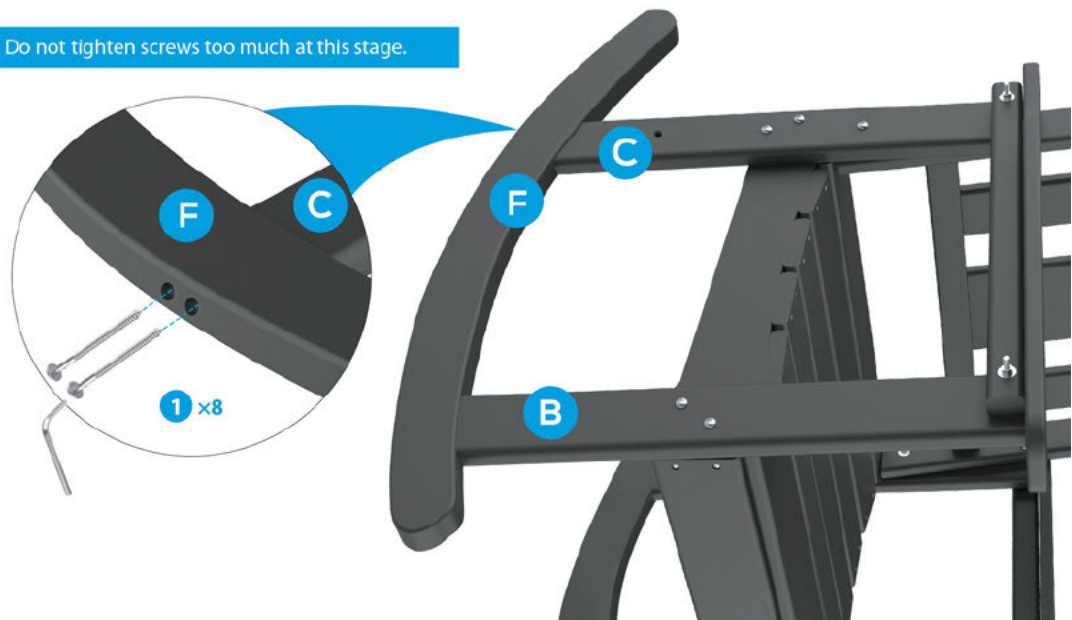

5

Attached Rail(H) to Front Chair Legs(B) by 2pcs bolt(5) using Allen Wrench(8).
Do same to connect Rail(H) with Rear Chair Leg(C).



! Make sure all nuts are tightened and complete the assembly.

CARE AND MAINTENANCE



DO NOT

- Avoid harsh, abrasive cleaners, and other corrosive chemicals.
- Do not use metal scouring pad for cleaning. Most stains can be removed by using a mild soap and a soft bristled brush.
- Avoid placing any direct heat source on or near the surface.
- Leaving any glassware on the Side Table under sunlight may result in burn marks on the surface. Please use a coaster when placing glassware on the rocking chair.

Cleaning Tips

Even Nalone gets dirty - here are some ways to help keep it clean :

For a quick clean:

Simply wipe down with soap and water.

For a deeper clean:

You'll need:

- » $\frac{1}{3}$ bleach and $\frac{2}{3}$ water solution
- » clean cloth
- » soft bristle brush

Wipe on solution with your cloth and let it sit on the lumber for a few minutes (this will not affect the color) Then, loosen any dirt and debris that may catch in surface grooves with a soft bristle brush: hose down to rinse.