

CLOCK HANGING INSTRUCTIONS

You will need :



Screw Driver



Measuring Tape



Screws
(included in your order)



Hooks

Step 1 :

Determine where you would like to hang your new clock.

Your clock has the wall hanging bracket built directly into the actual wood frames.

The top part of each frame is designed with a lip, which you will hang over the included hooks.

We recommend using two hooks for every circular clock, regardless of the size.

We recommend using one hook per panel for every multipanel clock.

Step 2 :

Set the time by manually moving the clock hands. Once you have set the correct time, insert the included battery in the back of the clock.

The clock should start ticking as soon as the battery is installed.

Step 3 :


Insert the screw into an included hook, with the c shape part of the hook facing upward. Drill the screw into the desired placement on the wall. Use a measuring tape and mark the placement of your second hook, again, and turn the screw into an included hook, with the c shape part of the hook facing upward. Drill the screw into the desired placement on the wall. Repeat until the desired number of hooks has been installed.

Finally, hang your new clock over the installed hooks.

Trouble shooting All of our clocks have been tested prior to shipping.

If you install the battery and the clock is not working, please take the following steps.

1. Verify if the battery is installed in the correct direction.
2. Try another battery (we include brand new batteries but a defective battery is always possible)
3. Make sure the clock hands are securely fitted on the corresponding rings of the clock face. If they have moved during transit and are no longer in the correct place, the clock will not work. Adjust them until they click into place.

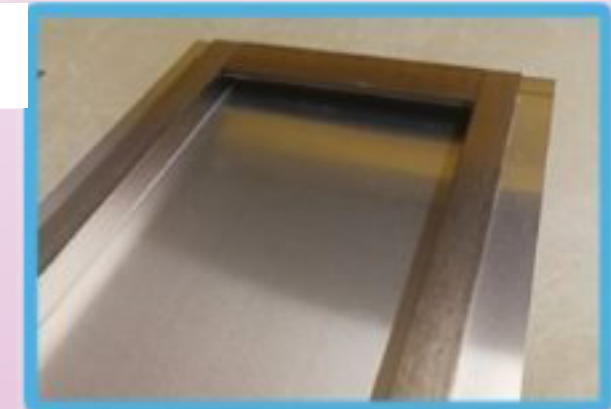

Lip for hanging over screws

