

Product Installation Manual

WARNING - if any Special Control Devices are used with this Fixture, Follow the instruction Carefully to assure fun compliance With N.E.C.requirements.If there are any questions, contact a Qualified Electrical Contractor.



Attach(N).(P) to achieve overall desired length.
Una(N),(P)Para lograr la longitud deseada.
Joignez(N),(P) pour obtenir la Longueur voulue.

AWHITE SUPPLY WHITE.MARKED OR
RIBBEDD FIXTURE WIR
ULLISTED
WIRE NUTS

BLACK SUPPLY BLACK OR SMOOTH
WIRE
FLXTURE WIRE

BLACK COPPER BARE COPPER OR
GREEN GROUND
WIRE FROM SUPPLY
GREEN FIXTURE
GROUND WIRE

GREEN GROUND
WIRE FROM SUPPLY
GREEN GROUND
SCREW

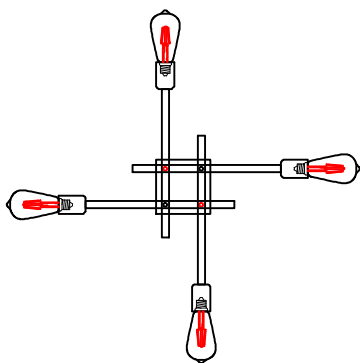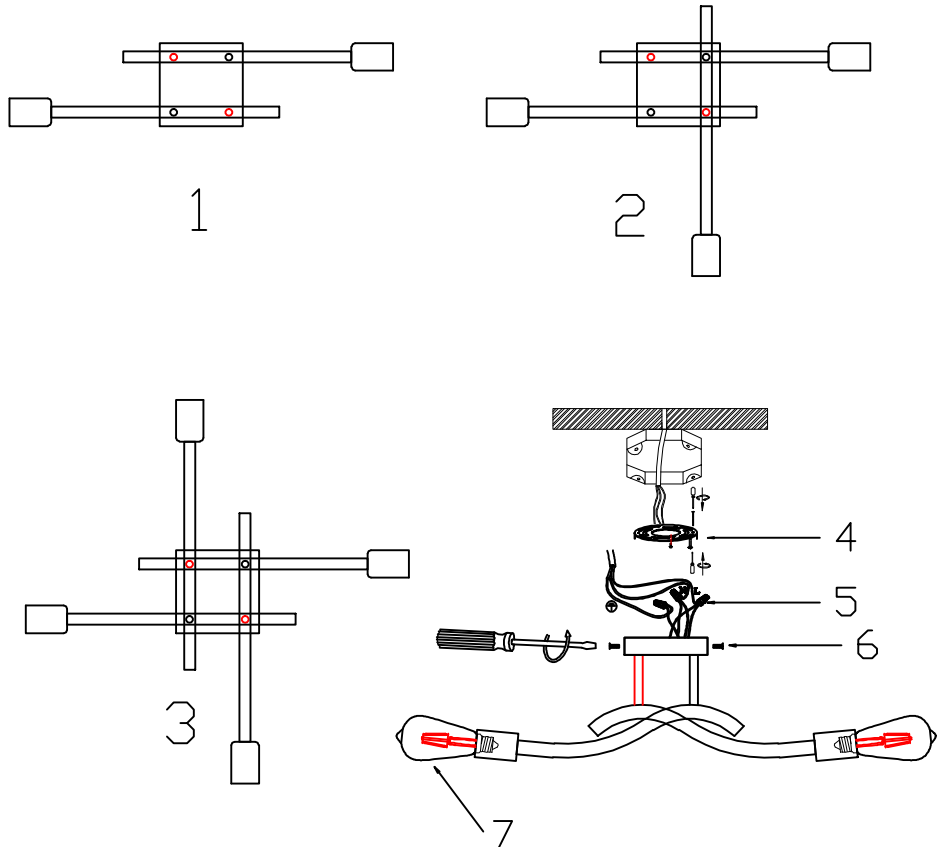

- 1.AC110~130V,50~60Hz.The Max lamps power is 60W TYPE S Bulb,
- 2.Aveld to scratch the surface of lighting and the wires when install it.
3. Connect the live wire with the black wire, the zero wire with the white wire, and wrap the bare copper wire on the green screw vith the symbol (L-L,N-N.)
4. Don't install it to the ceiling before it's cmpletely dry, thesurrounding around must be ventilated and dry.
- 5.Keep away from the acid, basily objeds and gases, clean withsoft cloth, water washing is not allowed.
- 6.The lighting must be installed by professinal electrican and used Indoor only
- 7.Please keep attention to cut off the power supply when installing cleaning and replacing bulb.