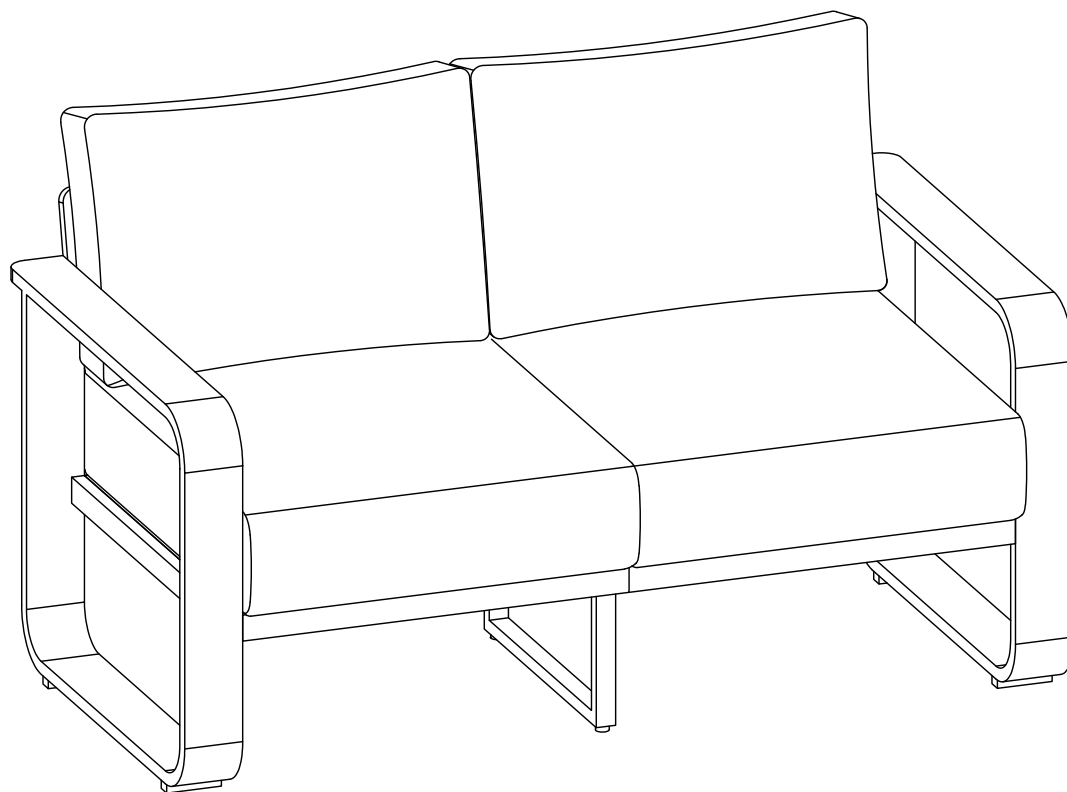















P7O007 Assembly Manual

Patio Loveseat



 CAUTION

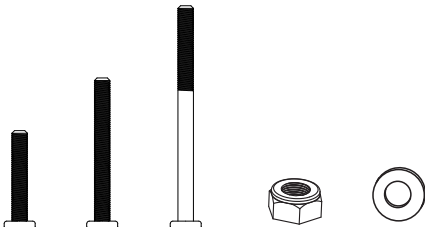
THIS ASSEMBLY MANUAL CONTAINS IMPORTANT SAFETY INFORMATION.
PLEASE READ AND KEEP FOR FUTURE REFERENCE.

A x 1  Right Arm	B x 1  Left Arm	C x 2  Seat Panel	D x 2  Back Panel
E x 1  Support Leg	F x 2  Seat Cushion	G x 2  Back Cushion	H1 x 8  Bolts (M6 x 35mm)
H2 x 4  Bolts (M6 x 55mm)	H3 x 1  Bolts (M6 x 85mm)	H4 x 16  Flat Washers (M6)	H5 x 3  Nuts (M6)
H6 x 1  Open-Ended Wrench (M6)	H7 x 1  Allen Wrench (4#)	 Extra Hardware	


Before you begin:

1. Check if you have received all parts using the diagram on this page. Do not start the assembly process until all parts are present. If you have not received all parts or received wrong or damaged ones, please contact our customer service and we will get back to you.
2. Do not discard any of the packaging until you are certain that you have all the necessary parts for the assembly.
3. Do NOT use power tools for assembly.

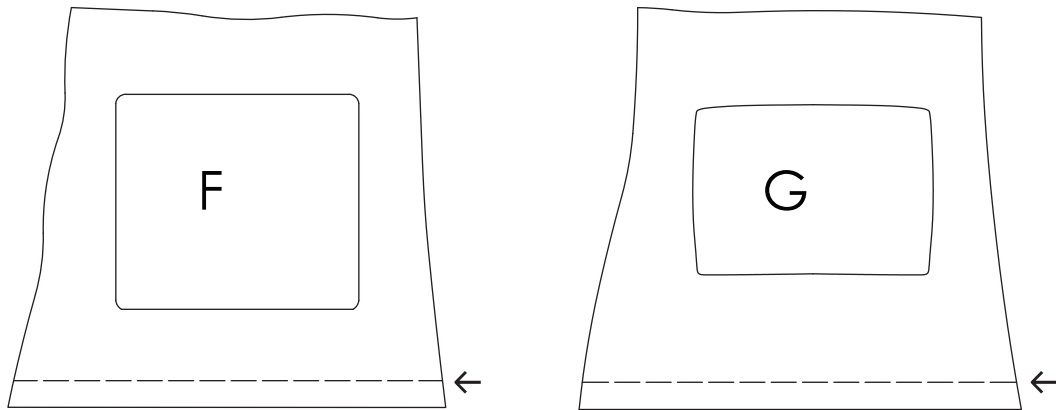
- 1** Open the vacuum-packed bags containing the Seat Cushion (F) and Back Cushion (G).
Note: Do NOT use sharp tools such as knives or scissors to open these bags as it could potentially damage the cushions. Please use your hands to gently pull the bags apart.



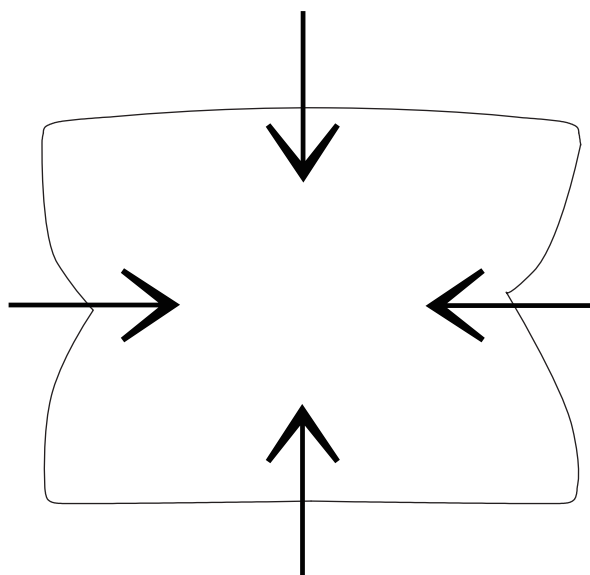
- 2** Please allow up to 48 hours for the cushions to return to the original thickness. For Back Cushion (F), fluff the cushion as indicated below to help it return to the original thickness.



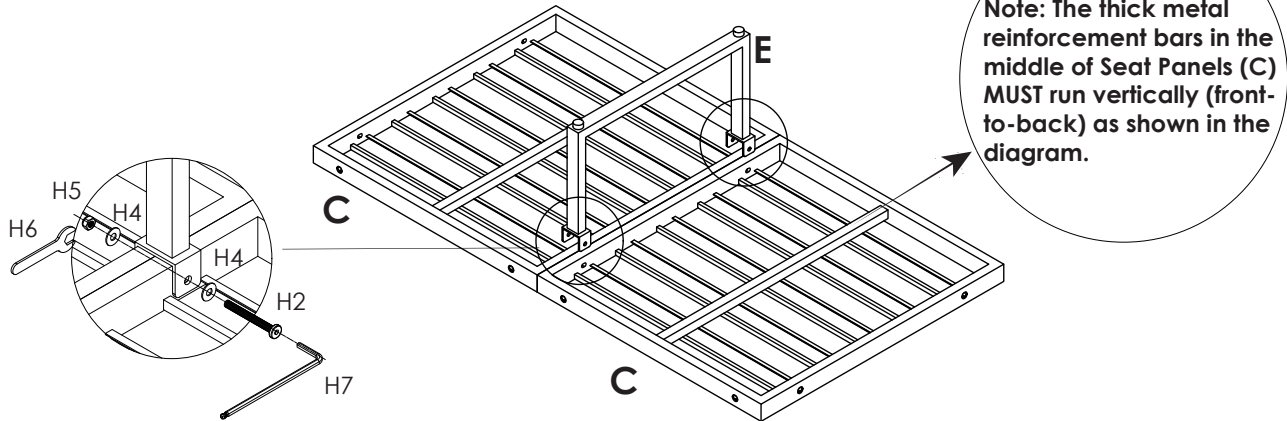
- 3** Place the two Seat Panels (C) horizontally side by side on the floor. Attach the Support Legs (E) to the Seat Panels (C) using the Bolts (H2), Flat Washers (H4), Nuts (H5), the Allen Wrench (H7), and the Open-Ended Wrench (H6). **Fully tighten.**



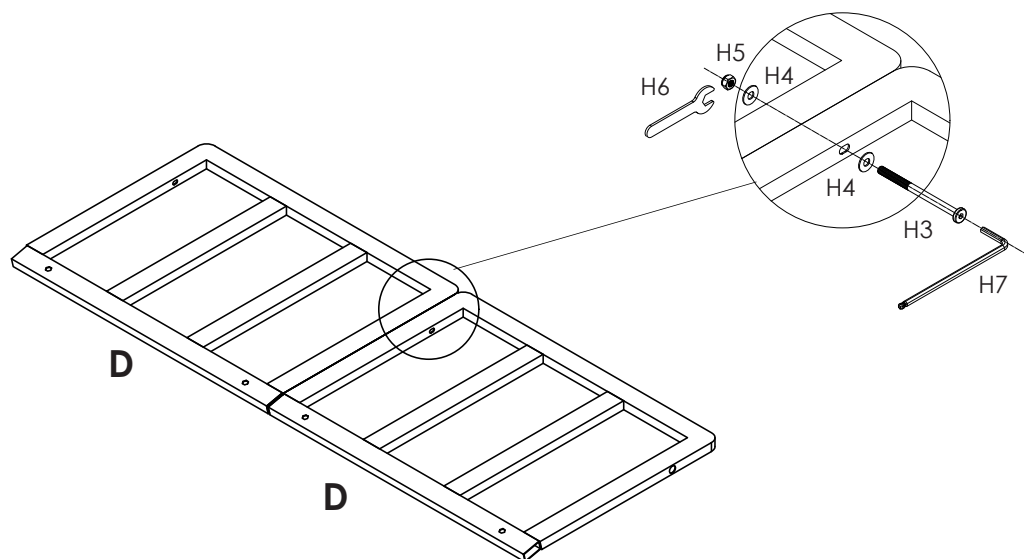
- 4** Place the two Back Panels (D) horizontally side by side on the floor. Assemble the two Back Panels (D) together using the Bolts (H3), Flat Washers (H4), Nuts (H5), the Allen Wrench (H7), and the Open-Ended Wrench (H6). **Fully tighten.**



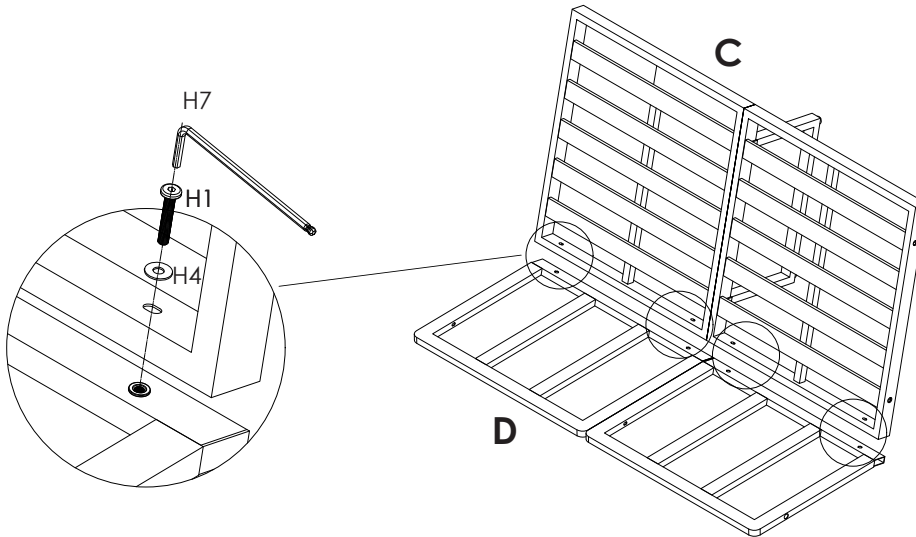
- 5** Attach the Seat Panel (C) to the Back Panel (D), using Bolts (H1), Flat Washers (H4) and Allen Wrench (H7). **Do NOT fully tighten yet.**



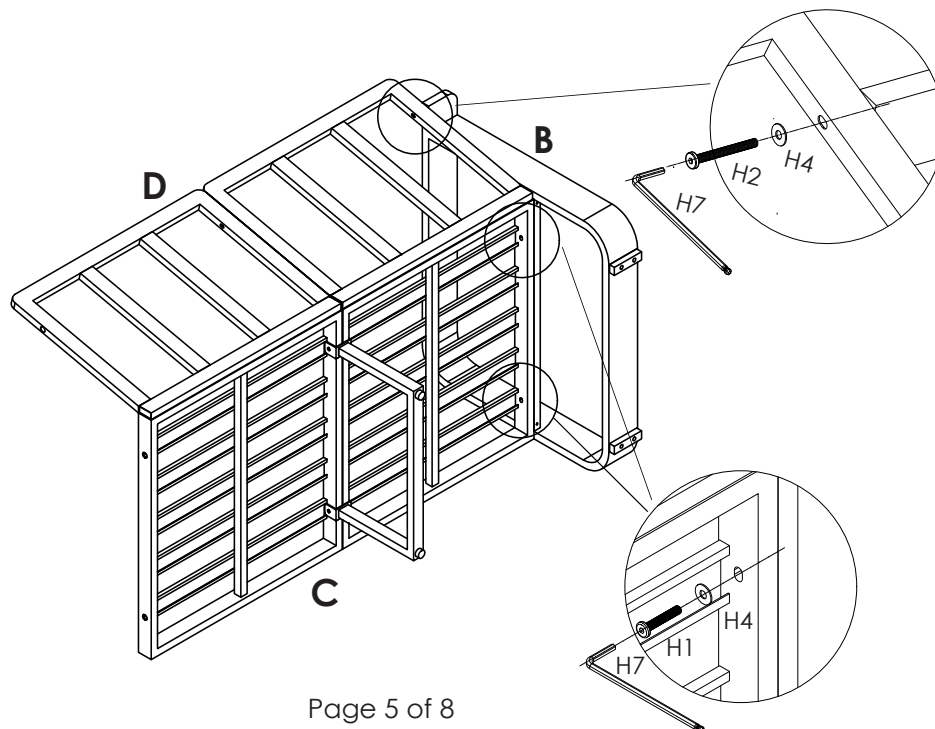
- 6** Place the Left Arm (B) and the Seat Panel (C) upright on the floor. Attach the Seat Panel (C) to the Left Arm (B), using Bolts (H1), Flat Washers (H4), and the Allen Wrench (H7). **Do NOT fully tighten yet.** Then, attach the Back Panel (D) to Left Arm (B), using Bolts (H2), Flat Washers (H4), and Allen Wrench (H7). **Do NOT fully tighten yet.**



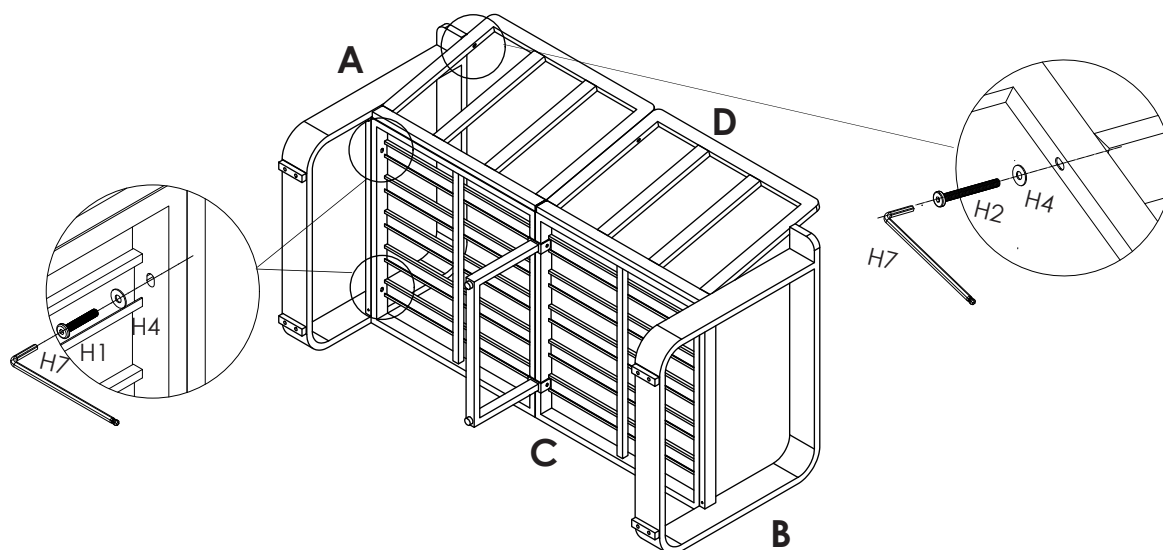
- 7** Place the Right Arm (A) and the Seat Panel (C) upright on the floor. Attach the Seat Panel (C) to the Right Arm (A), using Bolts (H1), Flat Washers (H4), and the Allen Wrench (H7). **Do NOT fully tighten yet.** Then, attach the Back Panel (D) to Right Arm (A), using Bolts (H2), Flat Washers (H4), and Allen Wrench (H7). **Do NOT fully tighten yet.**



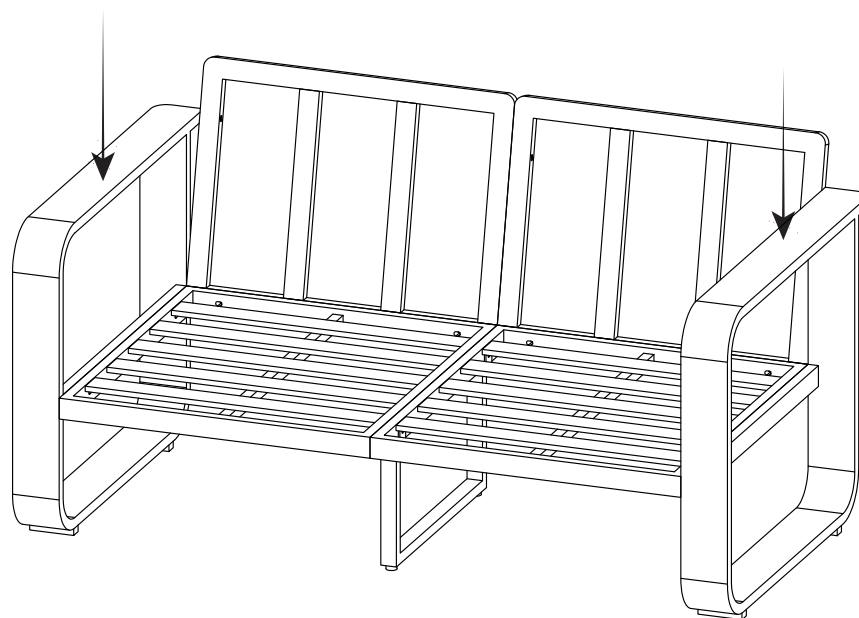
- 8** Turn assembled sofa upright and place on a flat surface. Push legs up or down as necessary to level. **Once level, tighten all Bolts.**



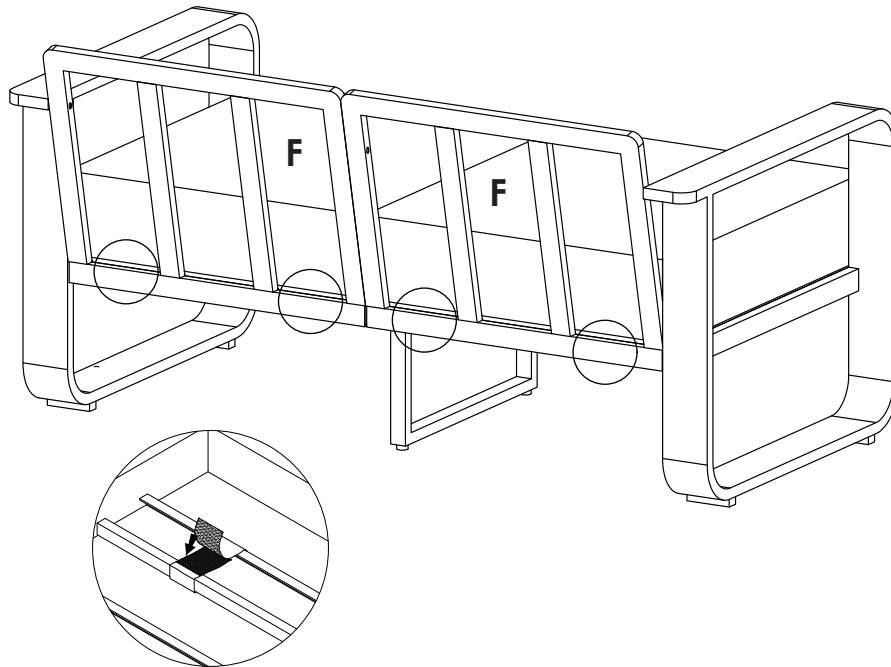- 9** Secure the Seat Cushion (F) in place using the Velcro fasteners on its bottom to ensure it fits properly without shifting.



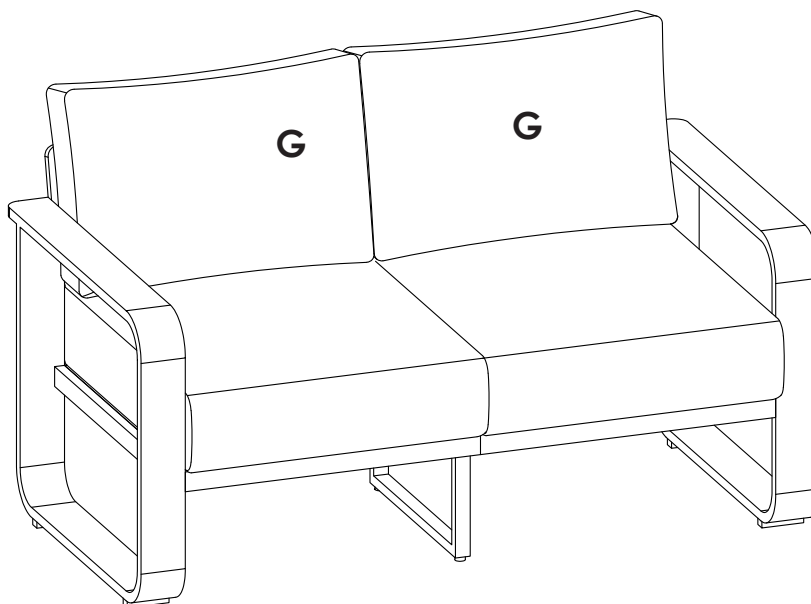- 10** Then place the Back Cushion (G) on the chair.



11 Assembly complete. Enjoy.

