

HOTMASTER™ by WESTBRASS


D204, D2041, D205 and D2051 INSTALLATION INSTRUCTIONS

HOT TANKS:

After hot water has been dispensed during normal usage, the tank immediately starts the reheating process to bring the water in the tank back up to the temperature the customer has set on the thermostat. During that time, the water will expand and sometimes condense on the inside of the spout delivery tube and the unit may drip for a couple of minutes until the water in the tank reaches the set temperature. Normally, the heating process at startup or re-heating from a completely cold tank (two quarts) to the highest temperature setting takes no more than 20 minutes. Again, this is normal for a vented faucet system. However, excessive pressure is not recommended for the hot tank installation, and recommends no more than 60 psi of incoming water pressure to provide the maximum performance from your system.

WATER PRESSURE:


Inlet pressure above 60 psi may cause the water to "cavitate" inside the filtration system when water is dispensed, this creates tiny air bubbles resulting in water that looks cloudy. If the water is left to stand and clears after a few minutes it verifies an over-pressure condition in the filtration system – not a defect on the faucet, chiller, or hot tank. If the water remains cloudy, check the water source or filtration system. As always, never run hot water through a filter system.

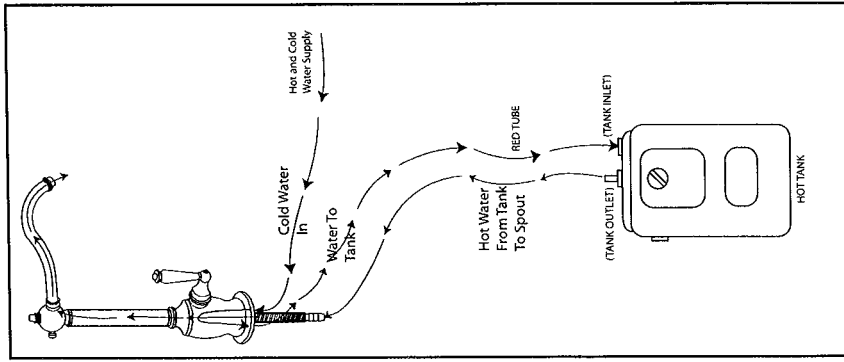

WARRANTY


All Westbrass products are warranted to the original purchaser for a period of 10 years in all finishes except Polished Chrome (26), PVD Brass (01) and Satin Nickel (07) which have a Lifetime Warranty. All products with a living finish do not hold any finish warranty. The living finishes include Unlacquered Polished Brass (02), Weathered Brass (03W), Unlacquered Copper (09), Weathered Copper (10W), Fired Copper (10F), Verde Green (28) and Oil Rubbed Bronze (12). Westbrass also warrants all other aspects of its products to be free of defects in material and workmanship during normal residential use for as long as the original consumer purchaser owns his or her home. If a defect is found in normal residential use, Westbrass will, at its election, repair, provide a replacement part or product, or make appropriate adjustment. Damage to a product caused by accident, misuse, or abuse is not covered by this warranty. Improper care and cleaning will void the warranty. Proof of purchase (original sales receipt) must be provided to Westbrass with all warranty claims. Westbrass is not responsible for labor charges, installation, or other incidental or consequential costs. Liability under warranties expressed or implied is limited to replacement of defective goods only. The use of plumbers' putty on our products also voids the warranty. Silicon sealing compounds should be used. **LIMITATION OF REMEDIES**
THE EXCLUSIVE REMEDY TO THE PURCHASER IS THE REPAIR OR REPLACEMENT OF THE DEFECTIVE OR NON-CONFORMING PRODUCT. SELLER EXCLUDES INCIDENTAL AND CONSEQUENTIAL DAMAGES OF EVERY TYPE AND DESCRIPTION RESULTING FROM ANY CLAIMS OF BREACH OF WARRANTY. ANY ACTIONS FOR BREACH OF WARRANTY MUST BE BROUGHT WITHIN THE STATE OF CALIFORNIA.

WESTBRASS 2429 E Olympic Blvd., Los Angeles, CA 90021 · (213) 627-8441
Fine Decorative Plumbing Since 1935 www.westbrass.com · info@westbrass.com · Fax (213) 627-2844

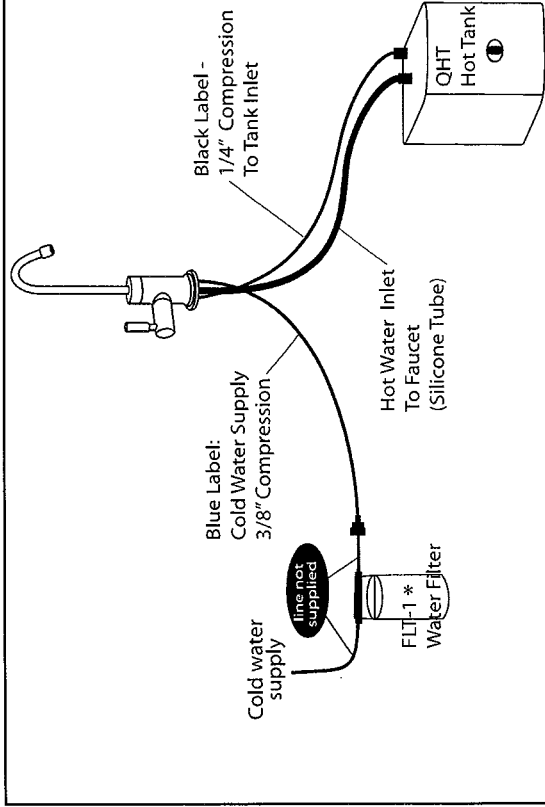

IMPORTANT NOTE TO

INSTALLERS AND CUSTOMERS:
Vented Faucets do no shut off like standard faucets! The valve shuts off pressure in front of the chiller or hot tank, and like a garden hose, the water pressure may cause water to run out of the end of the faucets spout. This is normal for a vented faucet, and should not be mistaken for a valve defect or leak.

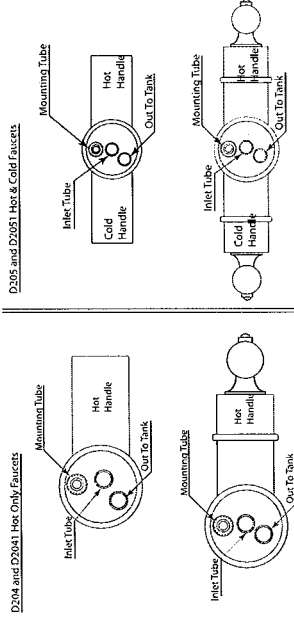

Installation:

1. Place a small bead of silicone seal around the base of the faucet and insert faucet through sink. Using mounting nut and washer, fasten faucet to sink. Do not over tighten.
2. Attach rubber line to mounting nipple using a nylon pinch clamp.
3. Attach cold water inlet line to cold water supply line.
4. Mount Hot water Tank to cabinet wall and hang tank on bracket. **DO NOT PLUG IN TANK.**
5. Attach cold supply from faucet to corner inlet of tank.
6. Attach adapter to tank outlet and attach rubber hose to tank with the other pinch clamp.
7. Turn on water supply and check for leaks. Operate faucet handles to purge air from the system.
8. Hold hot handle open to fill the tank with water. Check for leaks. Now plug in tank and turn knob on.
9. Allow tank to come to temperature - empty completely to rinse debris from system.

CARE AND CLEANING

With the exception of living finishes, all Westbrass decorative finishes are protected by the strongest finish treatments available while maintaining their luxurious appearance. While some finishes are more durable than others, no finish is indestructible. All Westbrass products should be cleaned with a damp non-abrasive cloth and mild, non-fortified soap. Protecting the finish by drying after use and occasional treatment with a high quality Carnuba Wax or non-abrasive polish like Turtle Wax or Maguires for Clear Coat Car Finishes will maintain the luster for a lifetime. Faucet waxing also helps deter water spots and cloudy surfaces caused by hard water.