


# ASSEMBLY INSTRUCTION


## X BACK SIDE CHAIR

**A** Chair Back




1pc

**B** Box Frame



1pc

**C** Wooden Seat



1pc

**D** Front Leg (Left-Right)




2pcs

**E** Side Stretcher (Long)



2pcs

**F** Front Stretcher (Short)



1pc

**G** Jcbc Bolt  
M6 x 70mm



8pcs

**H** Jcbc Bolt  
M6 x 40mm



2pcs

**I** Spring Washer  
M6 x 13mm



10pcs

**J** Flat Washer  
M6 x 16mm x 2mm



10pcs

**K** Glue



1pc

**L** Allen Key  
M4



1pc

**M** CBS Screw  
M4 x 25mm




6pcs

**N** CBS Screw  
M4 x 38mm




6pcs

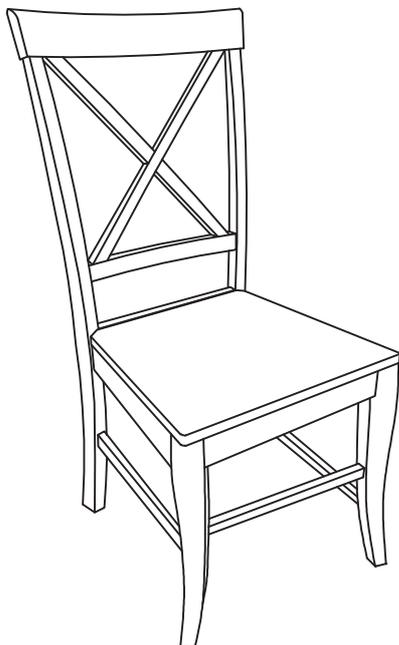


This page lists all the contents included in the box. Please take the time to identify the hardware as well as the individual components to this product. As you unpack and prepare for assembly, place the contents on a carpeted or padded area to protect them from damage.

- 1** Put the Chair Back (A) and Box Frame (B) upside down on the soft and smooth surface. With assistance, attach Box Frame (B) onto Chair Back (A). Then insert Jcbc Bolt (G), Spring Washer (I) and Flat Washer (J) into pre-drilled holes of each corner by using Allen Key (L). Finally, insert Jcbc Bolt (H), Spring Washer (I) and Flat Washer (J) into the pre-drilled holes of the middle of Chair Back (A), by using Allen Key (L). Do not fully tighten the bolts in this step.

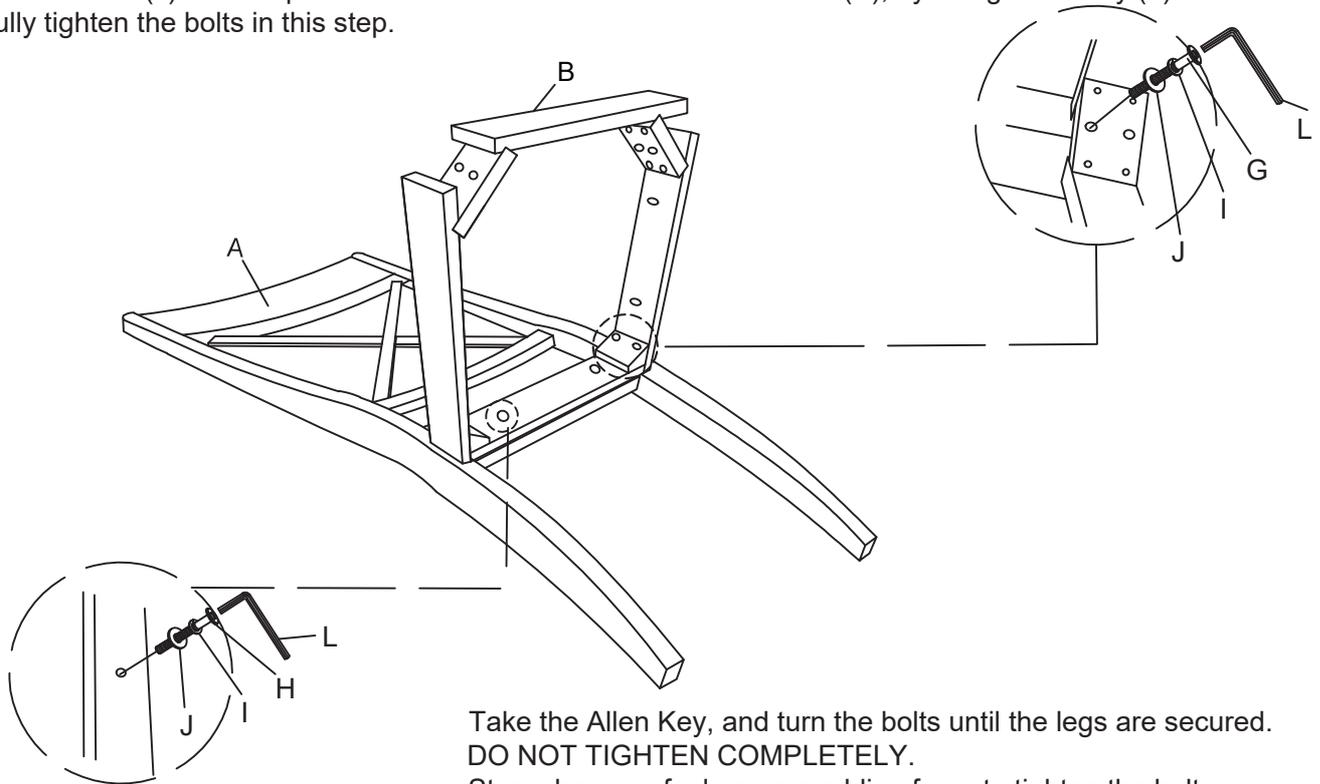

Take the Allen Key, and turn the bolts until the legs are secured.  
**DO NOT TIGHTEN COMPLETELY.**  
Stop when you feel you are adding force to tighten the bolt.

- 2** Apply some Glue (K) to the holes of the Chair Back (A) and insert Side Stretcher (Long) (E) into the holes of Chair Back (A) with CBS Screw (N) by using Screwdriver (not included). Do not fully tighten all screws in this step.

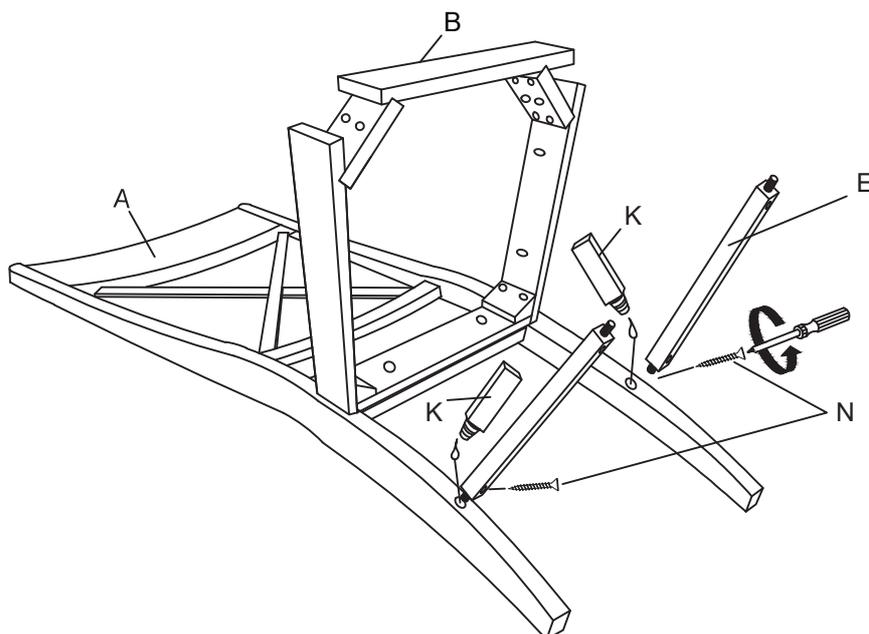




---

**5**


Attach Wooden Seat (C) and Box Frame (B) with CBS Screw (M) by using Screwdriver (not included). Tighten all screws in this step.

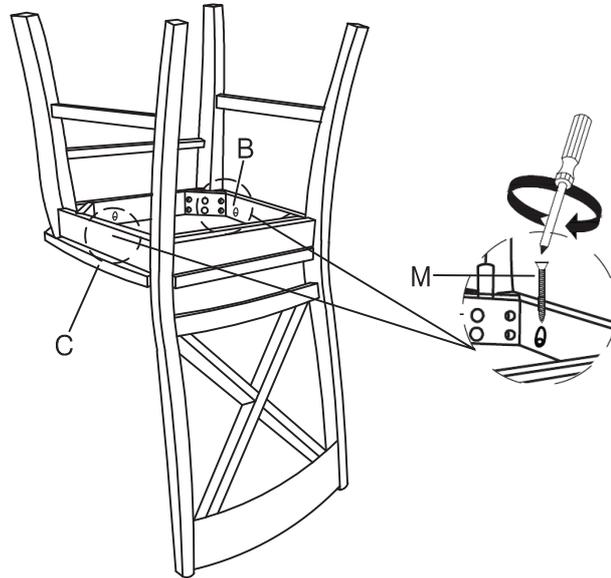

---

**6**

Turn the assembled chair to the upright position carefully. Make sure the chair is level, and then securely tighten all bolts at this stage. Assembly is now completed.

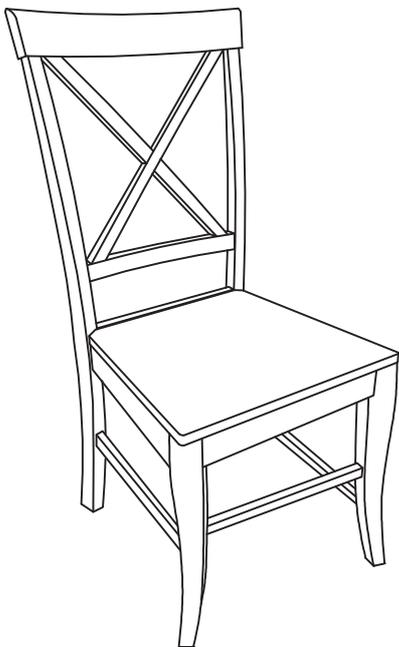

Stand chair up on an even surface and check that it is balanced. If there is a slight wobble, apply downward pressure in the corner where a leg is uneven. Keeping pressure in that corner, tighten all bolts. If balanced, apply downward pressure evenly in the center and tighten all bolts. Do not over-tighten beyond hole depth.

---

Helpful Tip: Instead of applying downward pressure while reaching under to tighten bolts, have someone sit in the chair while you tighten the bolts.

---

#### Cleaning & Care

Treat surface with care. Surface is resistant to scratches but is not scratch resistant. Clean surface with a dry or damp soft cloth. Do not use abrasive cleaners. Hardware may loosen over time. Periodically check that all connections are tight.