

# Assembly Instruction Sheet

Please go to our website for product cleaning tips. Go to the Care + Maintenance selection.

**Tools Required:** Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.

**Light Source:** (5) Medium Base 100W Maximum, Alternate bulb (5) 23W CFL

**Estimated Assembly Time:** 30-45 minutes

**Preparation:** Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.


## ⚠ Warnings and Cautions

Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.

These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation.

Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal. Do not subject glass parts to any shock while in operation or shattering may result.

## Package Contents

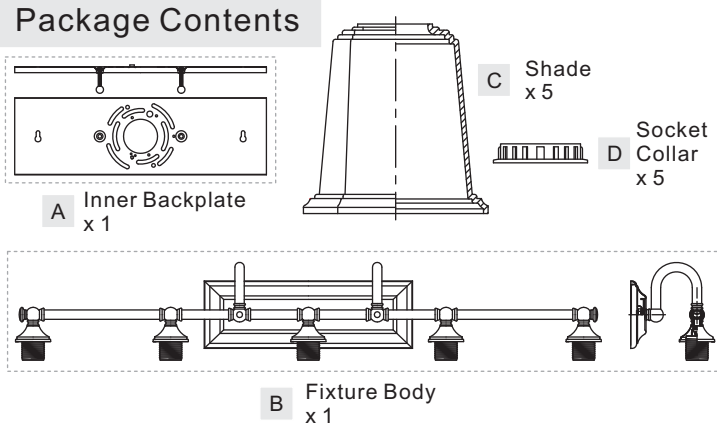

## STEP 1 – Attach Inner Backplate and Fixture Body

- A. Place all supply wires through the Inner Backplate (A) as shown. Position the Inner Backplate (A) onto the Wall, secure by threading the Outlet Box Screws (not supplied) into the mounting holes on the Outlet Box. Tighten until snug.

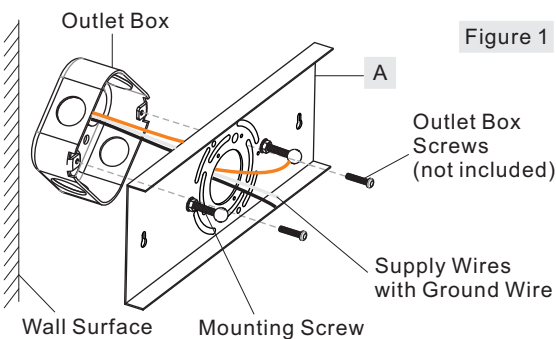


Figure 1

## STEP 2 – Test Fitting Backplate to Crossbar Assembly

- A. Remove mounting balls from the Inner Backplate (A). Fit the backplate on Fixture Body (B) to the Inner Backplate (A) and secure with mounting balls. Note: The backplate on Fixture Body (B) should be snug against the wall and the mounting balls. If not, adjust the length of the mounting screw on the Inner Backplate (A) by unscrewing the preassembled hex nut and lock washer and then screwing the mounting screws in or out of the crossbar until the correct length is achieved. Once the backplate on Fixture Body (B)

## (Step 2 Continued)

is secure, remove the mounting ball and Fixture Body (B) and proceed to Step 3.

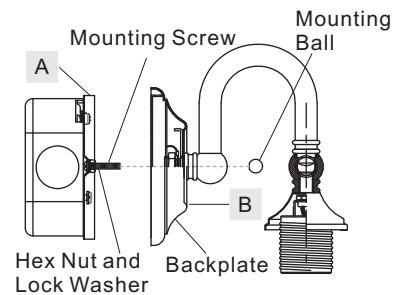


Figure 2

## STEP 3 - Wire Connections

- A. Use standard wire connectors (not included) to make all wire connections. (Connectors are not included with fixture.) Twist connectors until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

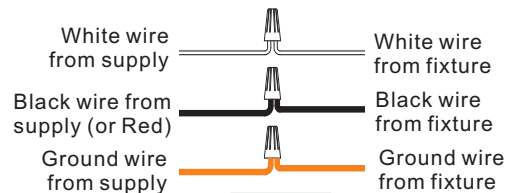


Figure 3

## STEP 4 – Install Fixture Body

- A. Carefully tuck all wires into the outlet box and position the backplate of fixture body (B) over the outlet box. Align the holes in the backplate with the mounting screws. Secure with the previously removed mounting balls and hand tighten until snug.

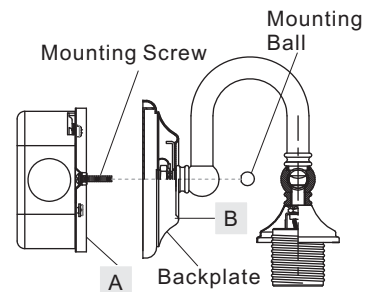


Figure 4

Thank you for purchasing our product.

Need assistance with parts or assembly? Call our customer service or visit us on-line at our website.

**STEP 5 – Install Shade and Bulb**

- A. Place Shade (C) over Socket and secure with Socket Collar (D). Hand tighten until snug.
- B. This fixture uses standard bulb with medium screw base. Maximum 100 watts. Insert bulb and screw snugly into place.

Your fixture is now assembled and ready to use. Enjoy!



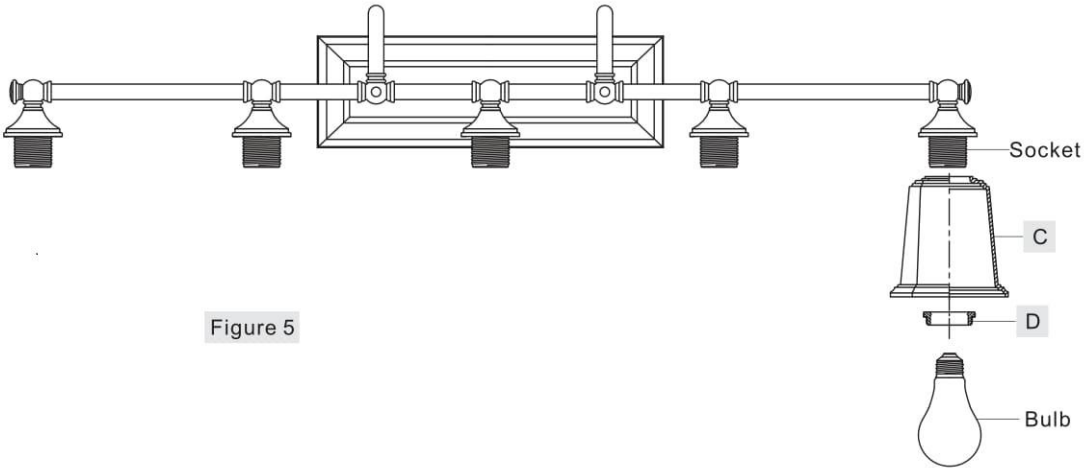


Figure 5

FINISH: POLISHED CHROME  
HARBOR BRONZE  
BRUSHED NICKEL

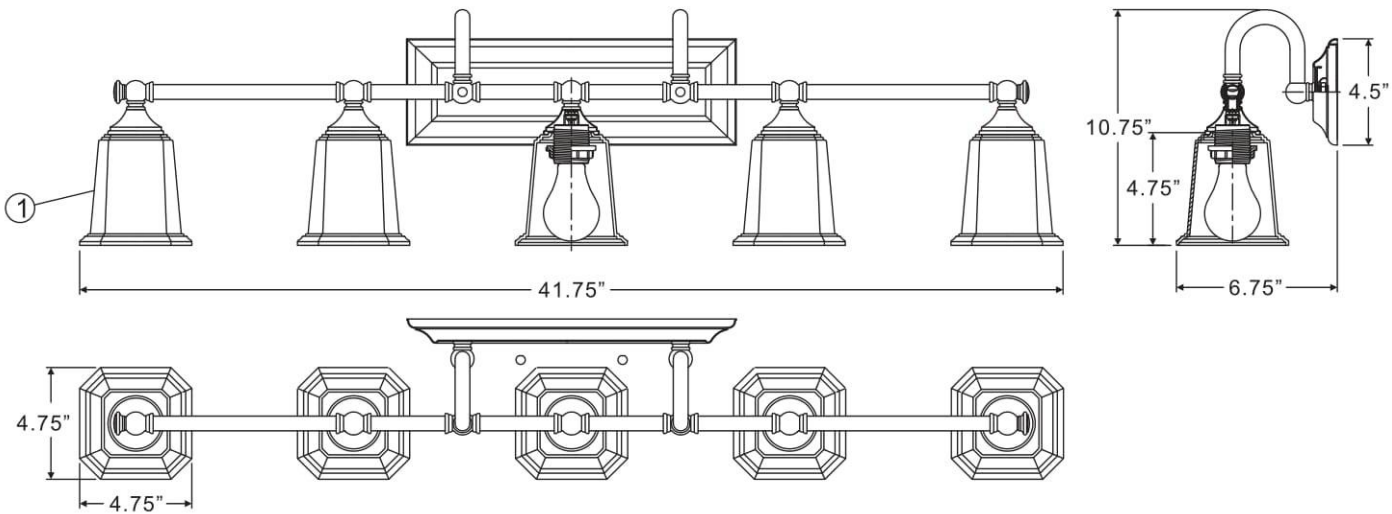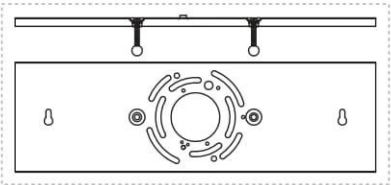

(5) 100W Medium  
Base Bulbs  
(Not Supplied)

NOTE: ALL DIMENSIONS ARE ROUNDED UP TO THE NEAREST 1/4"

NO.	REPLACEMENT PART DESCRIPTION	QTY.
1	GLASS SHADE	5

Thank you for purchasing our product.  
Need assistance with parts or assembly? Call our customer service or visit us on-line at our website.