4x3 Solara Pergola

· Tempered Glass Wall



Assembly Manual










Not Included

PARTS LIST


A3
x2
A
x4
A4
x2
D
x2
G
x4
11
x4
E
x1

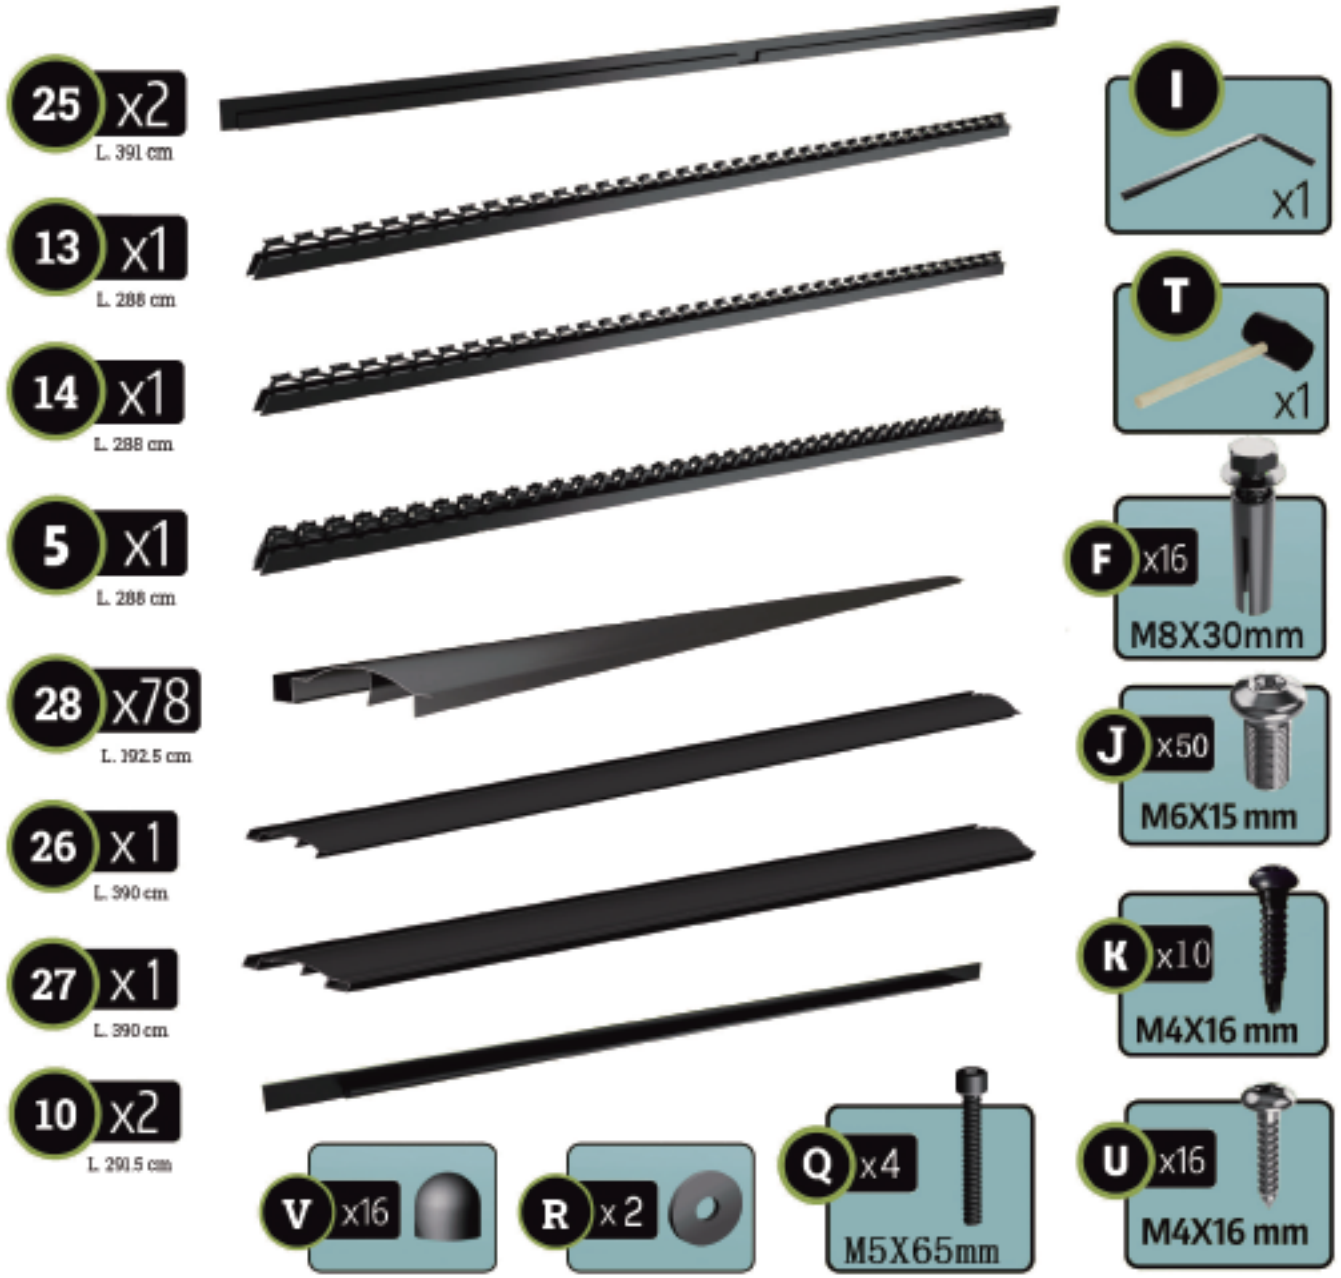
25
x2
L. 391 cm
13
x1
L. 288 cm
14
x1
L. 288 cm
5
x1
L. 288 cm
28
x78
L. 192.5 cm
26
x1
L. 390 cm
27
x1
L. 390 cm
10
x2
L. 291.5 cm
V
x16
R
x2
Q
x4
M5X65mm
I
x1
T
x1
F
x16
M8X30mm
J
x50
M6X15 mm
K
x10
M4X16 mm
U
x16
M4X16 mm

Step 1

Required Parts:






11 x4







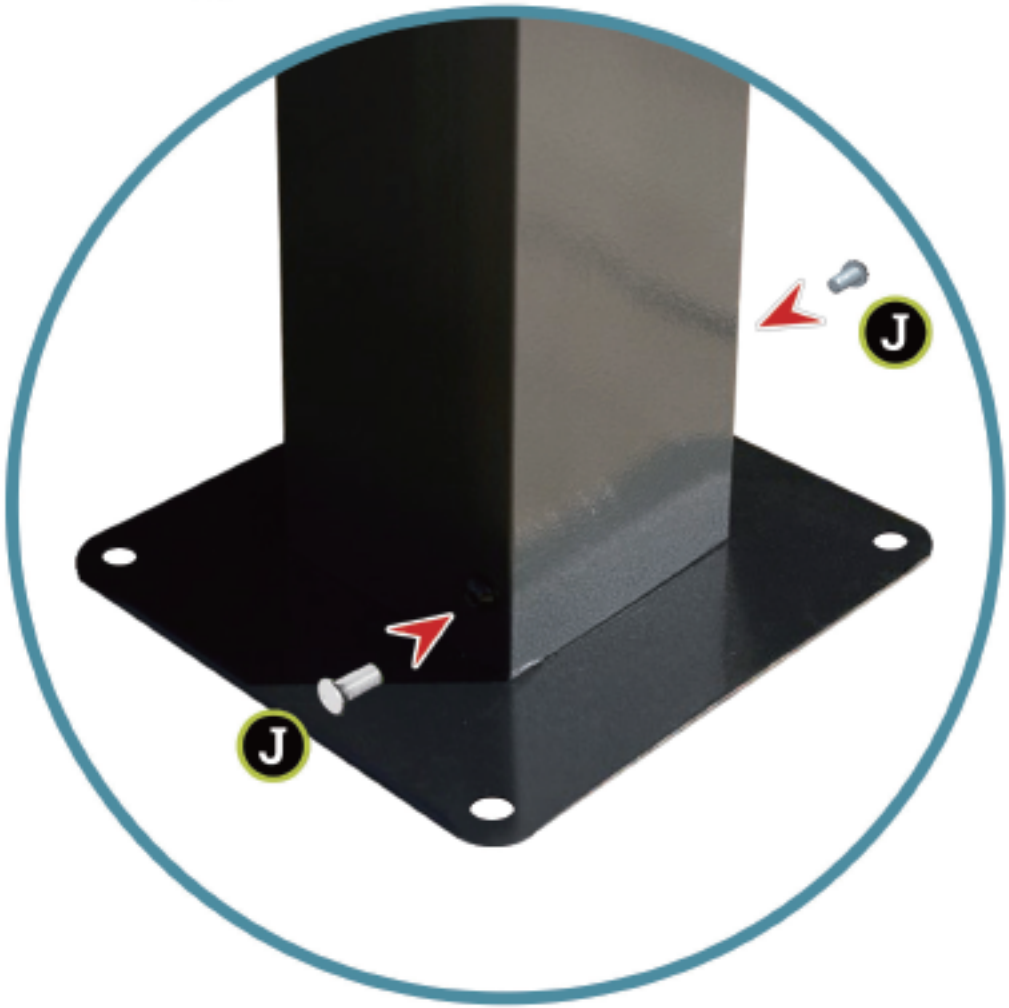


Step 2


Required Parts:





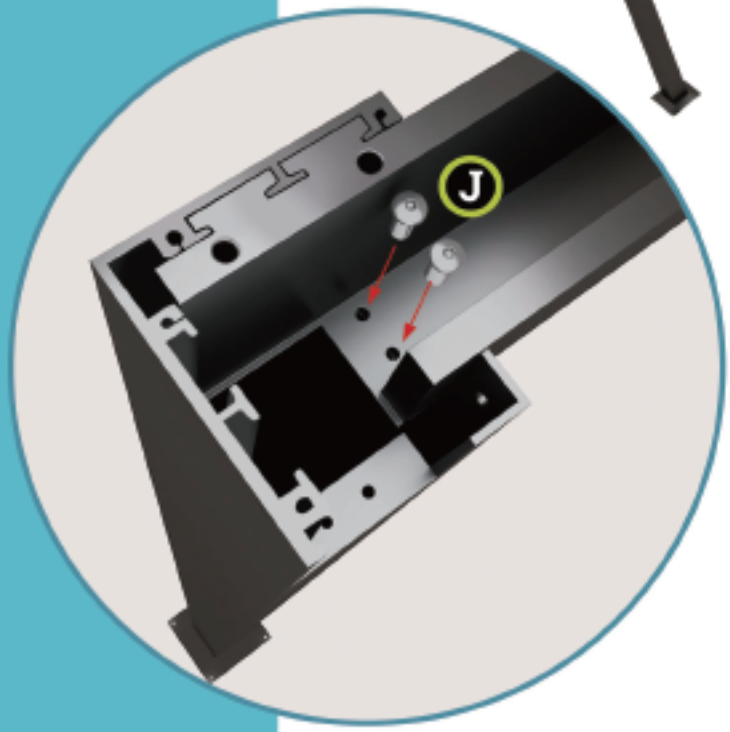

Place piece 25* on top of the previously assembled pieces

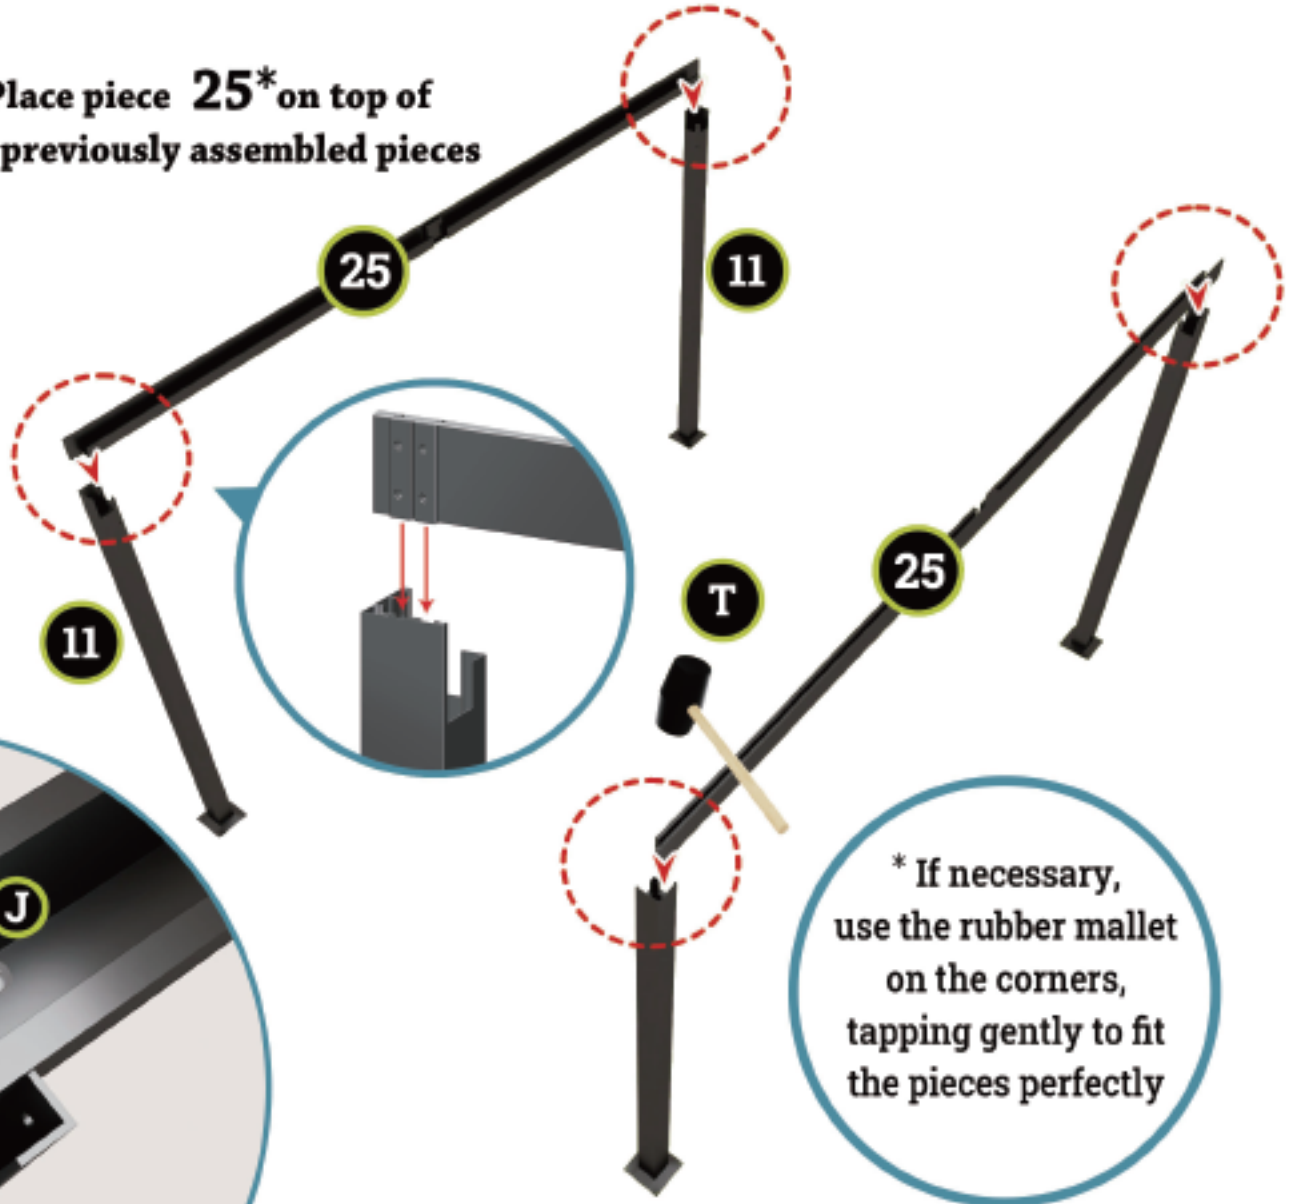

* If necessary, use the rubber mallet on the corners, tapping gently to fit the pieces perfectly


Fix the two J screws in all and Four corners as indicated here

Step 3

Required Parts:

13 x1

Left mechanism L. 288 cm

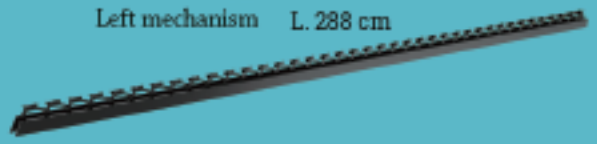

14 x1


Right mechanism L. 288 cm



J x8



Position pieces **13** and **14**
above previously assembled pieces

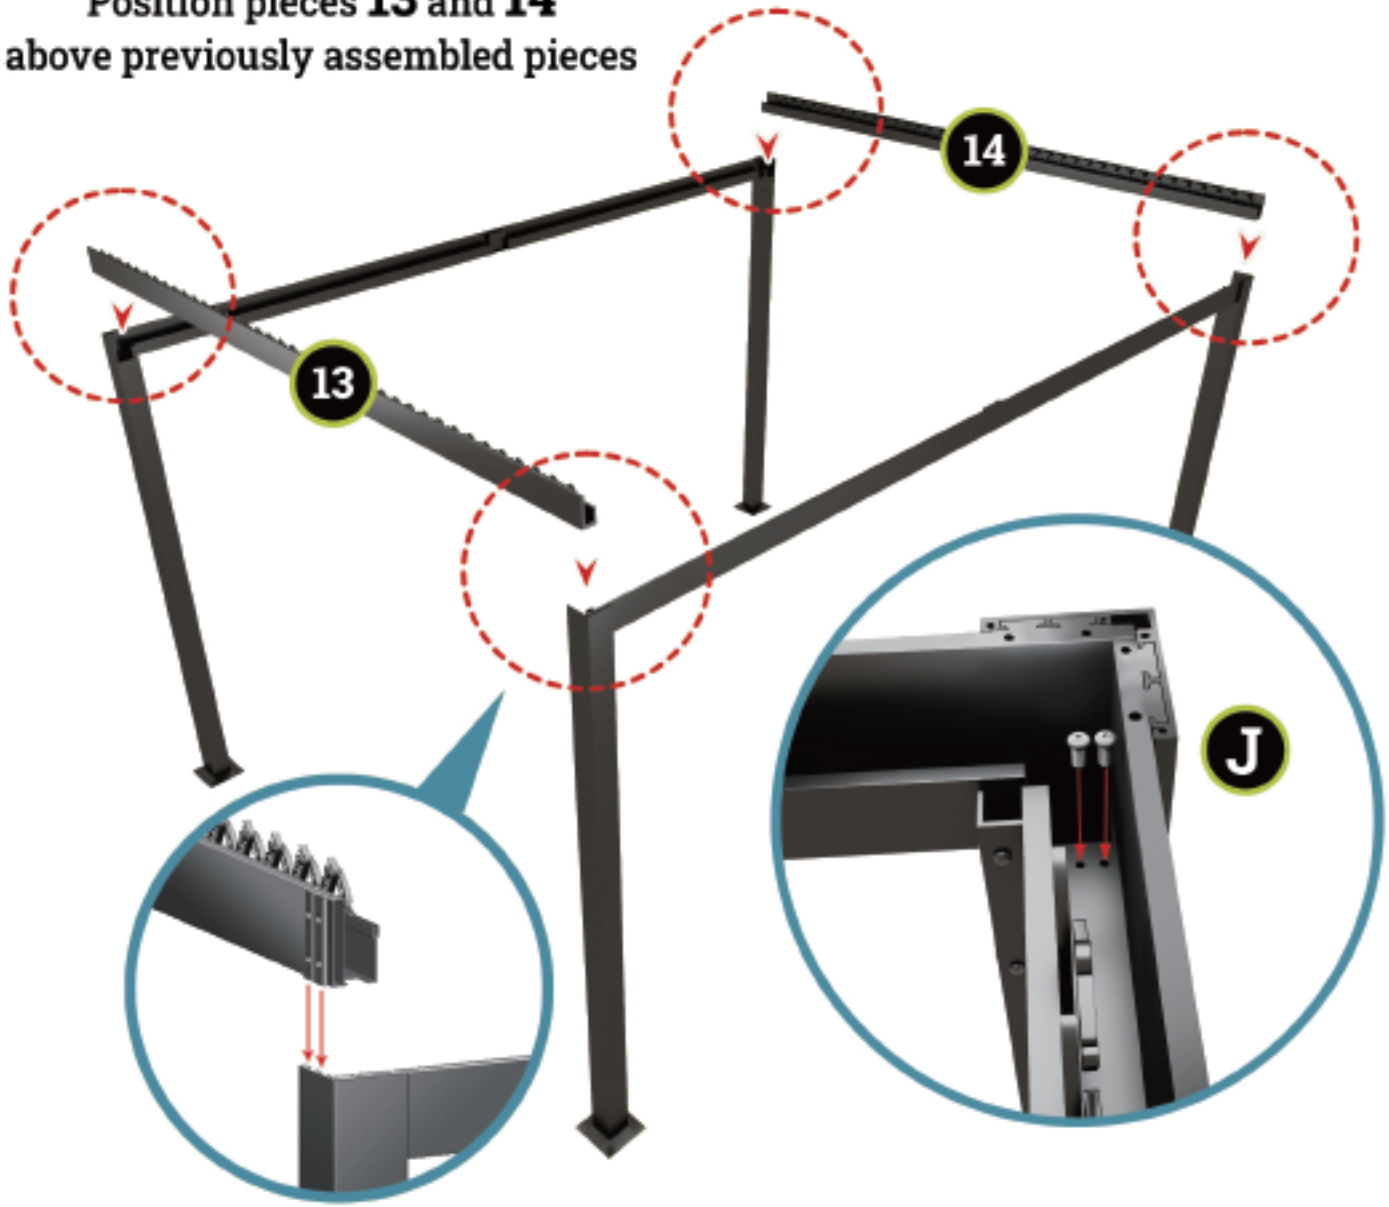

Fix two J screws on each
of the four corners as shown in the figure

Step 4


Required Parts:








Place **A** and screws **U** and **J** attach the corner

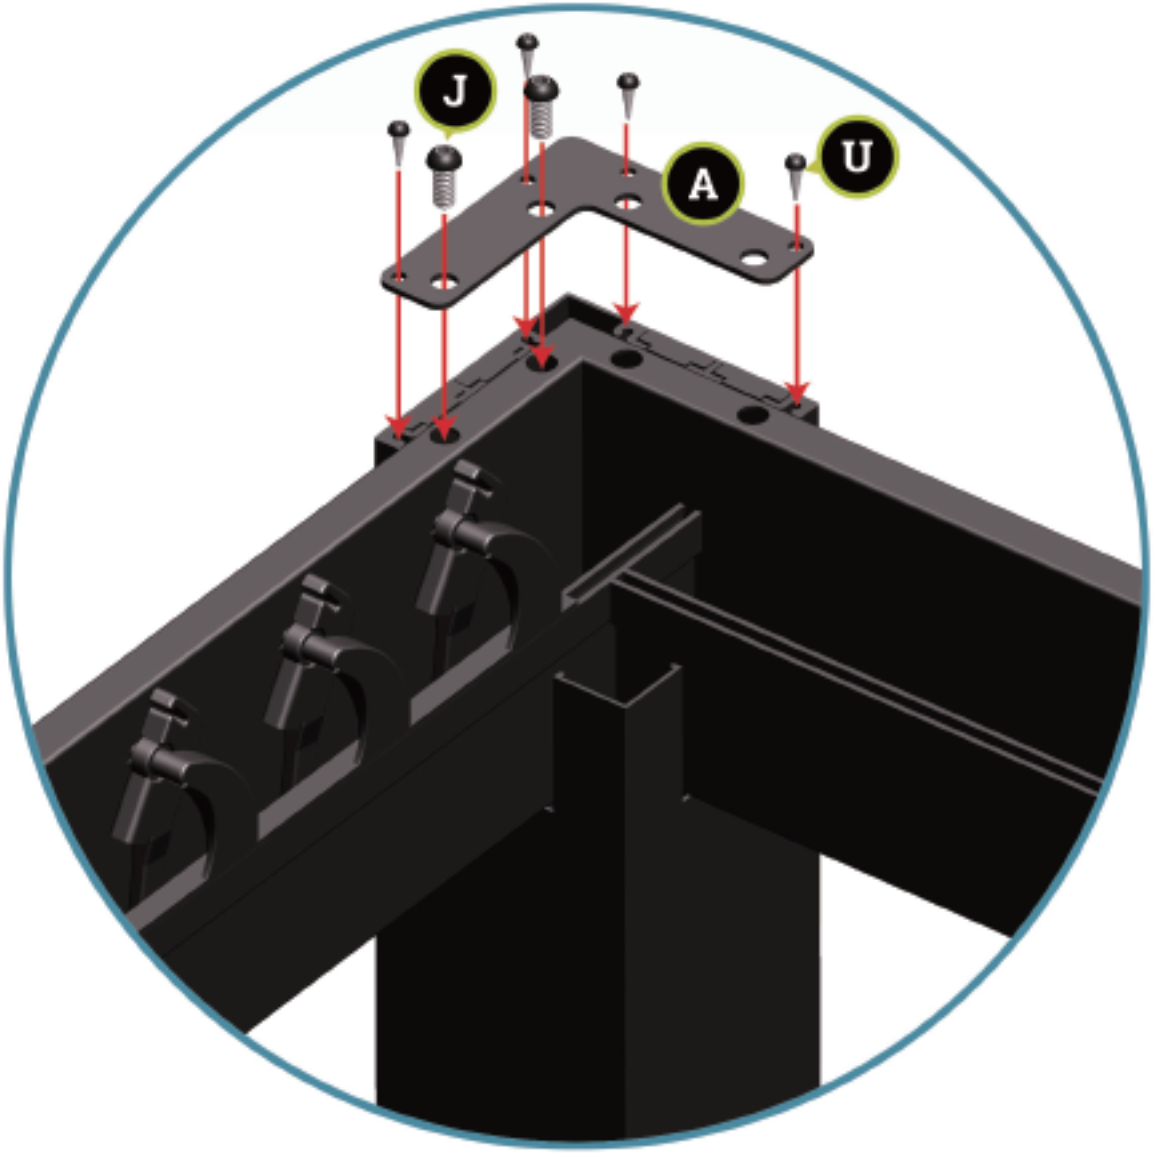

Step 5


Required Parts:



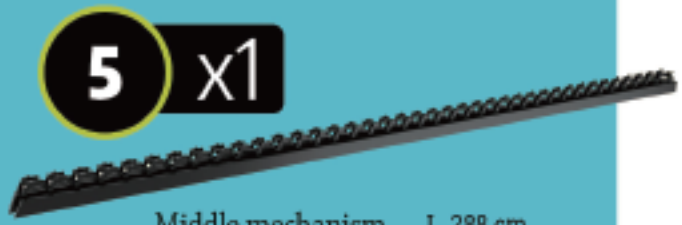

Middle mechanism L. 288 cm



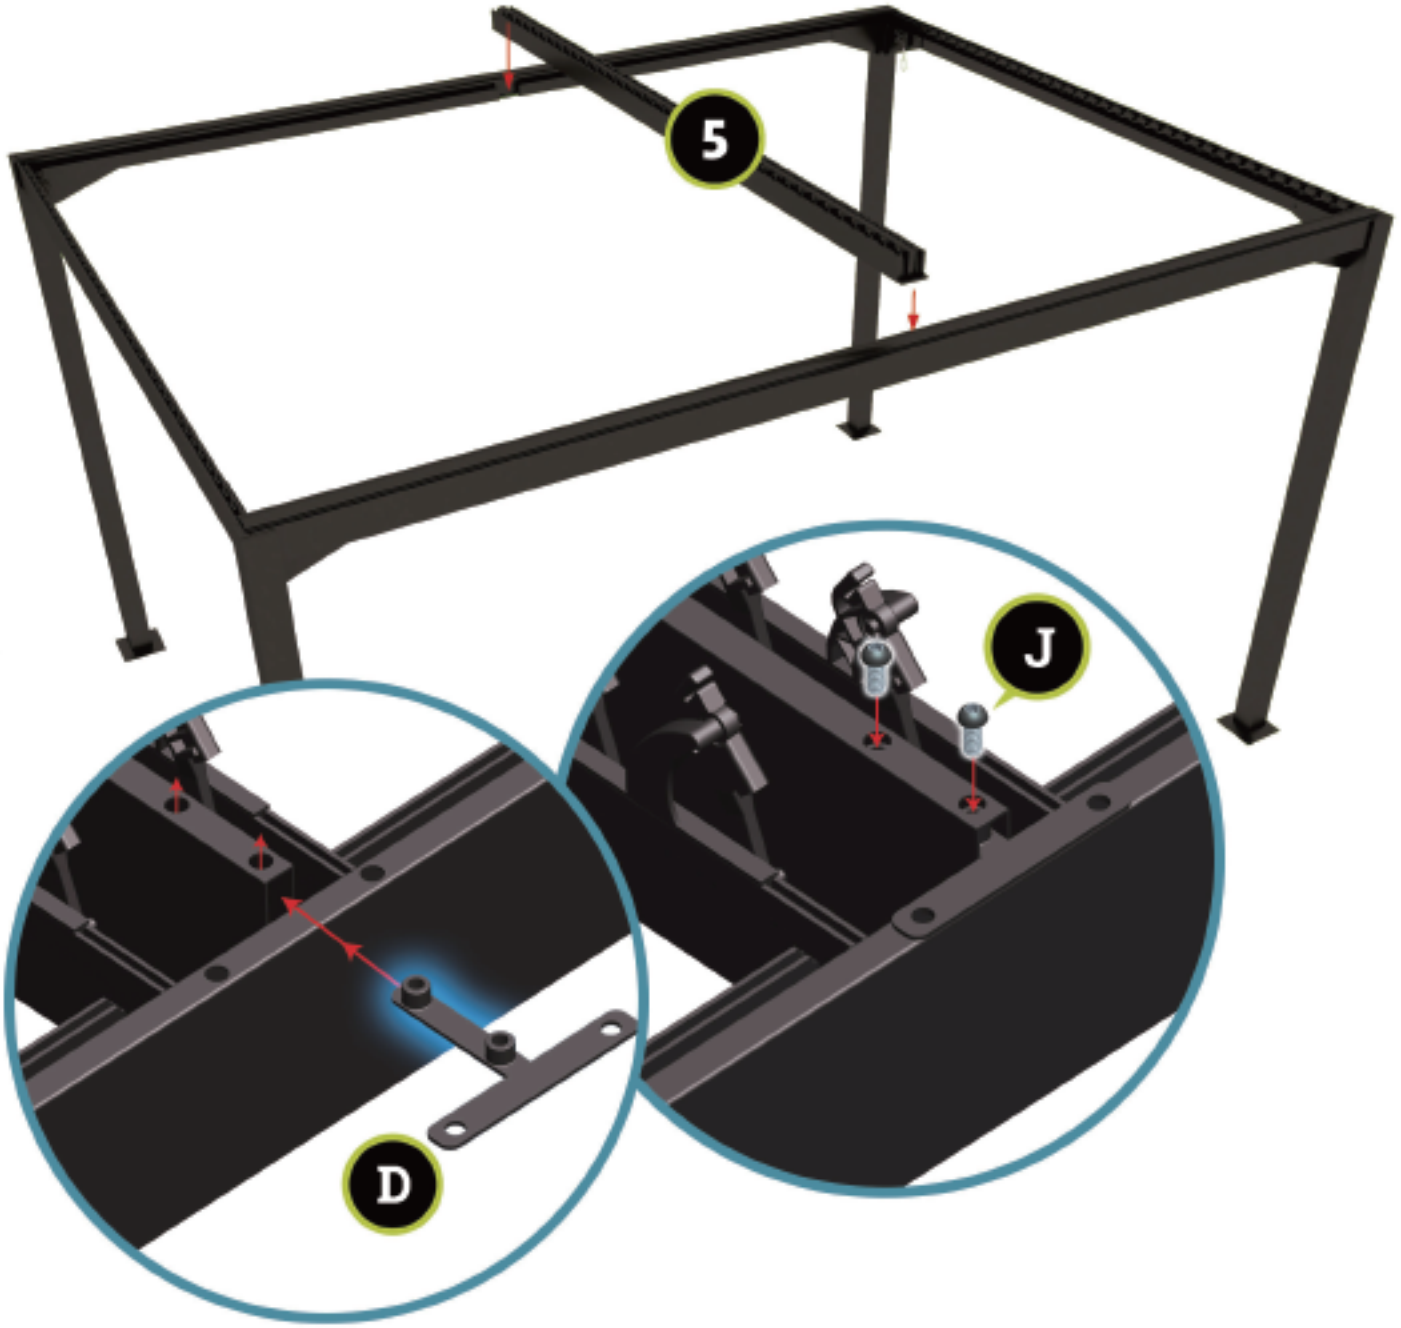



Step 6

Required Parts:

28 x78

Aluminium blades 192.5 cm

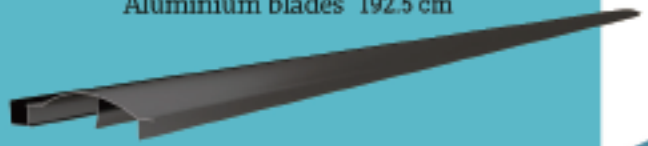

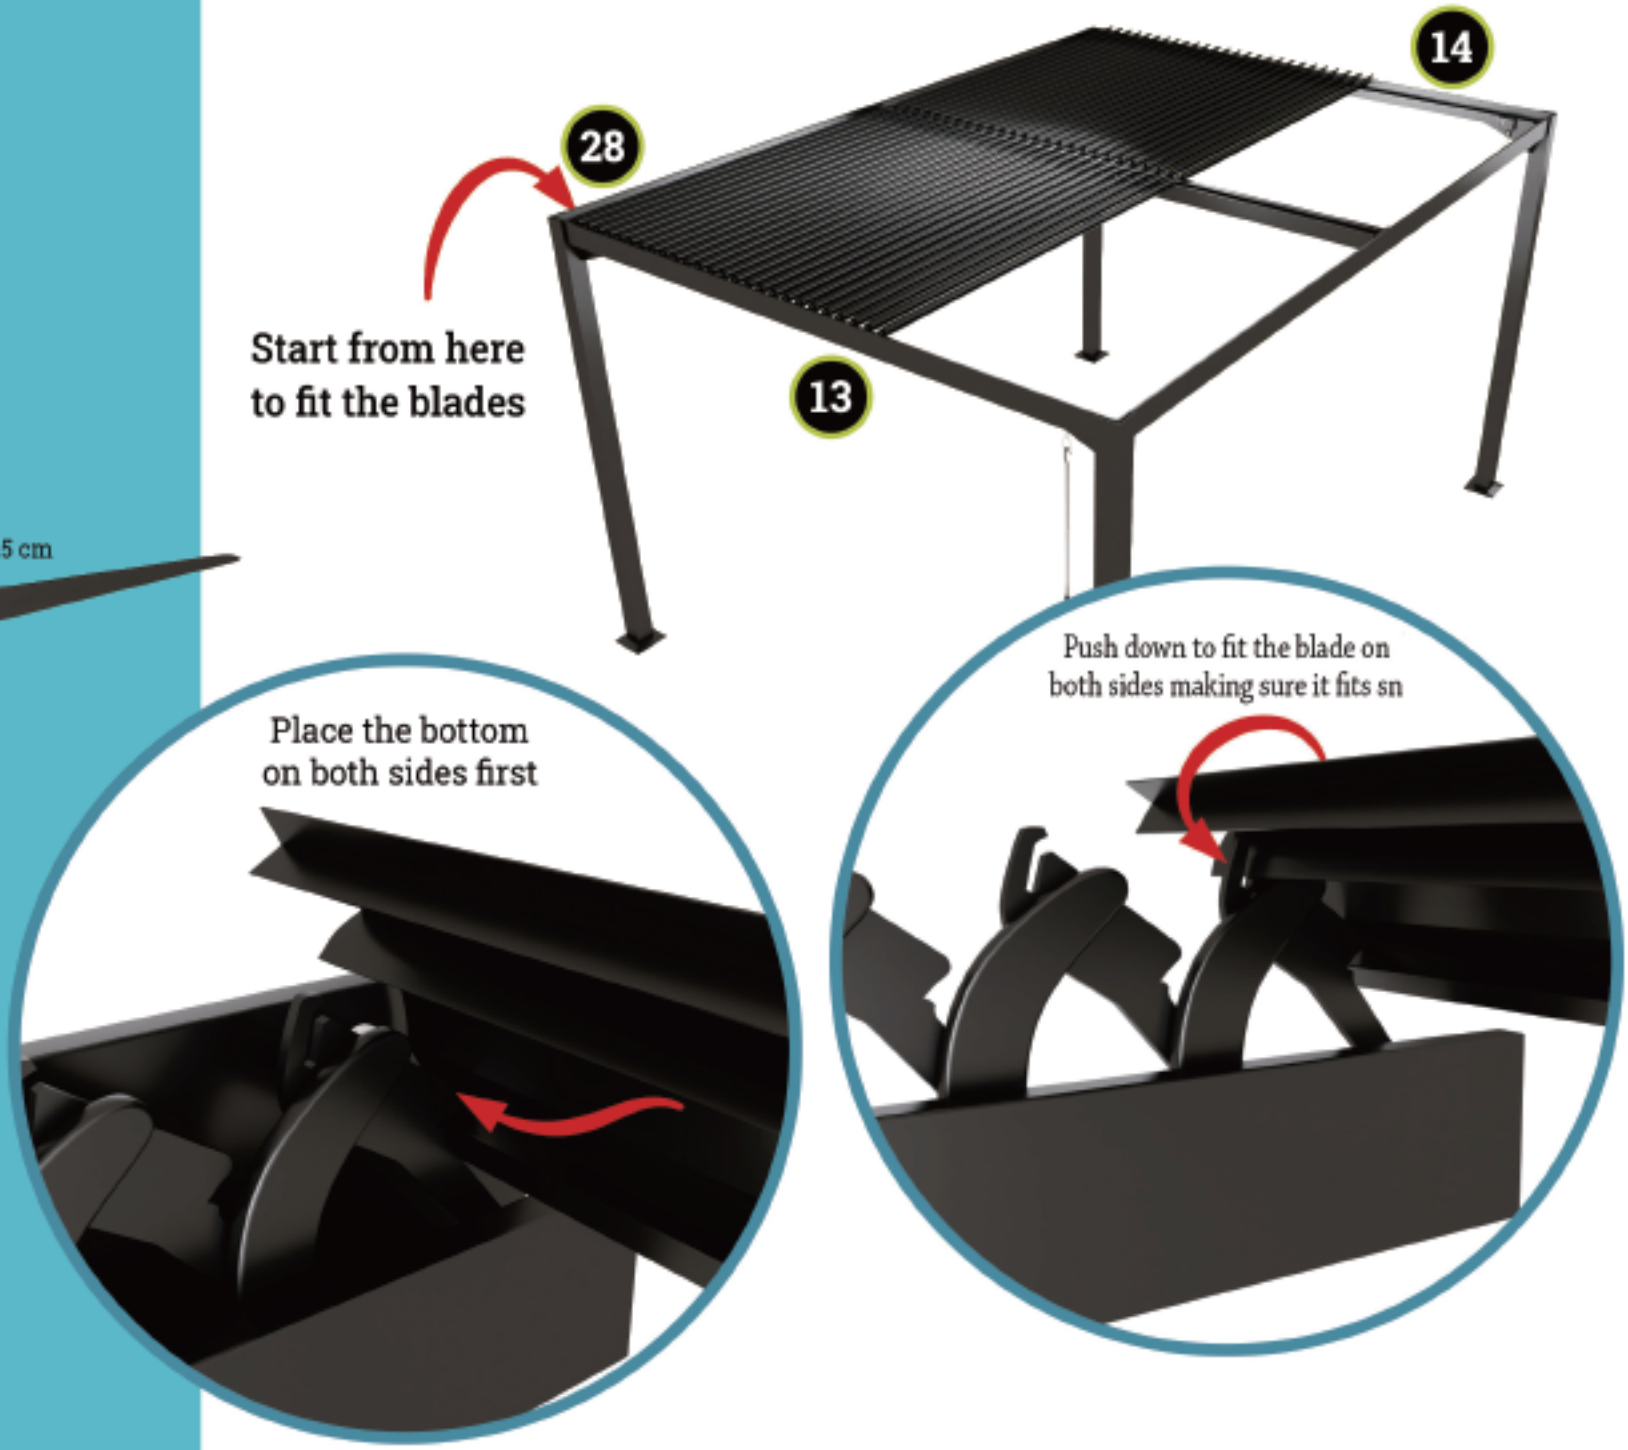

Step 7

Required Parts:

26 x1 **J** x6

Front
L. 390 cm





27 x1 **J** x6

Rear
L. 390 cm



Step 8

Required Parts:

10 x2

L. 291.5 cm







Before placing 10, make sure that the slats are in the OPEN position.




Step 9

Required Parts:



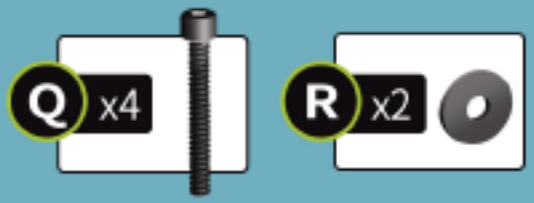




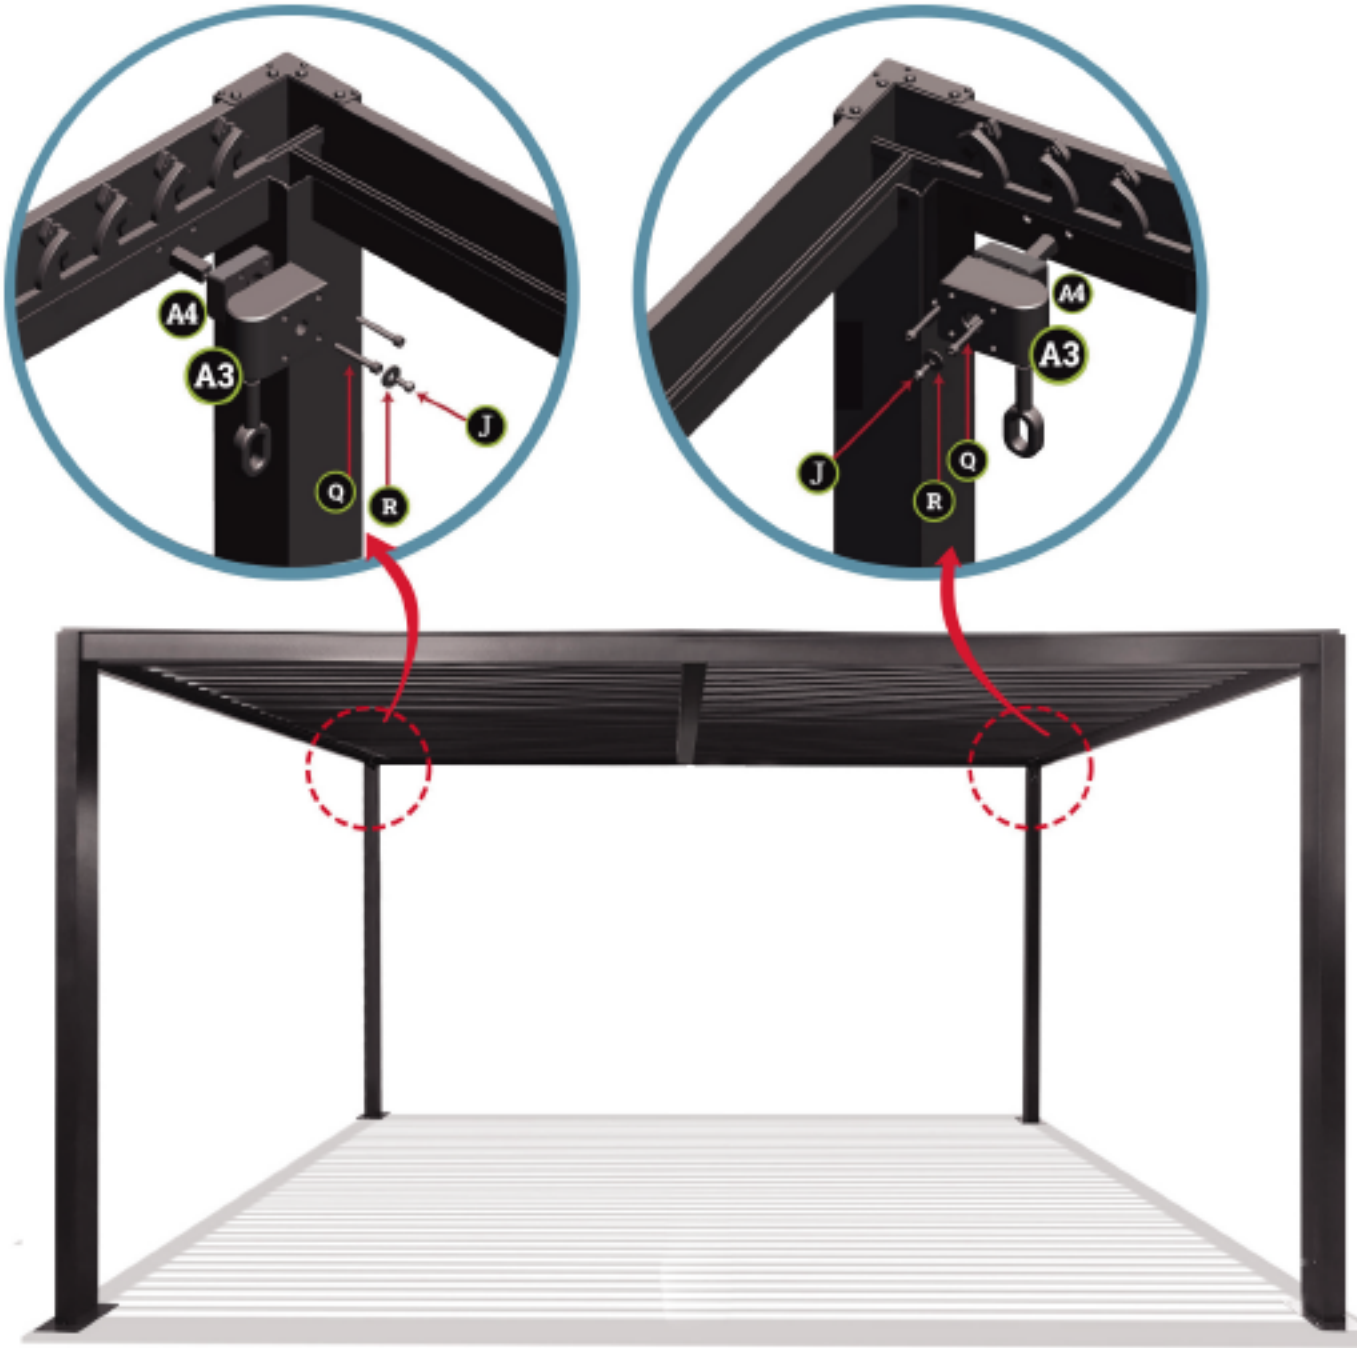

Step 10

Required Parts:



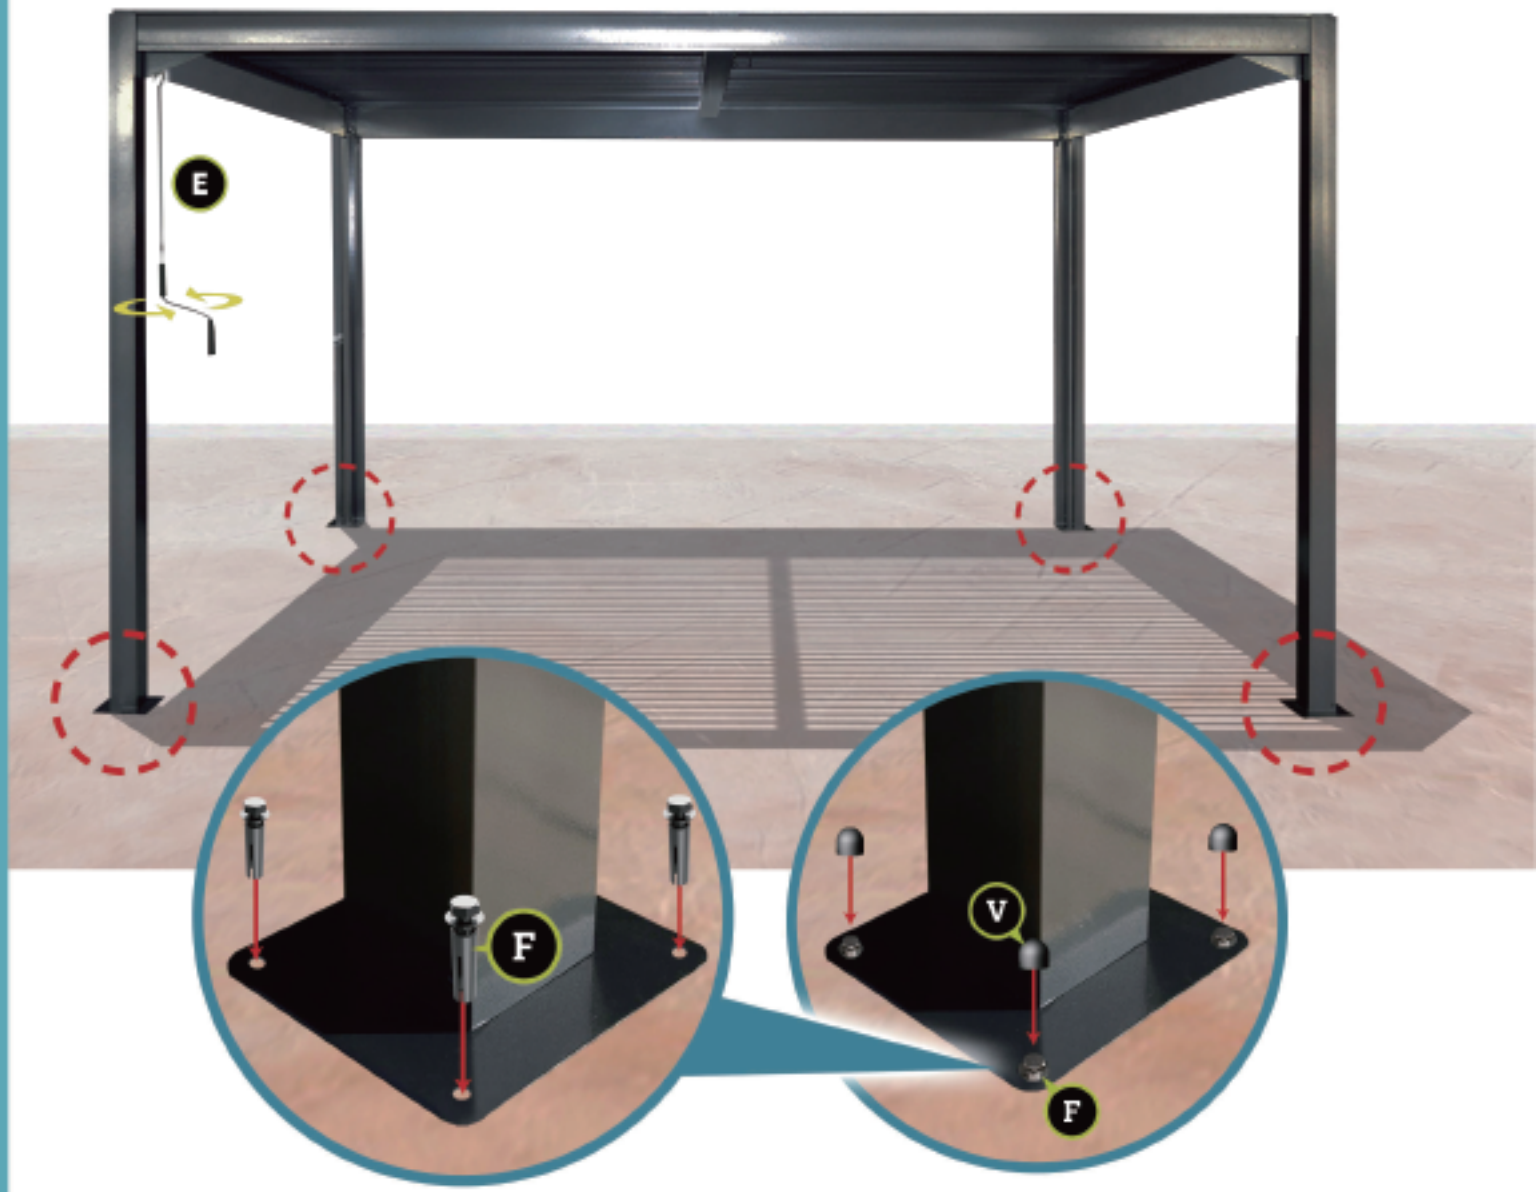


To fix the structure on the floor

Other features

Drainage gutter system



In case of snow,
it is recommended to
loosen the louvers;
the weight resistance
is 100 KG per square meter.

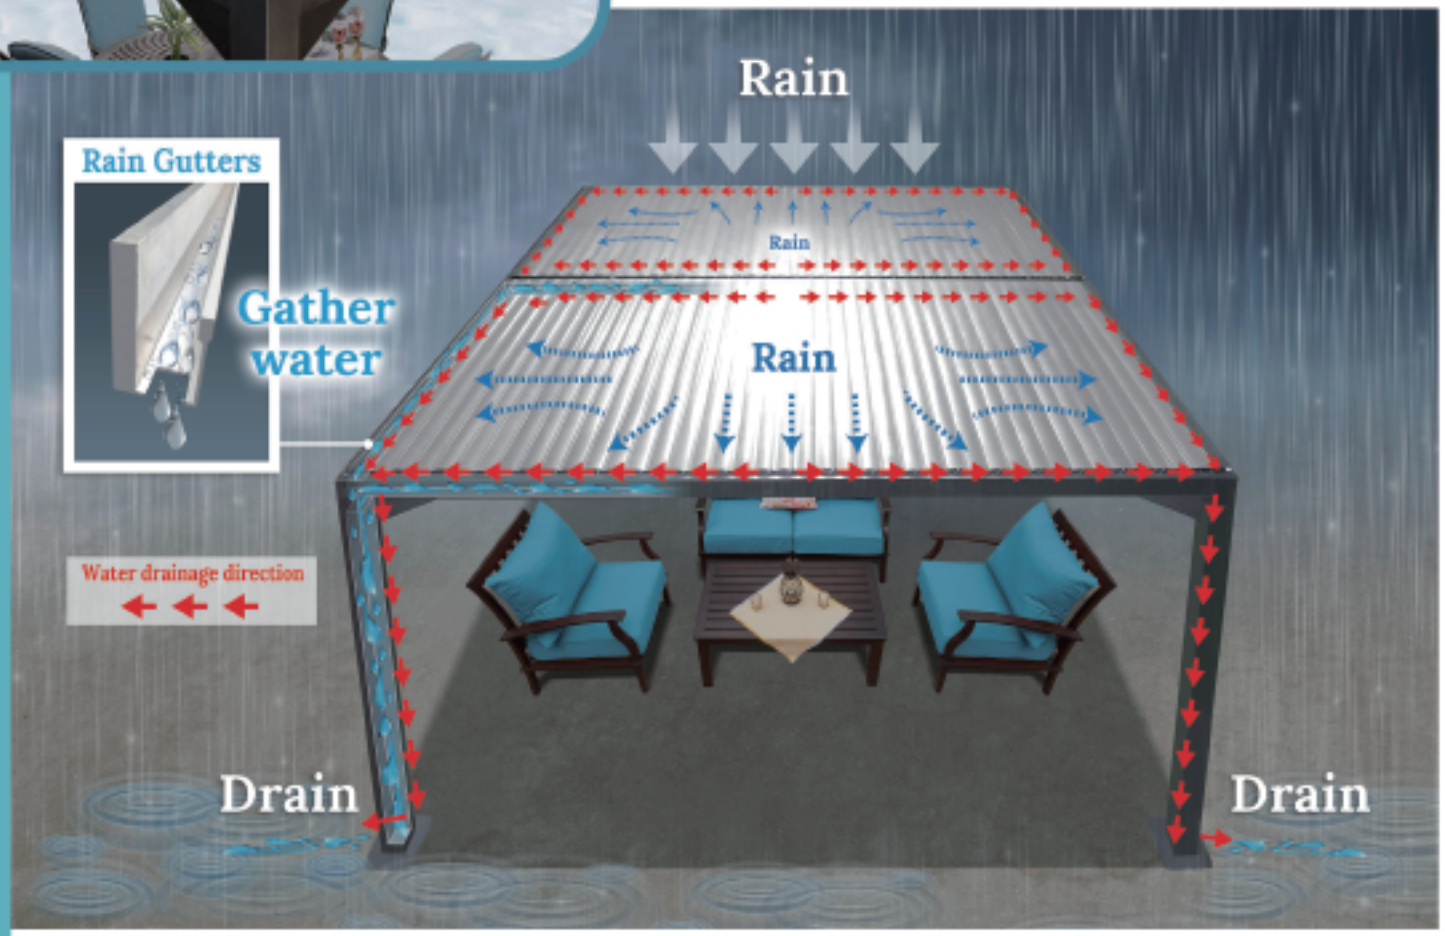

4M Tempered Glass Wall Panel with Sliding Doors

Suitable for 4x3m, 5x4m, and 6x4m sizes









Assembly Manual











Not Included

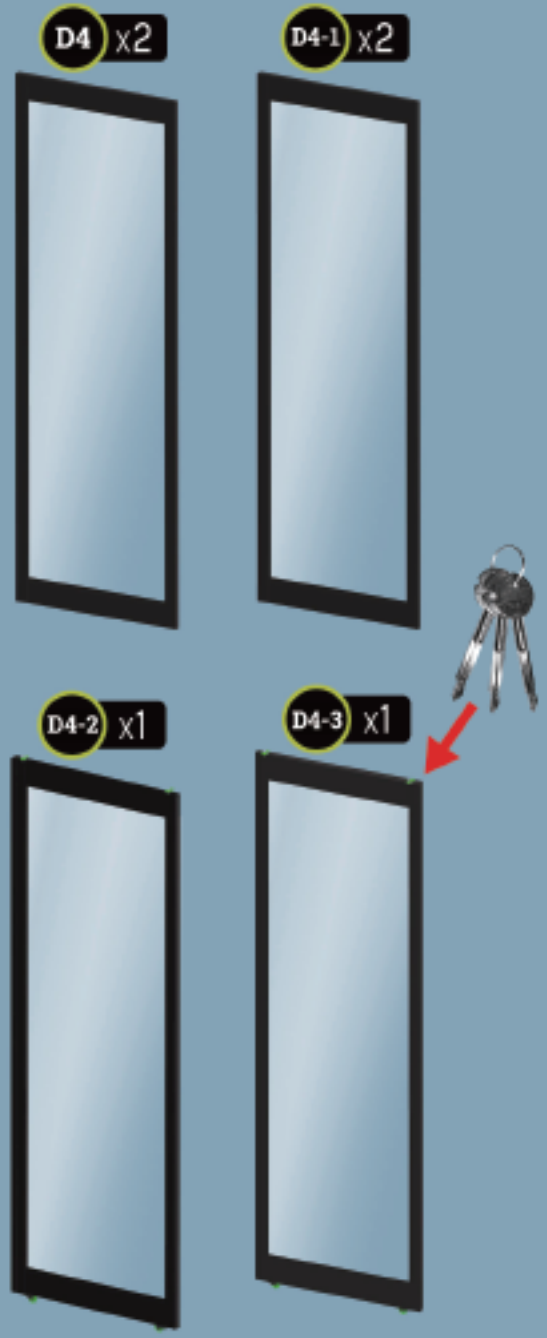
D4 x2
D4-1 x2
D4-2 x1
D4-3 x1


PARTS LIST

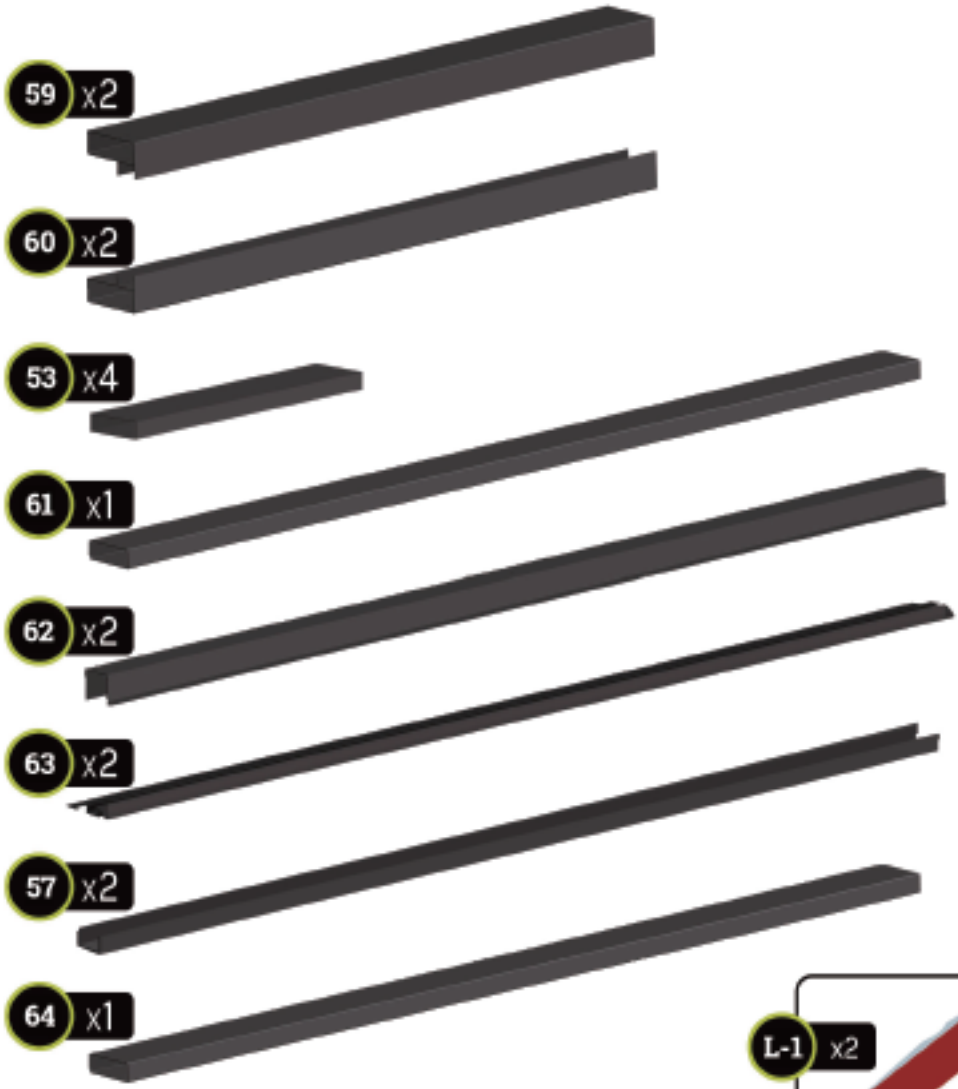

59 x2
60 x2
53 x4
61 x1
62 x2
63 x2
57 x2
64 x1


D-1 x6
E-1 x4
F-1 x2
G-1 x2
H-1 x4
K x66
L-1 x2
K-1 x1
R-1 x28
Q-1 x1
M-1 2M
P-1 10M

Step 1

Required Parts:

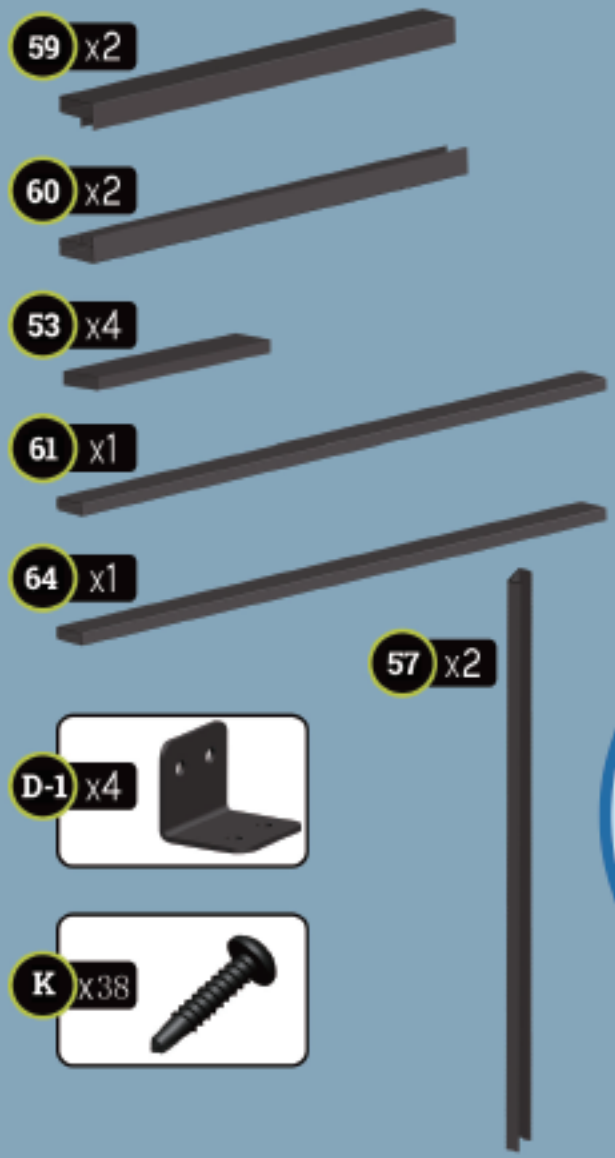

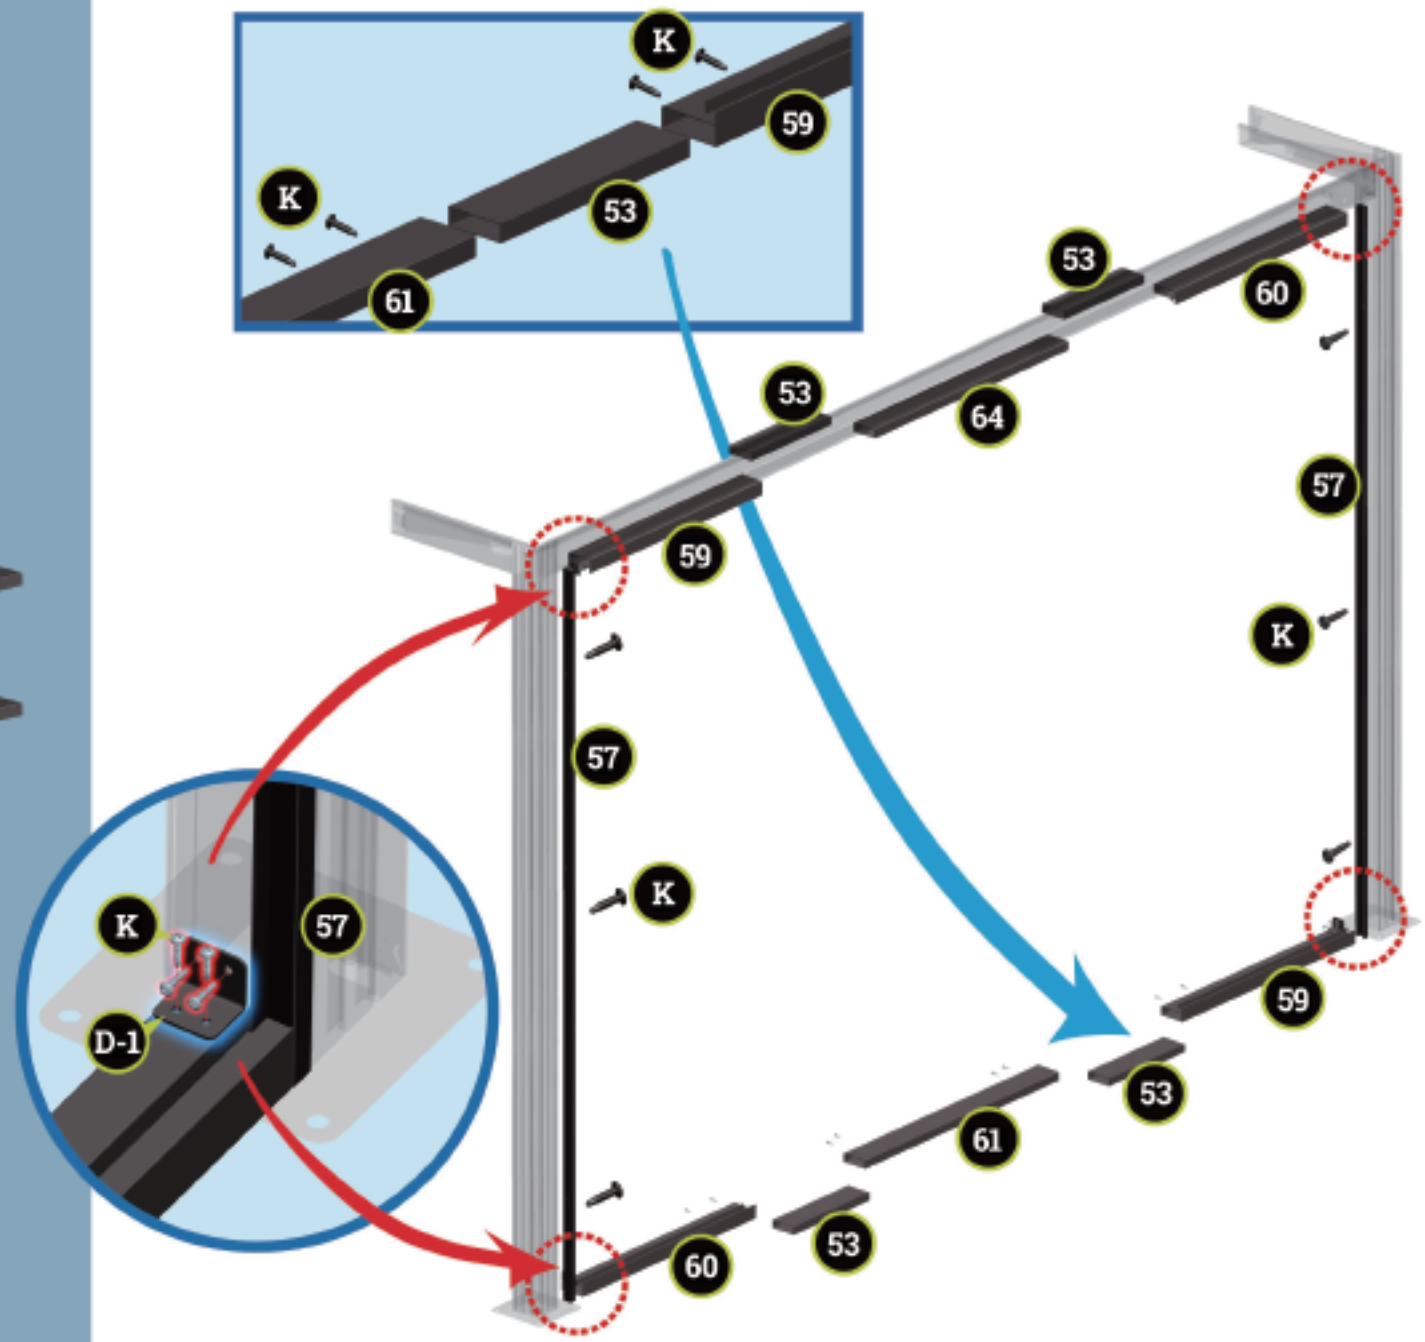

Step 2


Required Parts:











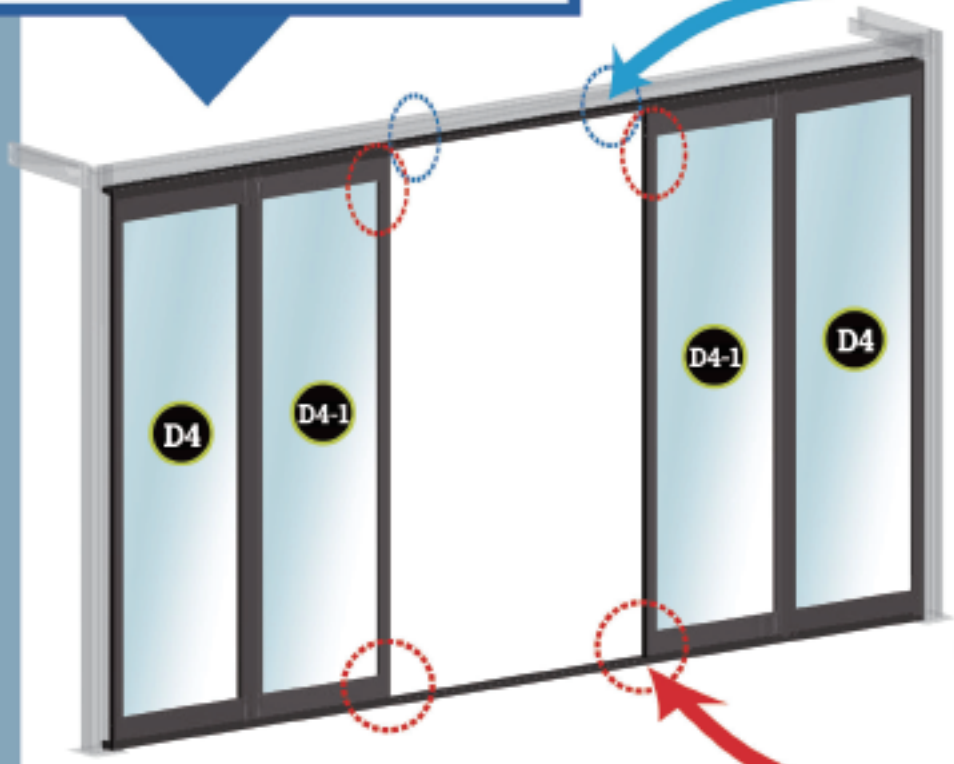


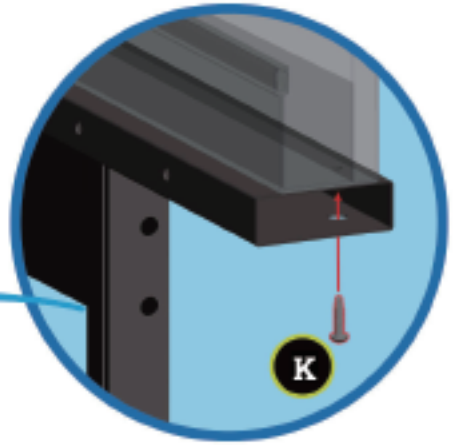


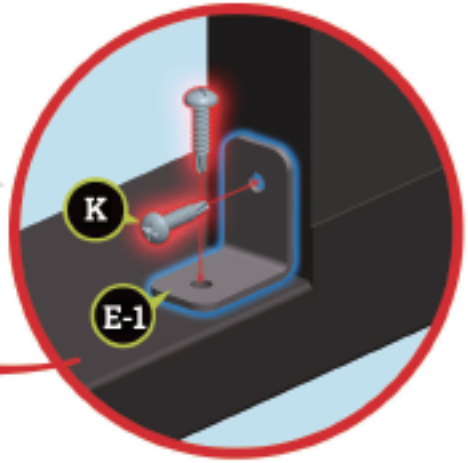

Step 3

Required Parts:

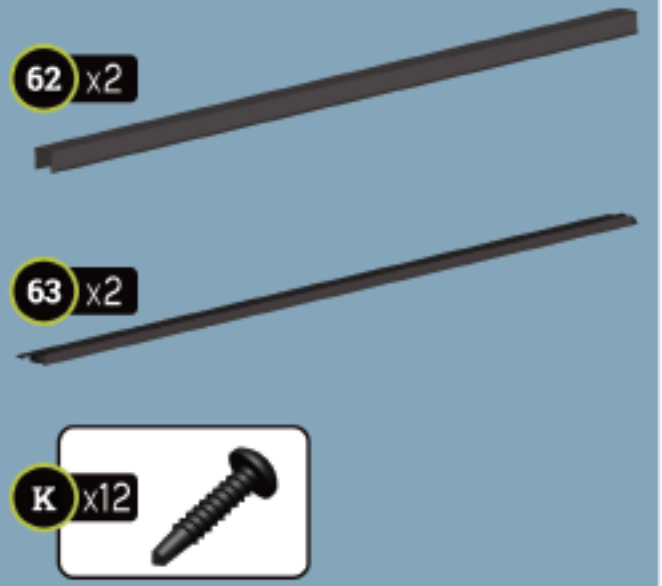


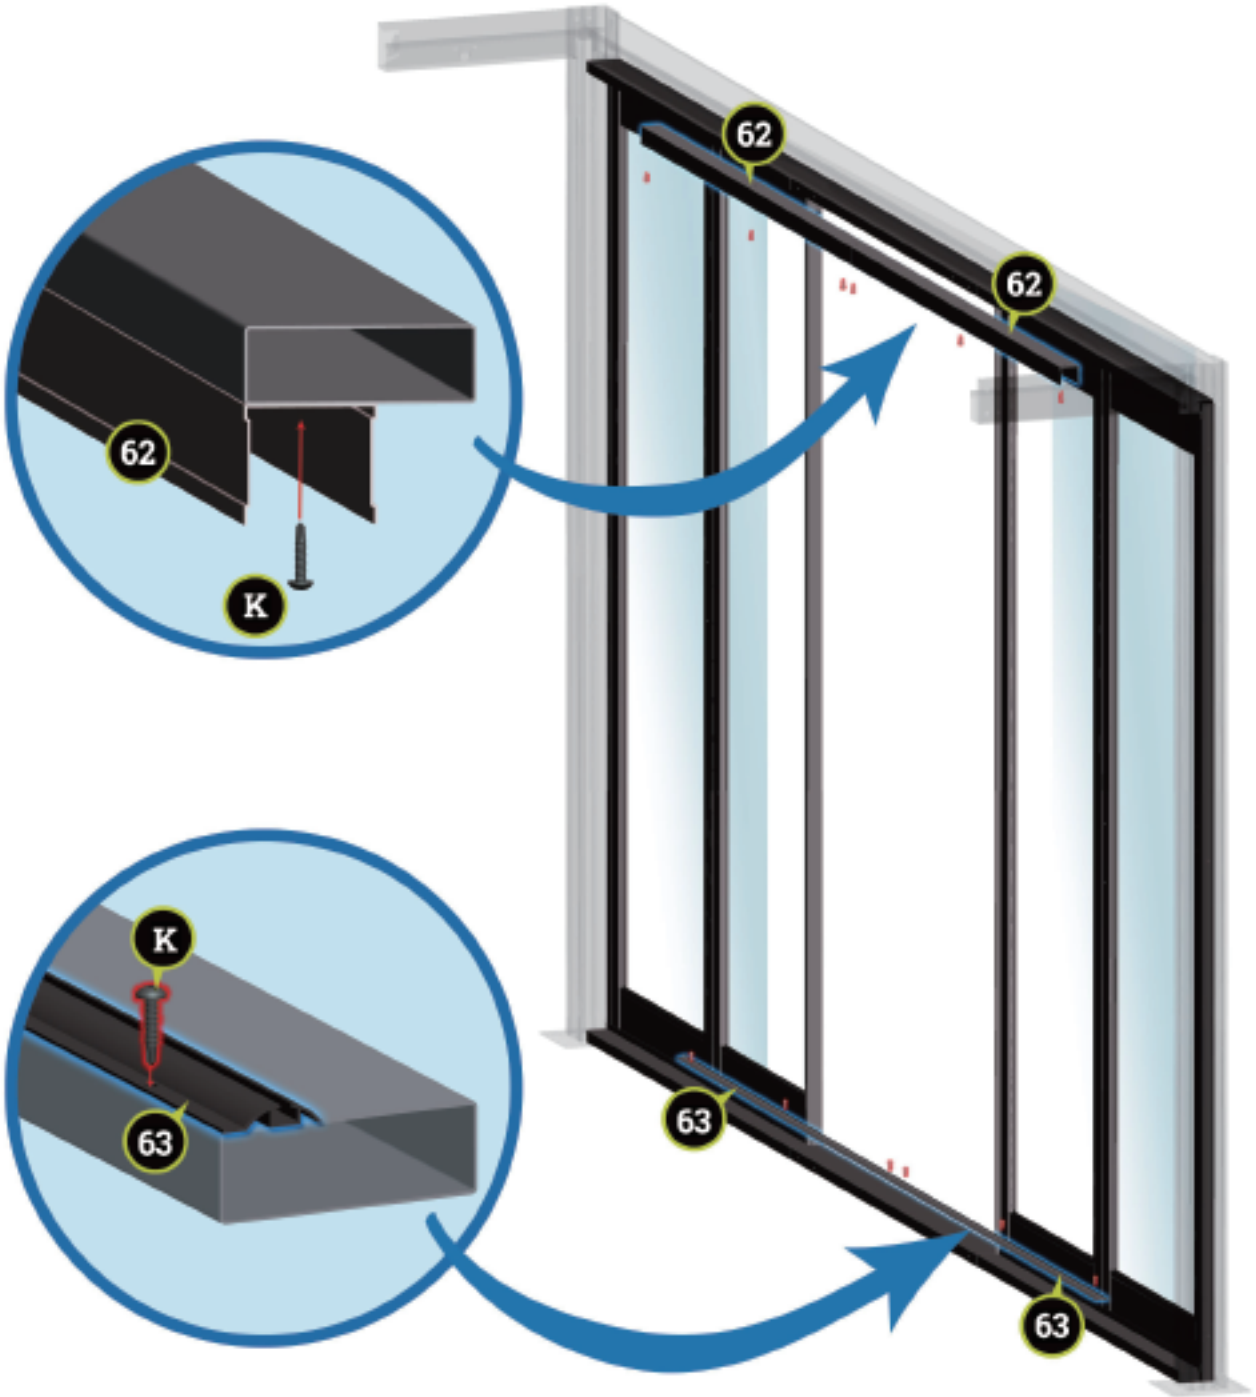

Step 4

Required Parts:




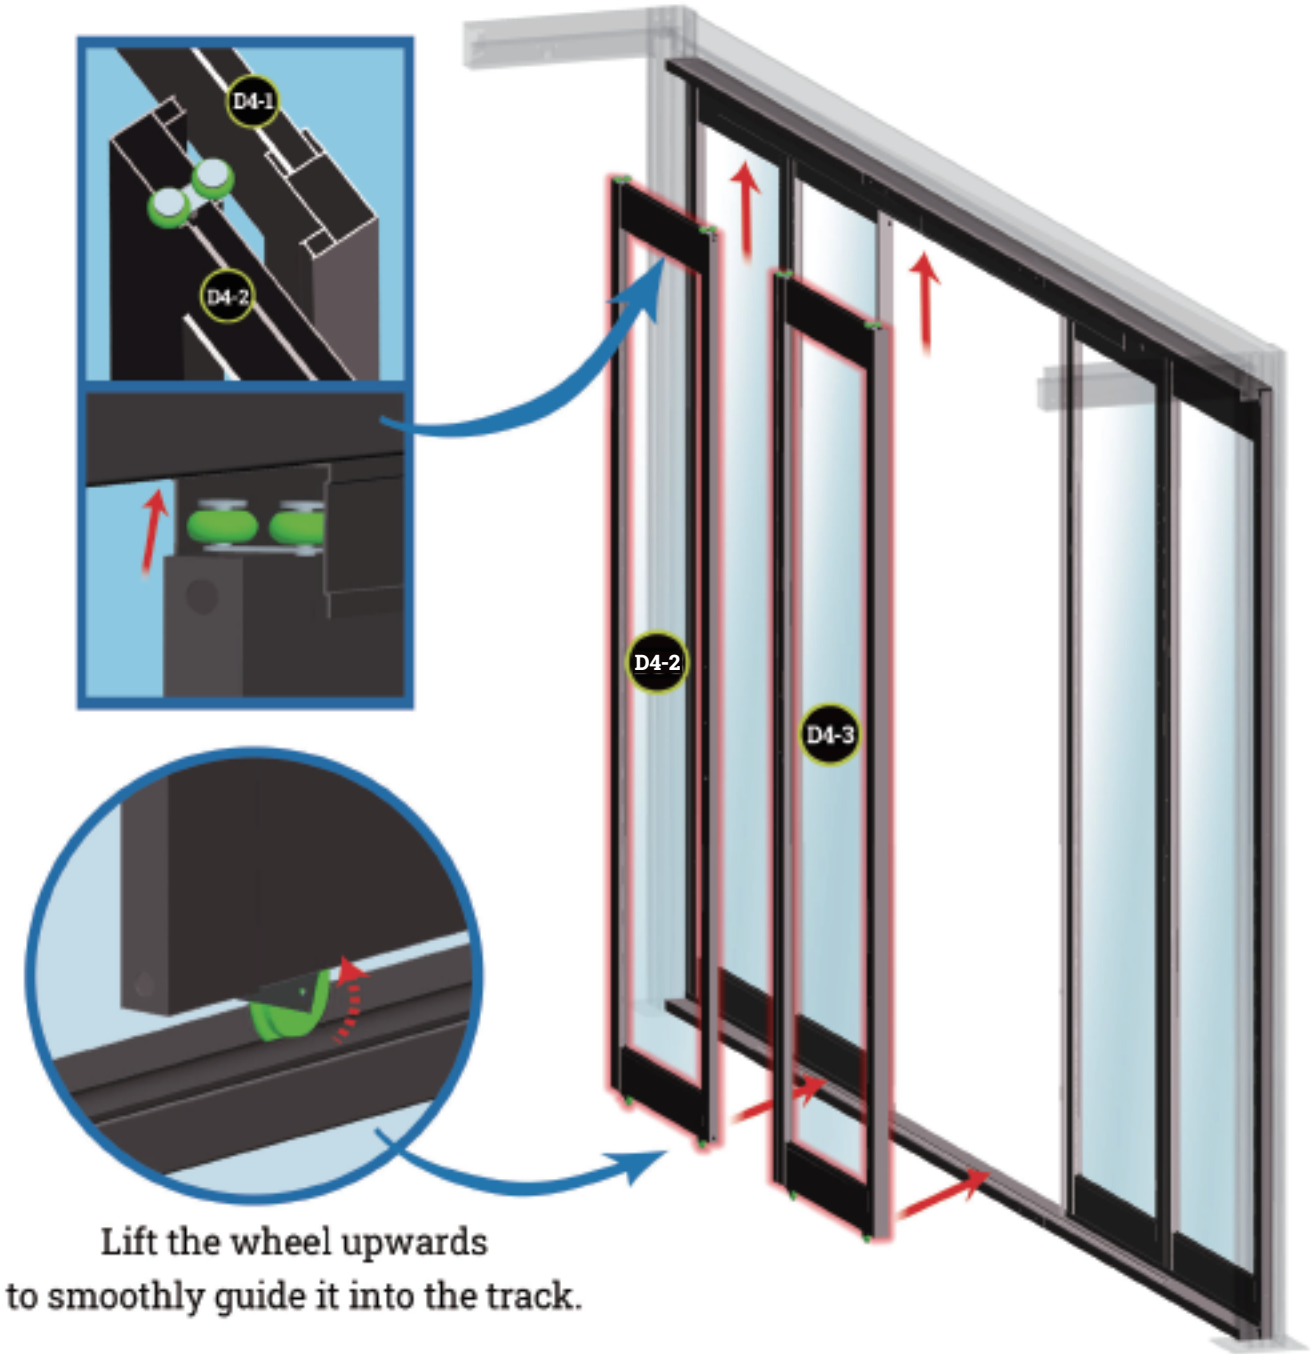


Lift the wheel upwards
to smoothly guide it into the track.

Step 5


Required Parts:

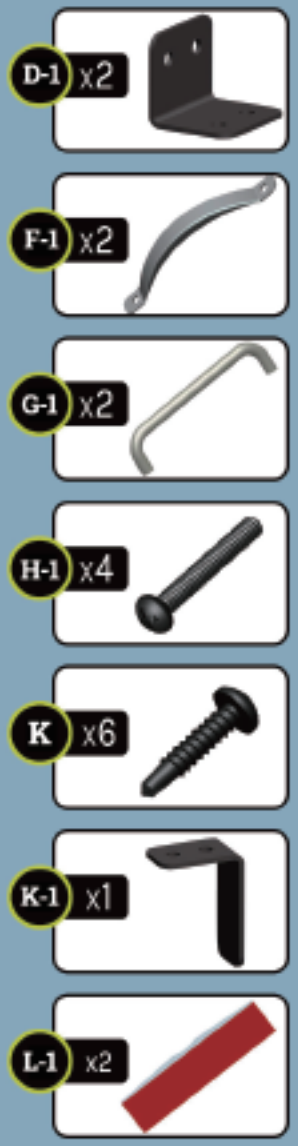

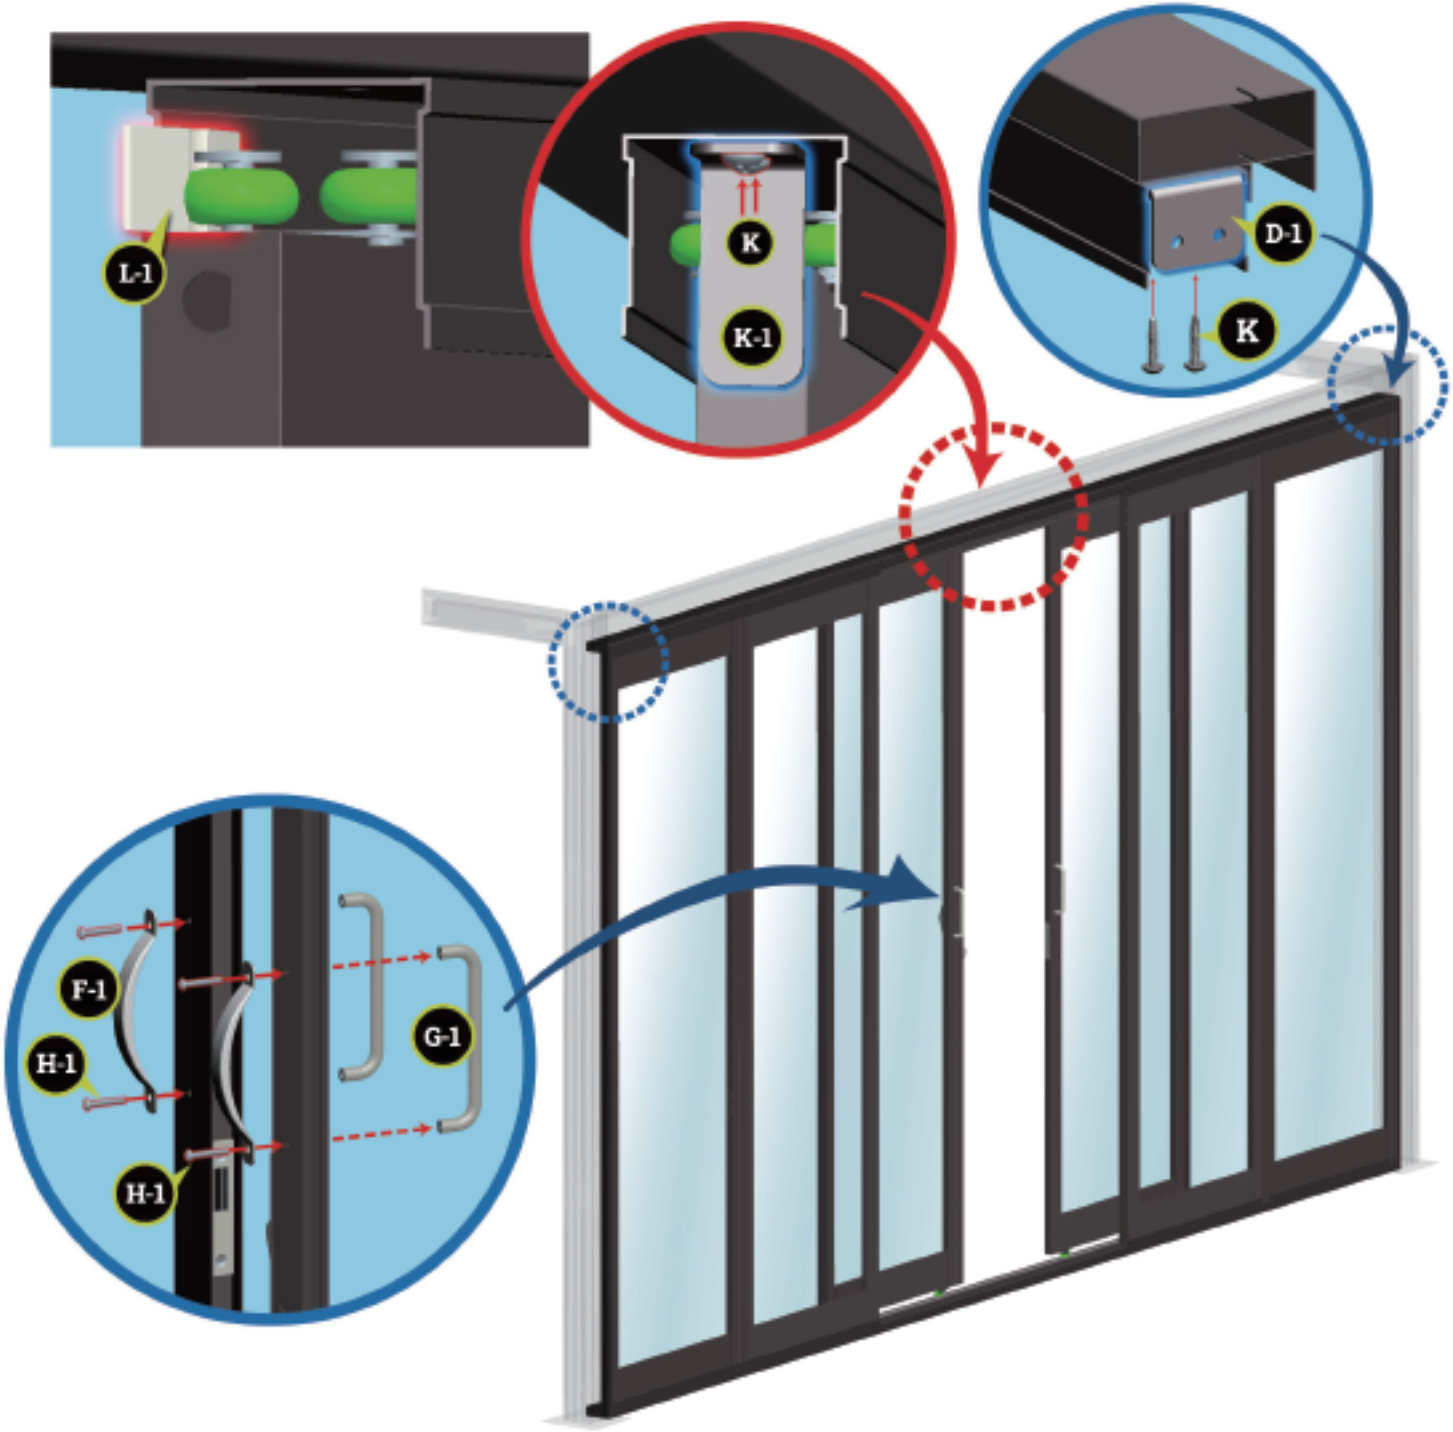


Step 6

Required Parts:

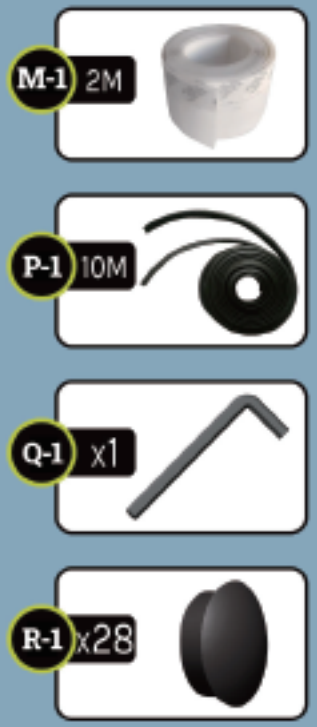



Rubber strip fills gaps for
waterproofing and shock absorption.

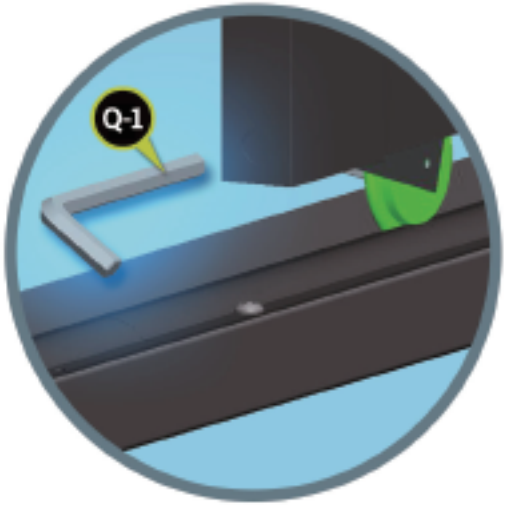

Please adjust the wheels
to keep the door in a straight position.



3M Tempered Glass Wall Panel with Sliding Doors

Suitable for 3x3m, 4x3m, and 6x3m sizes











Assembly Manual



Not Included

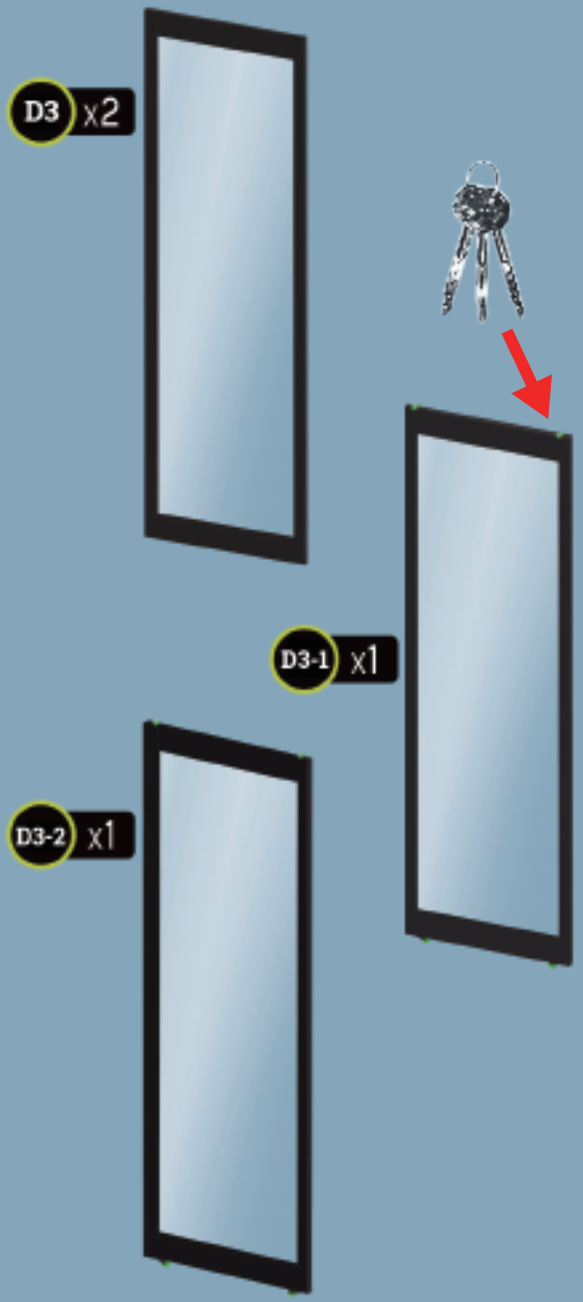
D3 x2
D3-1 x1
D3-2 x1

PARTS LIST

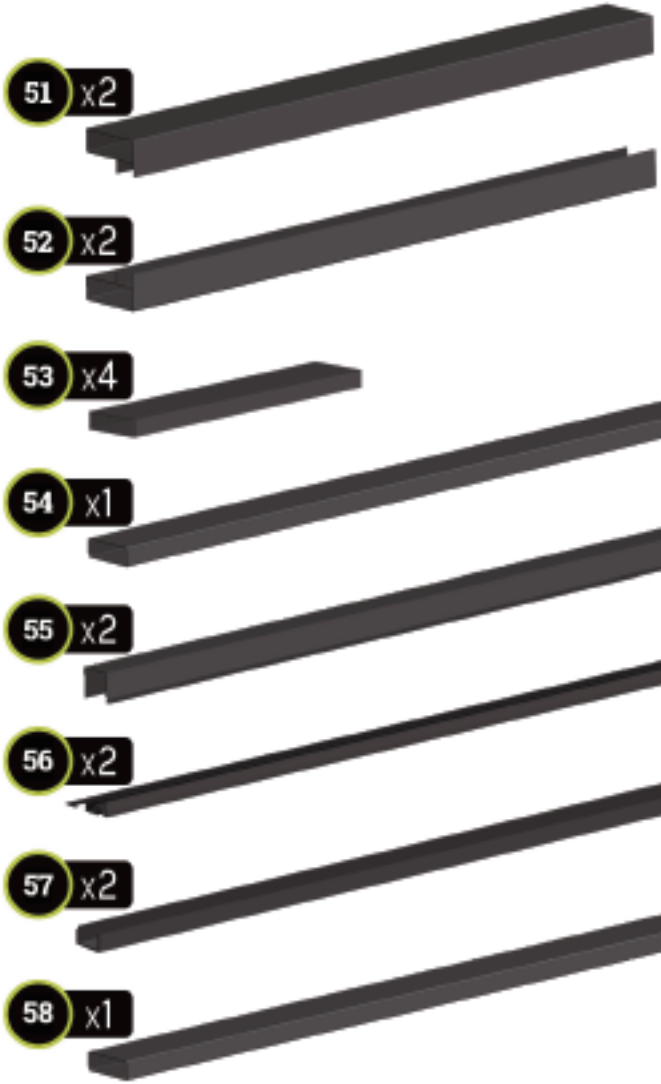
51 x2
52 x2
53 x4
54 x1
55 x2
56 x2
57 x2
58 x1


D-1 x6


E-1 x4


F-1 x2


G-1 x2


H-1 x4


K x66


L-1 x2


K-1 x1


R-1 x28



Q-1 x1



M-1 2M


P-1 10M

Step 1

Required Parts:

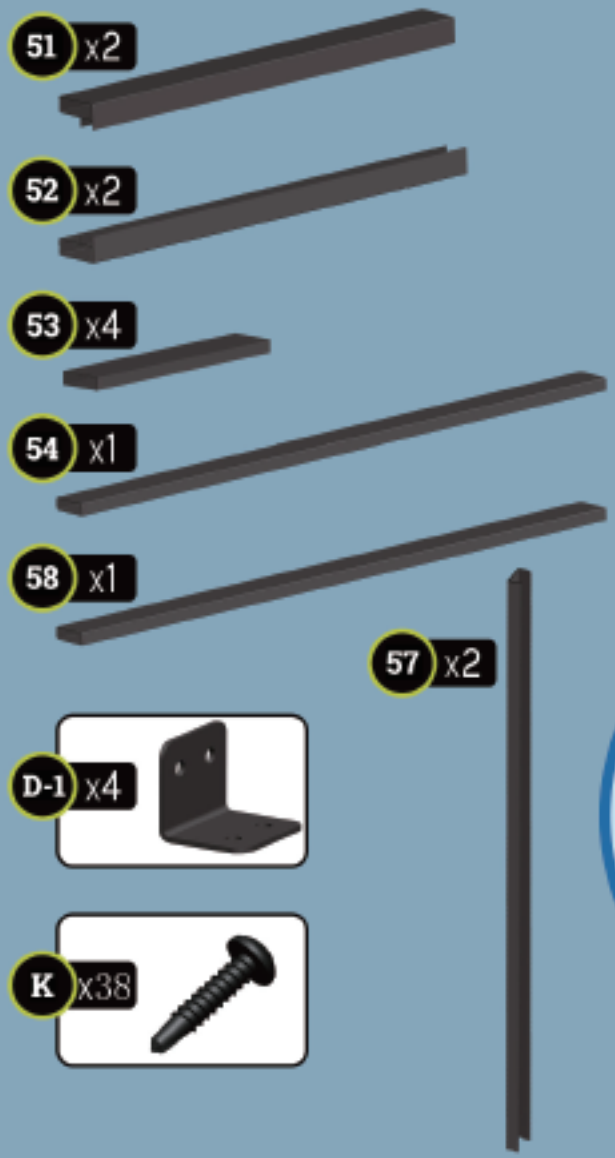

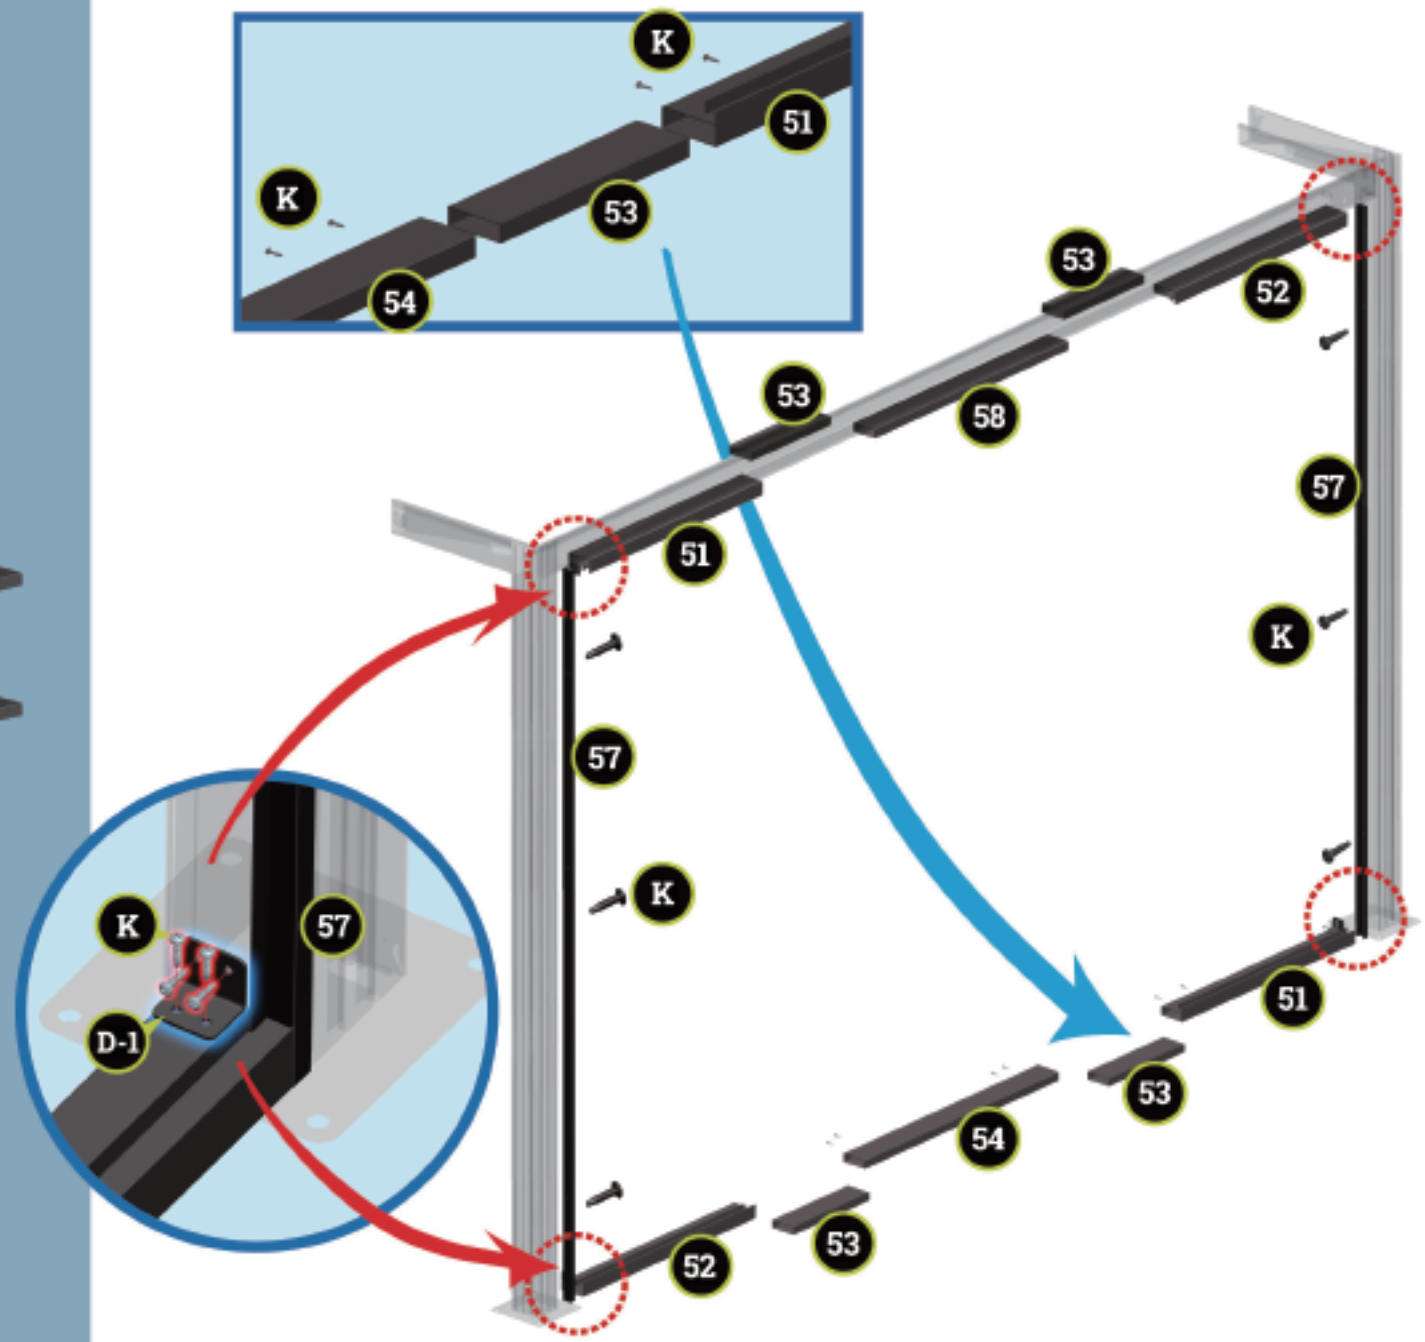


Step 2

Required Parts:









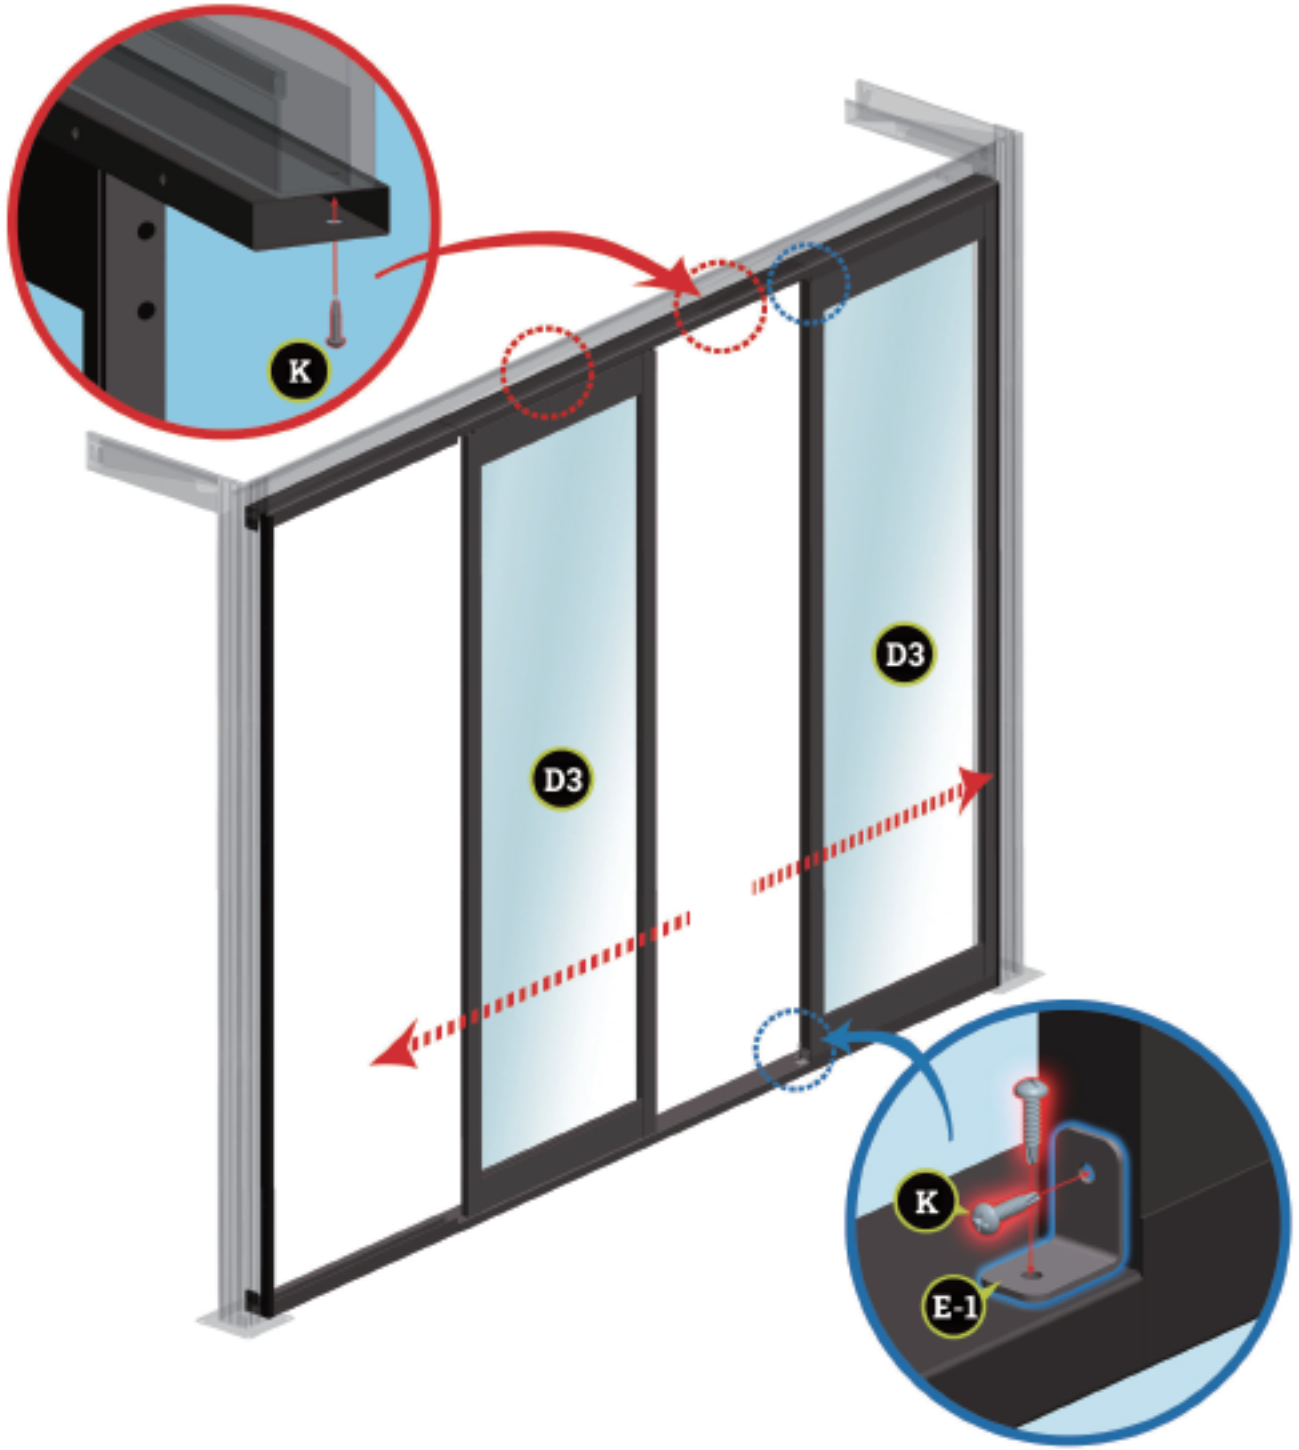

Step 3


Required Parts:

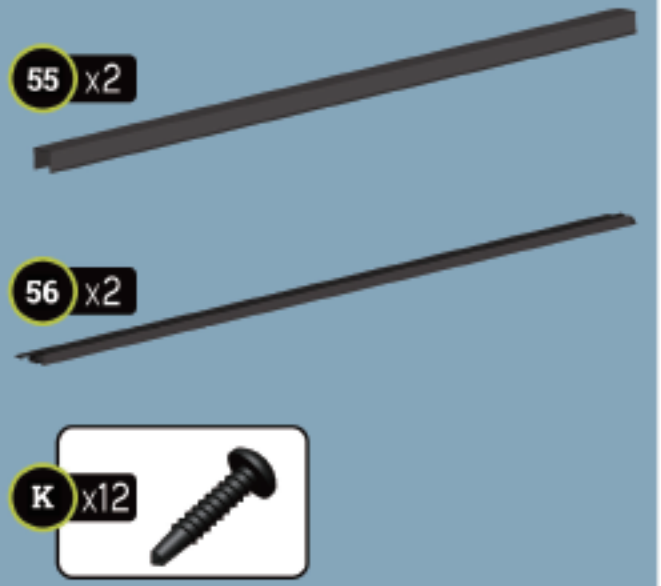


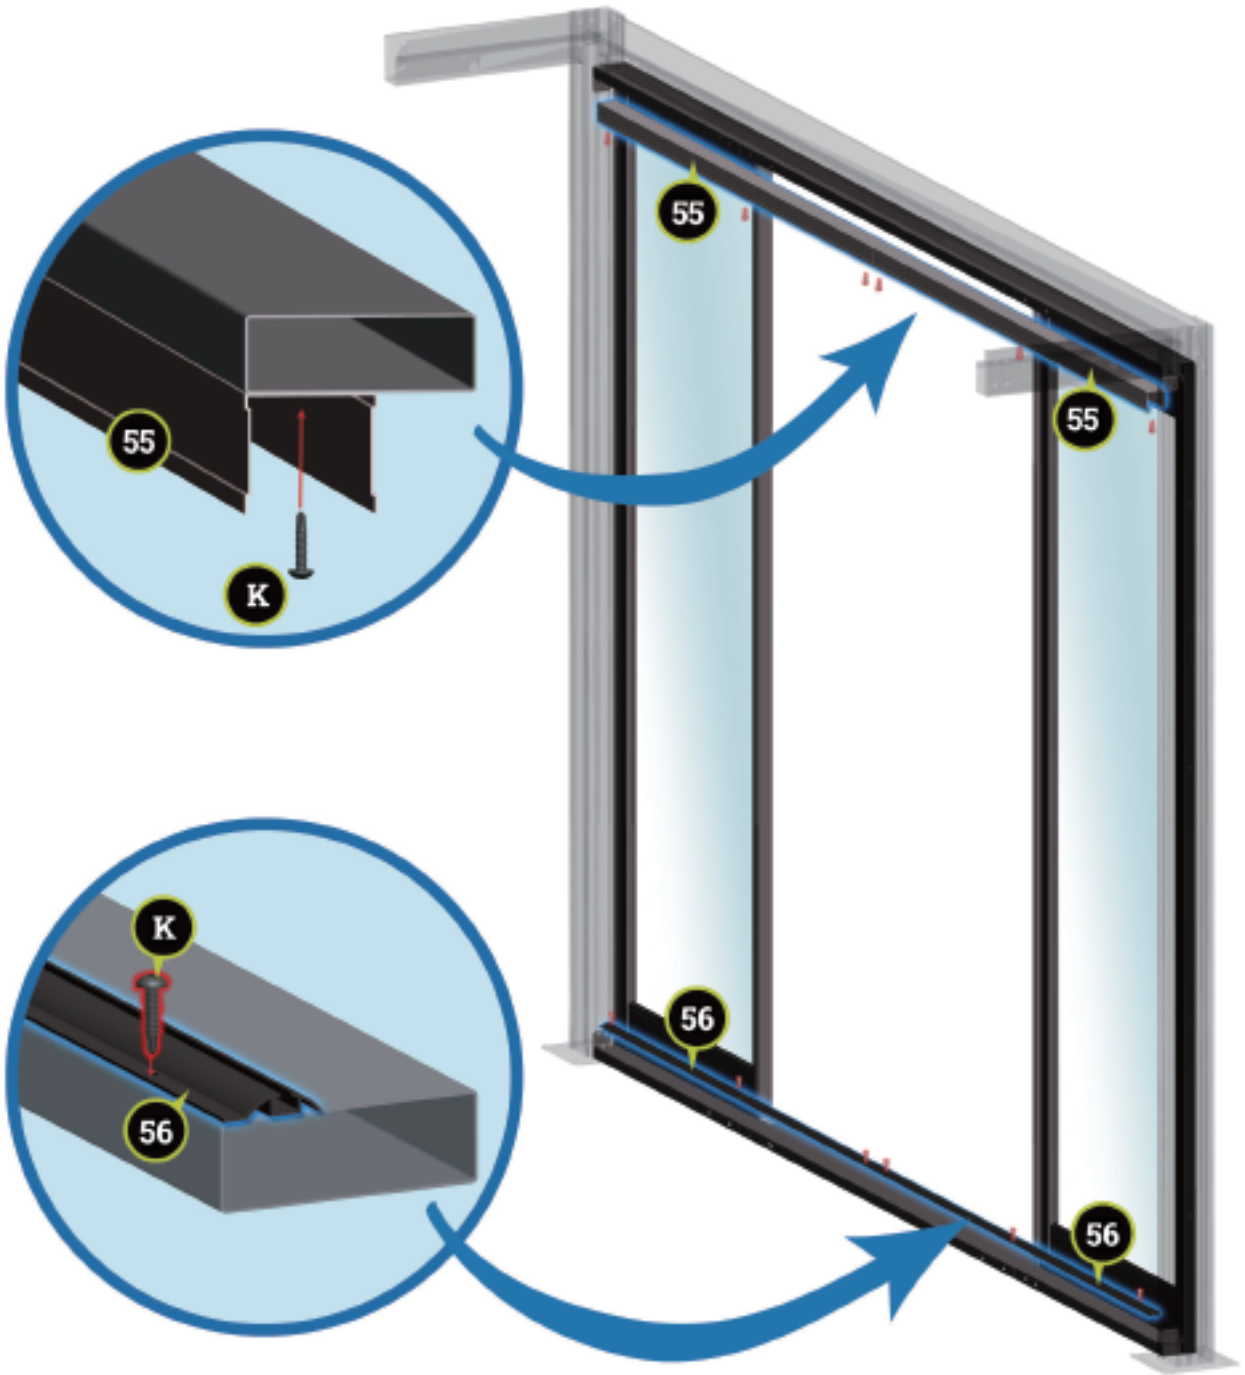

Step 4

Required Parts:

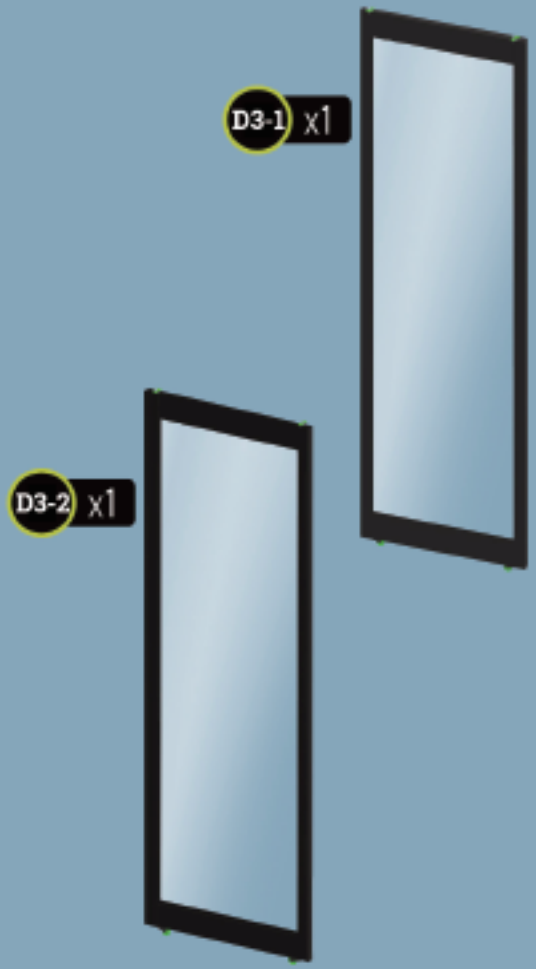

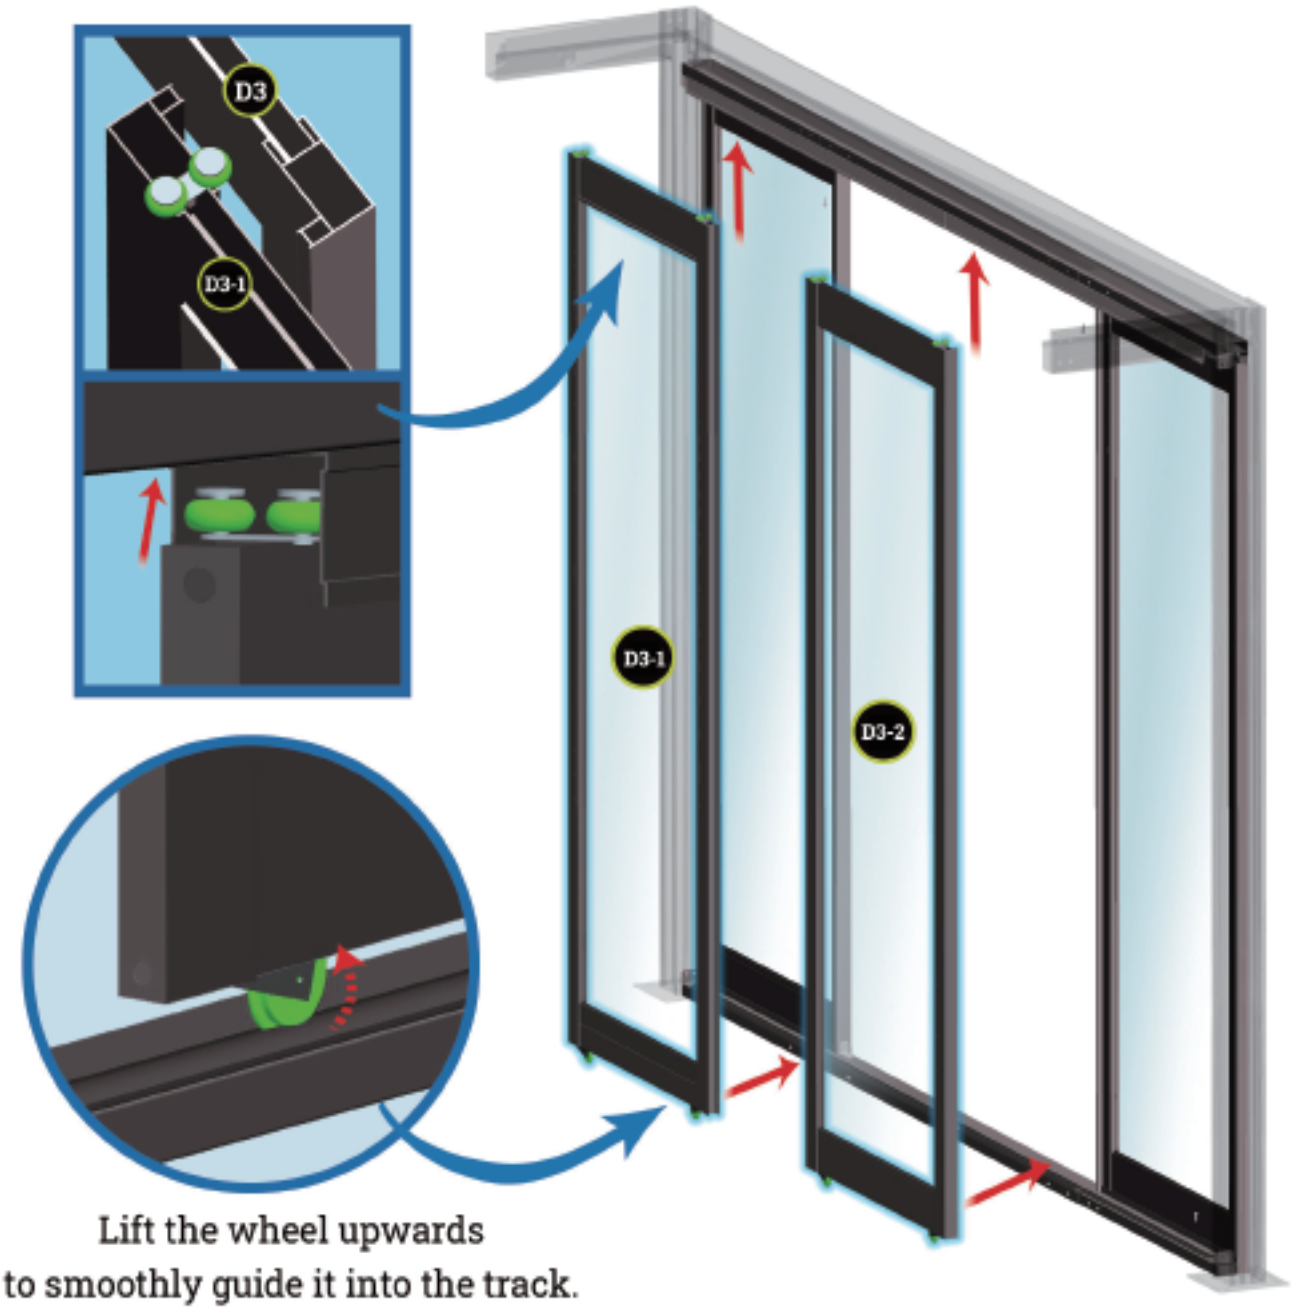


Lift the wheel upwards
to smoothly guide it into the track.

Step 5


Required Parts:



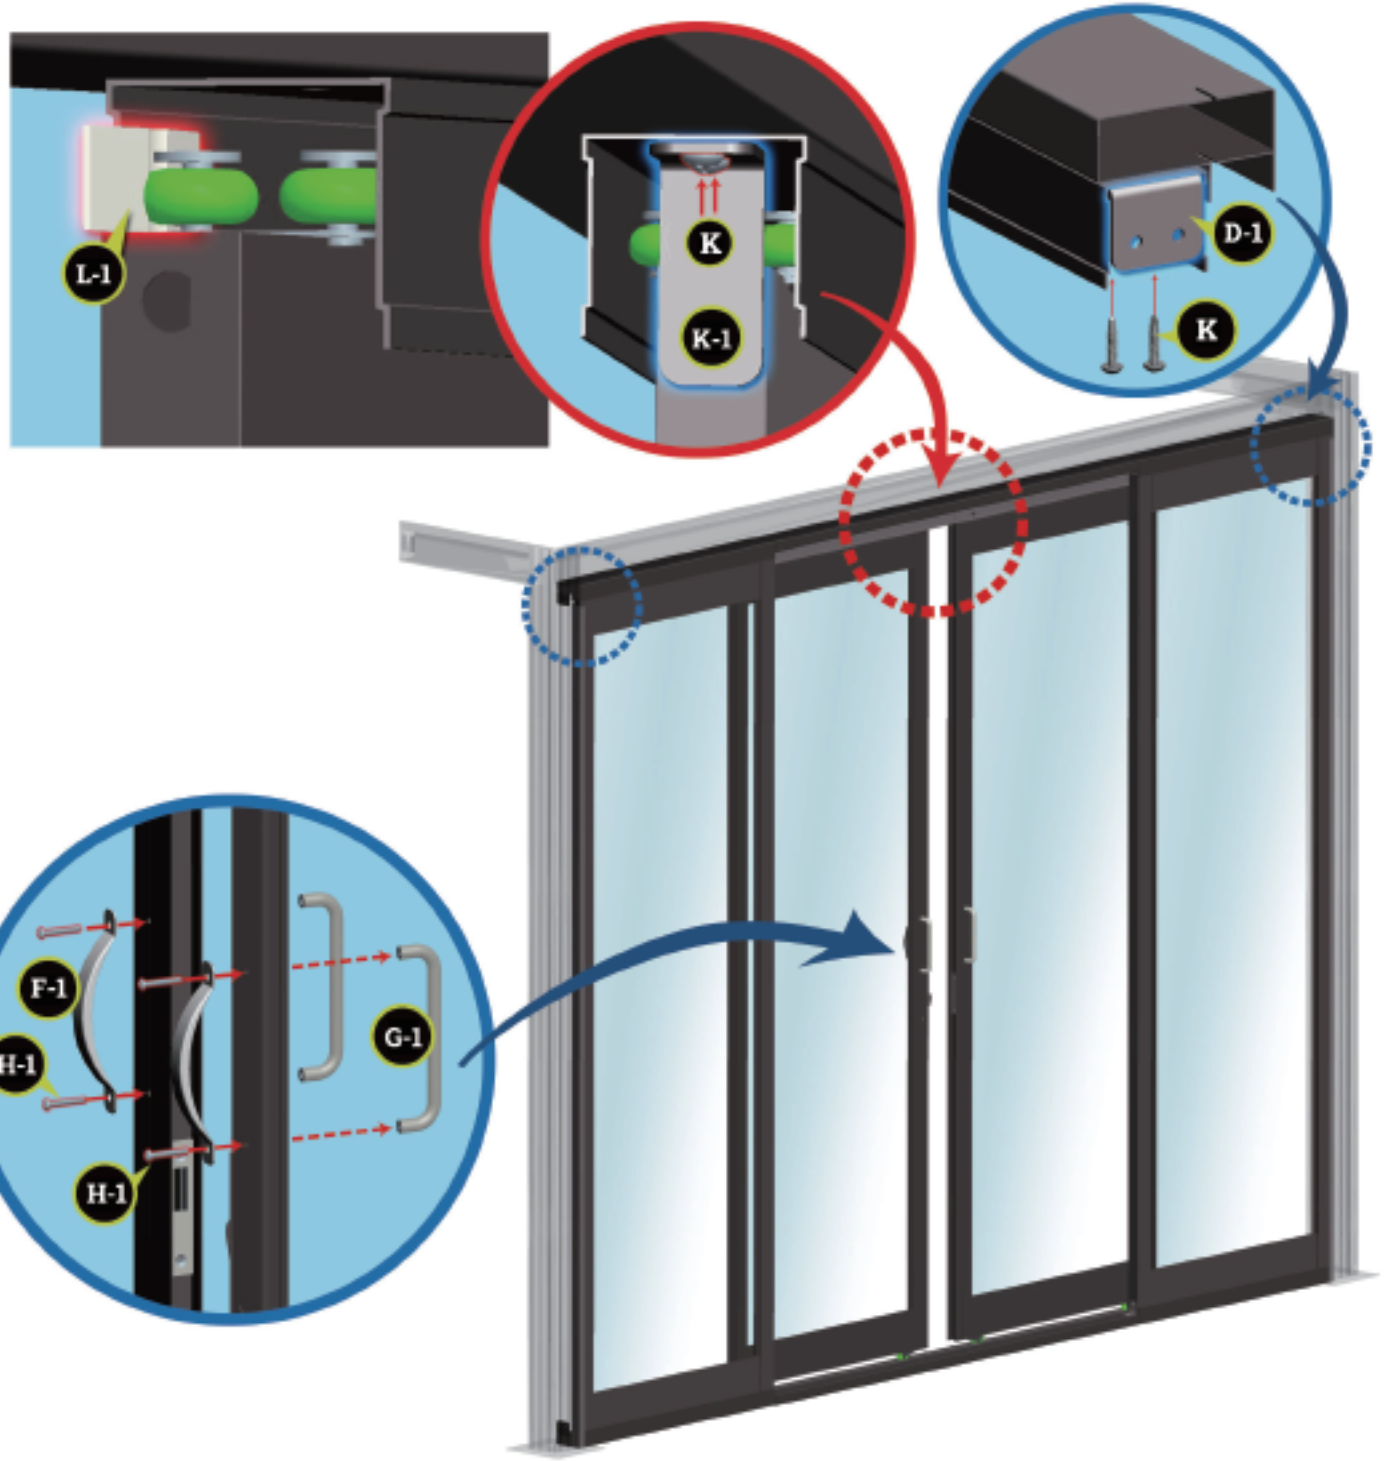


Step 6

Required Parts:

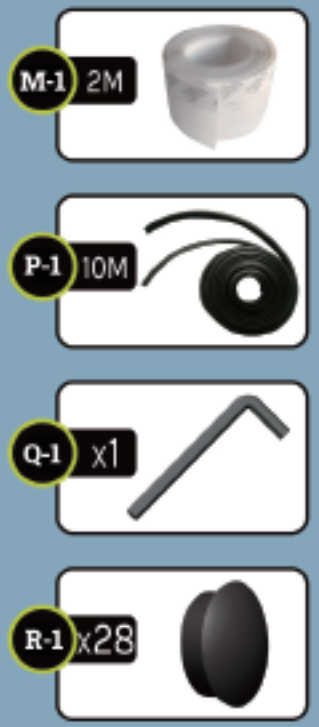



Rubber strip fills gaps for
waterproofing and shock absorption.

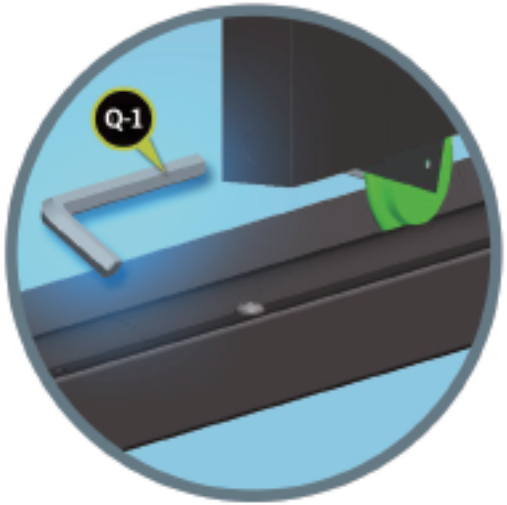

Please adjust the wheels
to keep the door in a straight position.

