



Grey - GRE
CRDSHIGRE848-N - 8"x48" Rectified Field Tile - Honed
CRDSHIGRE848R11-N - 8"x48" R11 Anti-Slip Rated Rectified Field Tile - Honed



Ivory - IVO
CRDSHIIVO848-N - 8"x48" Rectified Field Tile - Honed
CRDSHIIVO848R11-N - 8"x48" R11 Anti-Slip Rated Rectified Field Tile - Honed



Beige - BEI
CRDSHIBEI848-N - 8"x48" Rectified Field Tile - Honed
CRDSHIBEI848R11-N - 8"x48" R11 Anti-Slip Rated Rectified Field Tile - Honed



Walnut - WAL
CRDSHIWAL848-N - 8"x48" Rectified Field Tile - Honed
CRDSHIWAL848R11-N - 8"x48" R11 Anti-Slip Rated Rectified Field Tile - Honed

Shine

Glazed Color Body Porcelain

Photo Features 8"x48" Rectified Field Tile - Honed in Grey.


SIZING & PACKAGING

Type	Shape	Item Code	Size	Description	Pcs / Ctn	Sf / Ctn
Field		CRDSHI***848-N	8"x48"	Rectified Field Tile - Honed	4	10.33
		CRDSHI***848R11-N	8"x48"	R11 Anti-Slip Rated Rectified Field Tile - Honed	4	10.33

ANSI TECHNICAL SPECIFICATIONS - Rectified Field Tile


	DCOF Acutest	PEI Rating ASTM# C1027	Frost Resistant ASTM# C1026	Scratch Resistance MOHS	Breaking Strength ASTM# C648	Water Absorption ASTM# C373	Chemical Resistance ASTM# C650
Results	≥ 0.42	Pass ≤ 175 (ISO)	Unaffected	N/A	Pass (1,300 ISO)	≤ 0.5%	Unaffected

Shade Variation




ANSI TECHNICAL SPECIFICATIONS - R11 Anti-Slip Rated Rectified Field Tile

	DCOF Acutest	PEI Rating ASTM# C1027	Frost Resistant ASTM# C1026	Scratch Resistance MOHS	Breaking Strength ASTM# C648	Water Absorption ASTM# C373	Chemical Resistance ASTM# C650
Results	≥ 0.70	Pass ≤ 175 (ISO)	Unaffected	N/A	Pass (1,300 ISO)	≤ 0.5%	Unaffected

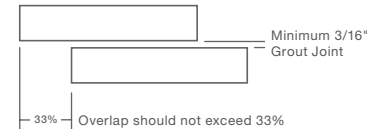

APPLICATIONS - Rectified Field Tile

	Floors	Walls	Countertops	Shower Floors	Shower Walls	Pools/Spas
Residential	● †	■	■	● †	■	■
Commercial	● †	■	■	● †	■	■



APPLICATIONS - R11 Anti-Slip Rated Rectified Field Tile

	Floors	Walls	Countertops	Shower Floors	Shower Walls	Pools/Spas
Residential	■	■	■	■	■	■
Commercial	■	■	■	■	■	■

LEGEND

- Product rated for Interior & Exterior use
- Product rated for Interior use only
- † May be suitable for Exterior Floors
- ⊘ Applications & ANSI Technical Specifications do not apply
- * Special Order only



Minimum grout joint must be 3/16 inch. Please refer to the most current TCNA Handbook for installation guidelines. This tile may possess varied sheens.

Merchandising materials and samples are for general reference only and representative of a product's potential characteristics. Tile is subject to variation in color/shade, size, texture, and finish. Field, mosaic and trim tile may not match exactly. Blend tiles from different boxes to achieve consistent shade distribution. Installer and end user must conduct a dry mock layout under proper lighting conditions to inspect the product. Installation constitutes product acceptance. Improper installation, application, use, care and maintenance voids warranty. Reference the TCNA Handbook and ANSI for installation guidance. Please visit bedrosians.com for current product information. We reserve the right to make product changes at any time without notice.

