


ASSEMBLY INSTRUCTION



All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.

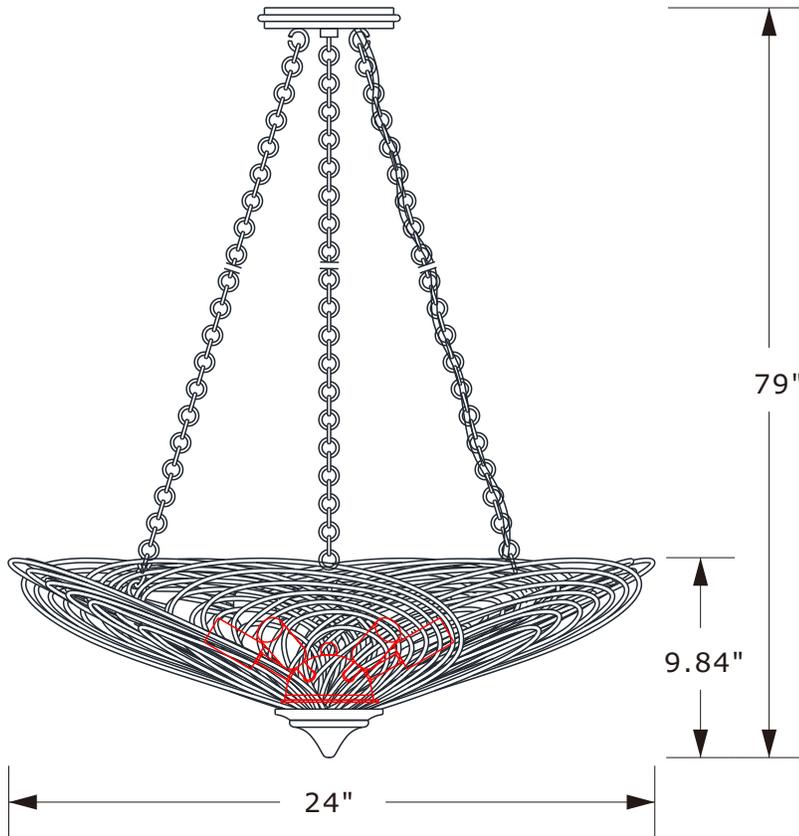

You will need 6 -Candelabra Base Bulb

40 Watts Recommended 60 Watts Max.


USE LED BULBS FOR EXTENDED USE

THIS FIXTURE IS DAMP RATED


How to install

1. Determine the preferred hanging height and adjust the chain accordingly.
2. Take one hanging chain. Hang one end onto the hook under the canopy and hang the other end onto the hook inside the frame. Repeat for the other two chains.
3. Weave the fixture wire through one of the hanging chains and through the canopy.
4. Install the mounting bar onto the outlet box.
5. Raise the fixture up and do the wire connection. Secure the canopy with hex nut and cap nut.

SEMI FLUSH

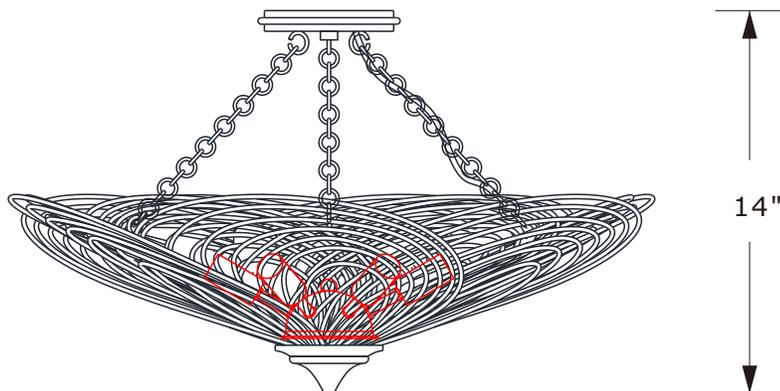

PART NUMBER

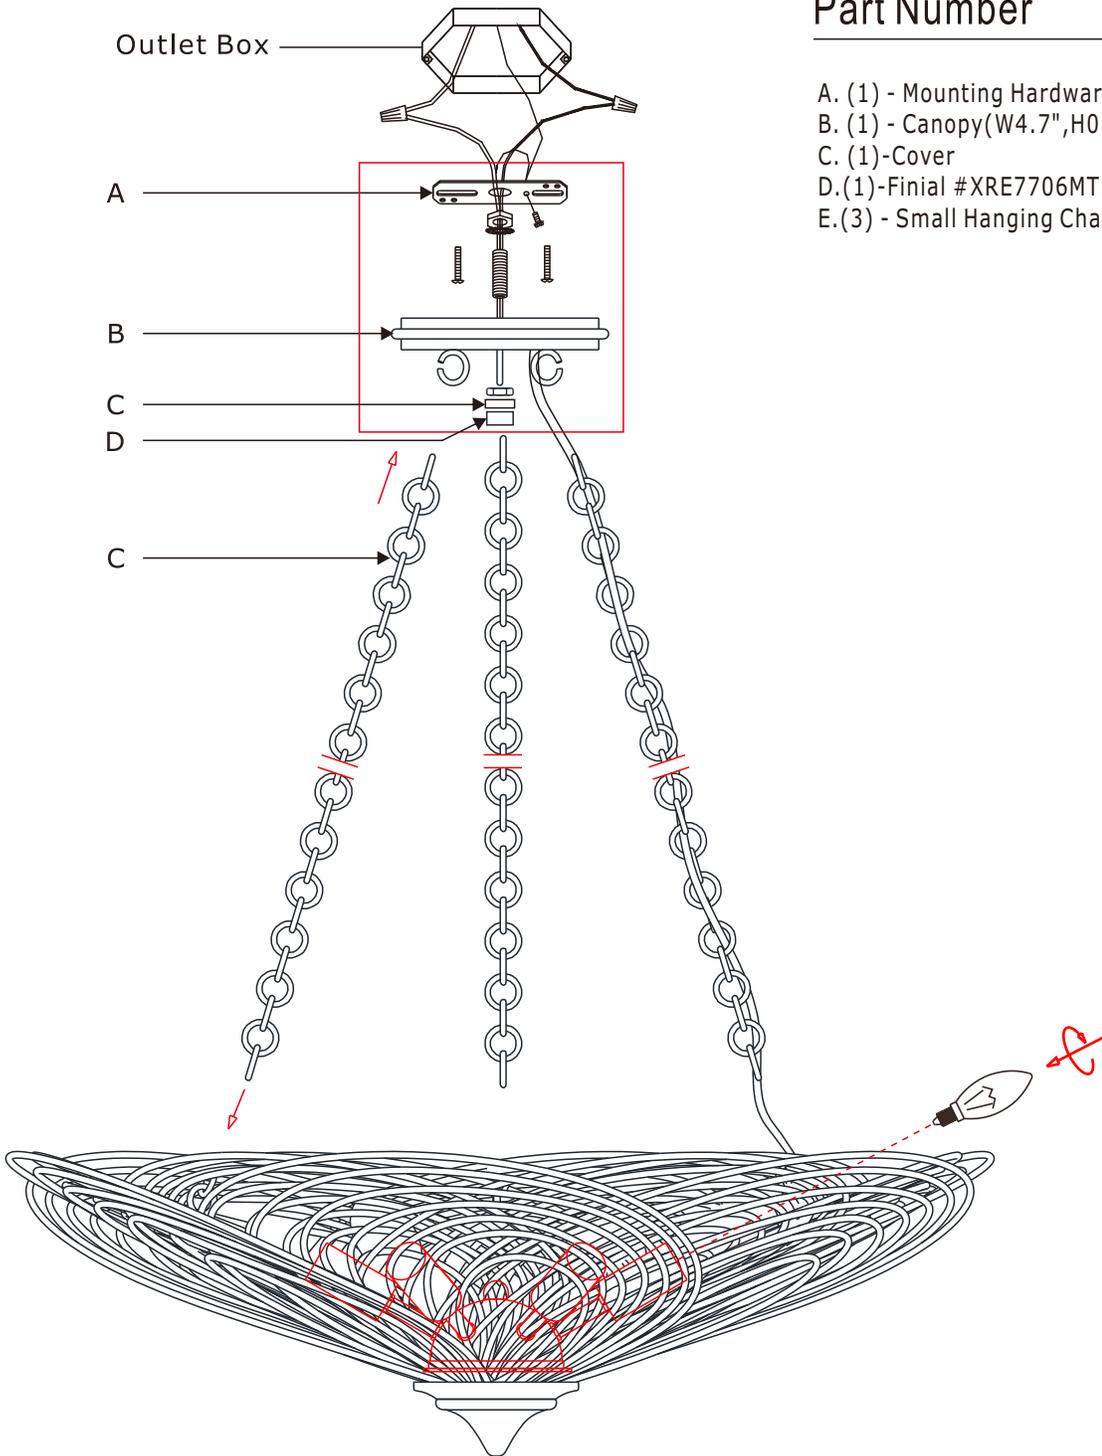

Part Number

- A. (1) - Mounting Hardware
- B. (1) - Canopy(W4.7",H0.78") #XRE7706MTCAN4.7IN
- C. (1)-Cover
- D.(1)-Finial #XRE7706MTFIN
- E.(3) - Small Hanging Chain(72",3mm) #XRE7706MTCHA3MM