

IMPORTANT SAFETY INSTRUCTIONS

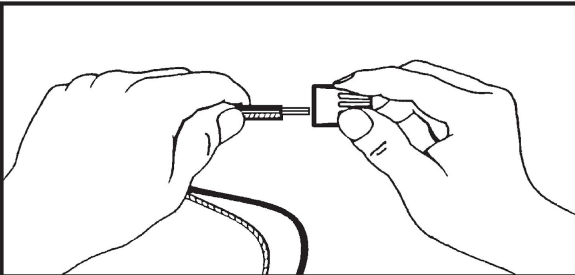
- To avoid injury or damage, mount only on a surface that is sturdy.
- To avoid electric shock, make sure the electricity is turned off at the main circuit breaker panel. If you are replacing an existing fixture, turn off the following in order: fixture, wall switch, and main fuse or breaker box.
Note: Some types of fuses must be unscrewed to shut the power off.
- If you are unclear as to how to proceed, please consult a licensed electrician.



UNPACK THE FIXTURE: Check the contents of the box. Box should contain all items on the parts diagram.

INSTALLATION INSTRUCTIONS

1. Secure Mounting Plate (A) to the junction box (not included) using Mounting Screws (B) provided. Ensure the attached Screw Collar Loop (E) is pointing down towards the floor.
2. Remove Threaded Ring (F) from Screw Collar Loop (E) by unscrewing it in a counter-clockwise direction. Set Threaded Ring (F) aside.
3. Place Canopy (D) against the ceiling with Screw Collar Loop (E) protruding through the hole in Canopy (D). Adjust Screw Collar Loop (E) and the hex nut above it until 3/8" of the threaded portion of Screw Collar Loop (E) is visible. Remove Canopy (D) and set it aside.
4. Secure Center Stem (K) onto Socket Assembly (L) by threading it in a clockwise direction. Pull through any necessary Wires (H).
5. Thread Wire (H) from the top of Center Stem (K) through Top Ring (N). Secure Center Stem (K) to Top Ring (N).
6. Position Center Ring (O) over Bottom Ring (P). Place one end of Frame Bar (Q) in the hole on Bottom Ring (P) with the notch facing outwards. Place the top end of Frame Bar (Q) into the hole on Top Ring (N). Secure Top Ring (N) to Frame Bar (Q) with Ring Screw (R). Do the same for each Frame Bar (Q), connecting Center Ring (O) to the notches on Frame Bar (Q) as you go.
7. Gently flip the entire fixture body over. Secure Bottom Ring (P) to each Frame Bar (Q) with Ring Screw (R). Readjust Center Ring (O) onto the notches on Frame Bar (Q) if necessary.

8. Determine desired hanging length using Downrods (I). Secure them together, ensuring that Downrod Loop (J) is on top.
9. Thread Wires (H) from Top Ring (N) up through Downrods (I) and Downrod Loop (J). Secure Downrods (I) to Center Stem (K) and Downrod Loop (J) to the top of Downrods (I). Pull through any necessary Wires (H).
10. Use wire cutters to cut Wire (H) 10" beyond the length of Downrods (I) for easier wire connection.
11. Slide Threaded Ring (F) down Wire (H) with the raised end (flange) facing up towards the ceiling. Slide Canopy (D) down Wire (H).
Note: Threaded Ring (F) and Canopy (D) will be used to secure the fixture to ceiling at a later step.
12. Open Quick Link (G) and carefully lift the fixture body (with the help of a friend). Secure Downrod Loop (J) to Screw Collar Loop (E) with Quick Link (G).
13. Insert the end of Wire (H) through the hole in Screw Collar Loop (E) into the junction box.
14. Using the wire graph below, connect the appropriate wires from the fixture to the corresponding wires in the electrical junction box (not included) and secure Wire Connectors (C).



Connect to BLACK house wire	Connect to WHITE house wire
BLACK 	WHITE 
PARALLEL WIRE (ROUND & SMOOTH) 	PARALLEL WIRE (RIBBED / RIDGED) 
WHITE OR GREY WITH TRACER 	WHITE OR GREY WITHOUT TRACER 
BROWN, GOLD OR BLACK WITHOUT TRACER 	BROWN, GOLD OR BLACK WITH TRACER 

A. Connect the ground wire (bare copper or green) from your fixture to the:

- 1) ground wire in the junction box, or
- 2) ground screw in the junction box

B. Connect the BLACK house wire to fixture hot wire that corresponds to diagram (black, round & smooth, white/grey with tracer, brown/gold without tracer).

C. Connect the WHITE house wire to fixture neutral wire that corresponds to diagram (white, ribbed/ridged, white/grey without tracer, brown/gold with tracer).

15. Place all Wires (H) and Wire Connectors (C) back into the junction box.
16. Slide Canopy (D) and Threaded Ring (F) up towards Screw Collar Loop (E). Place Canopy (D) flush against the ceiling and secure in place by screwing Threaded Ring (F) onto Screw Collar Loop (E) in a clockwise direction.
17. Install bulbs (not included) into Sockets (M).

Enjoy your new fixture!

HELPFUL TOOLS: Safety Goggles, Screwdriver, Wire Cutter/Stripper, Ladder, Measuring Tape, Chain Pliers

