


80086 Product Installation Instructions

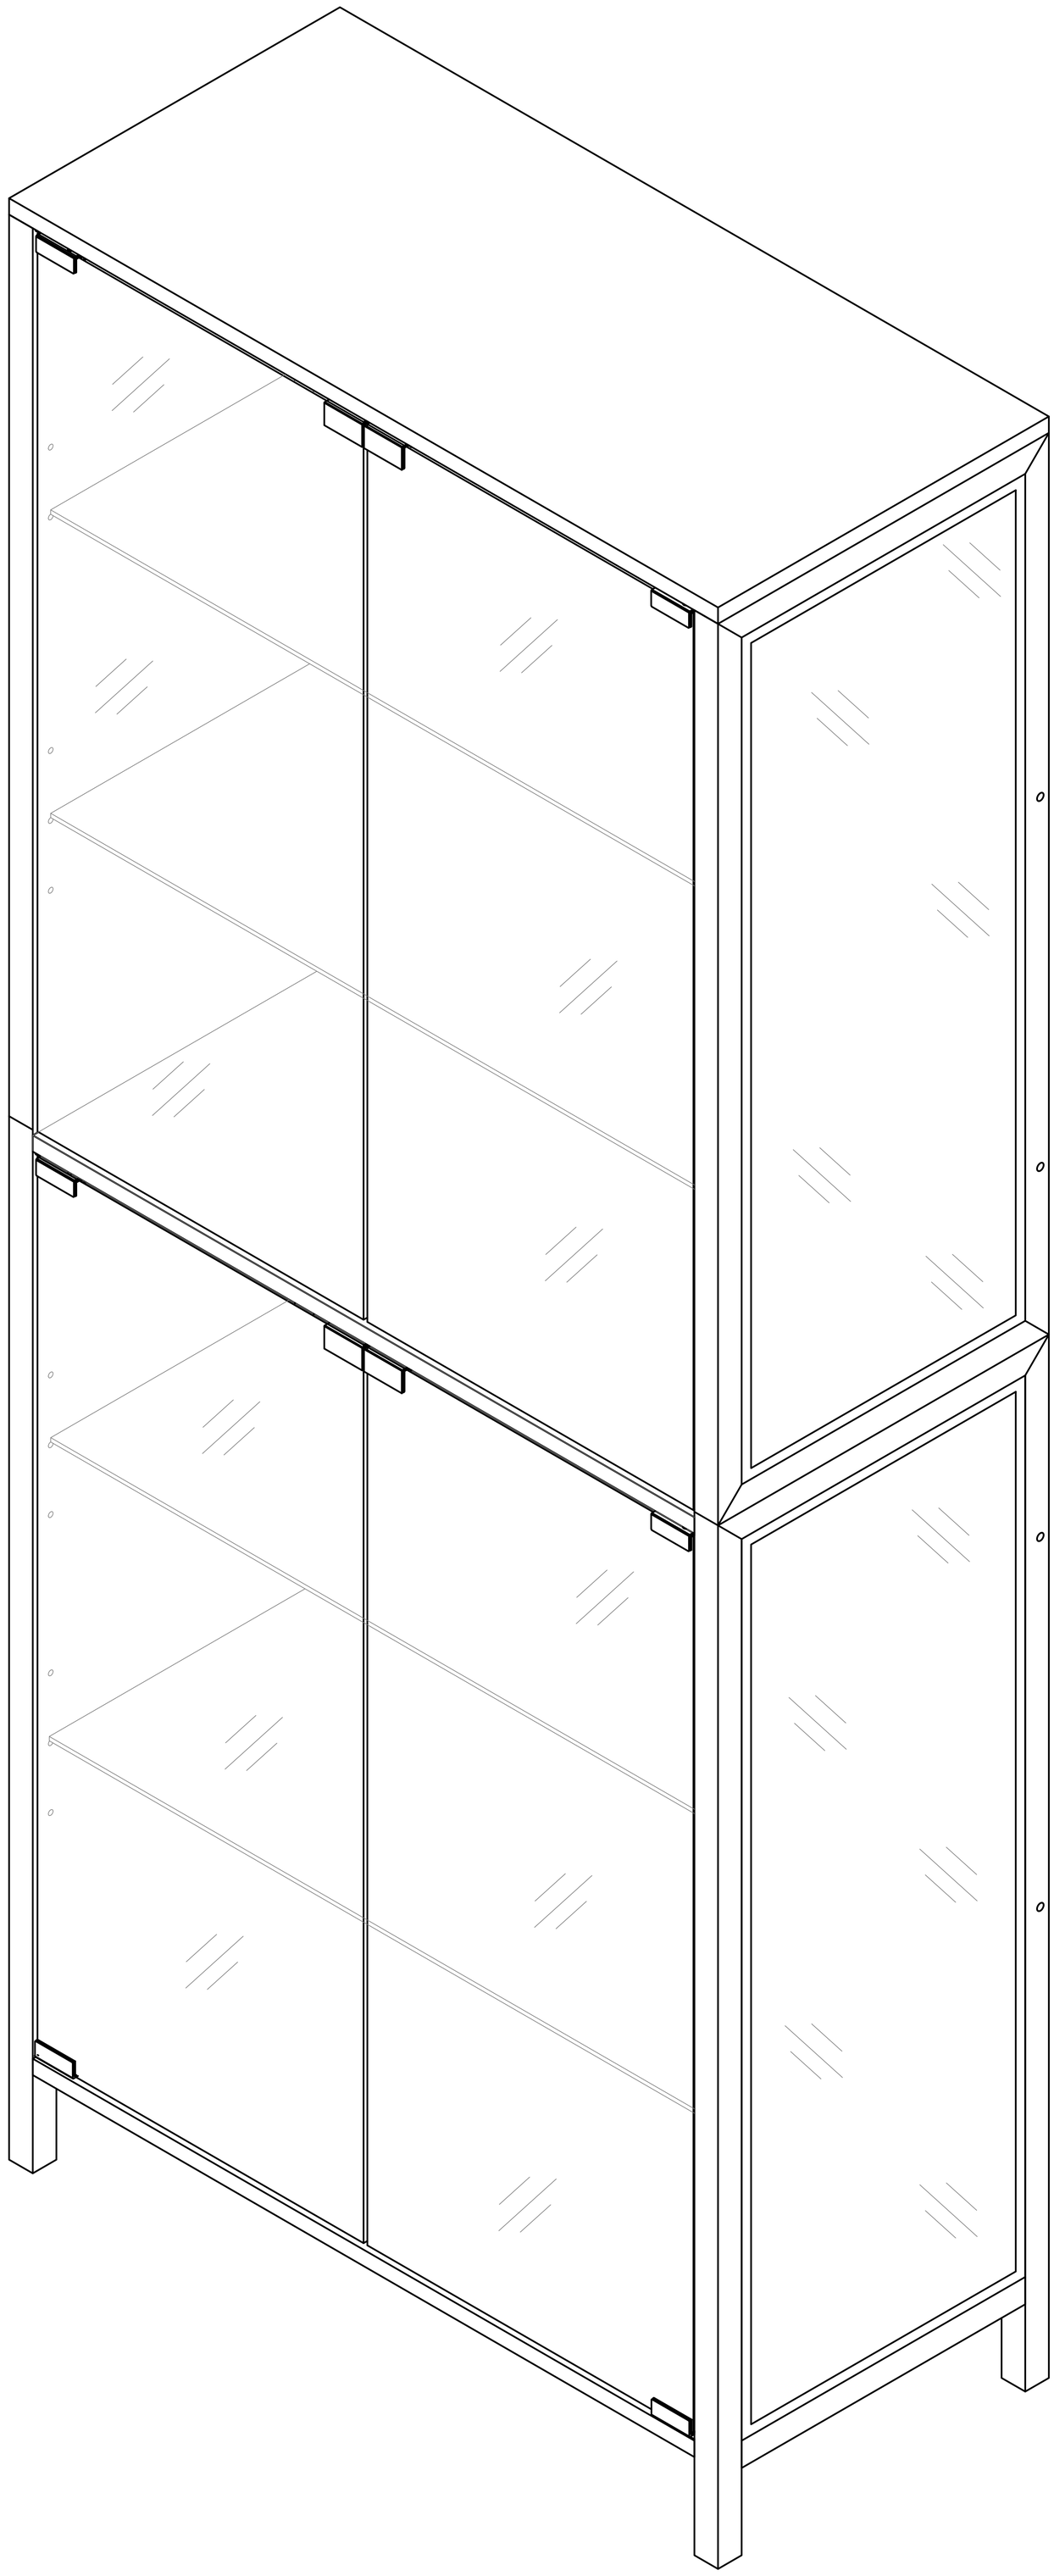


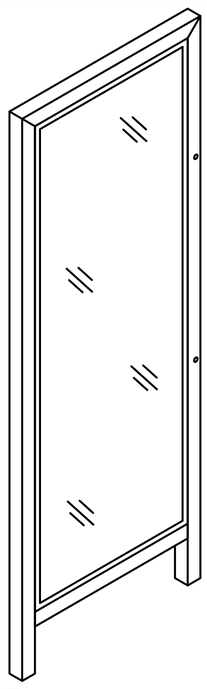


A x1

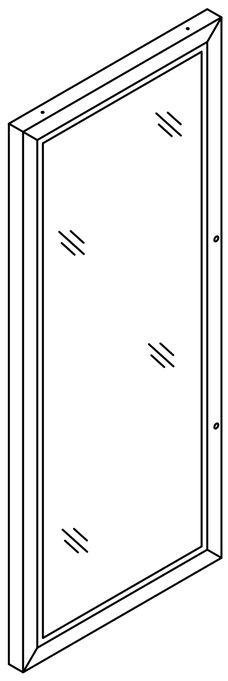


B x1

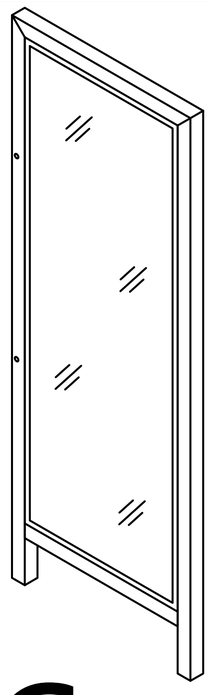


C x1

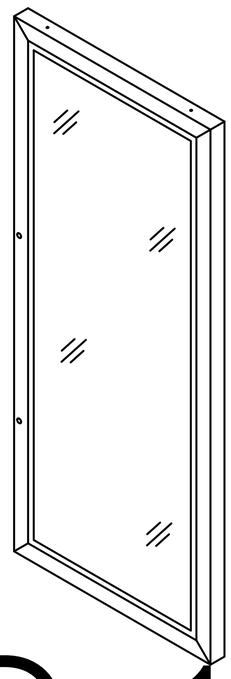


D x1

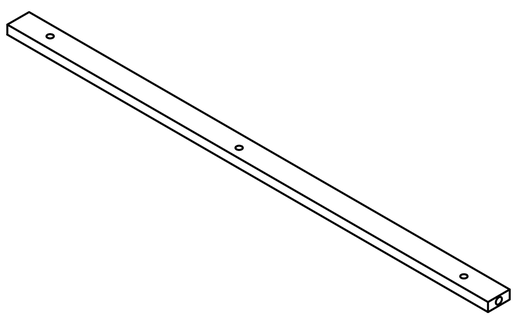


E x4

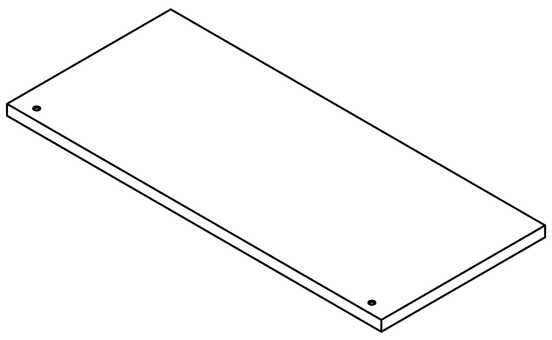


F x1

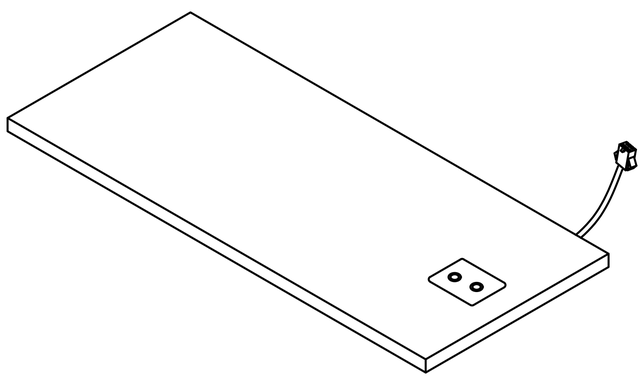


G x1

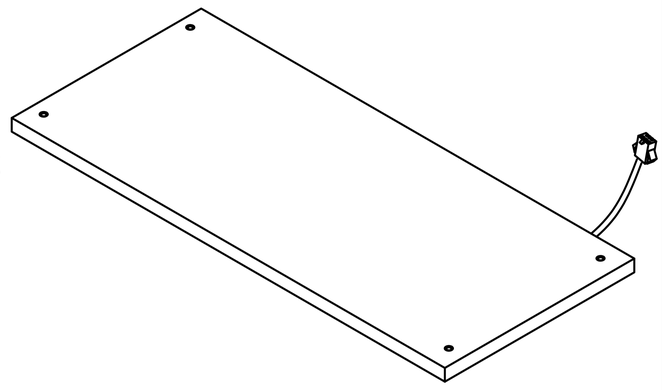


H x1

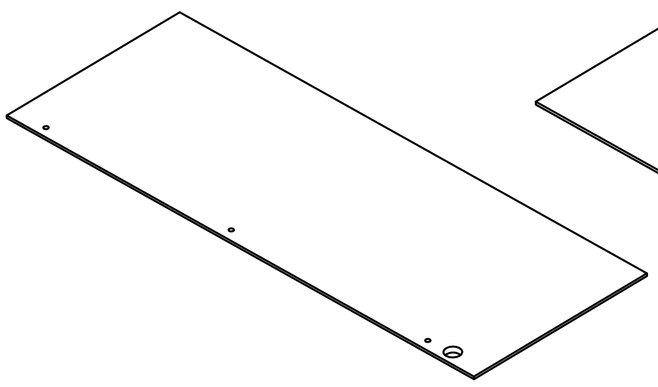


I x1

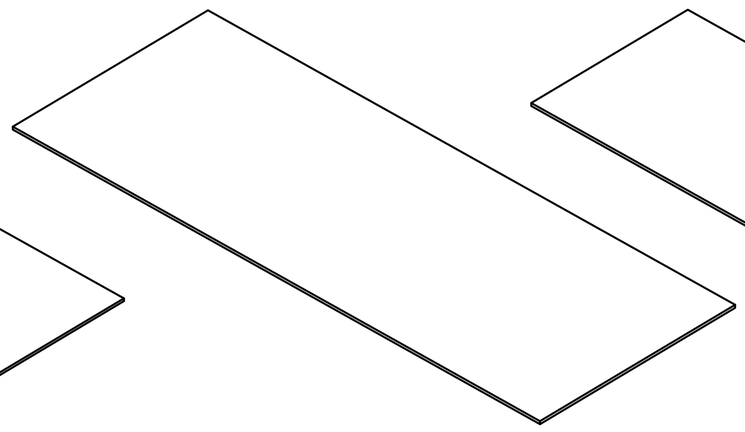


J x1

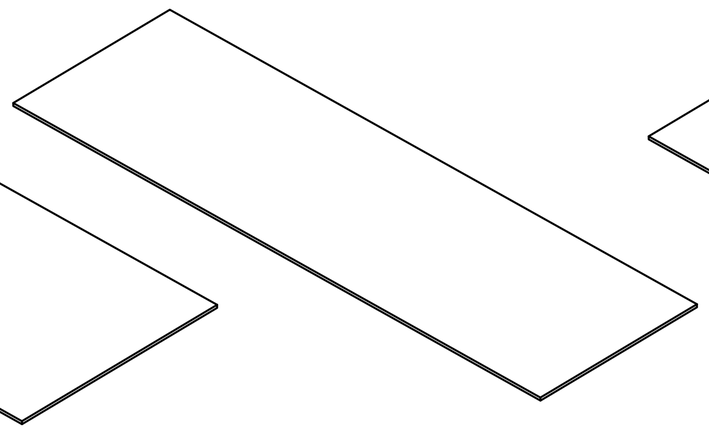


K x1

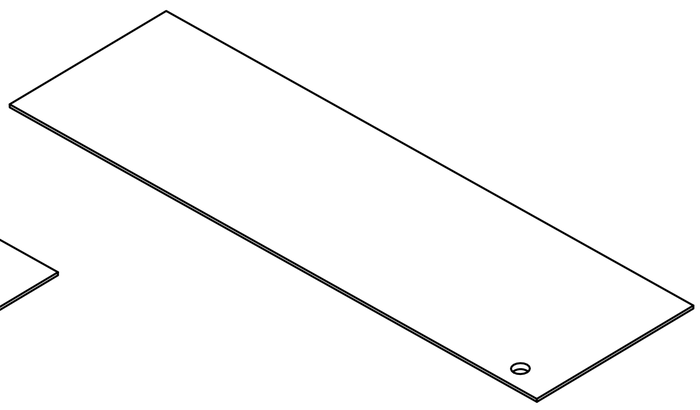


L x1

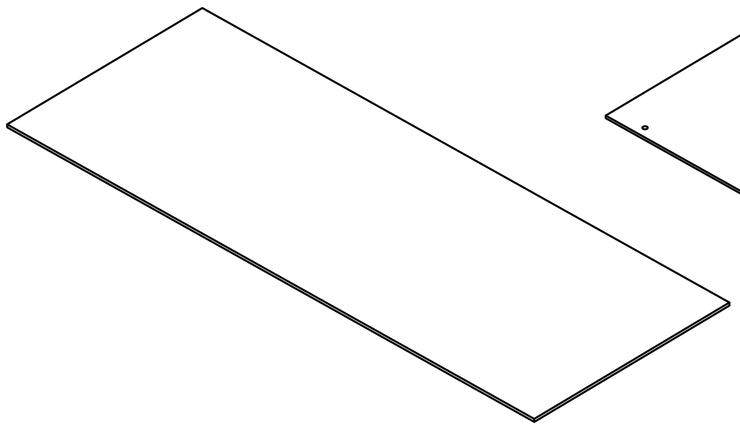


M x1

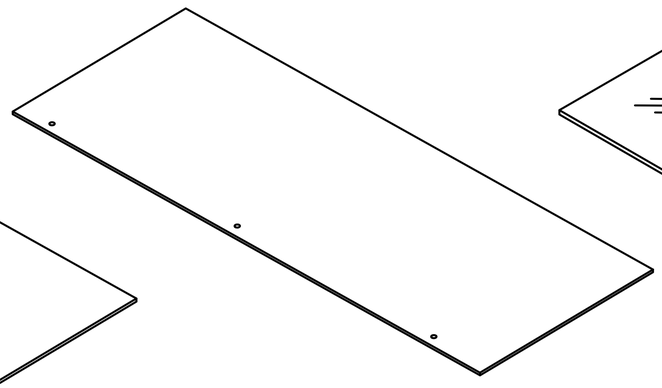

N x1










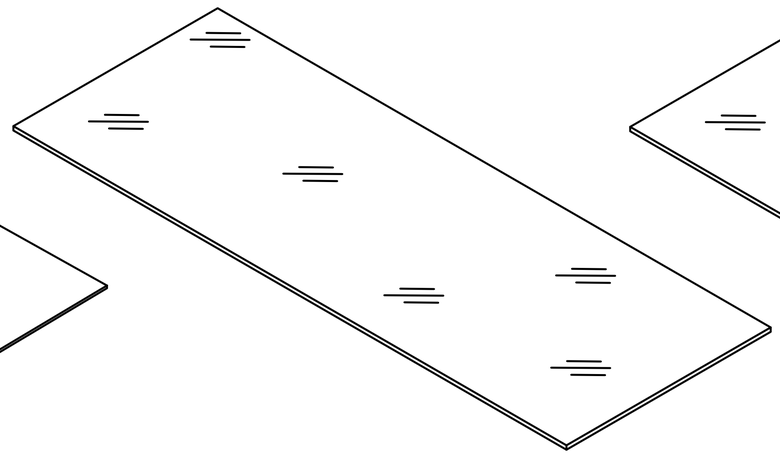


O x4

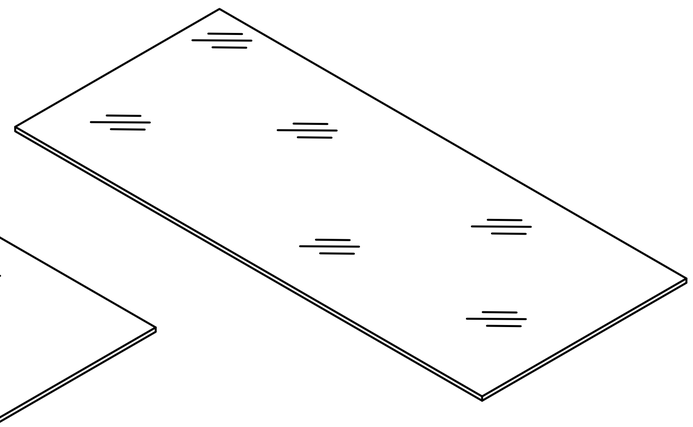


P x4


Accessories list

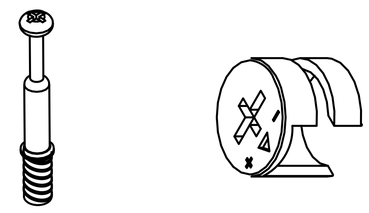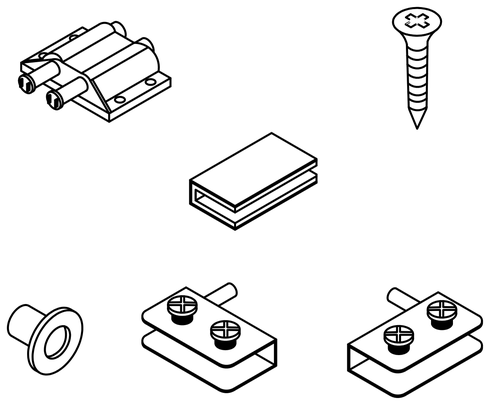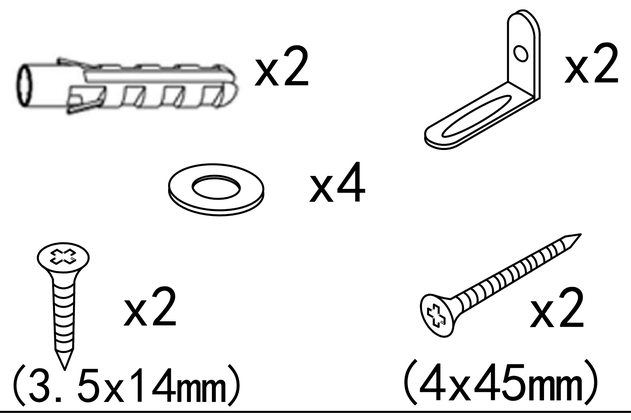1		Two In One Screw (6x28mm) Two In One Nut (10x12mm)	8pcs +1pcs
2		screw (6x33mm)	8pcs
3		Rebound device Screw (3x16mm) Iron sheet Hinge	2pcs 8pcs 4pcs 8pcs 4pcs 4pcs
4		screw (4x30mm)	4pcs +1pcs
5		screw (3x12mm) washer (φ10mm)	21pcs +4pcs
6		Laminate Support Nail	16pcs +2pcs
7		Adjustable Foot	4pcs
8		Anti Fall Hardware	1pcs
9		Wire clamp	1pcs
10		screw (6x10mm)	8pcs
		AC/DC Adapter (12V⎓3.0A)	1pcs

Double-head screwdriver, use as required

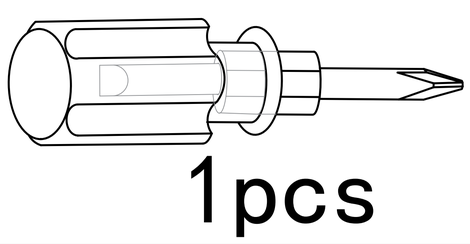


1pcs

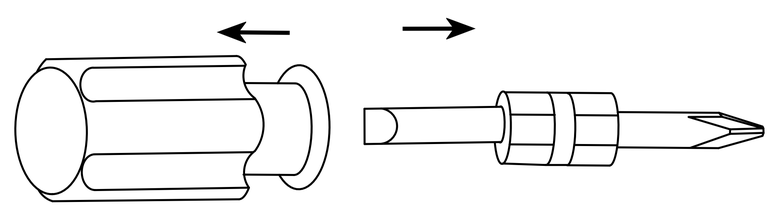

2


Product structure decomposition

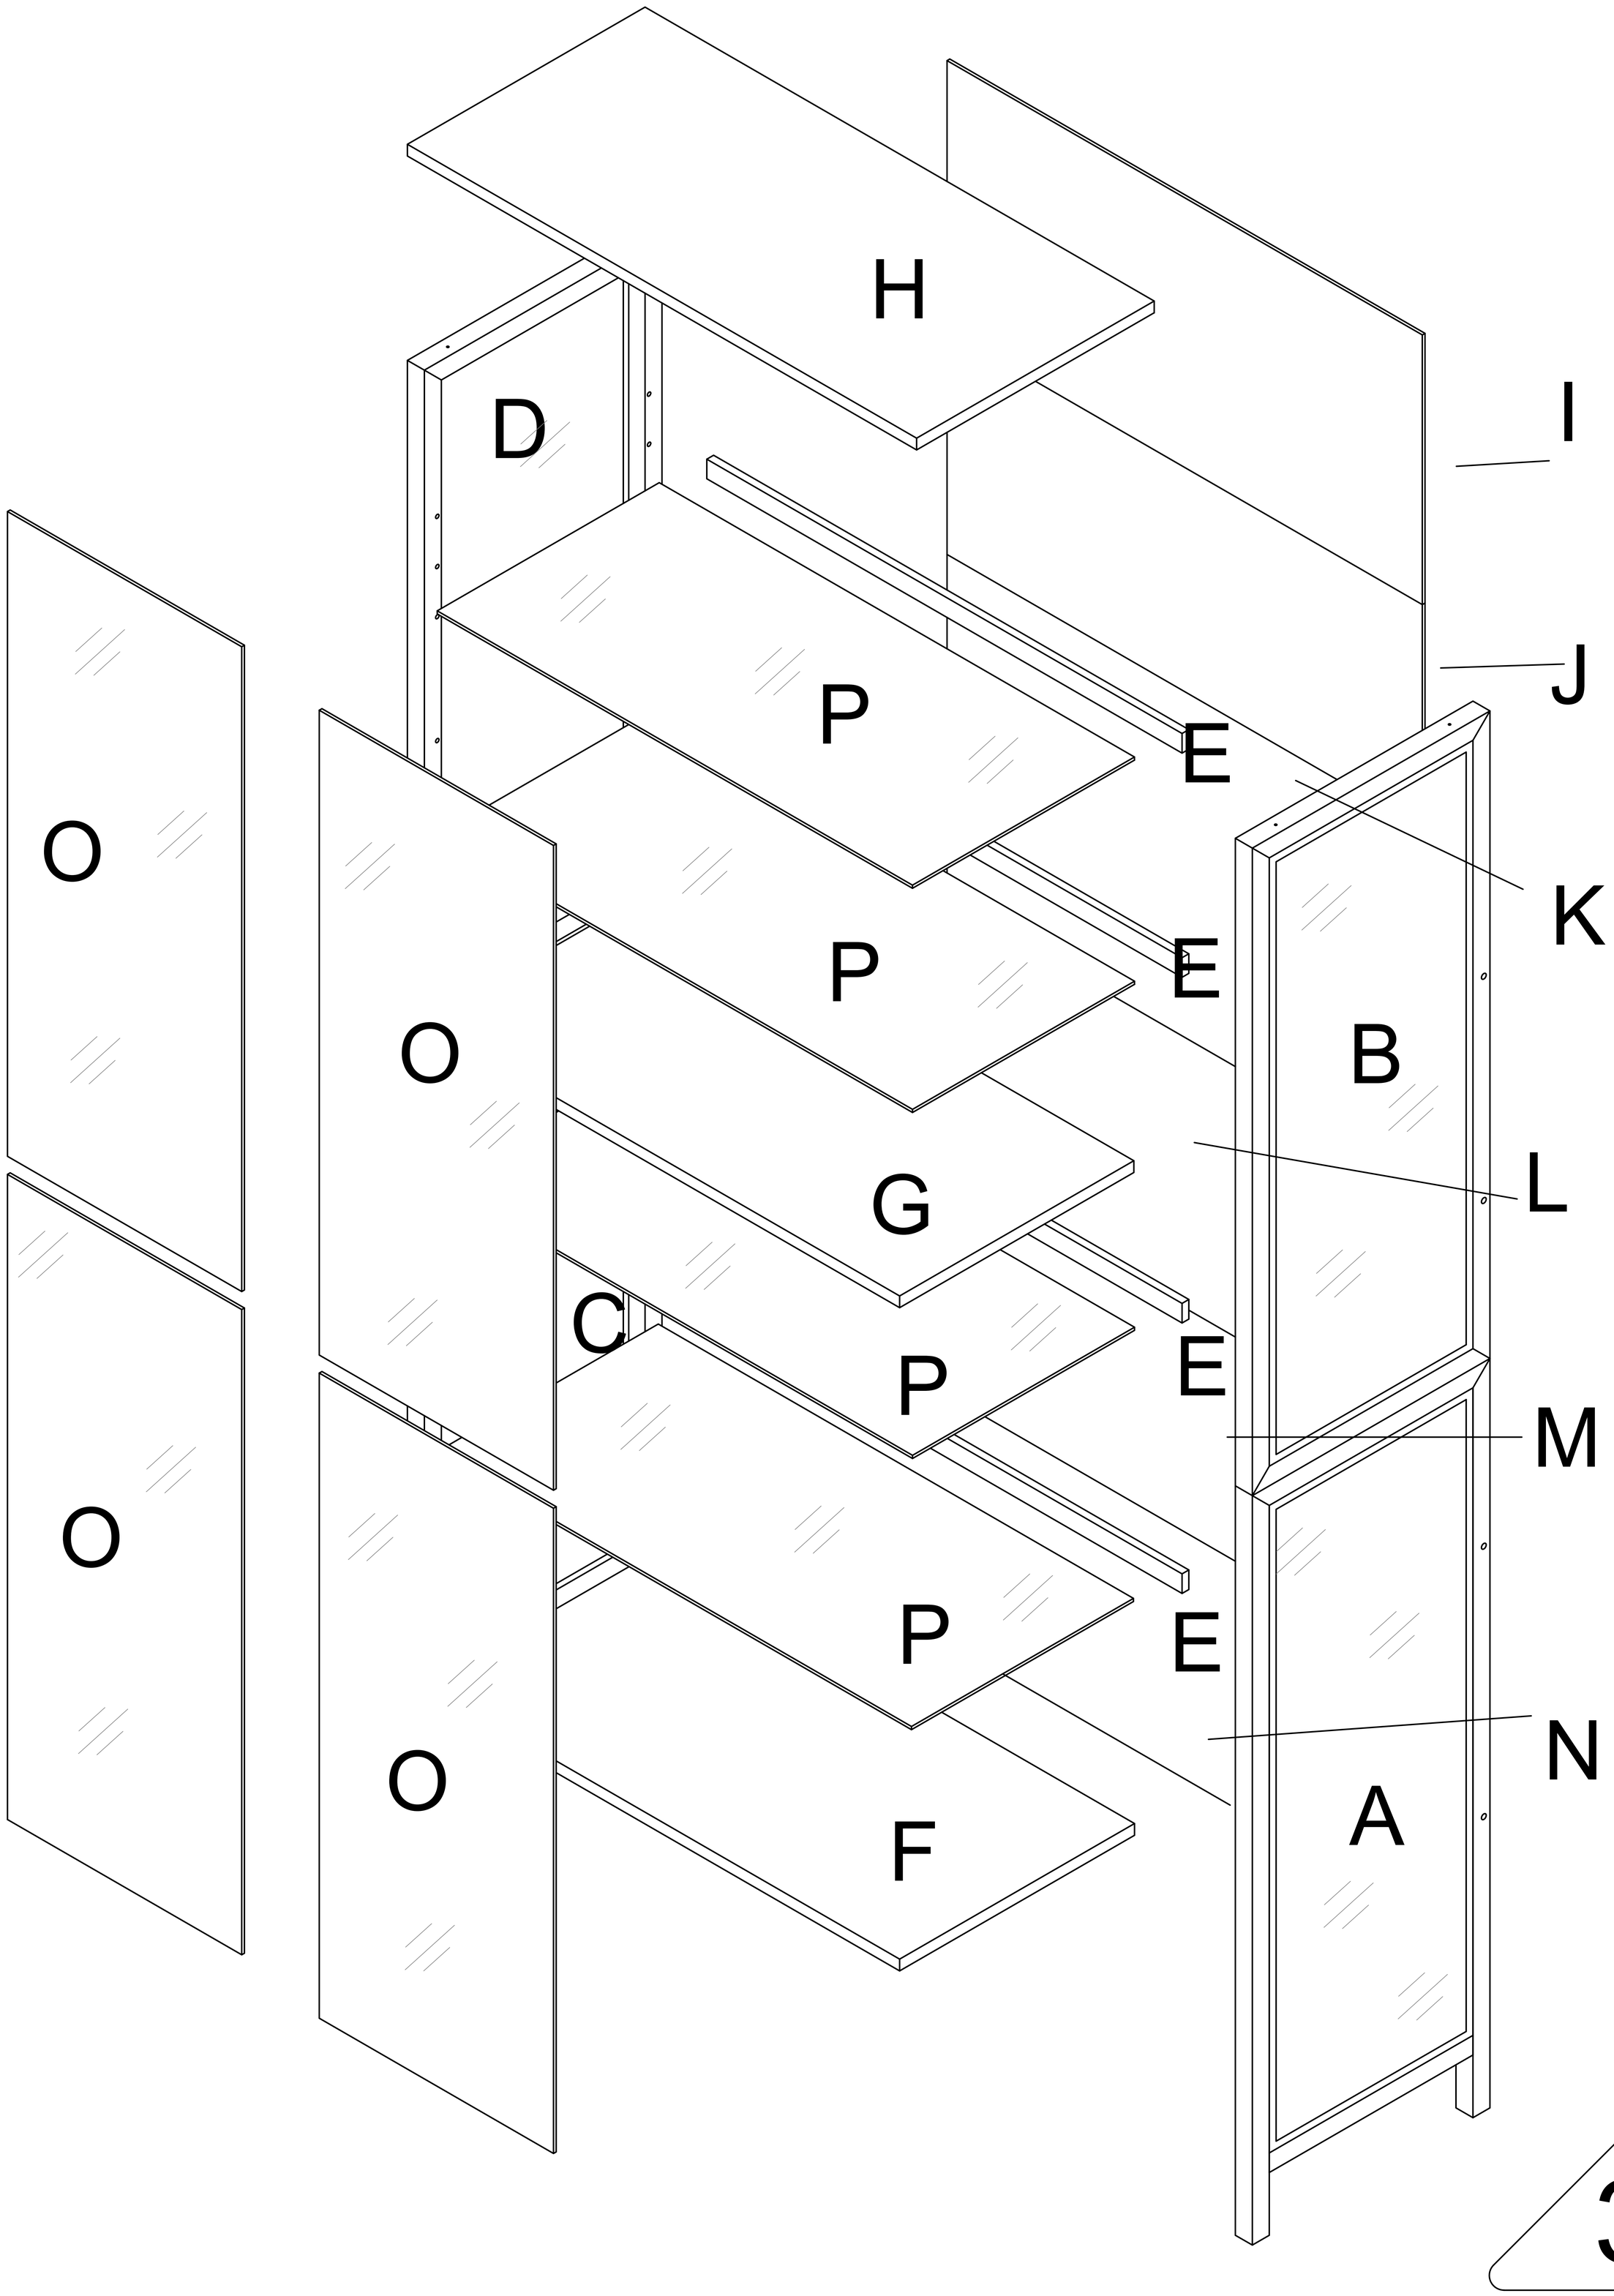


3

Use parts ① and ①


Step1

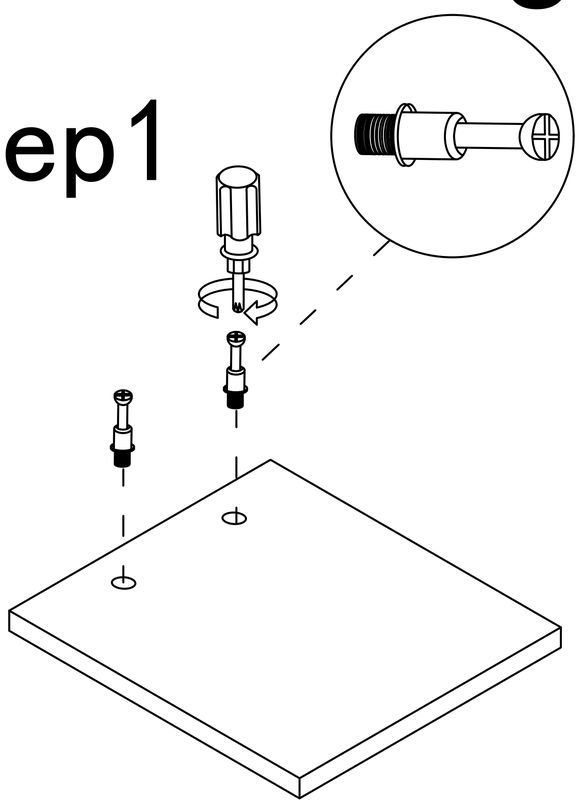


Step2

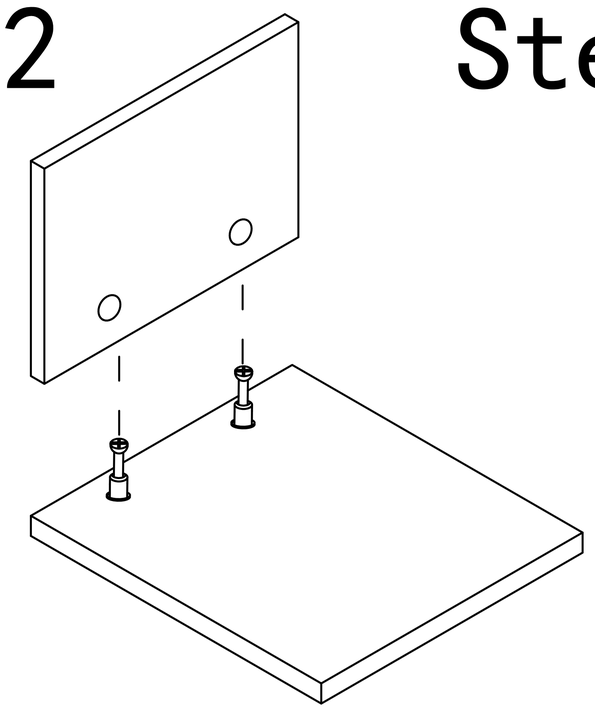


Step3

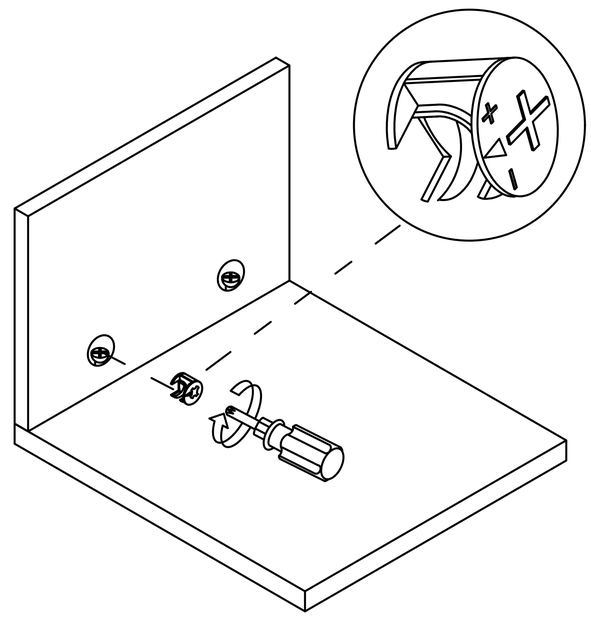

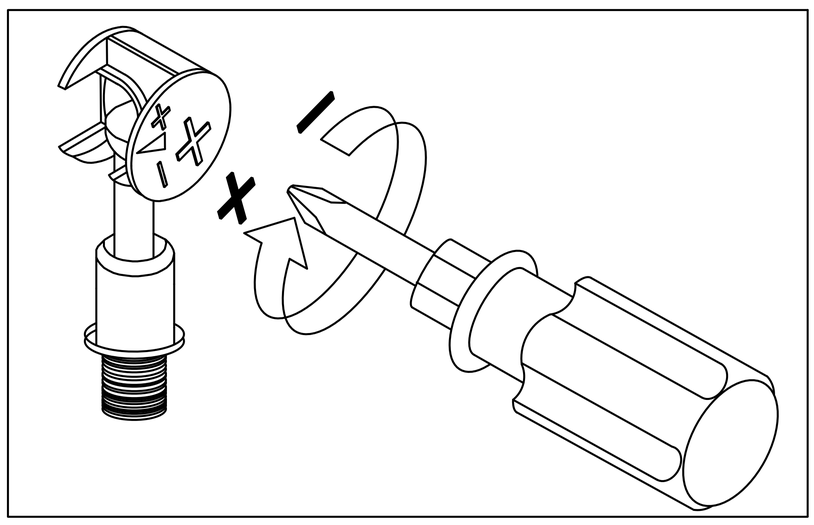



Use a screwdriver to lock in the direction of the "+" sign

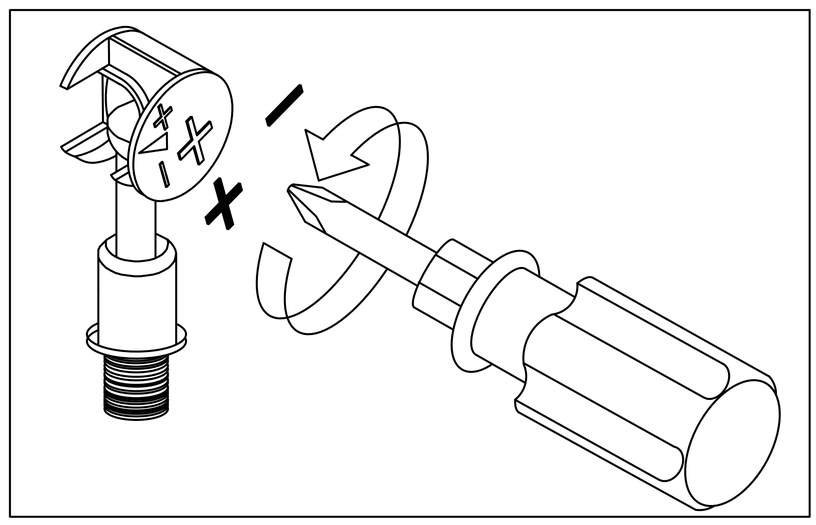


Disassemble along the direction of "-" sign

Step 1


①		x4

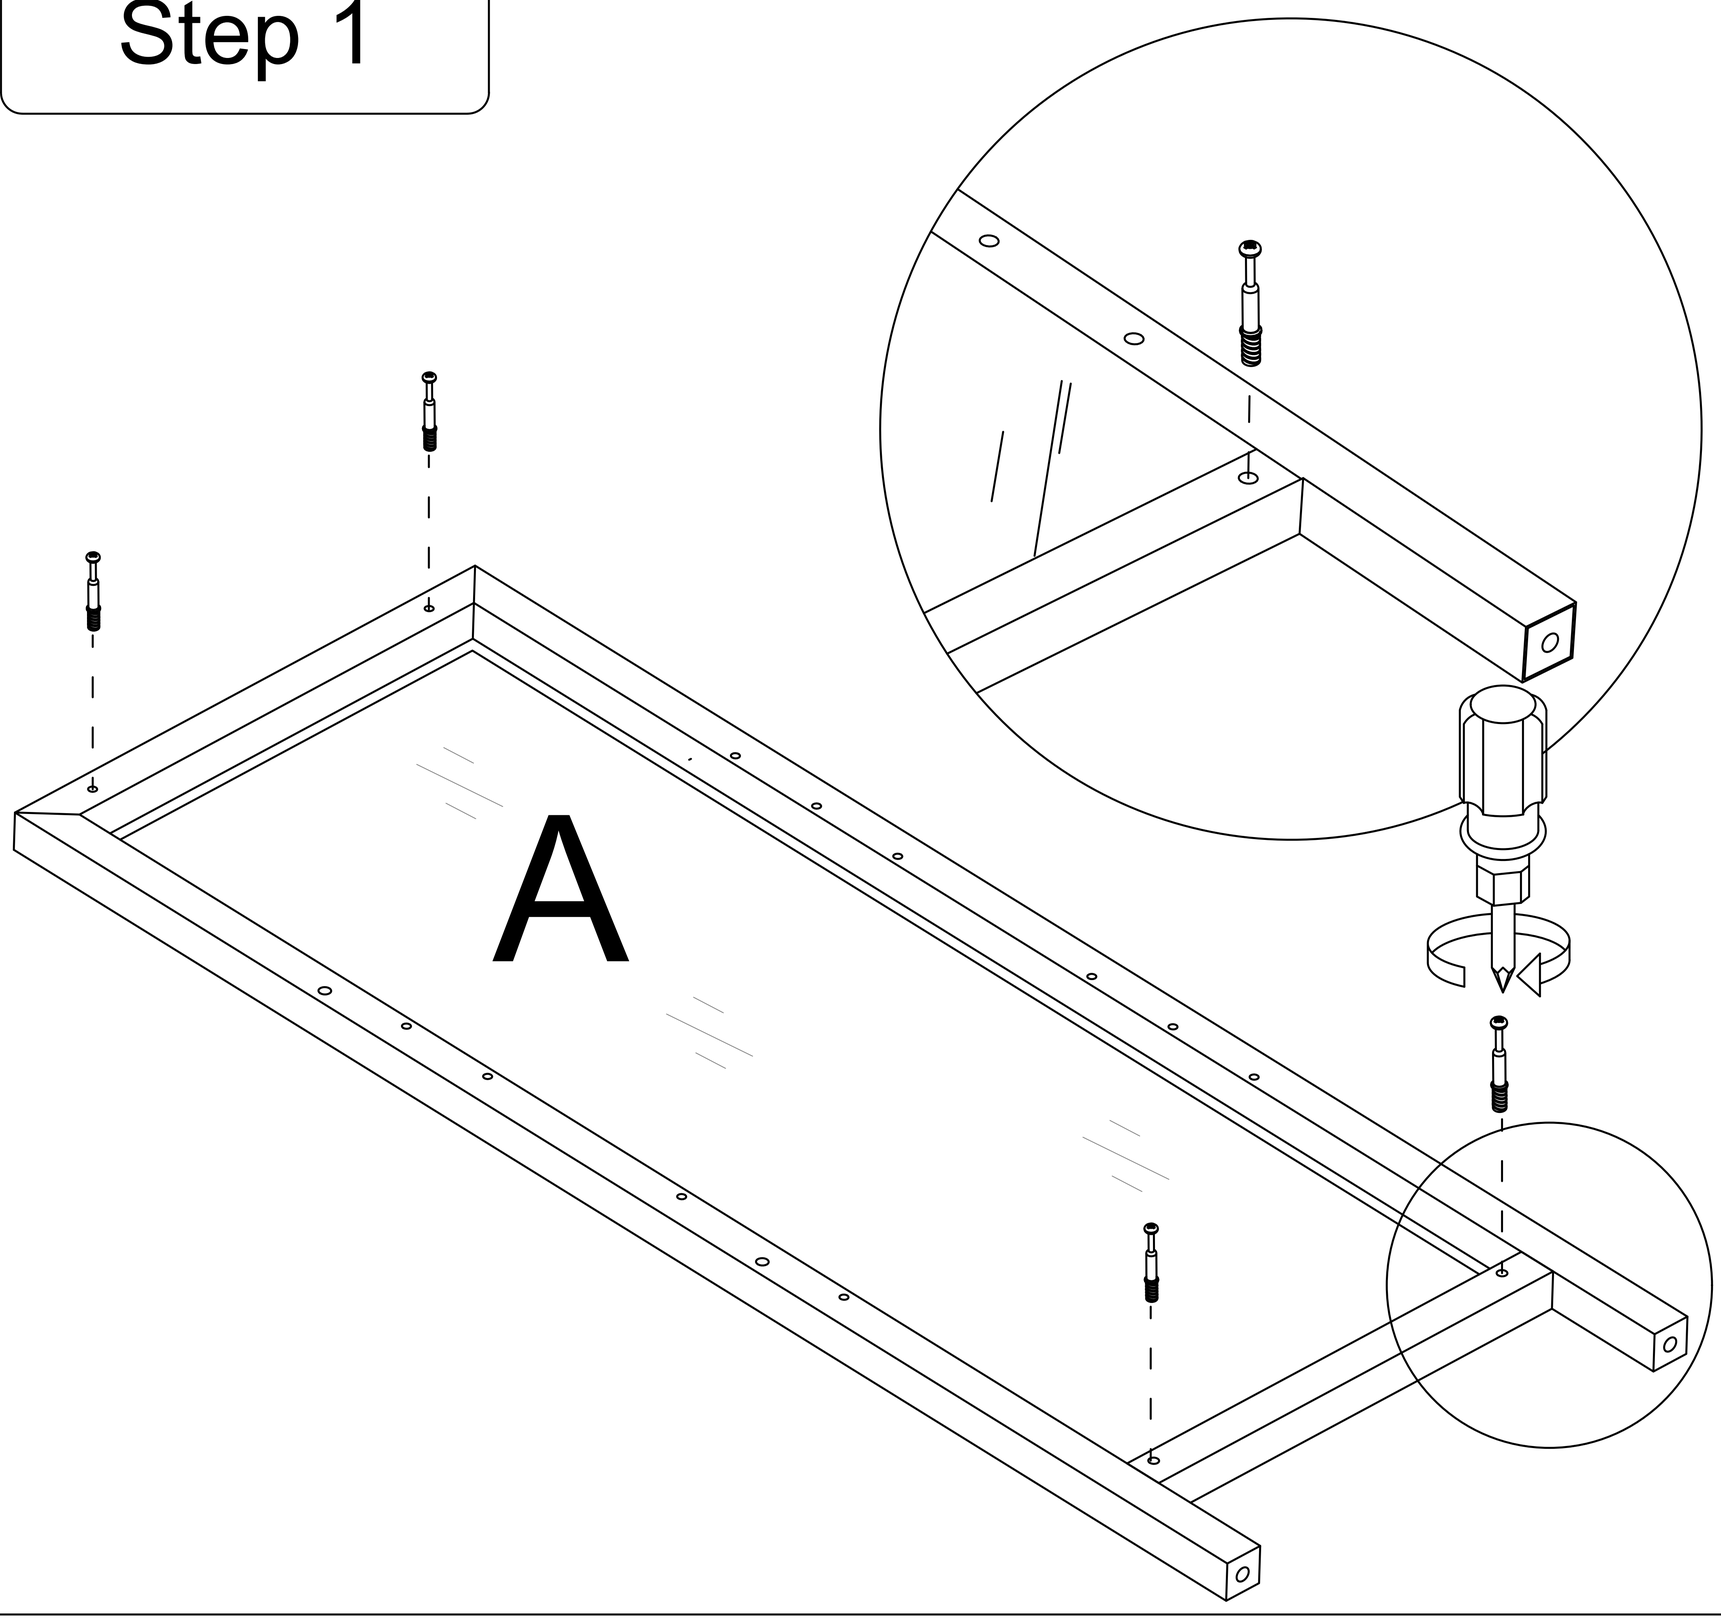


Step 2


1  x2

All connection holes
are on the same side.

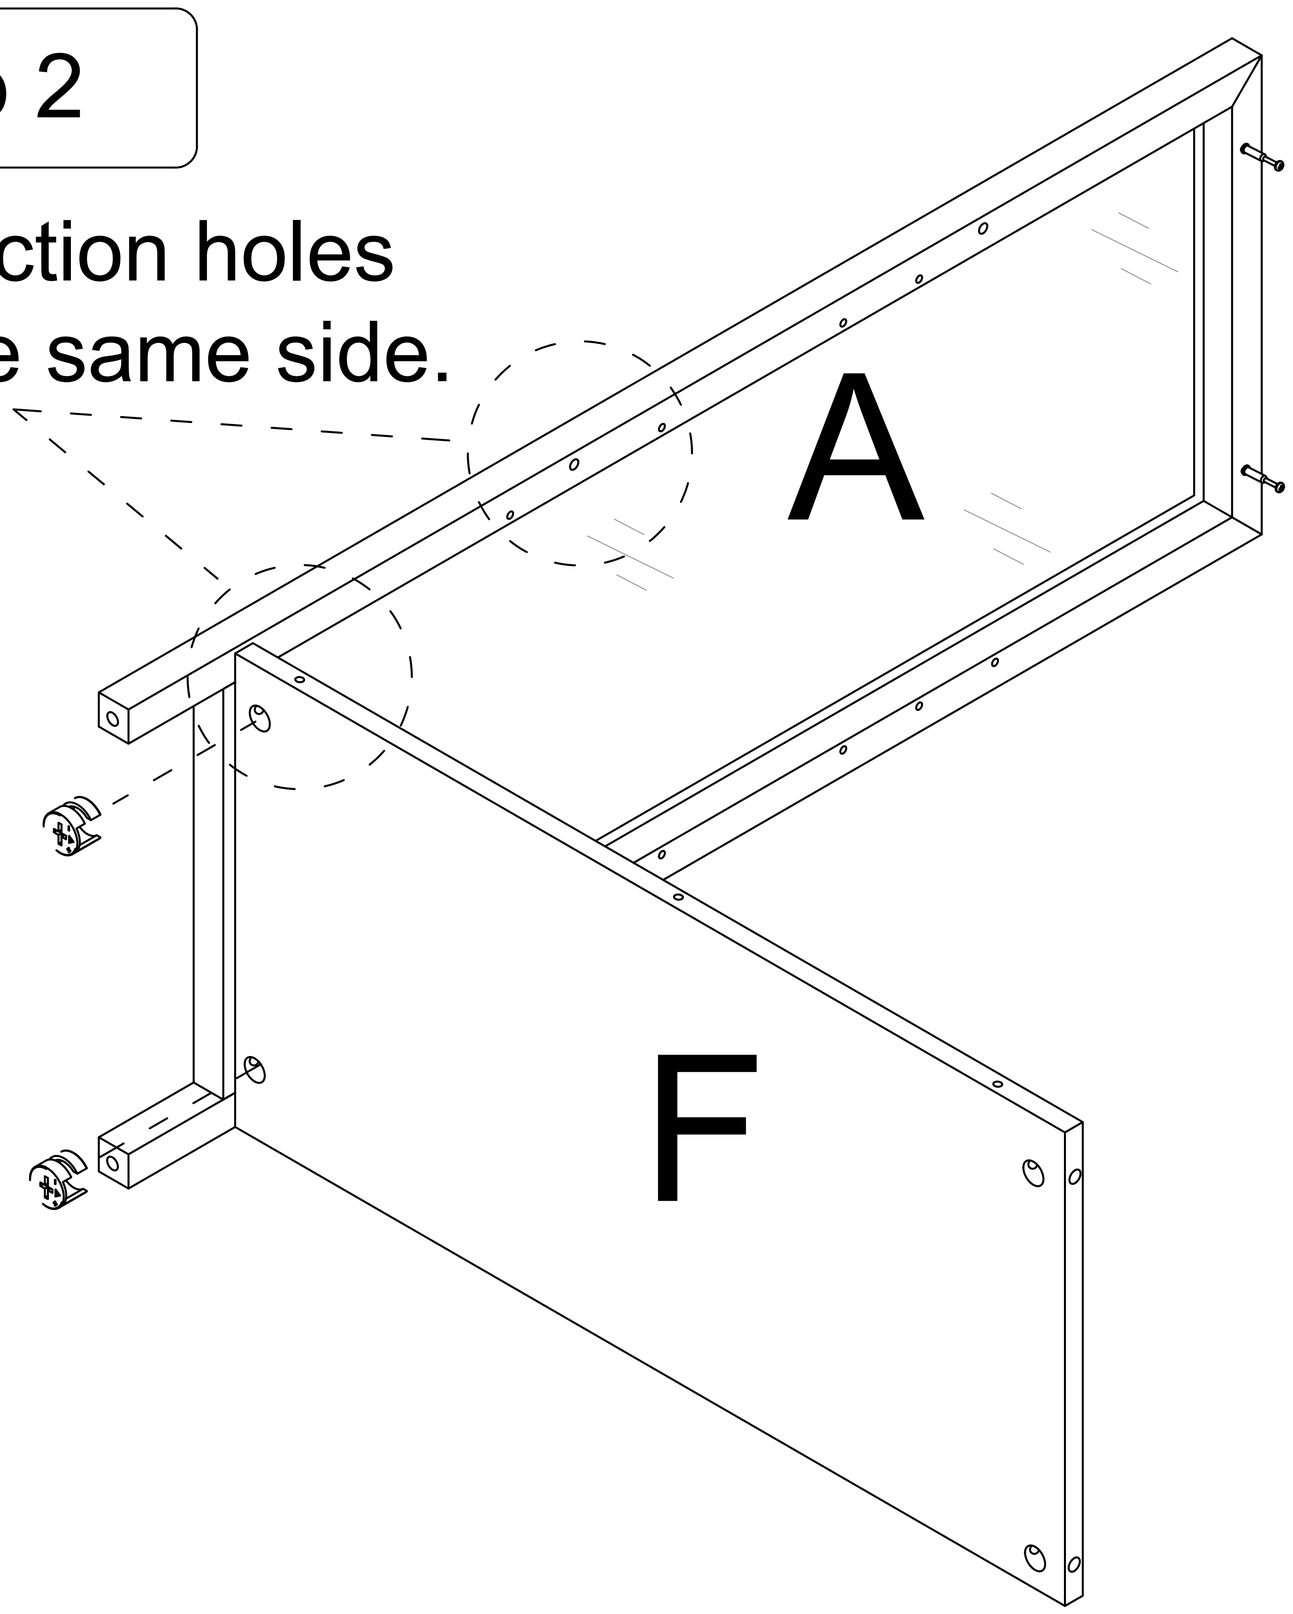

Step 3


3  x1  x4

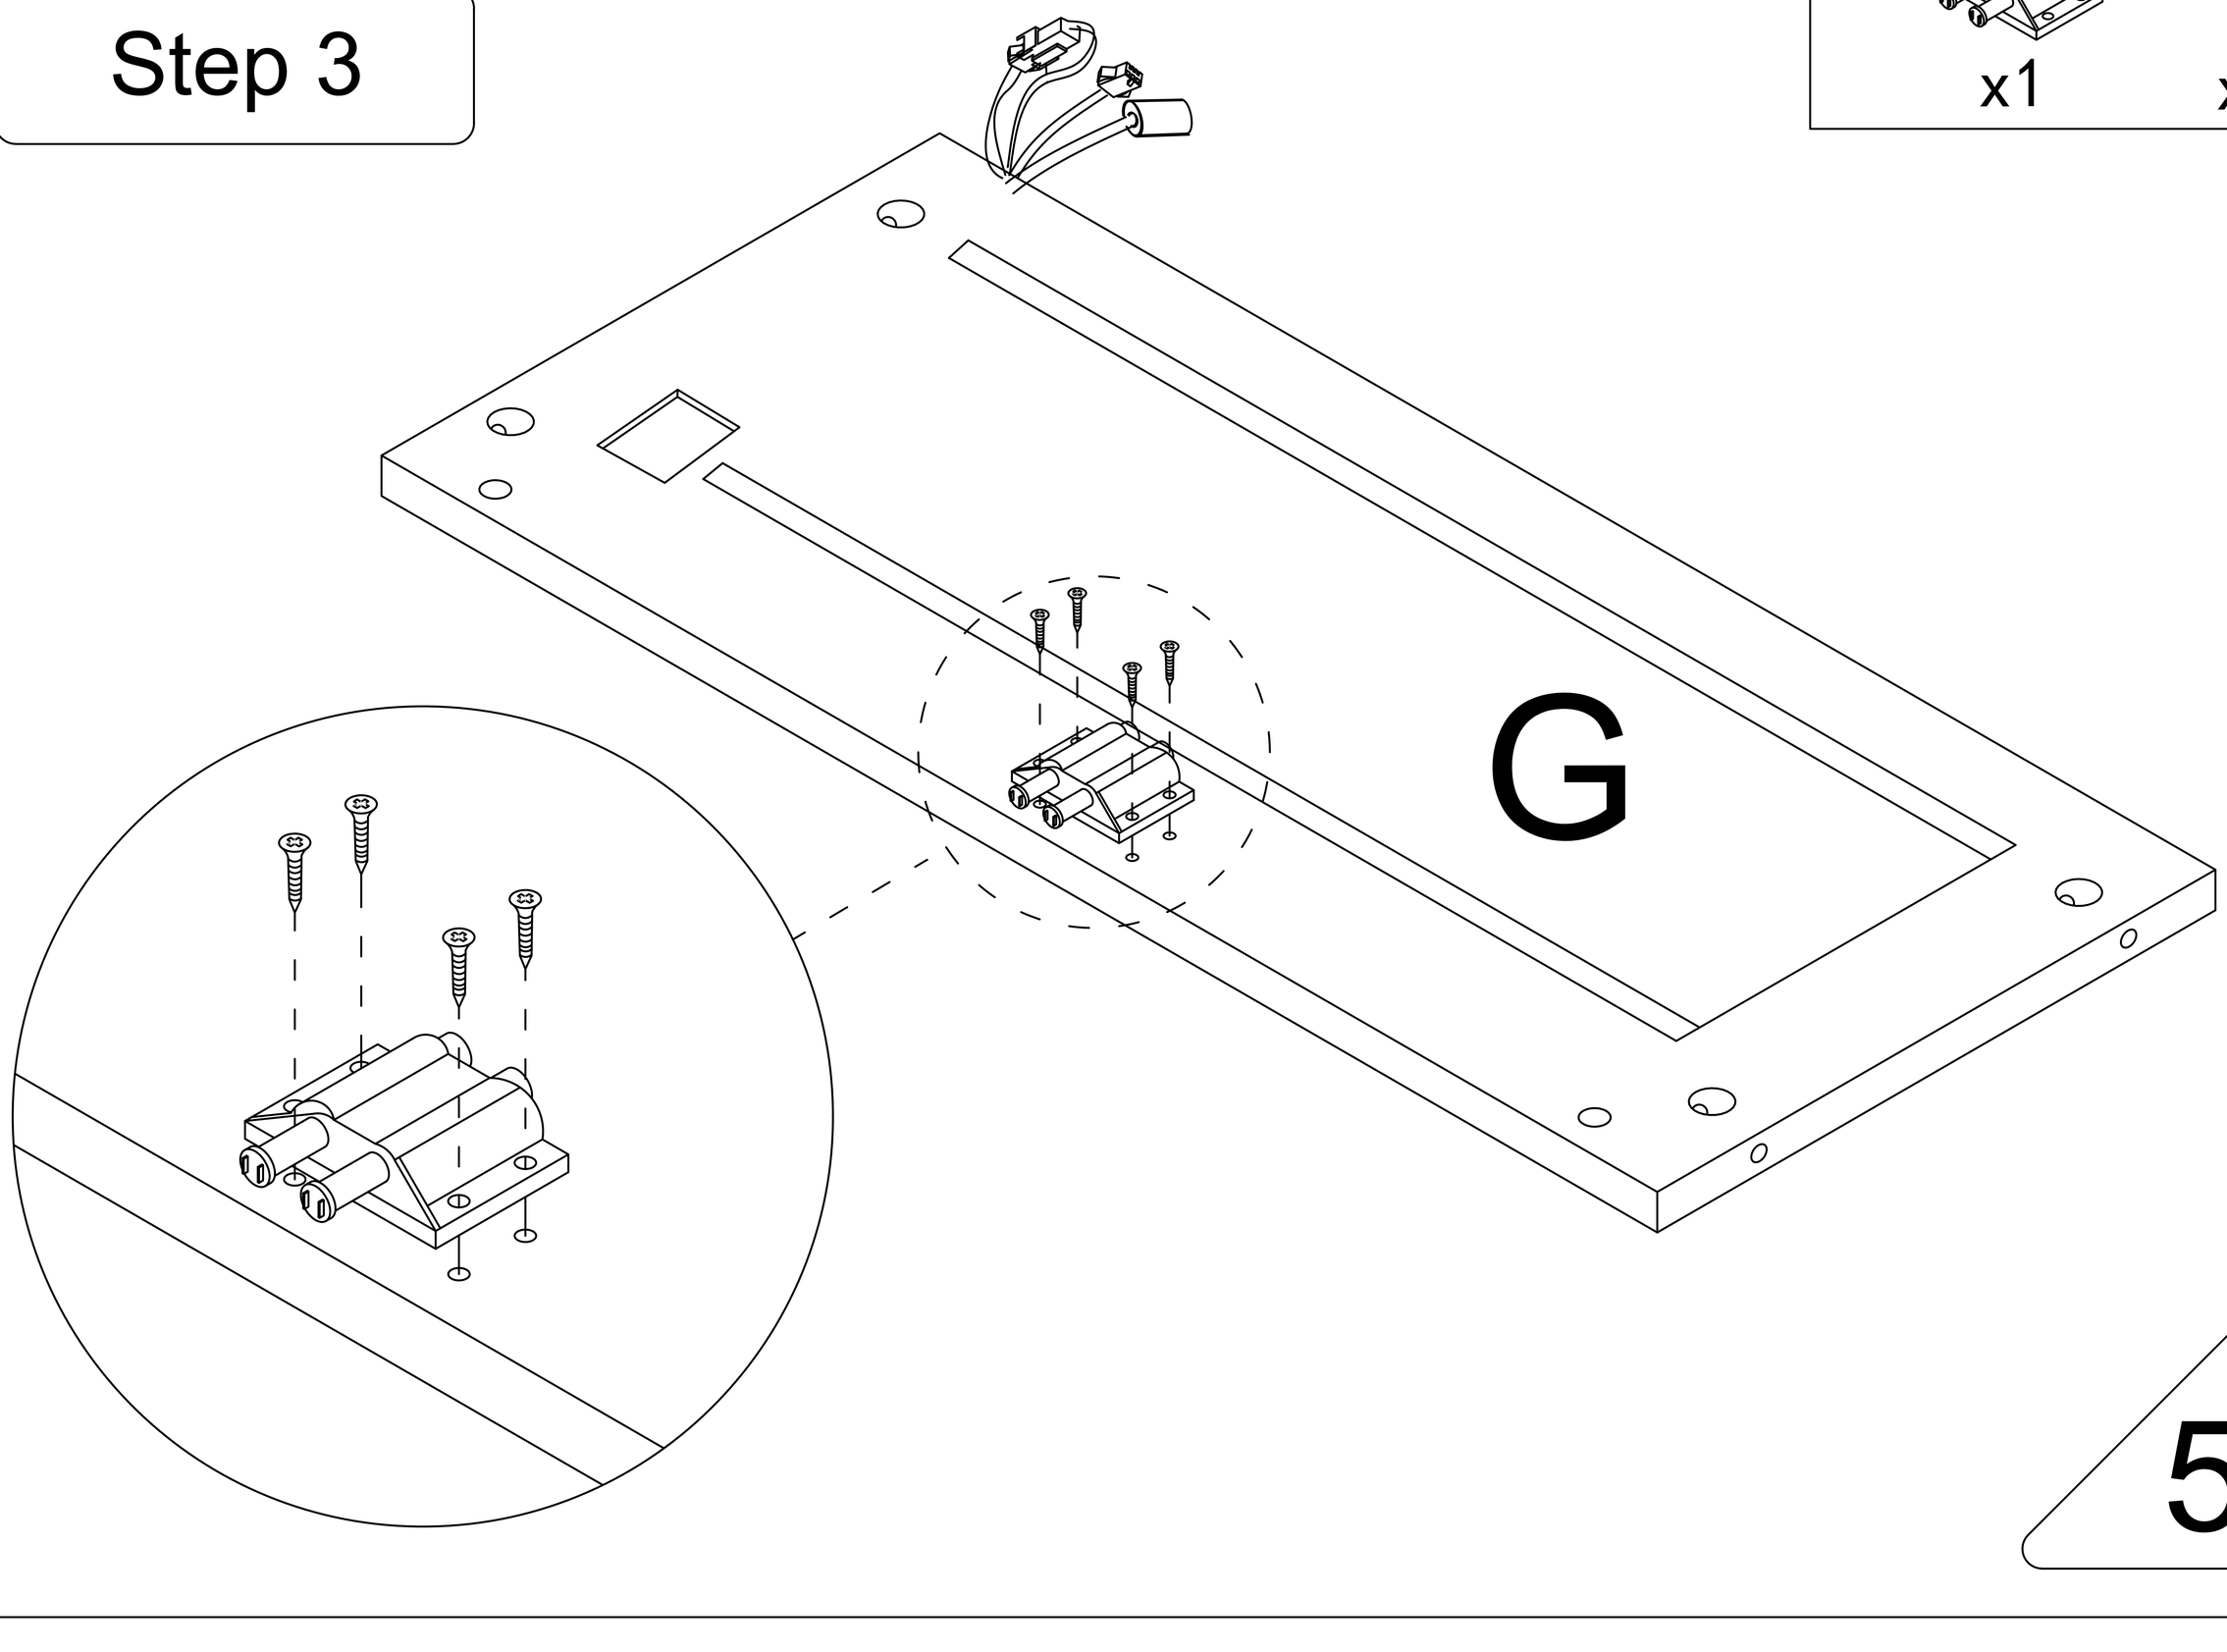

Step 4


All connection holes are on the same side.

1 x2

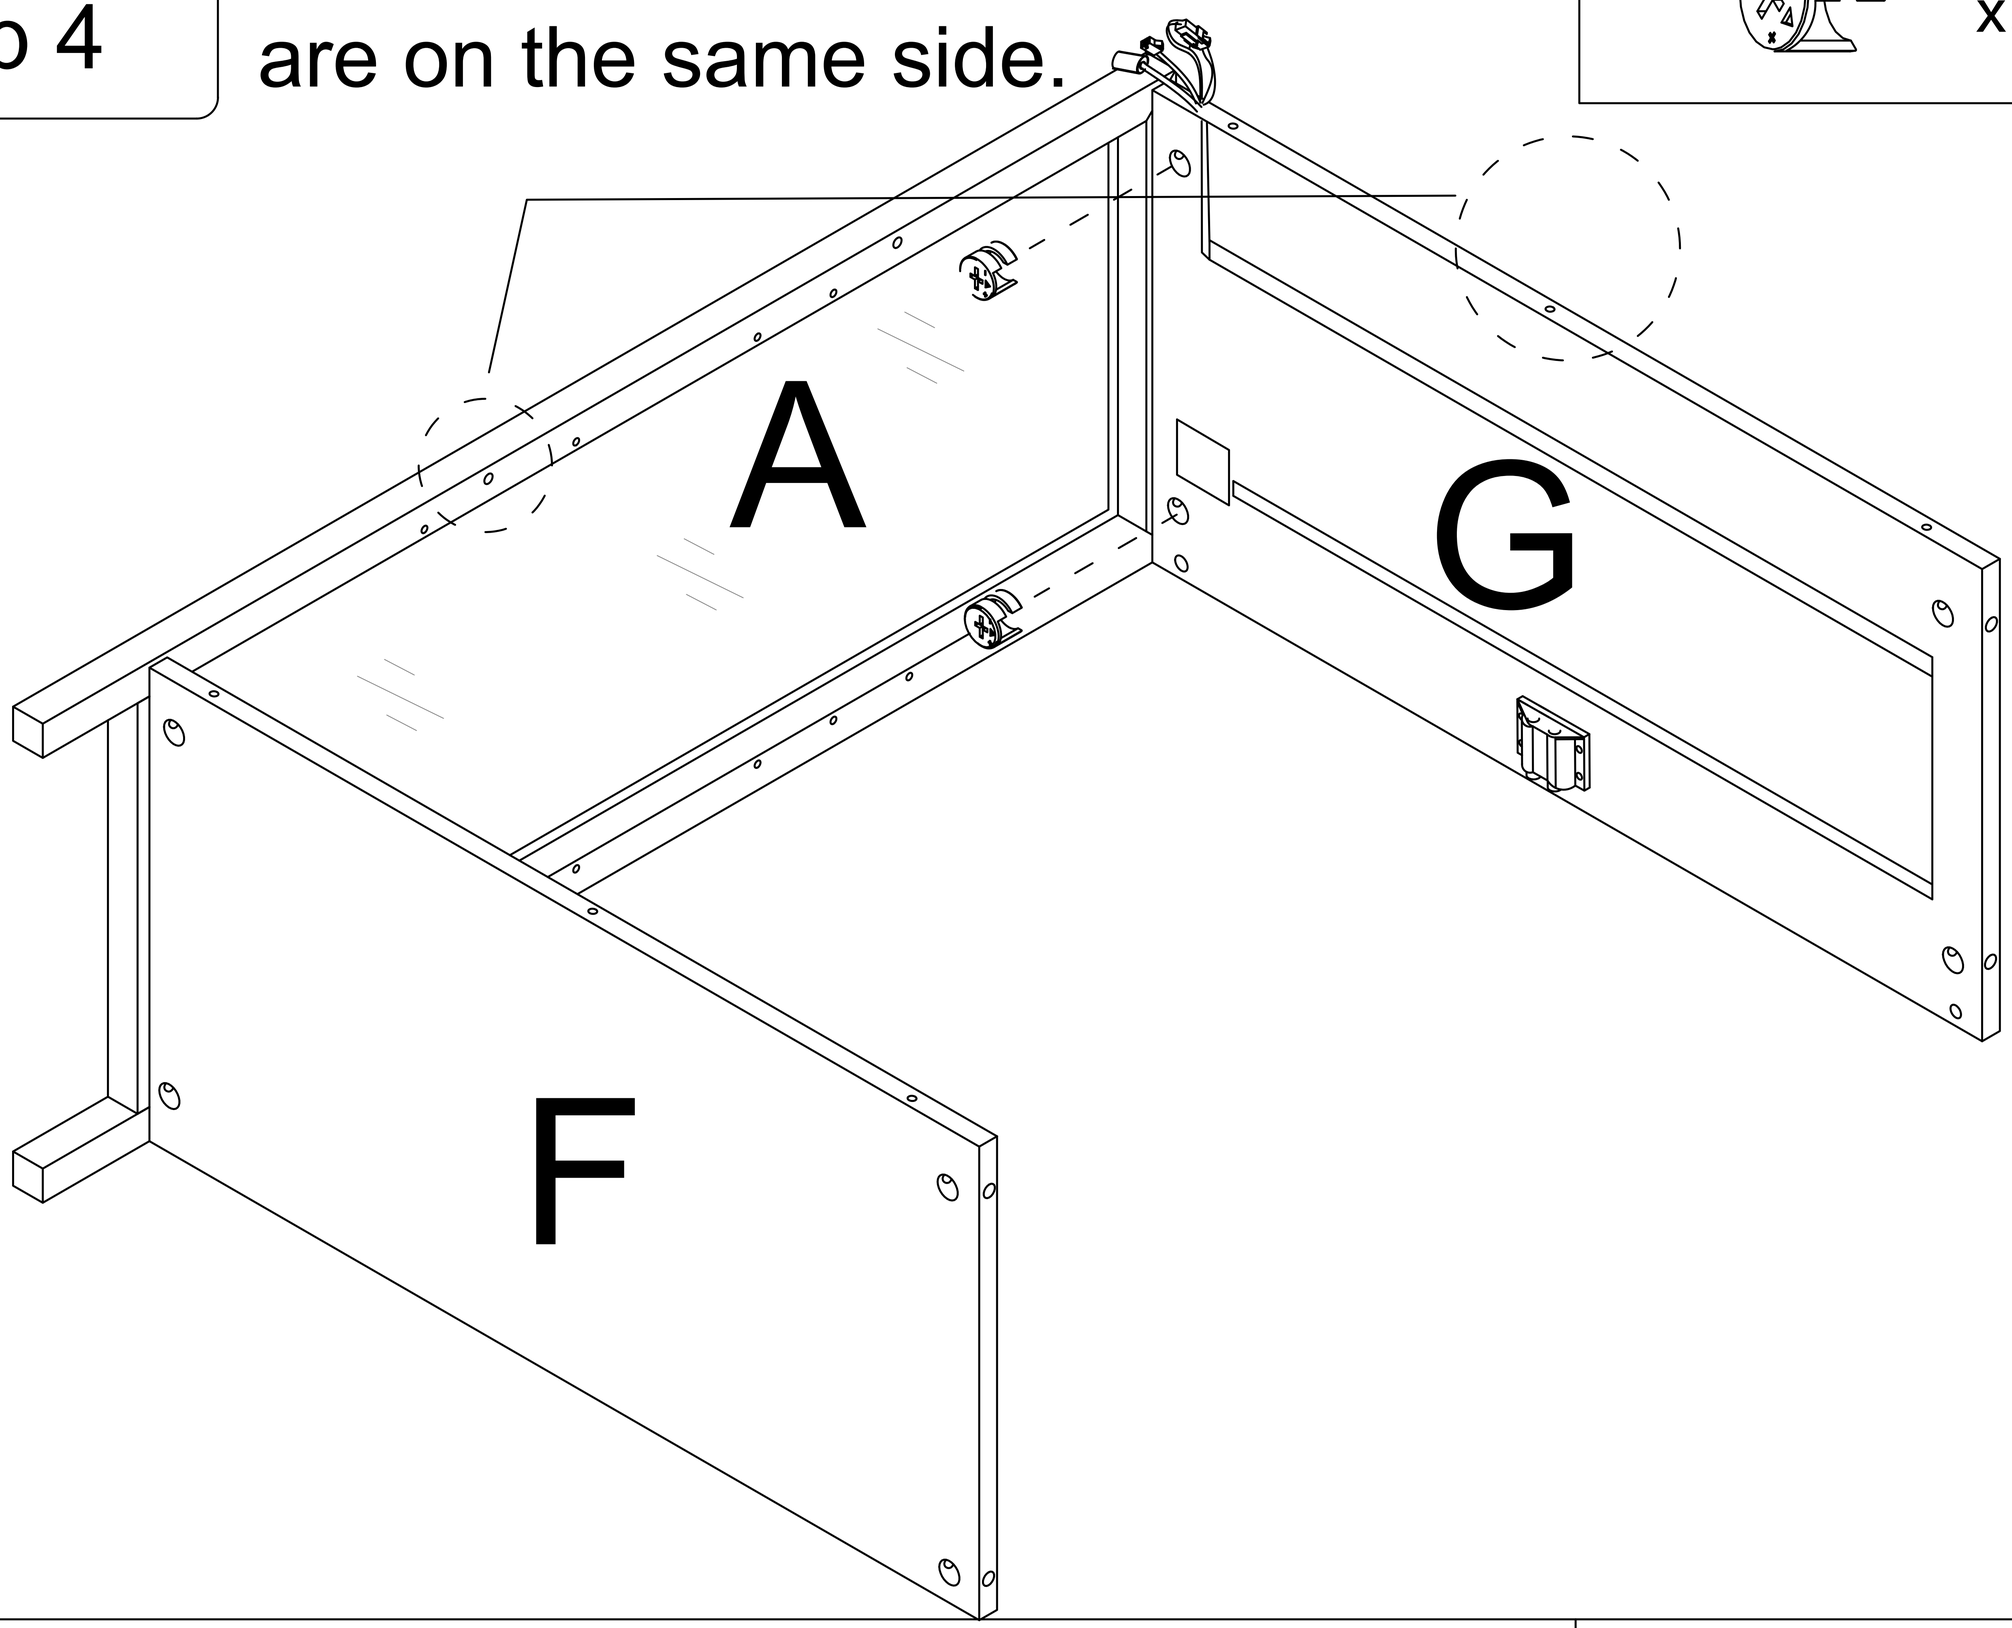


Step 5


1 x4

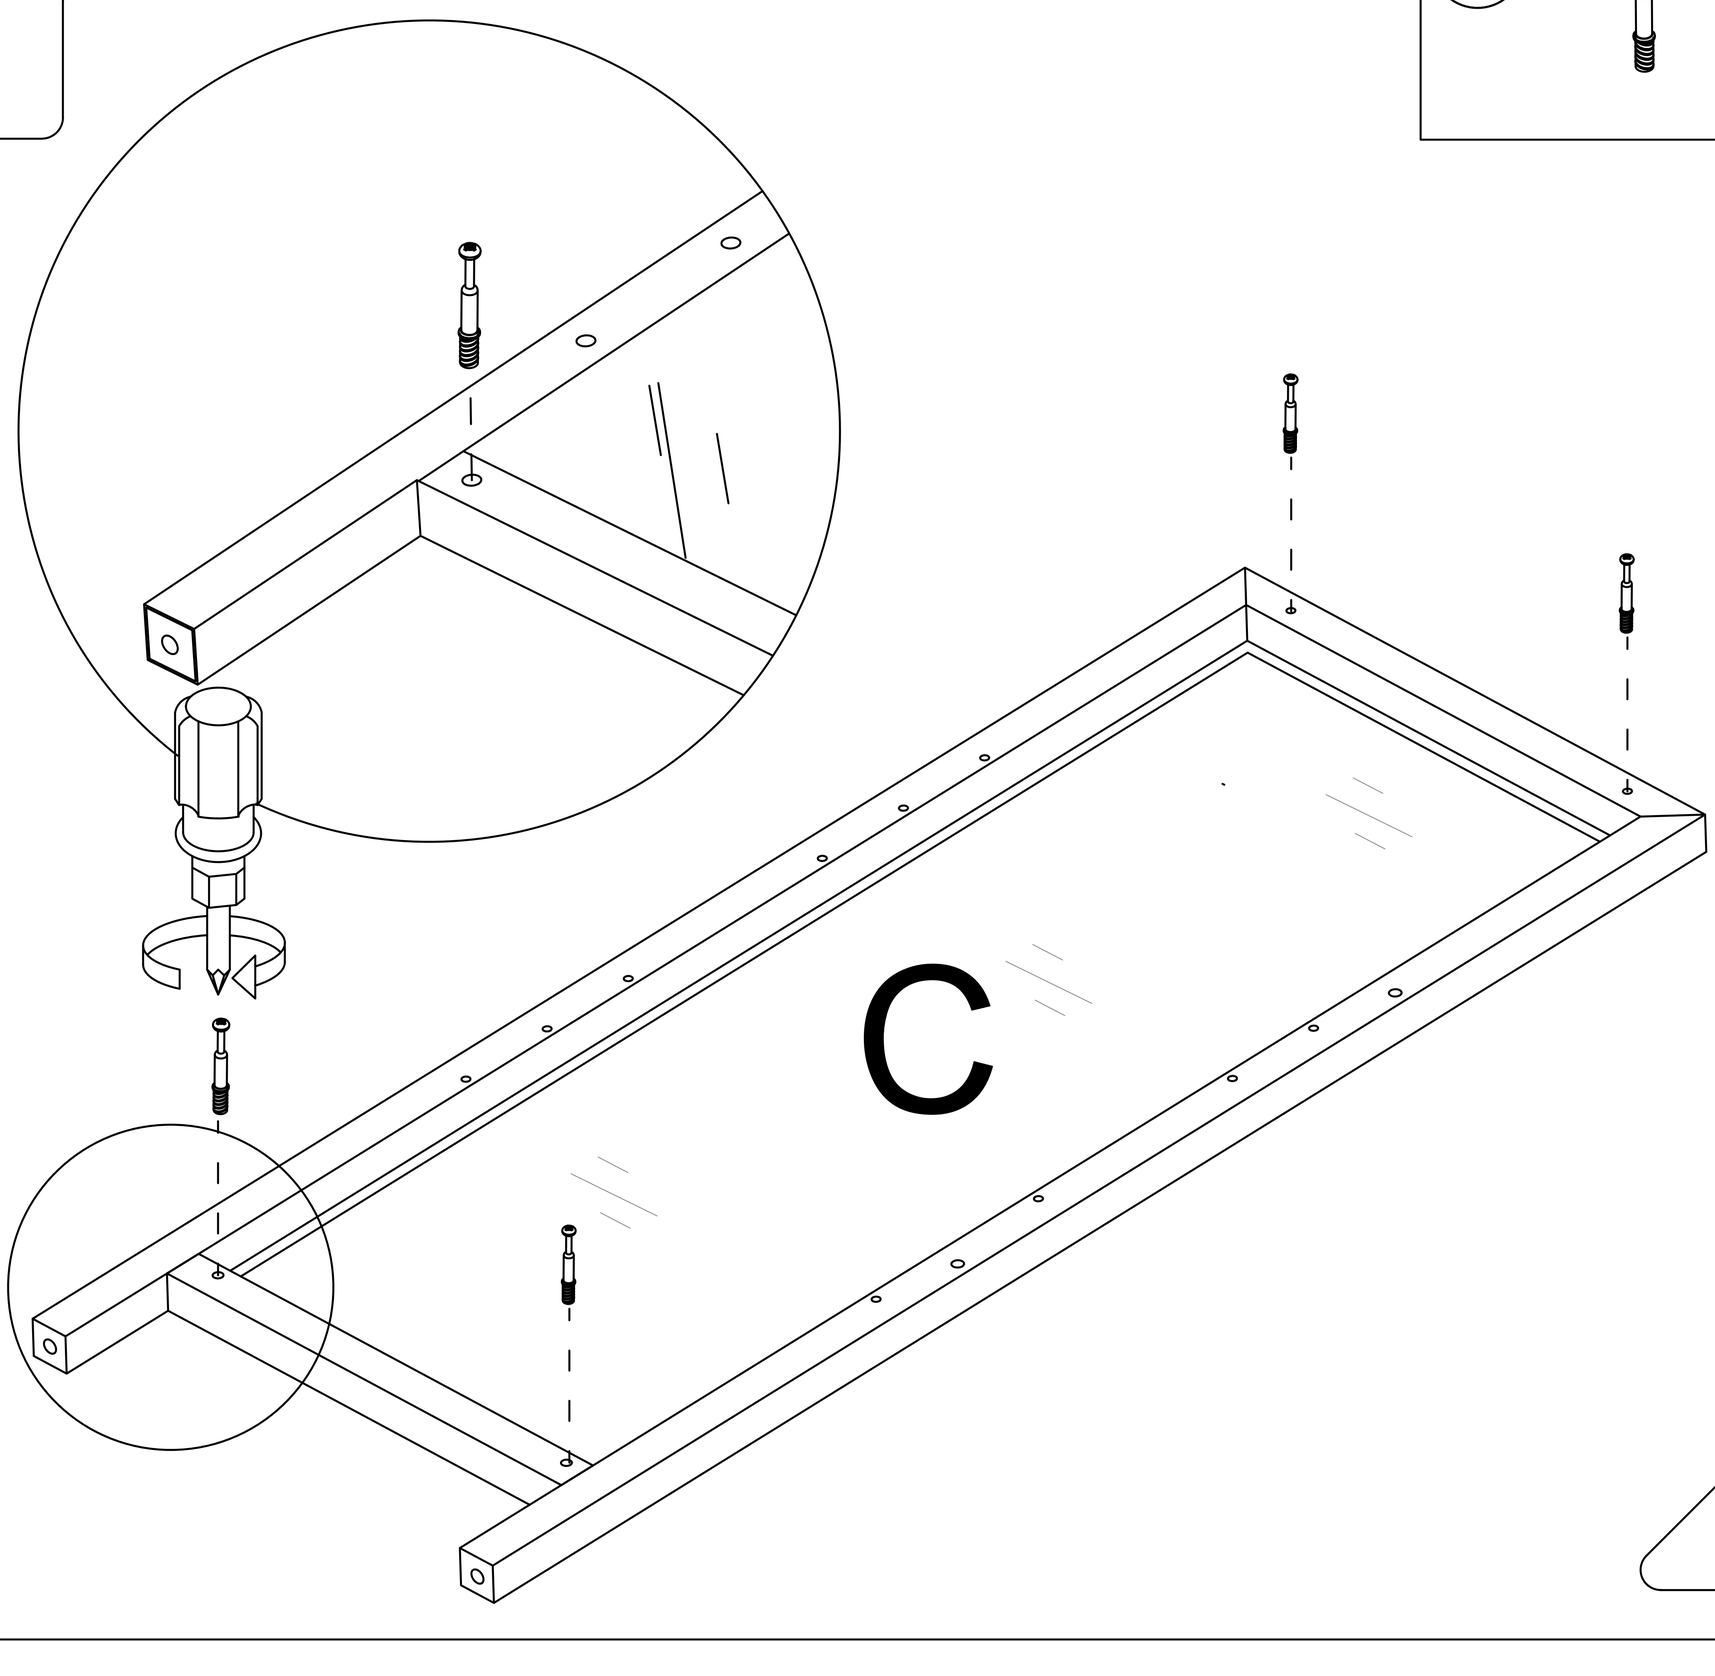


Step 4


1  x4

All connection holes are on the same side.

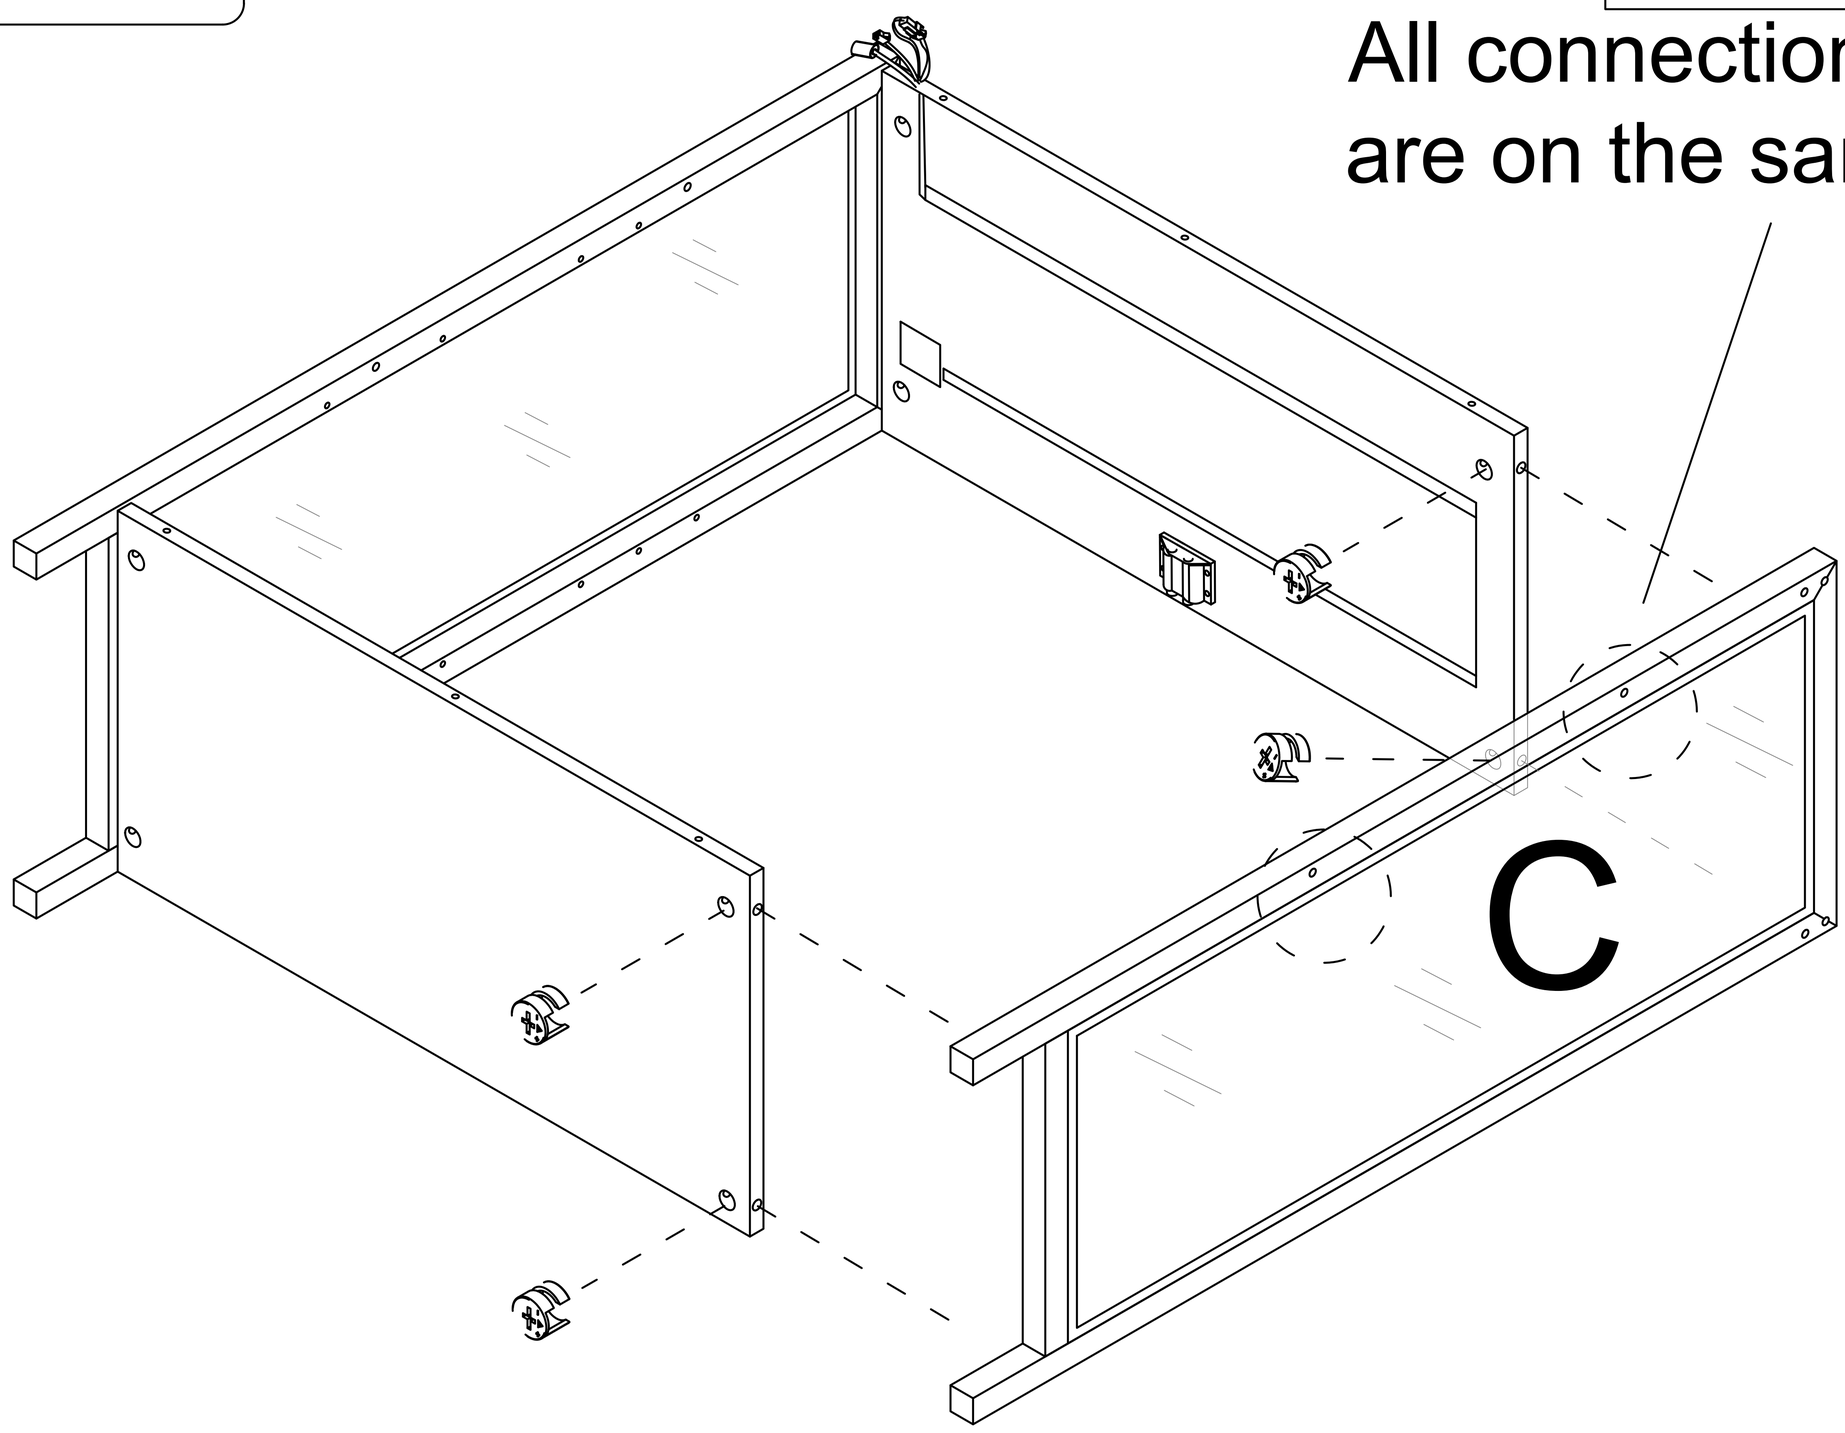

Step 5

2  x4

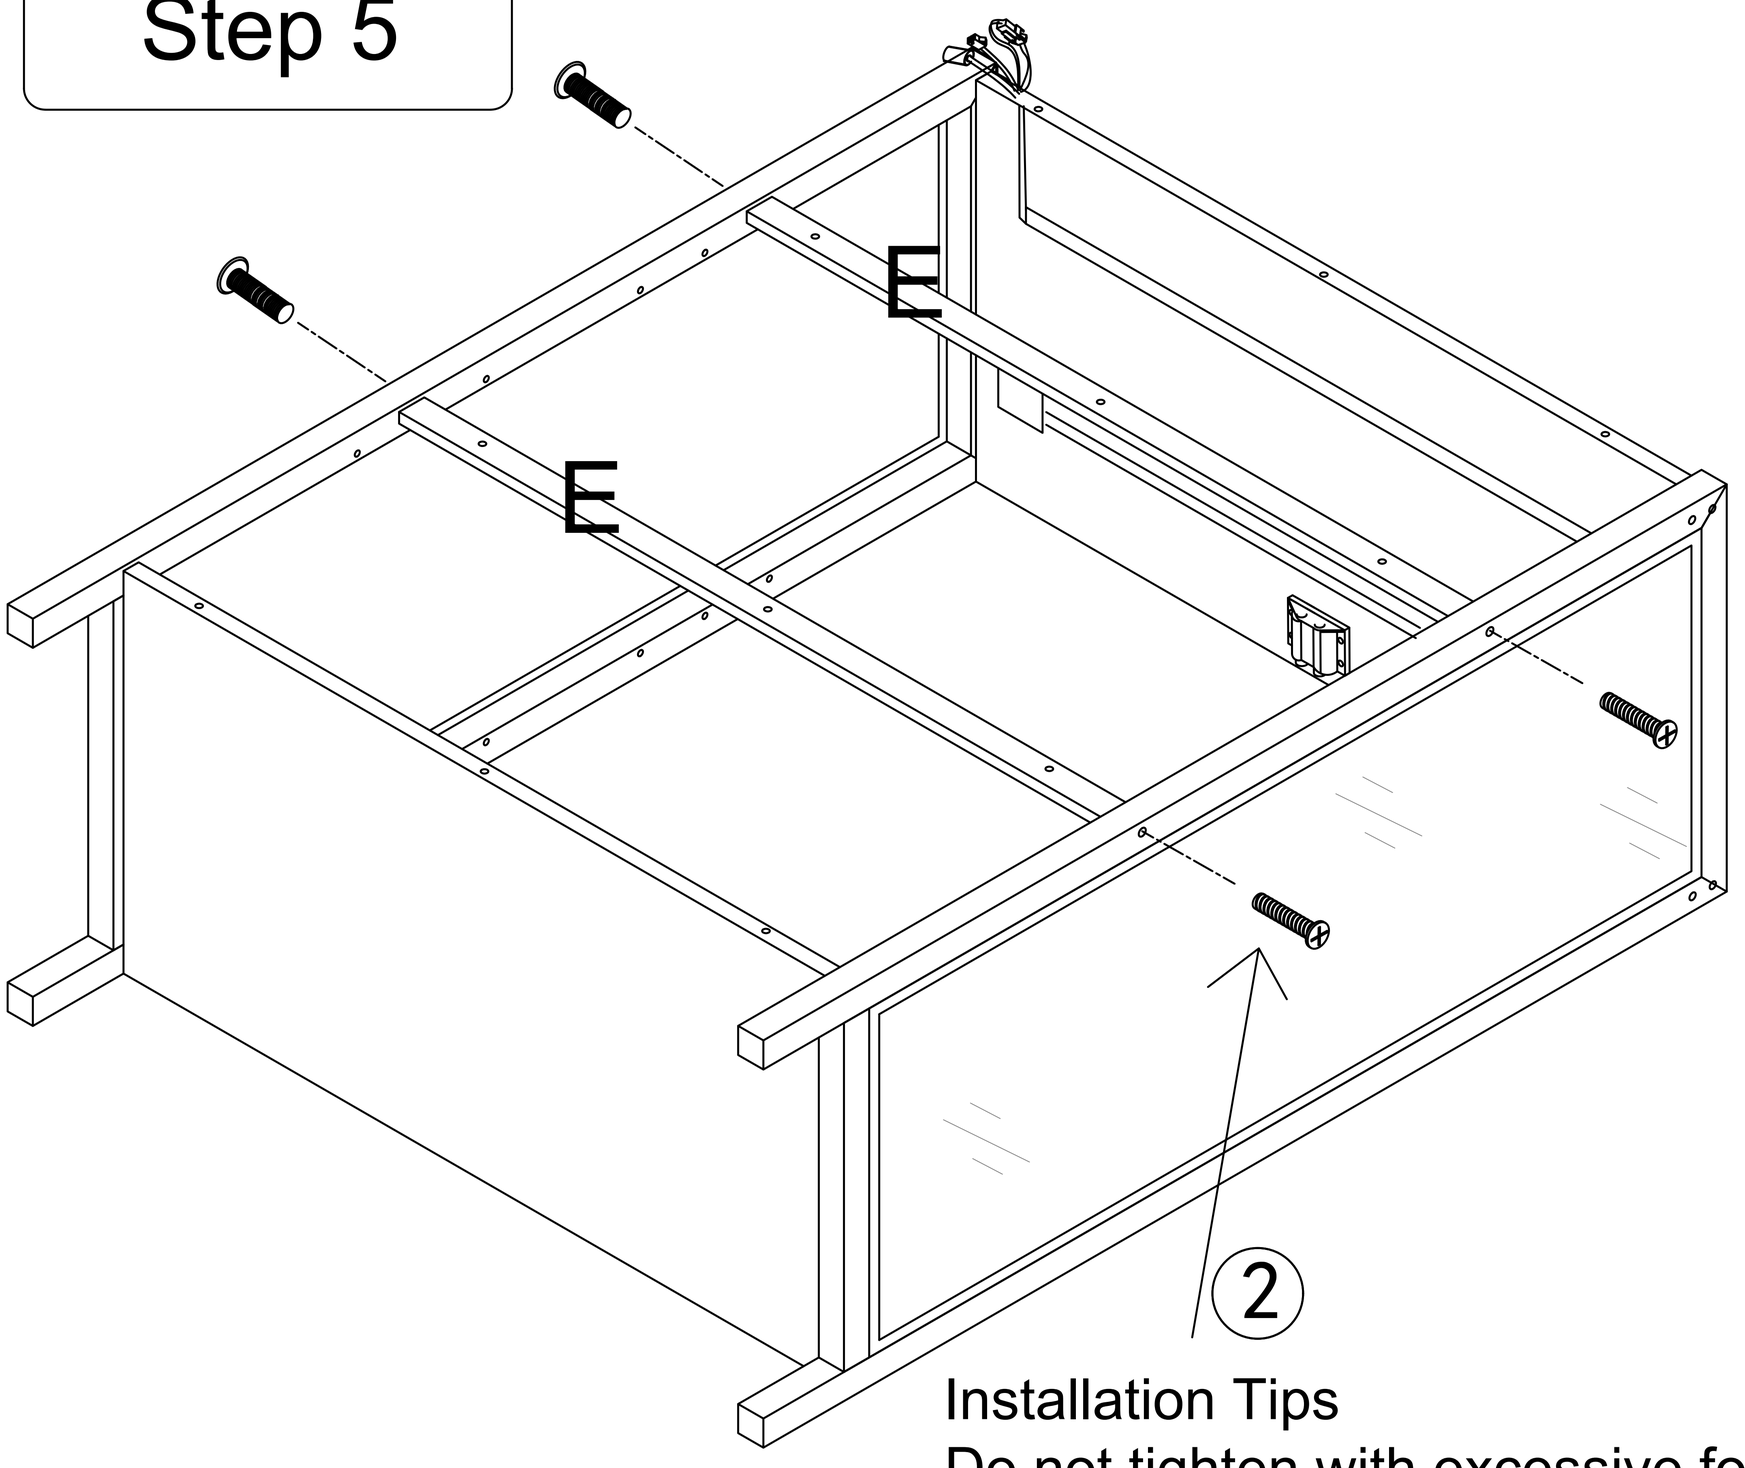


Installation Tips
Do not tighten with excessive force,
as the back panel needs to be installed later.

Step 6


10 x8

All connection holes are on the same side.

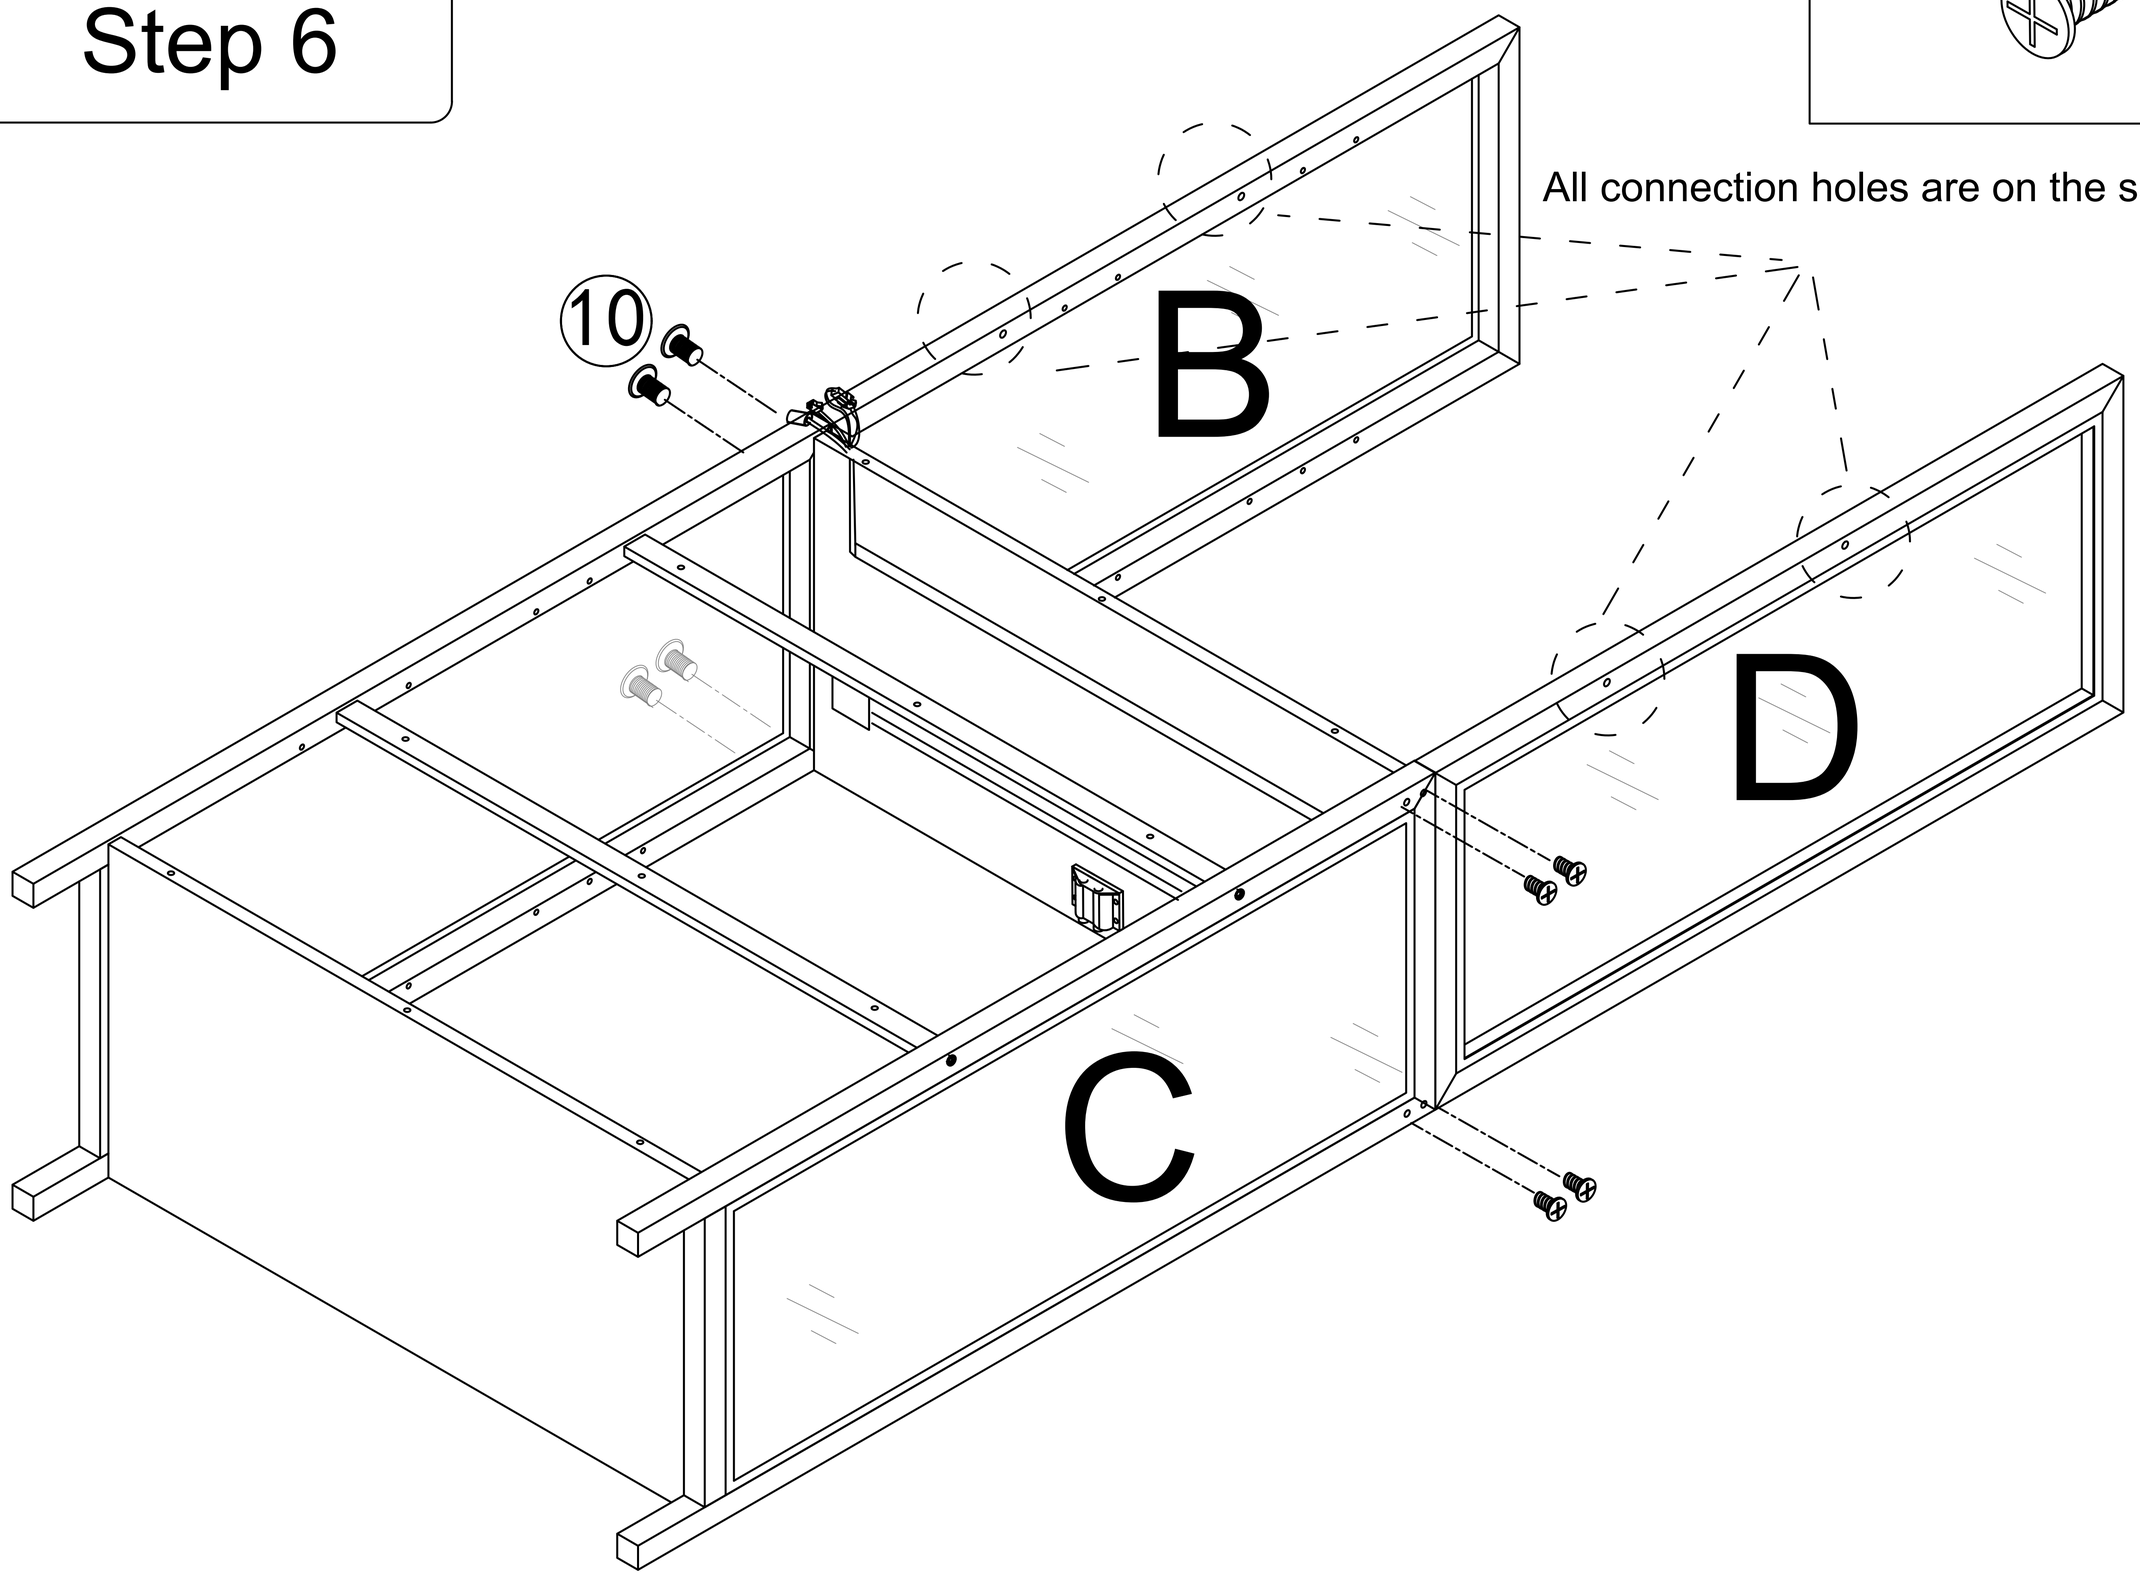

Step 7

2 x4

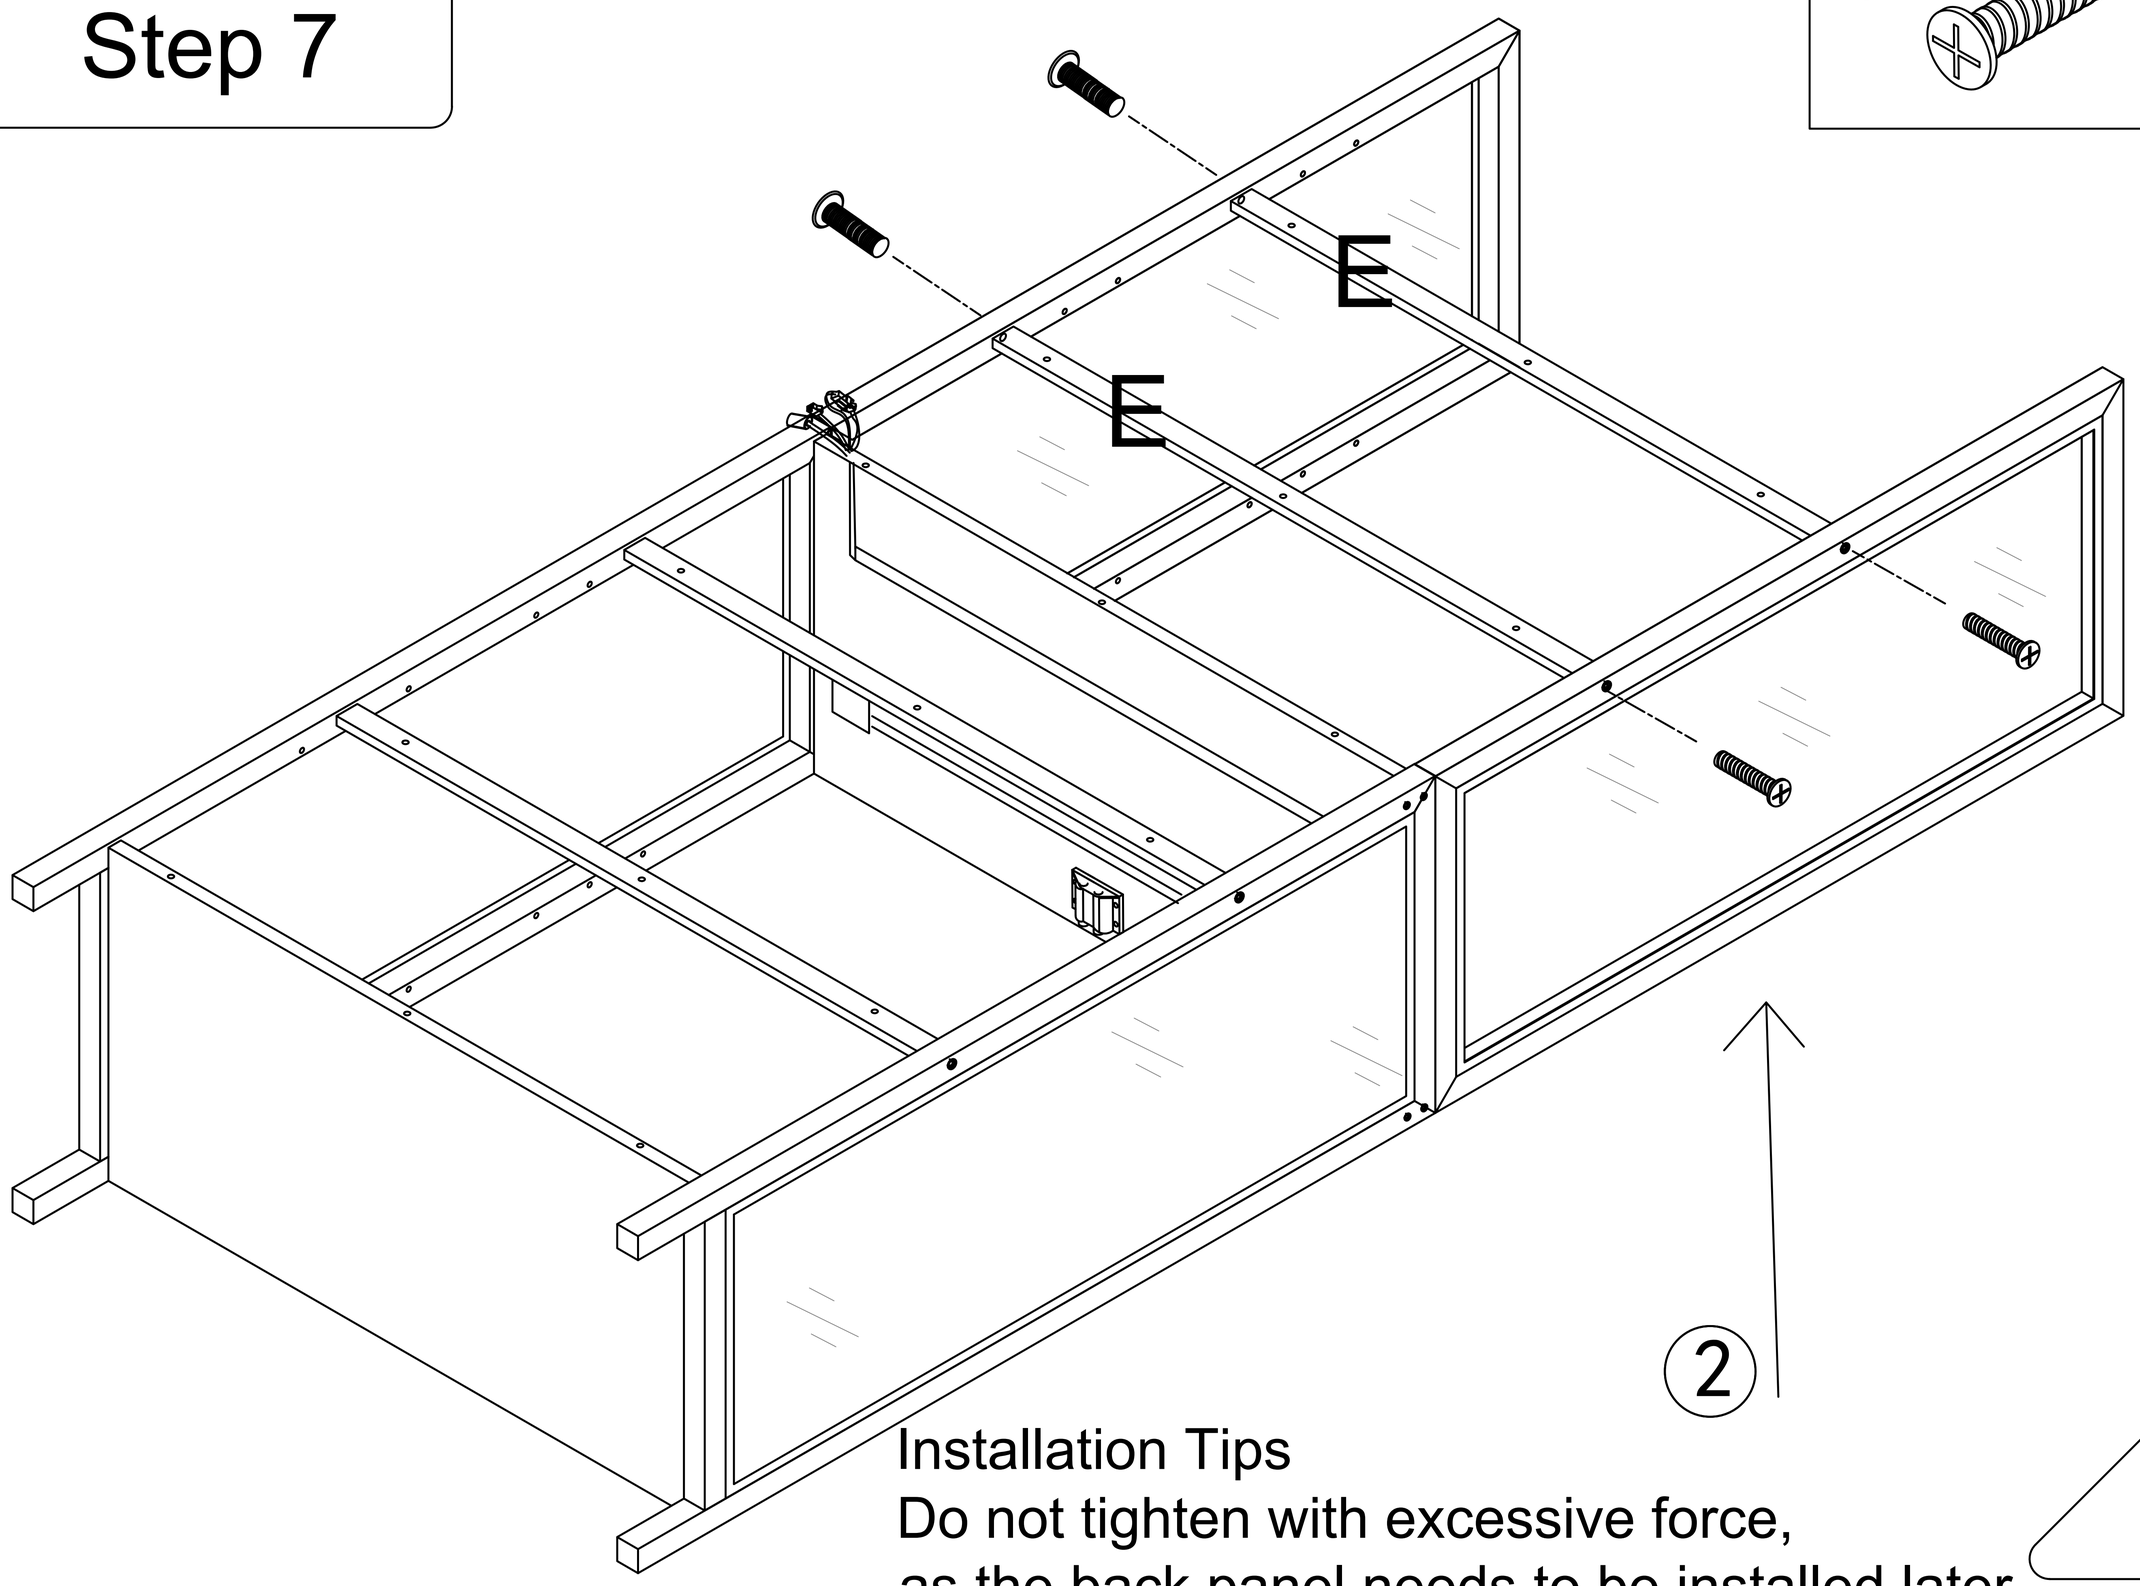


Installation Tips
Do not tighten with excessive force,
as the back panel needs to be installed later.

Step 8

3

x1


x4

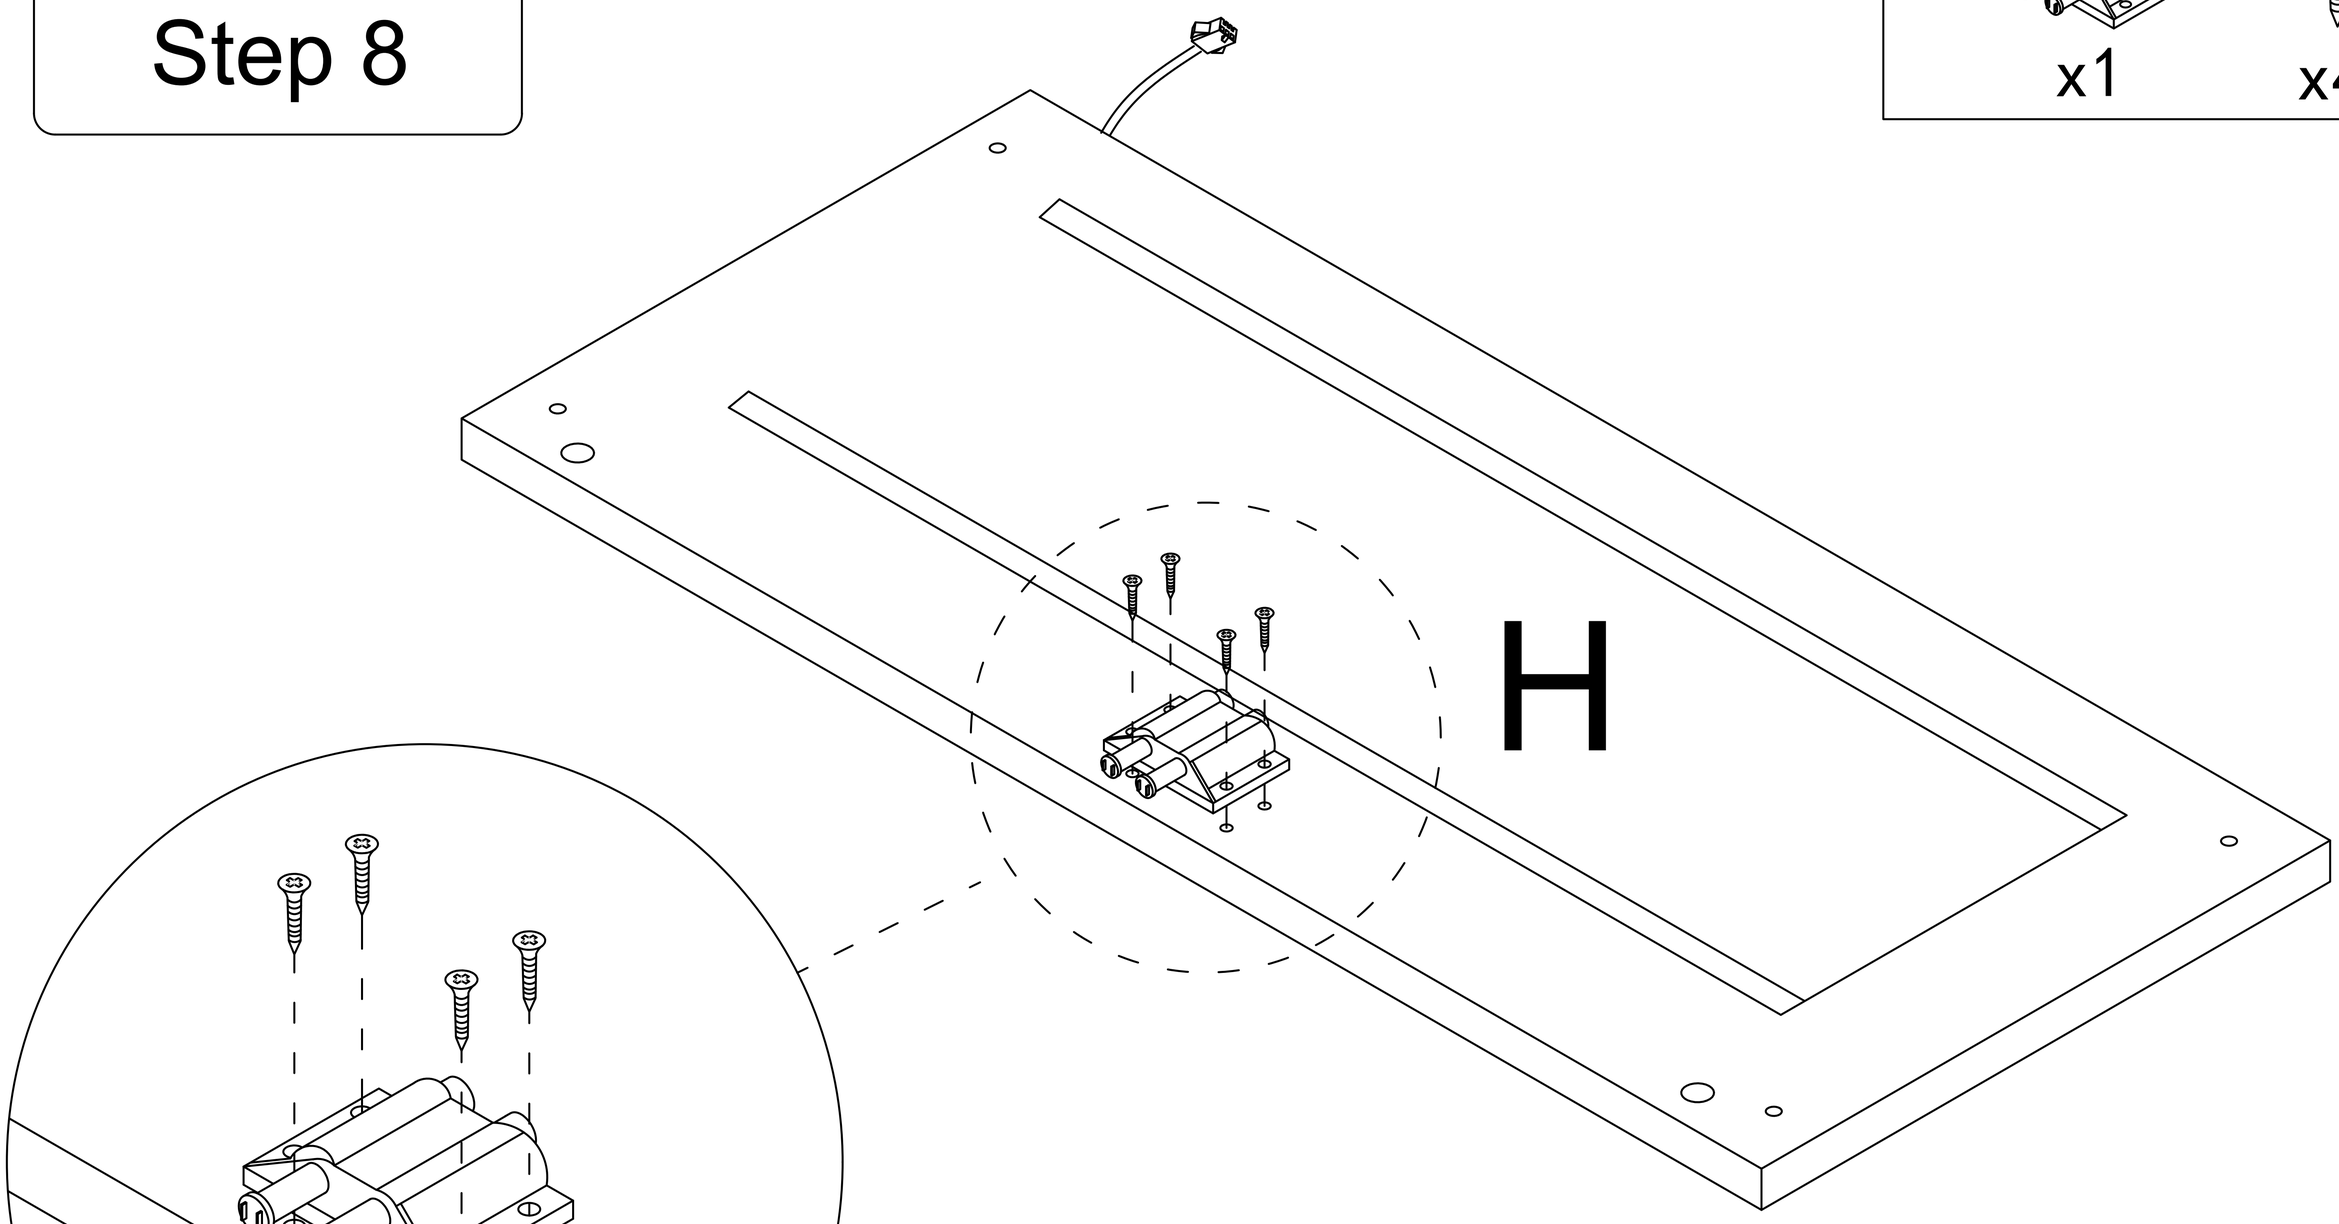

Step 9


4

x4

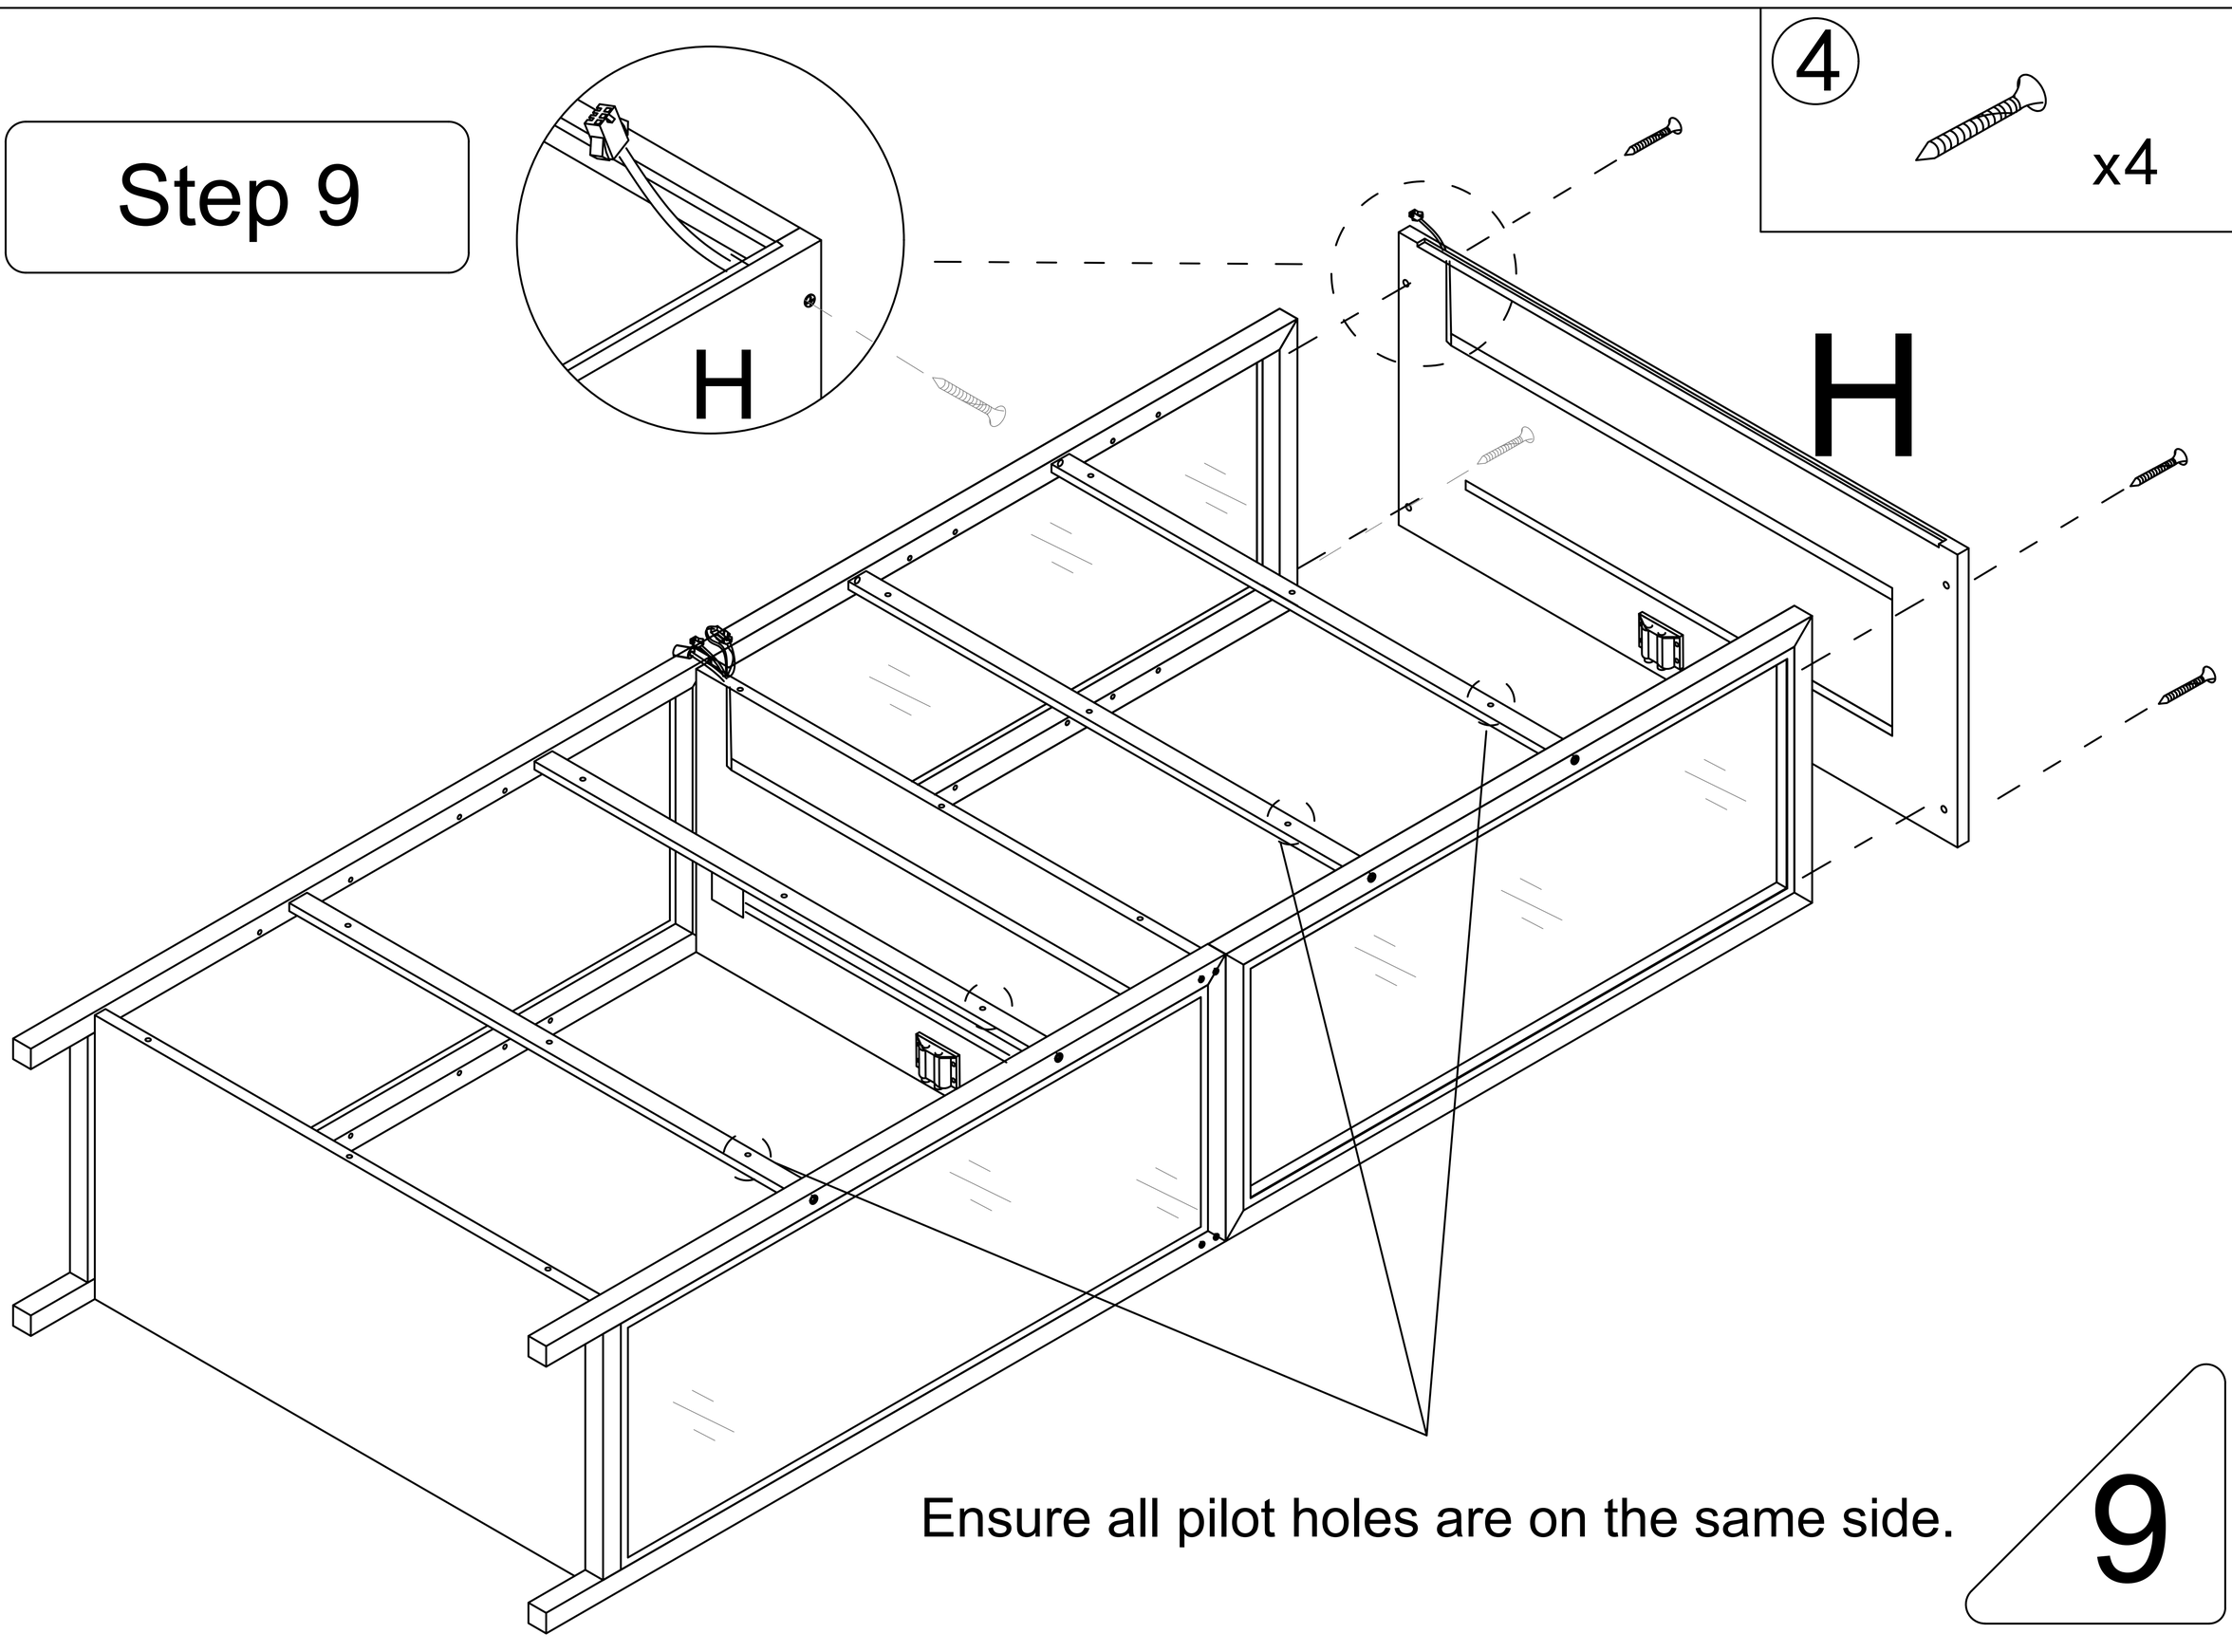


Ensure all pilot holes are on the same side.

Step 10

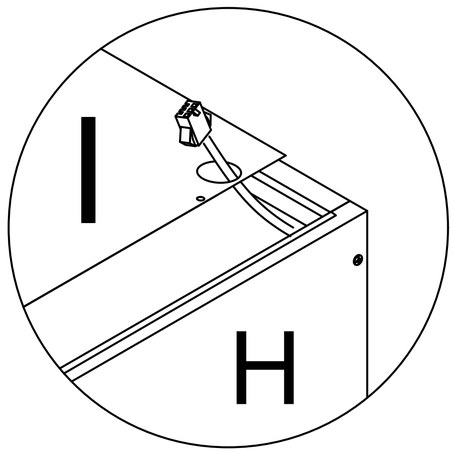


The light wire passes out through the hole in the back panel.

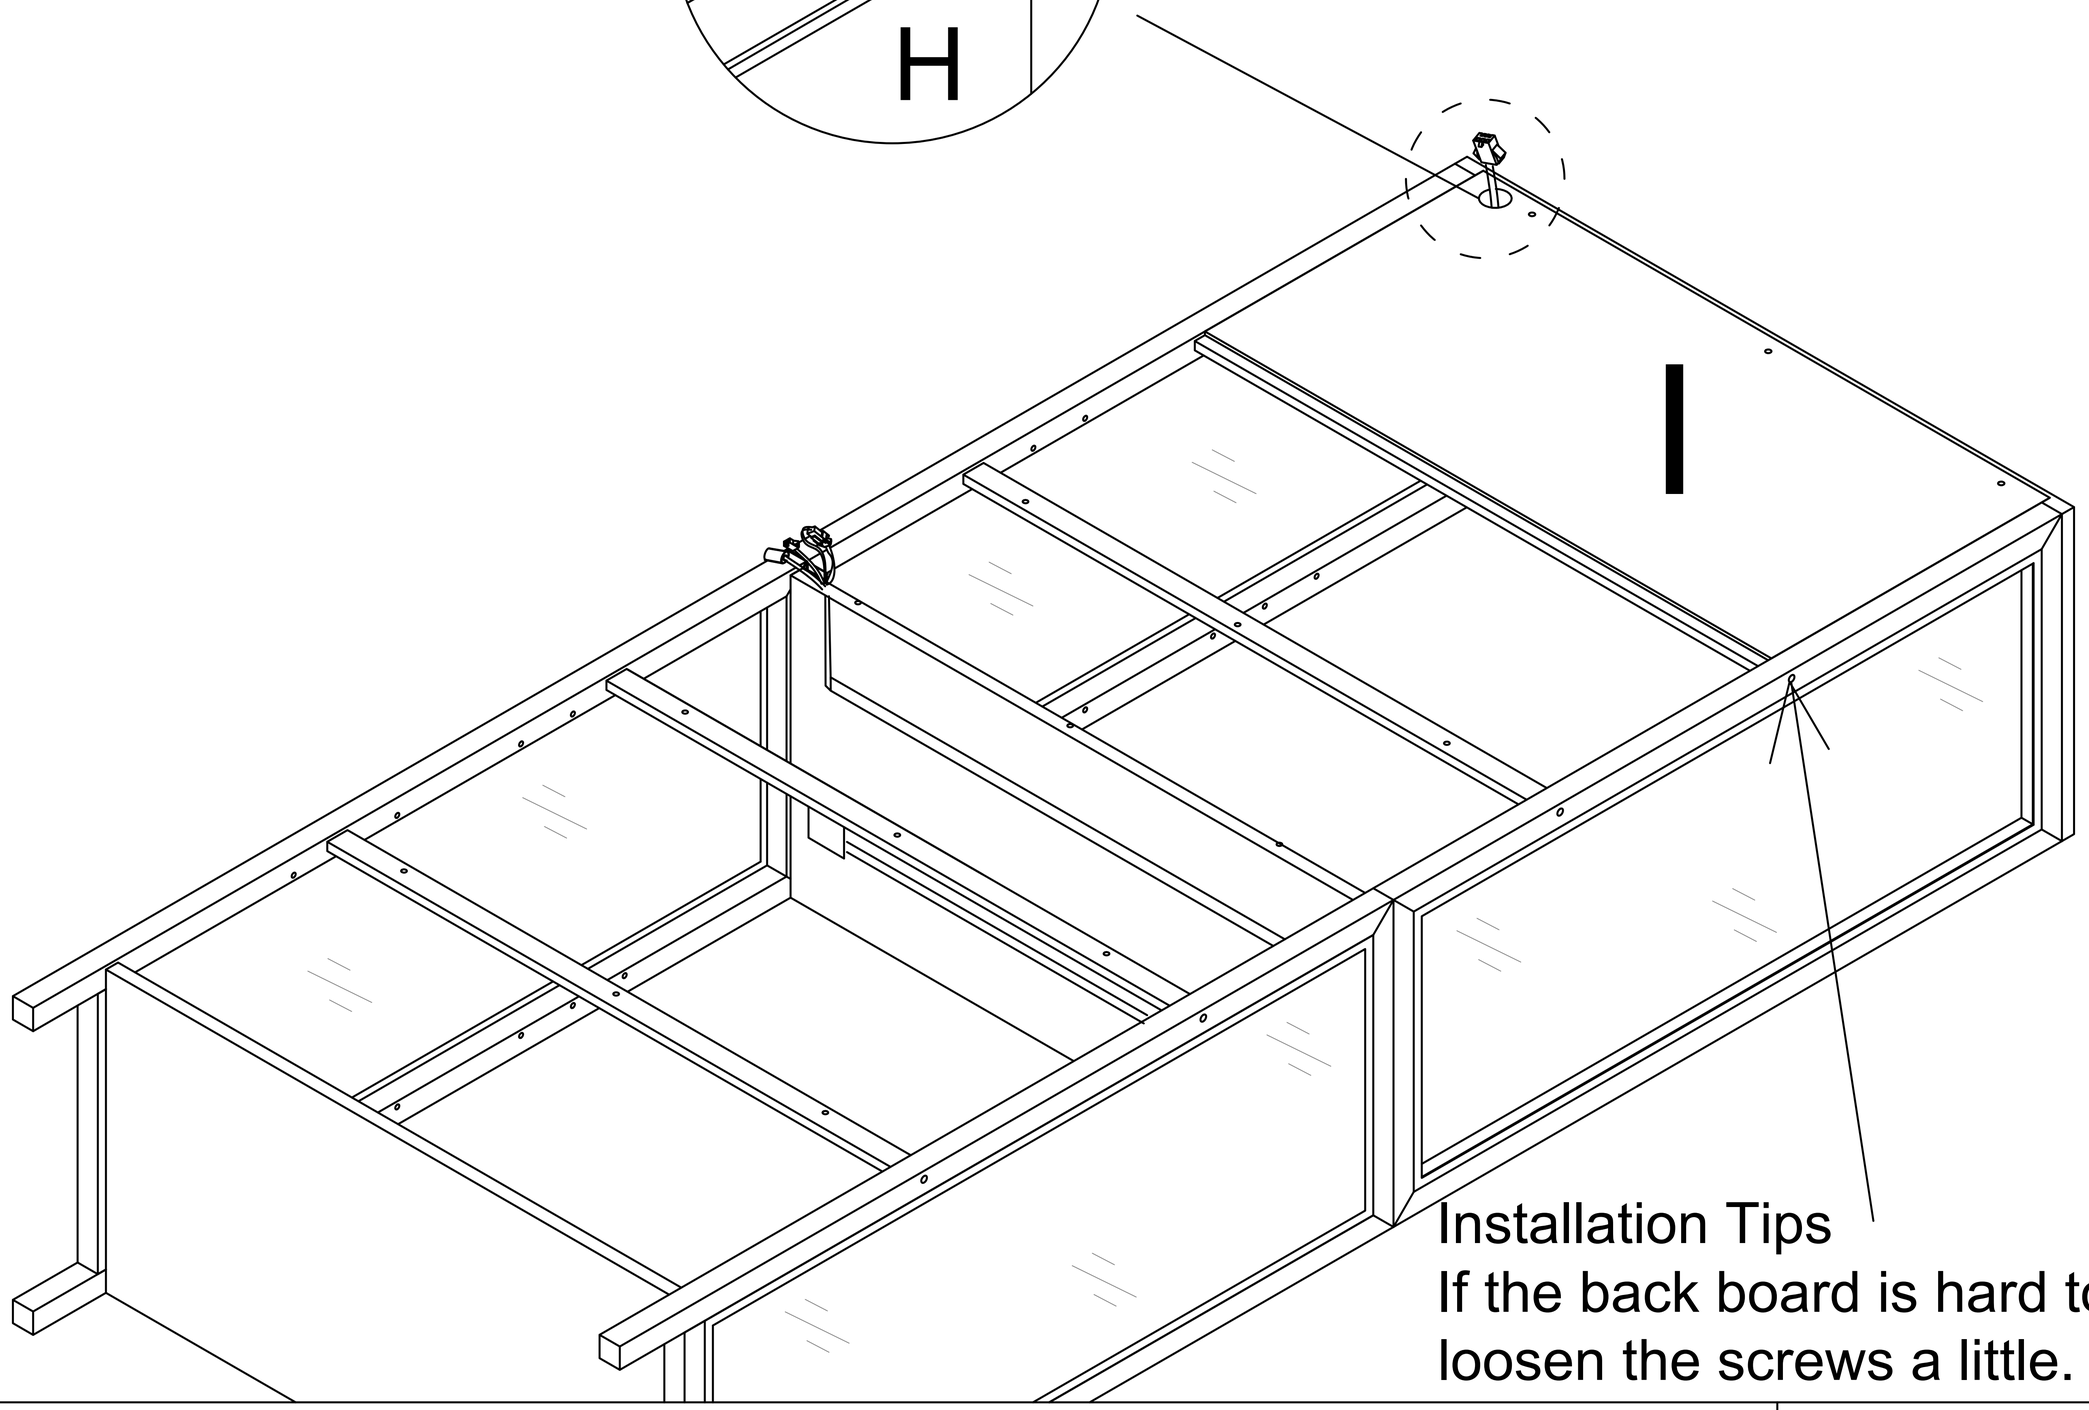


Installation Tips
If the back board is hard to insert, loosen the screws a little.

5



x3

Step 11

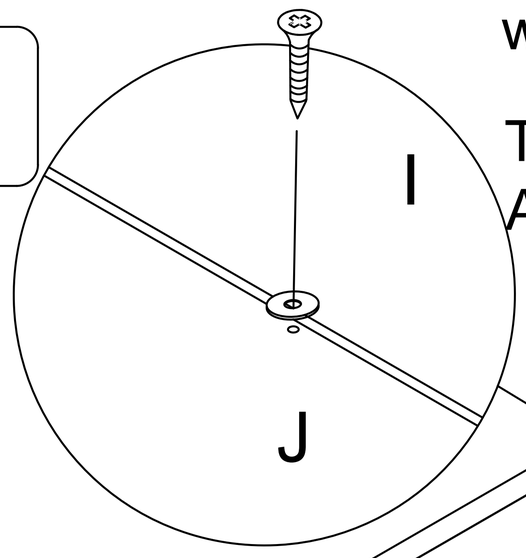


Reserve a gap for the pilot holes when installing the back panel.

There are pilot holes on the iron pipe. Align the holes for assembly.


Installation Tips
If the back board is hard to insert, loosen the screws a little.

Step 12

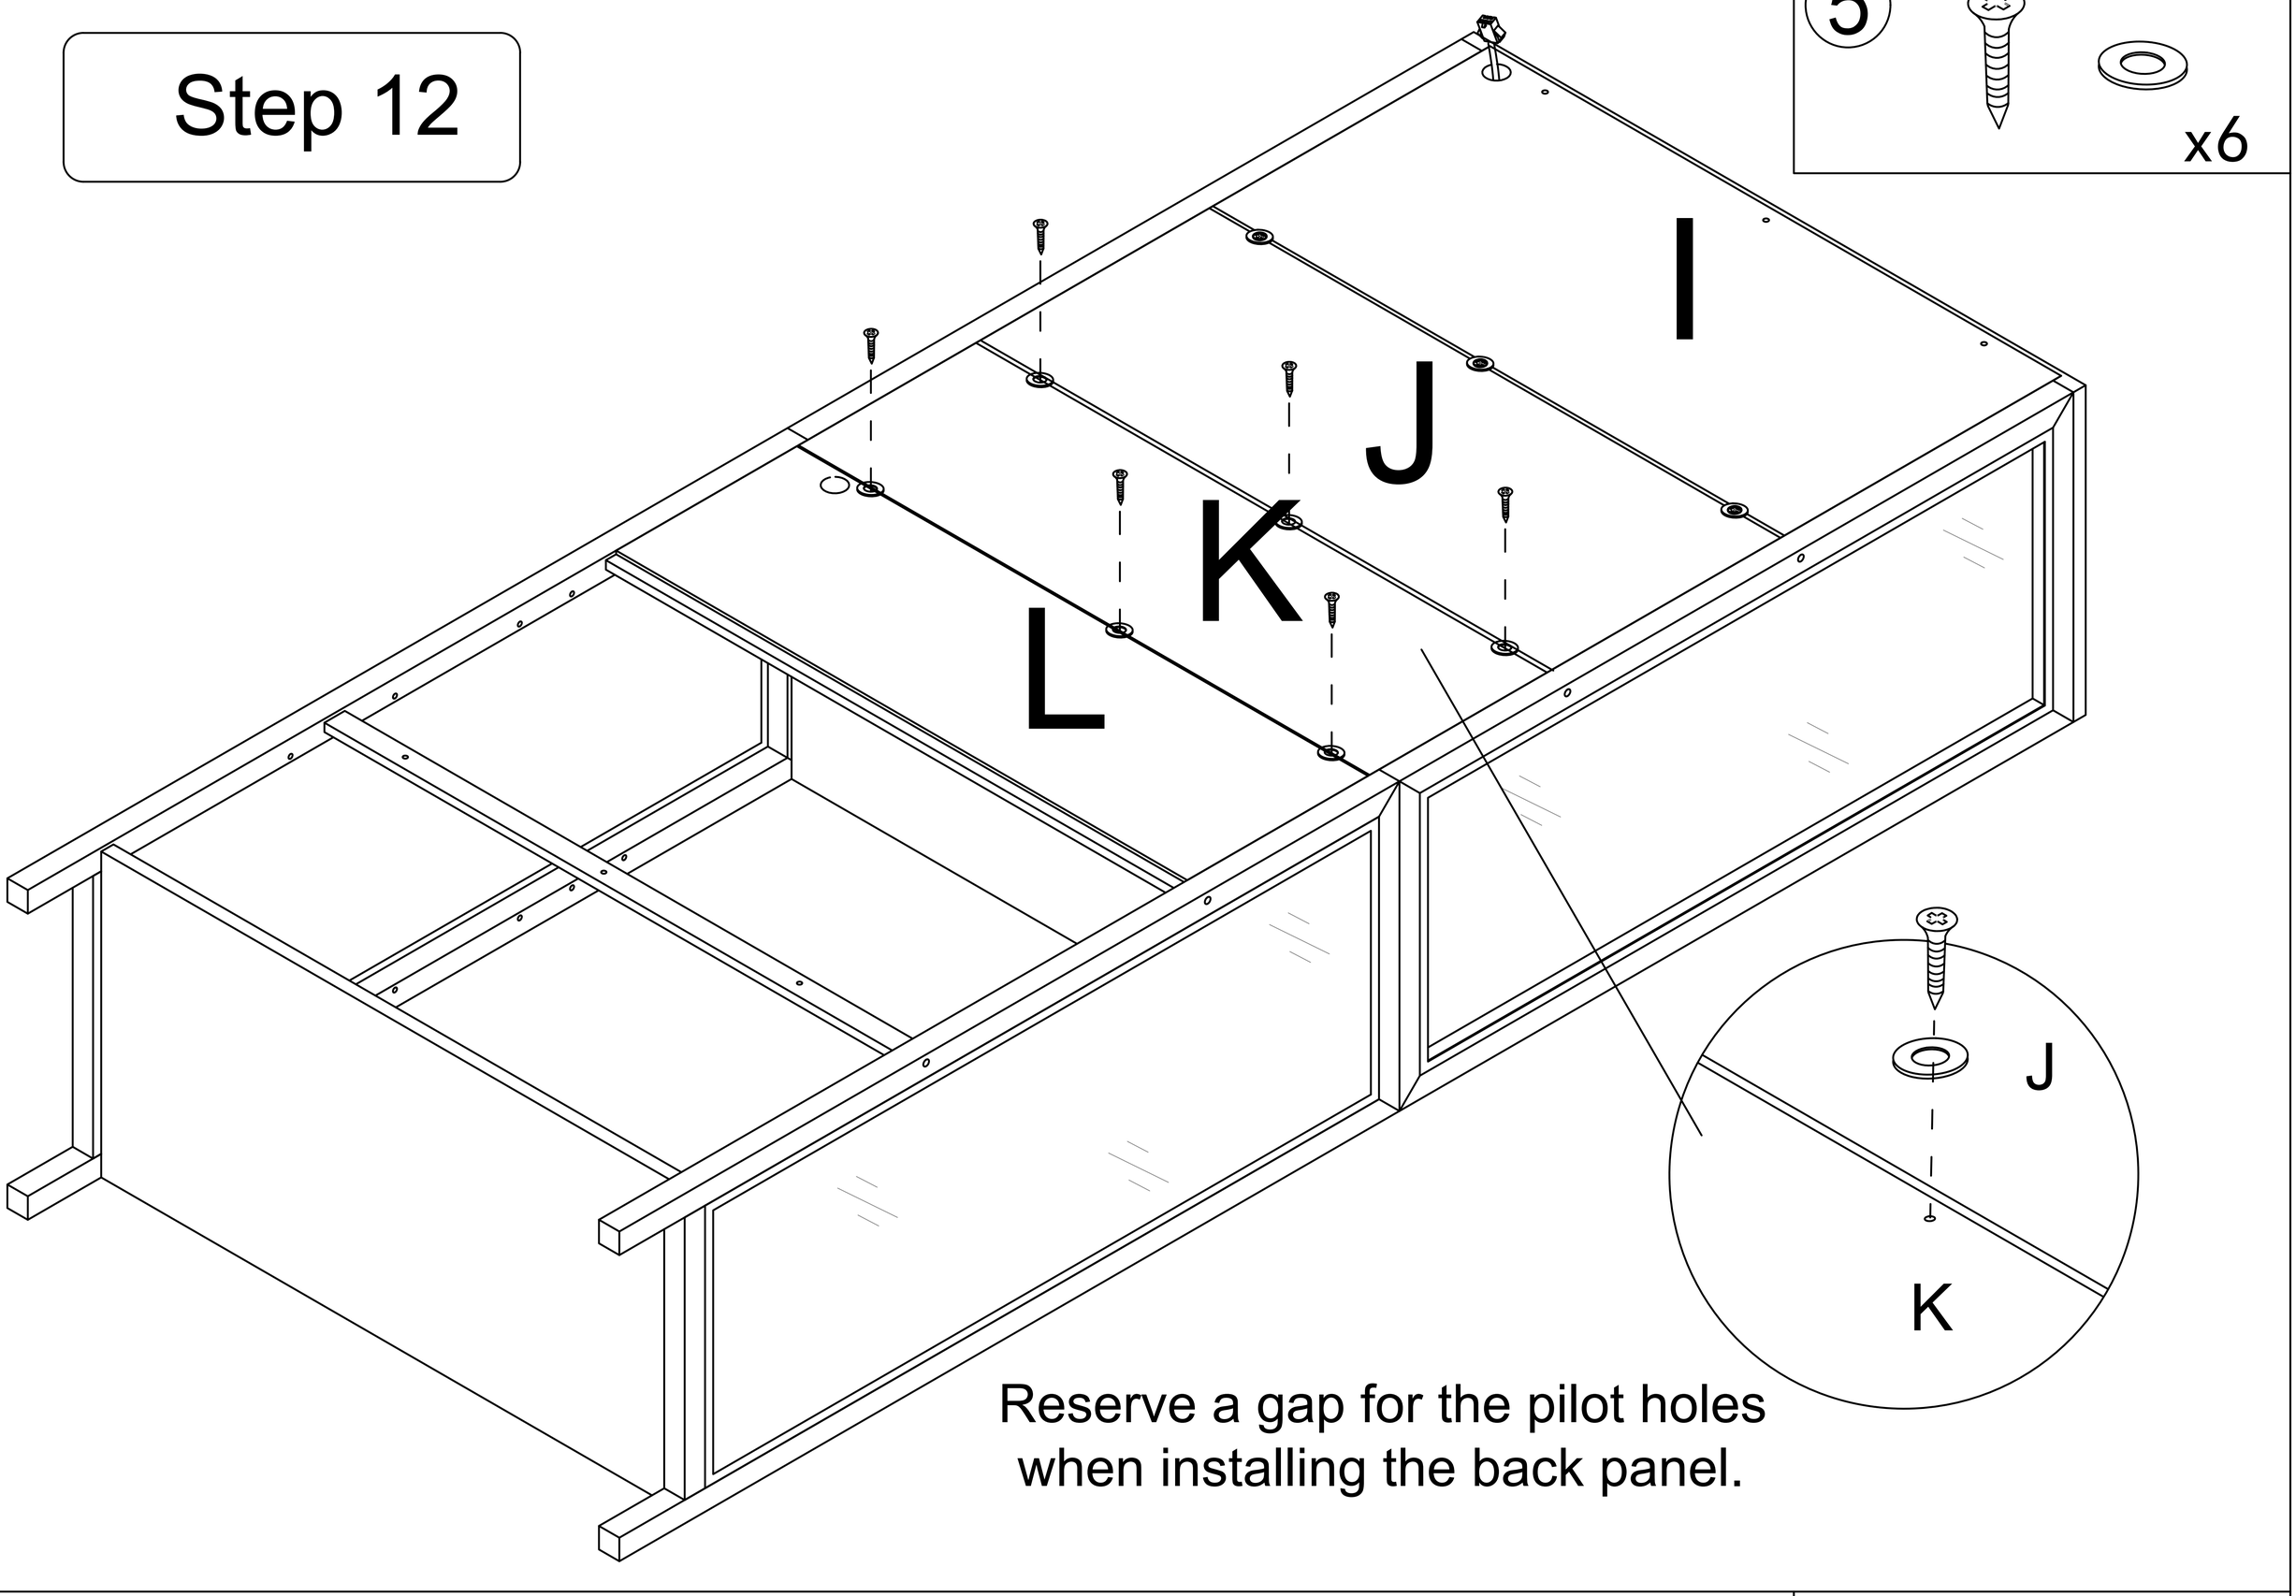


Reserve a gap for the pilot holes
when installing the back panel.

Step 13

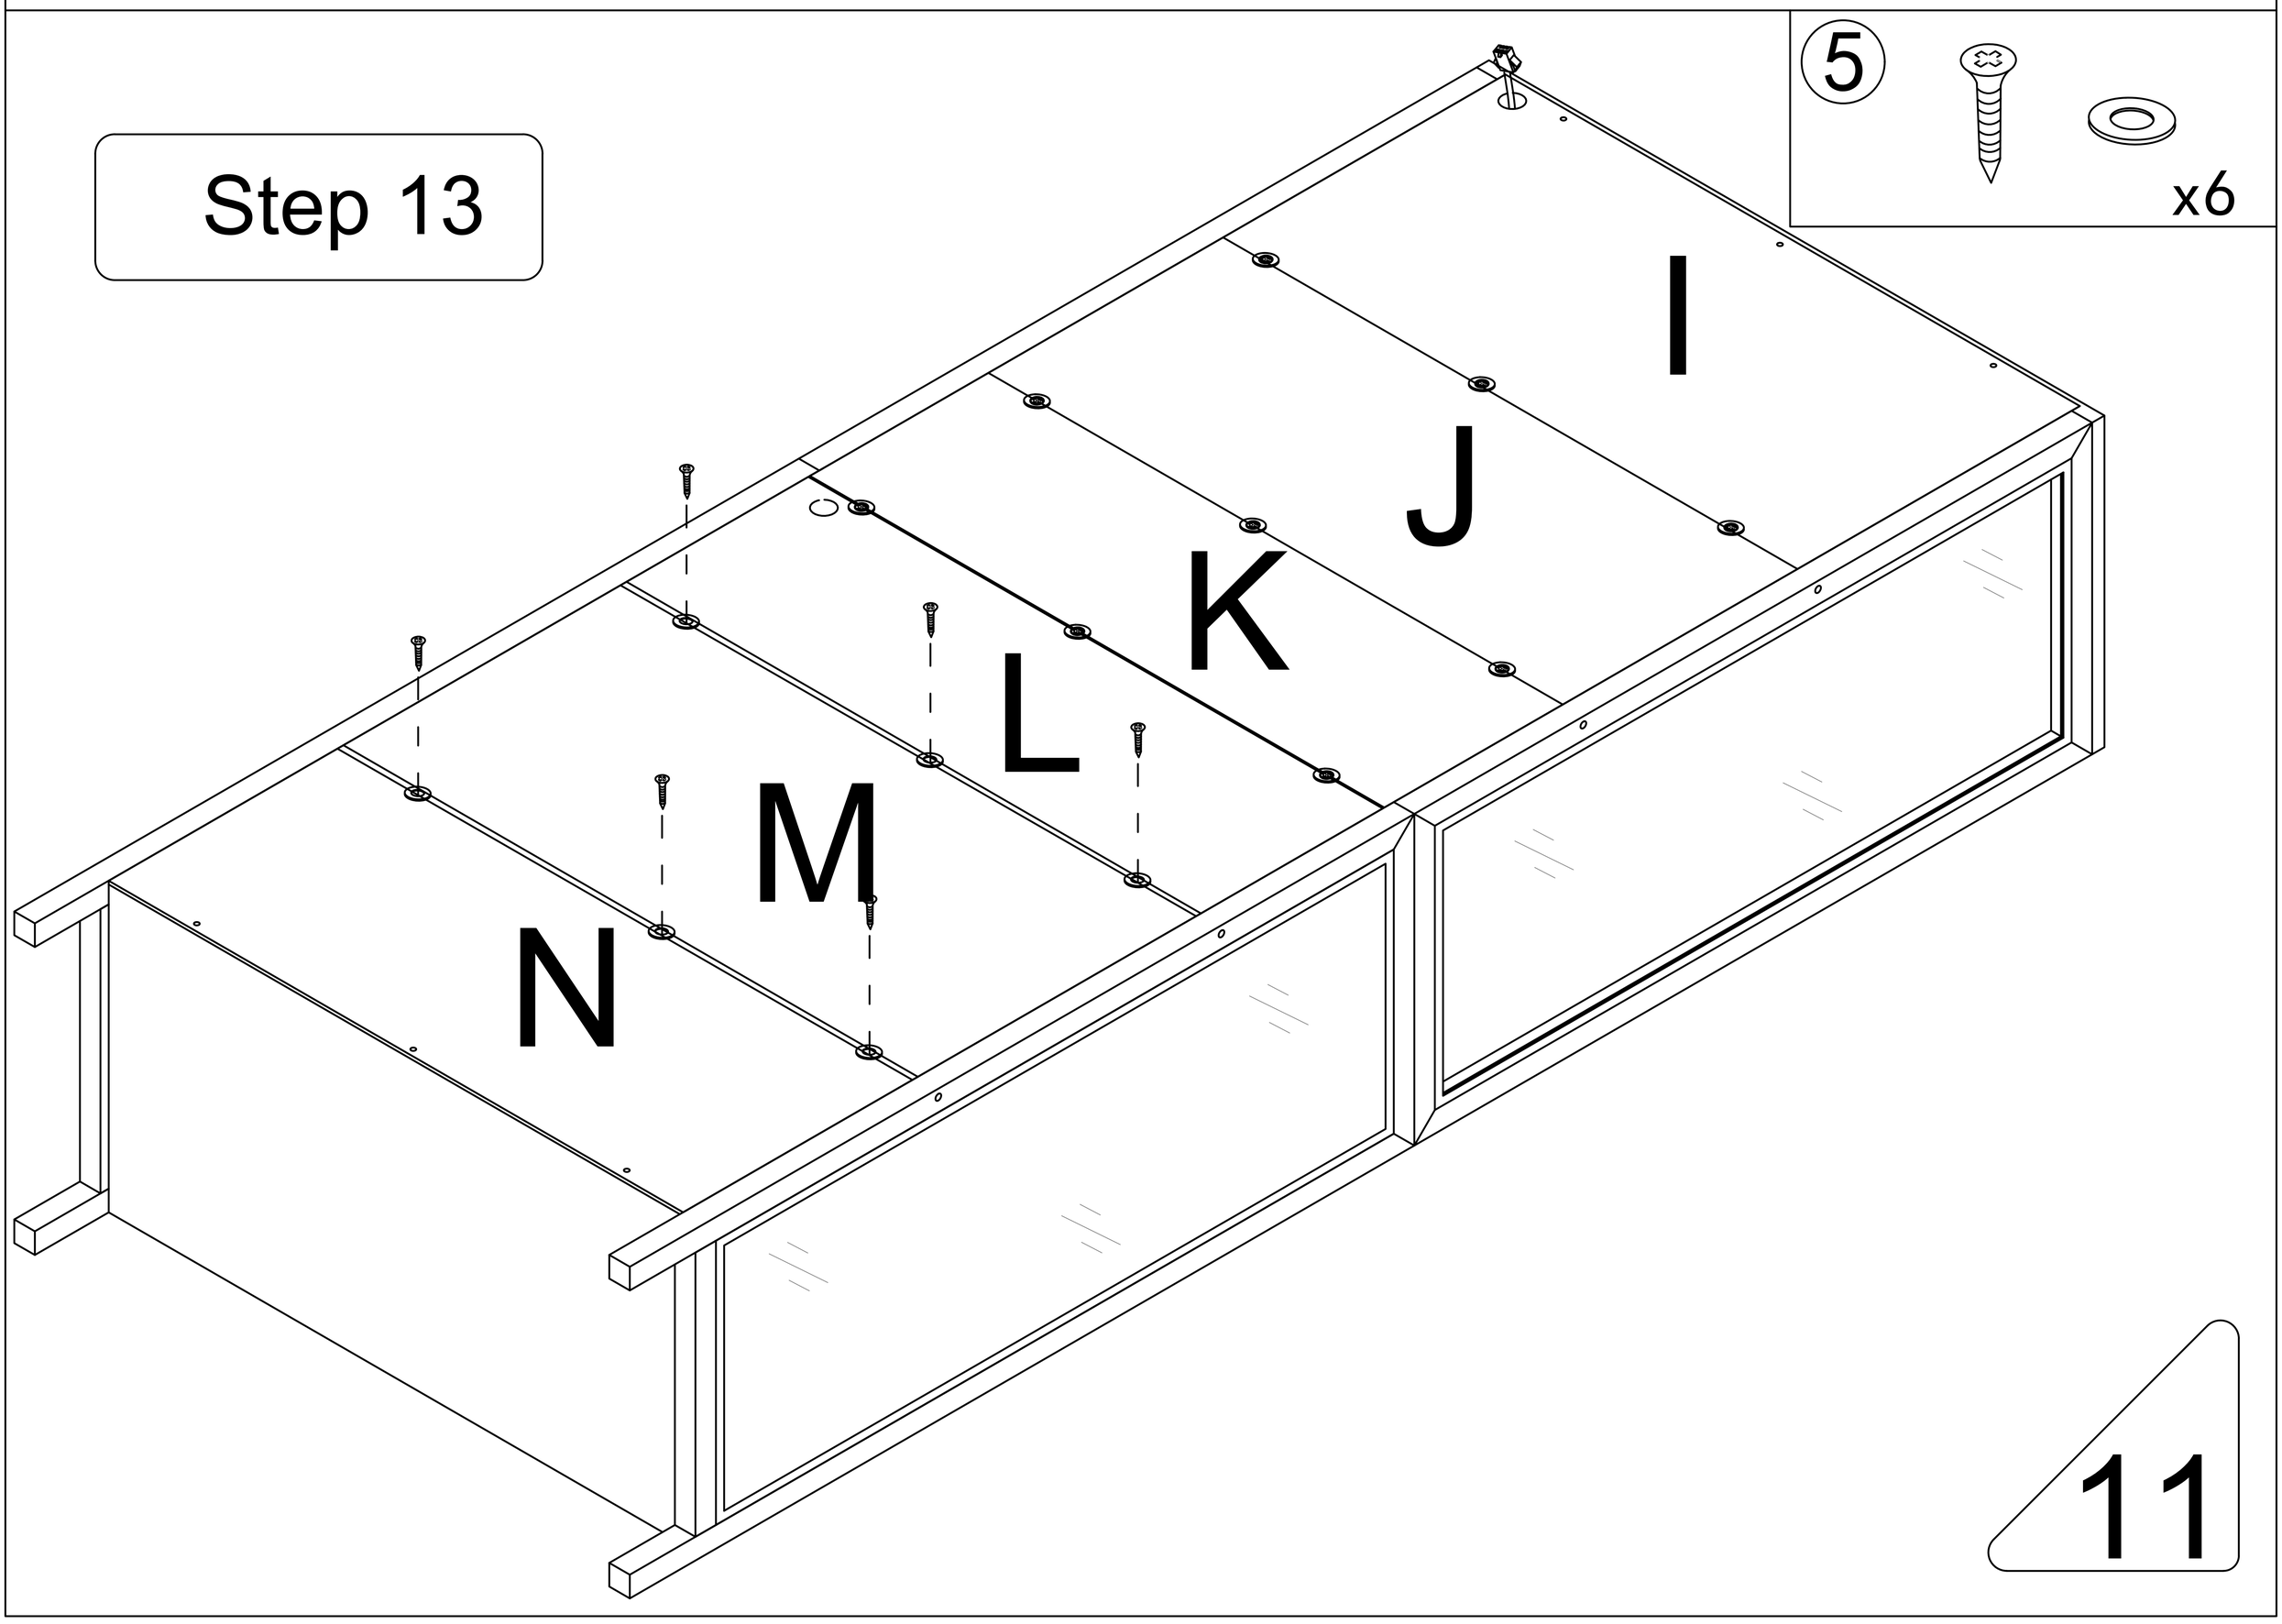


Step 14

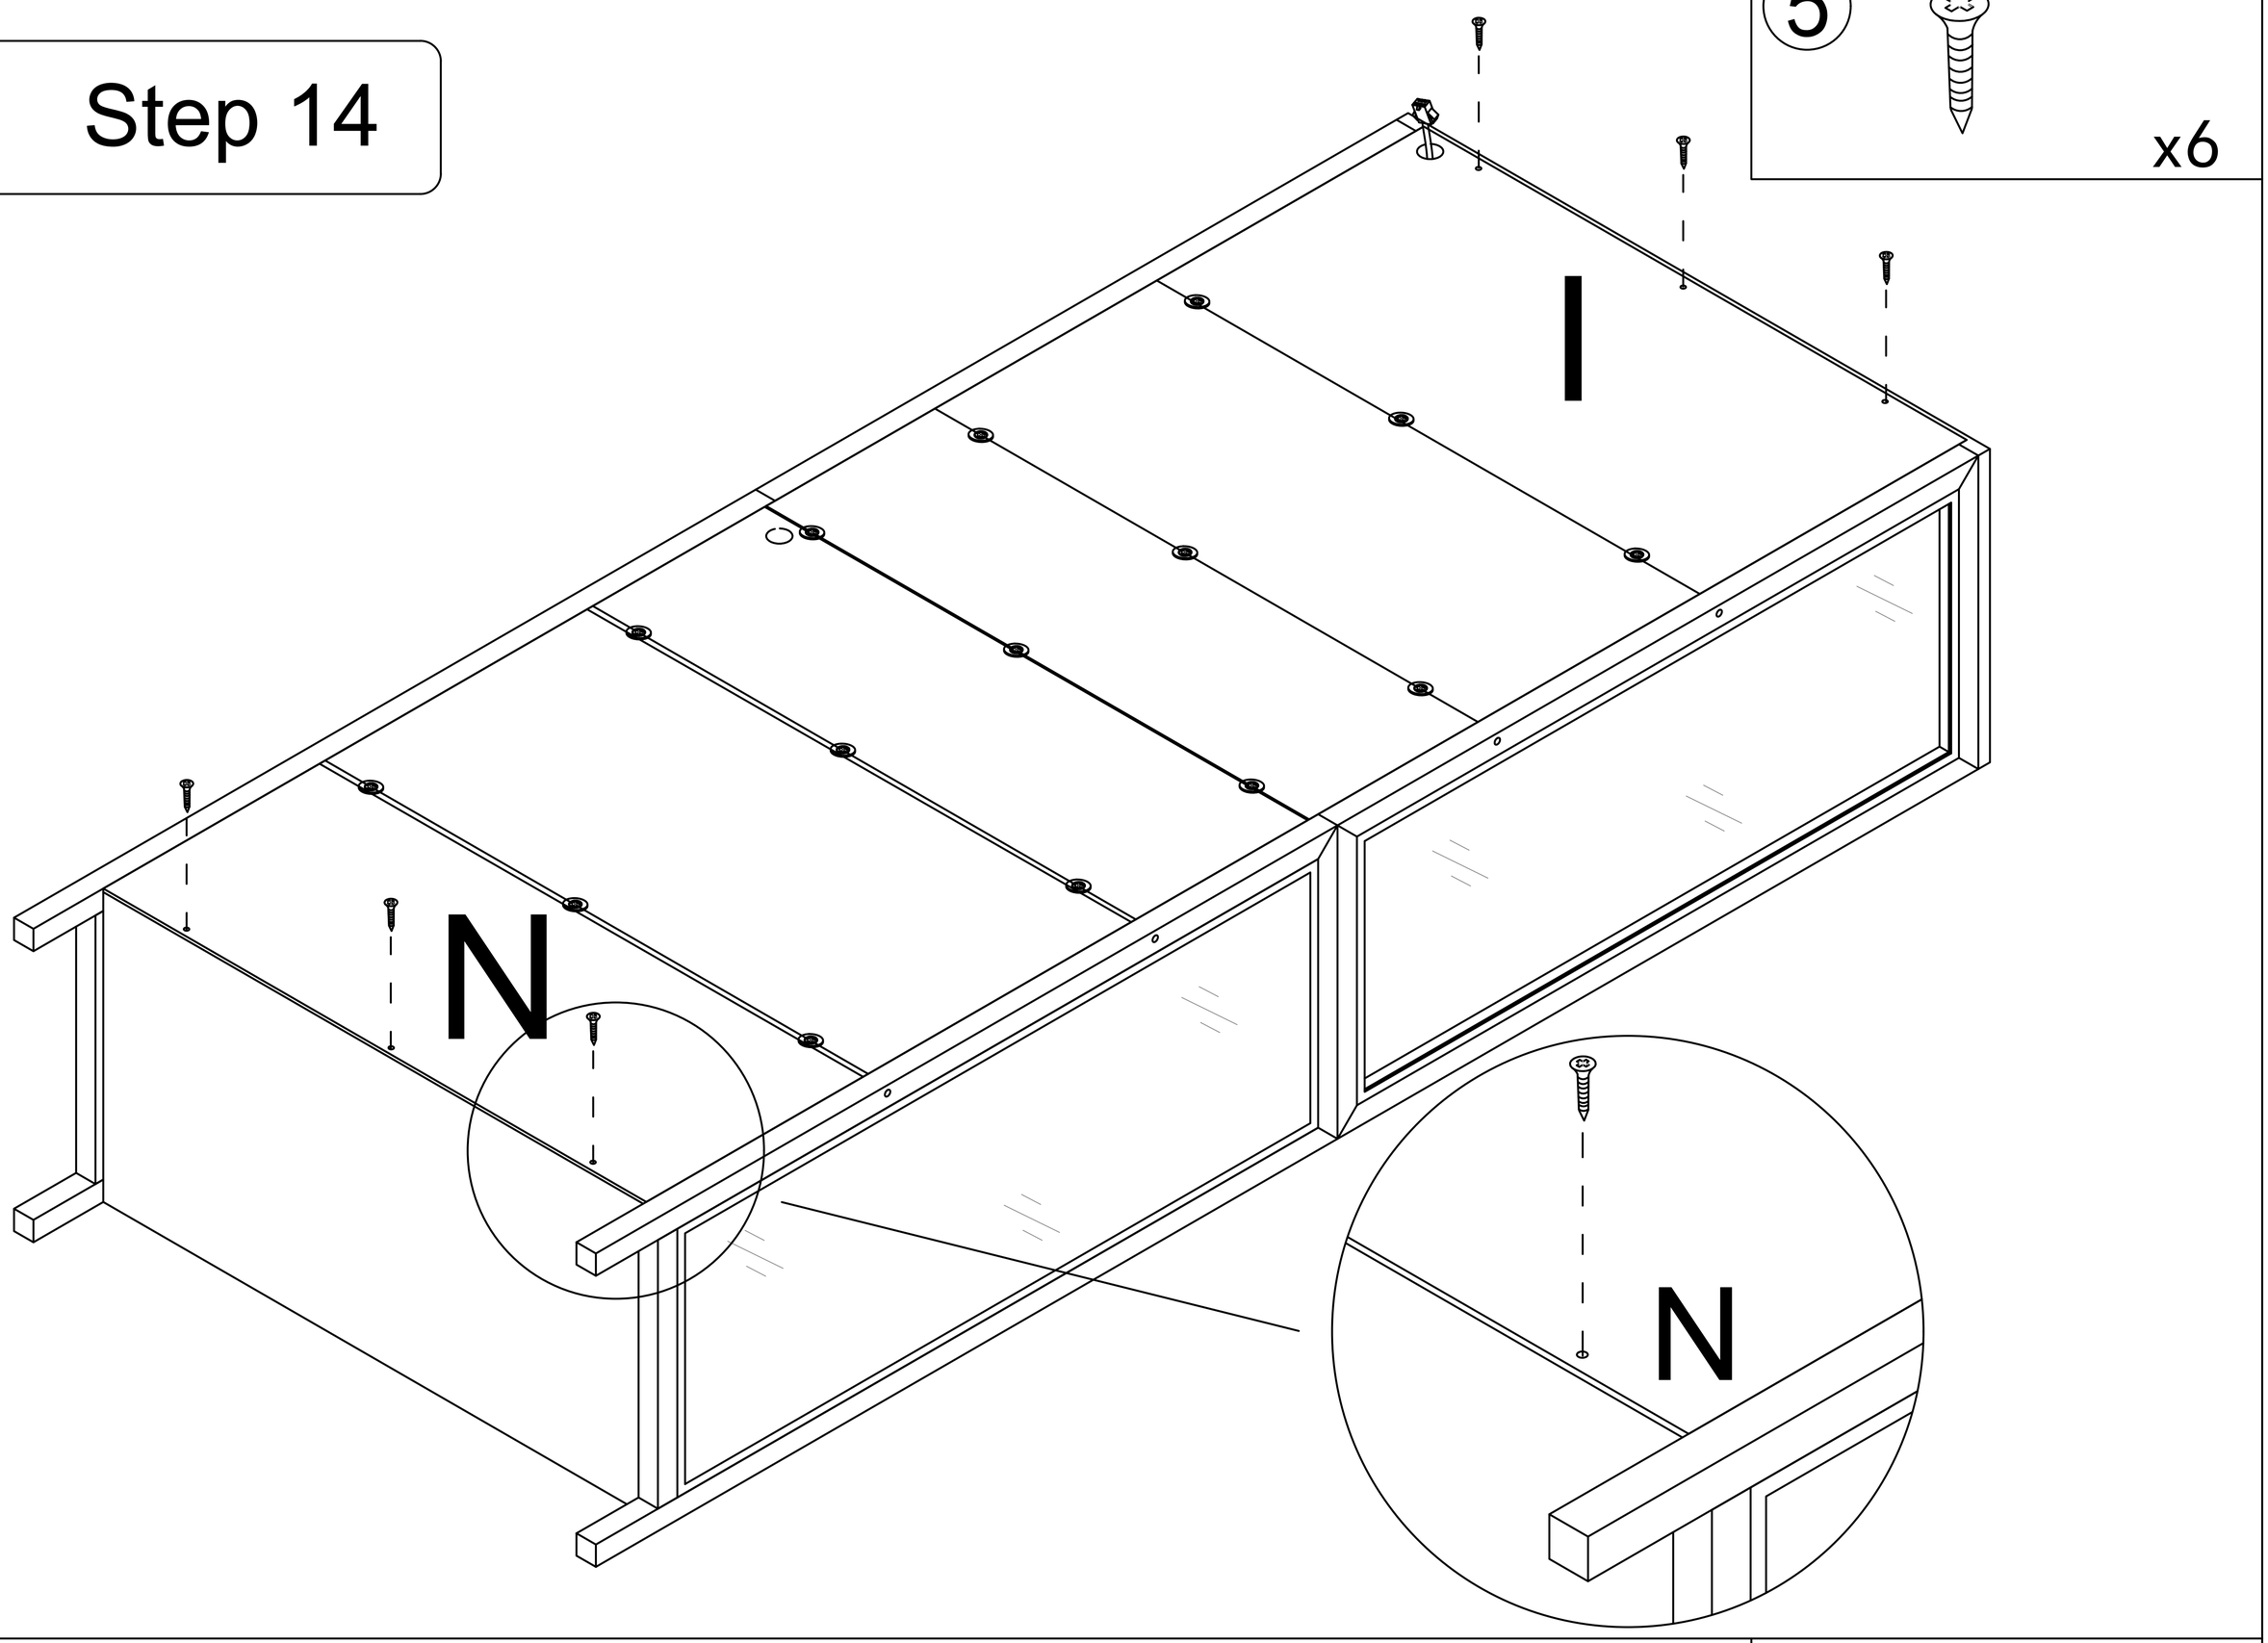

5 x6


Step 15

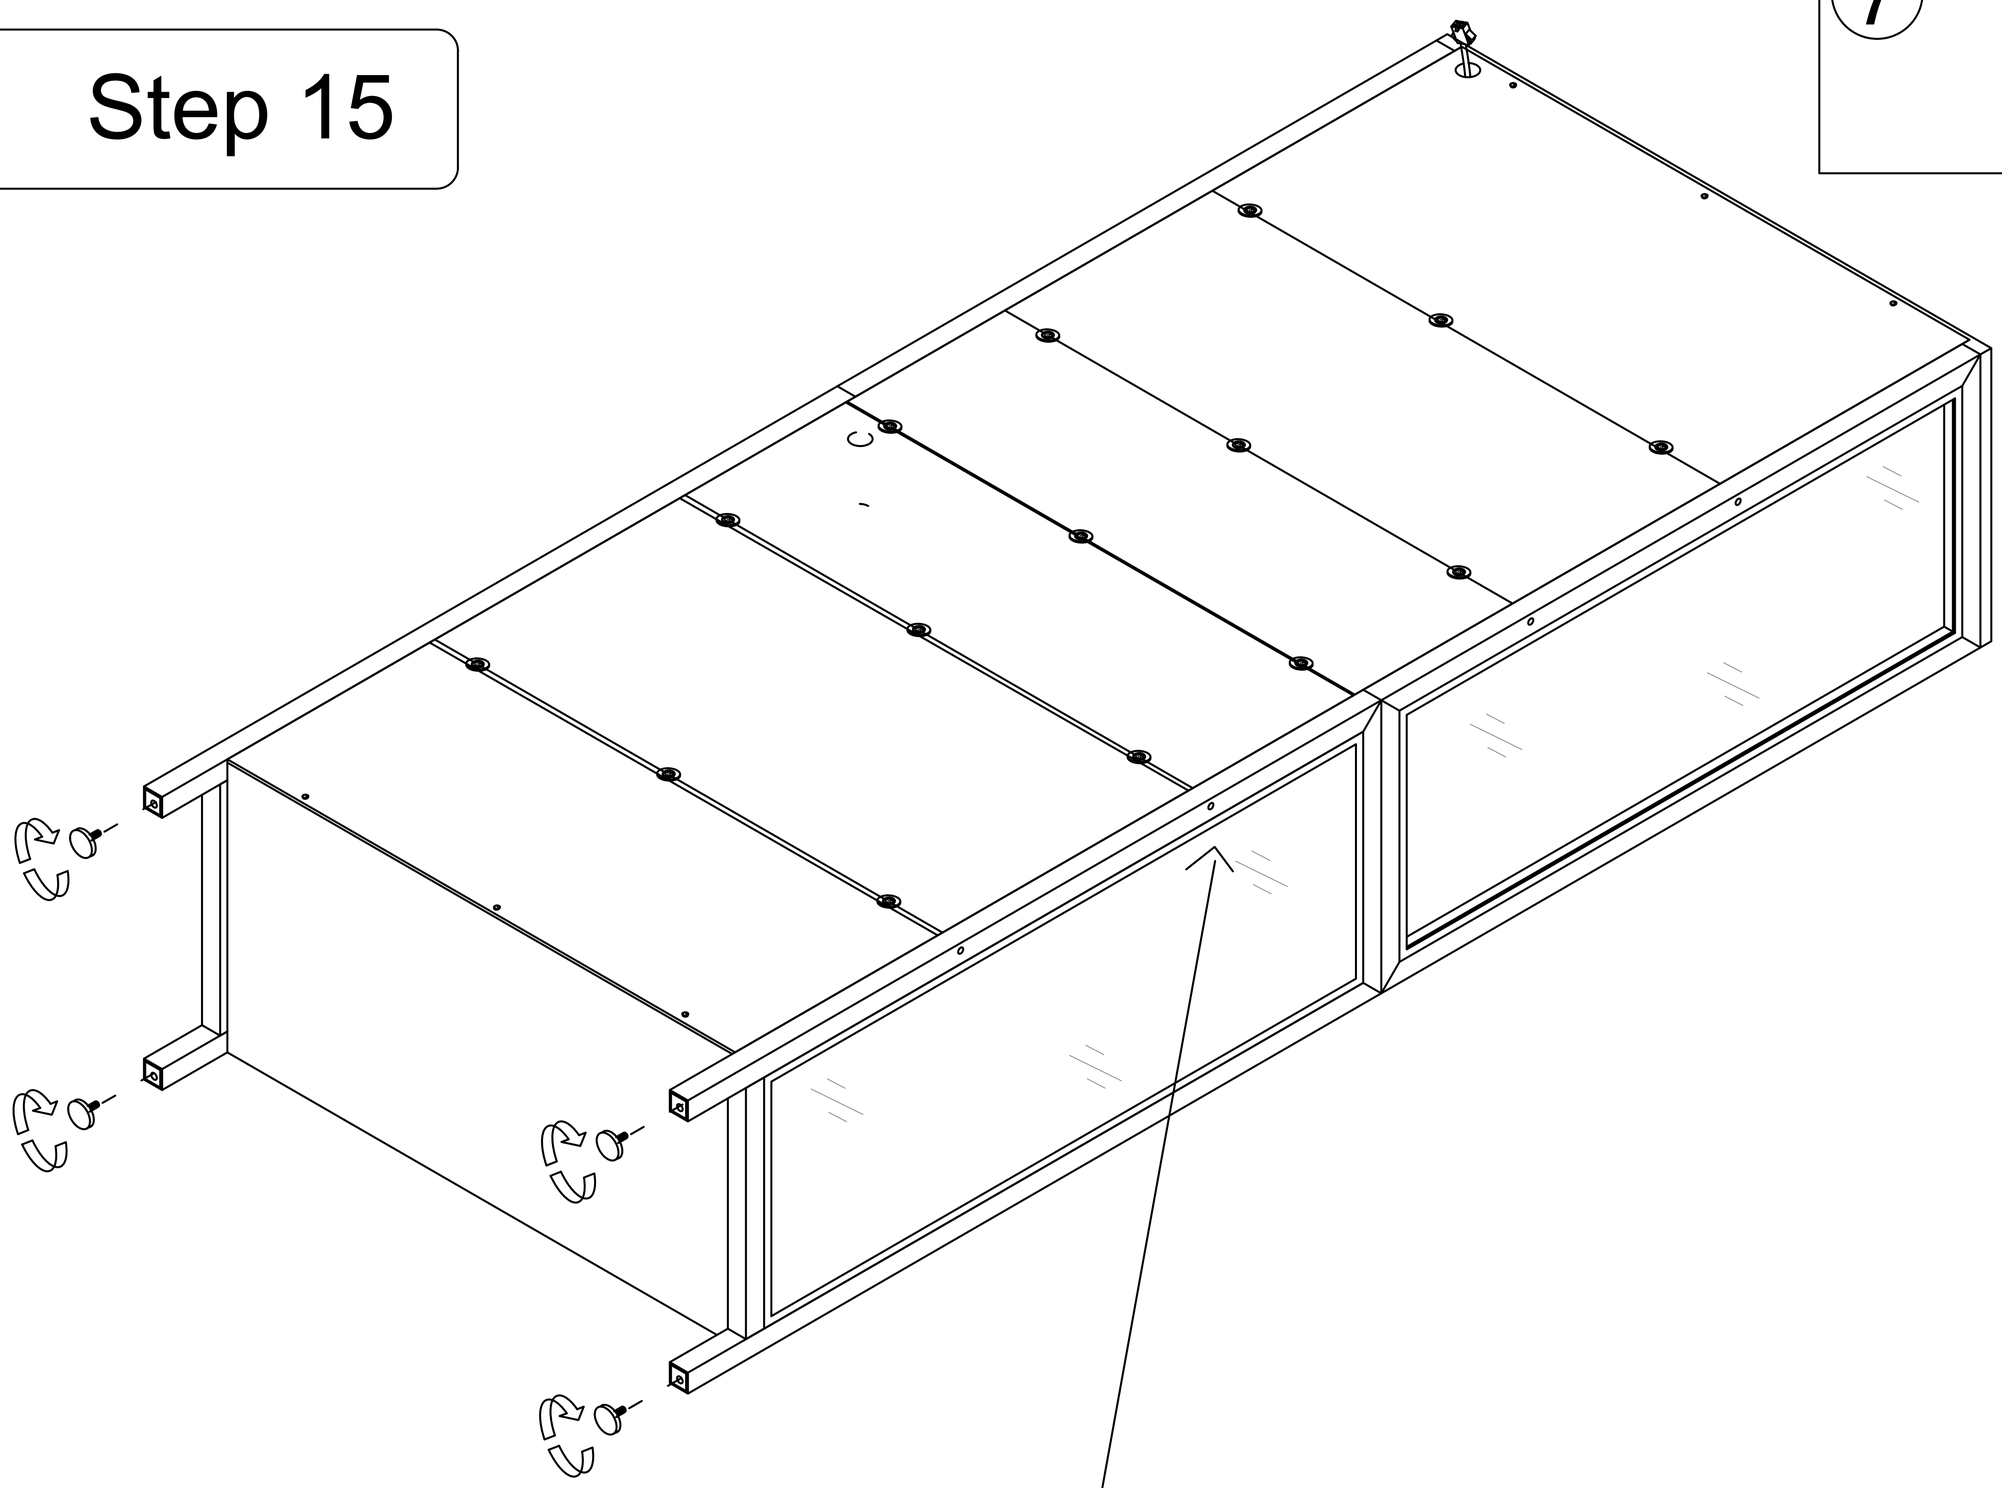


7 x4


Fit the back panel in place, then tighten the side screws.

Step 16

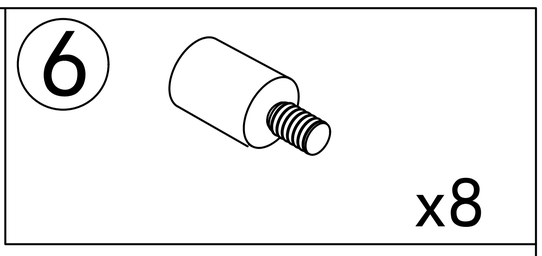

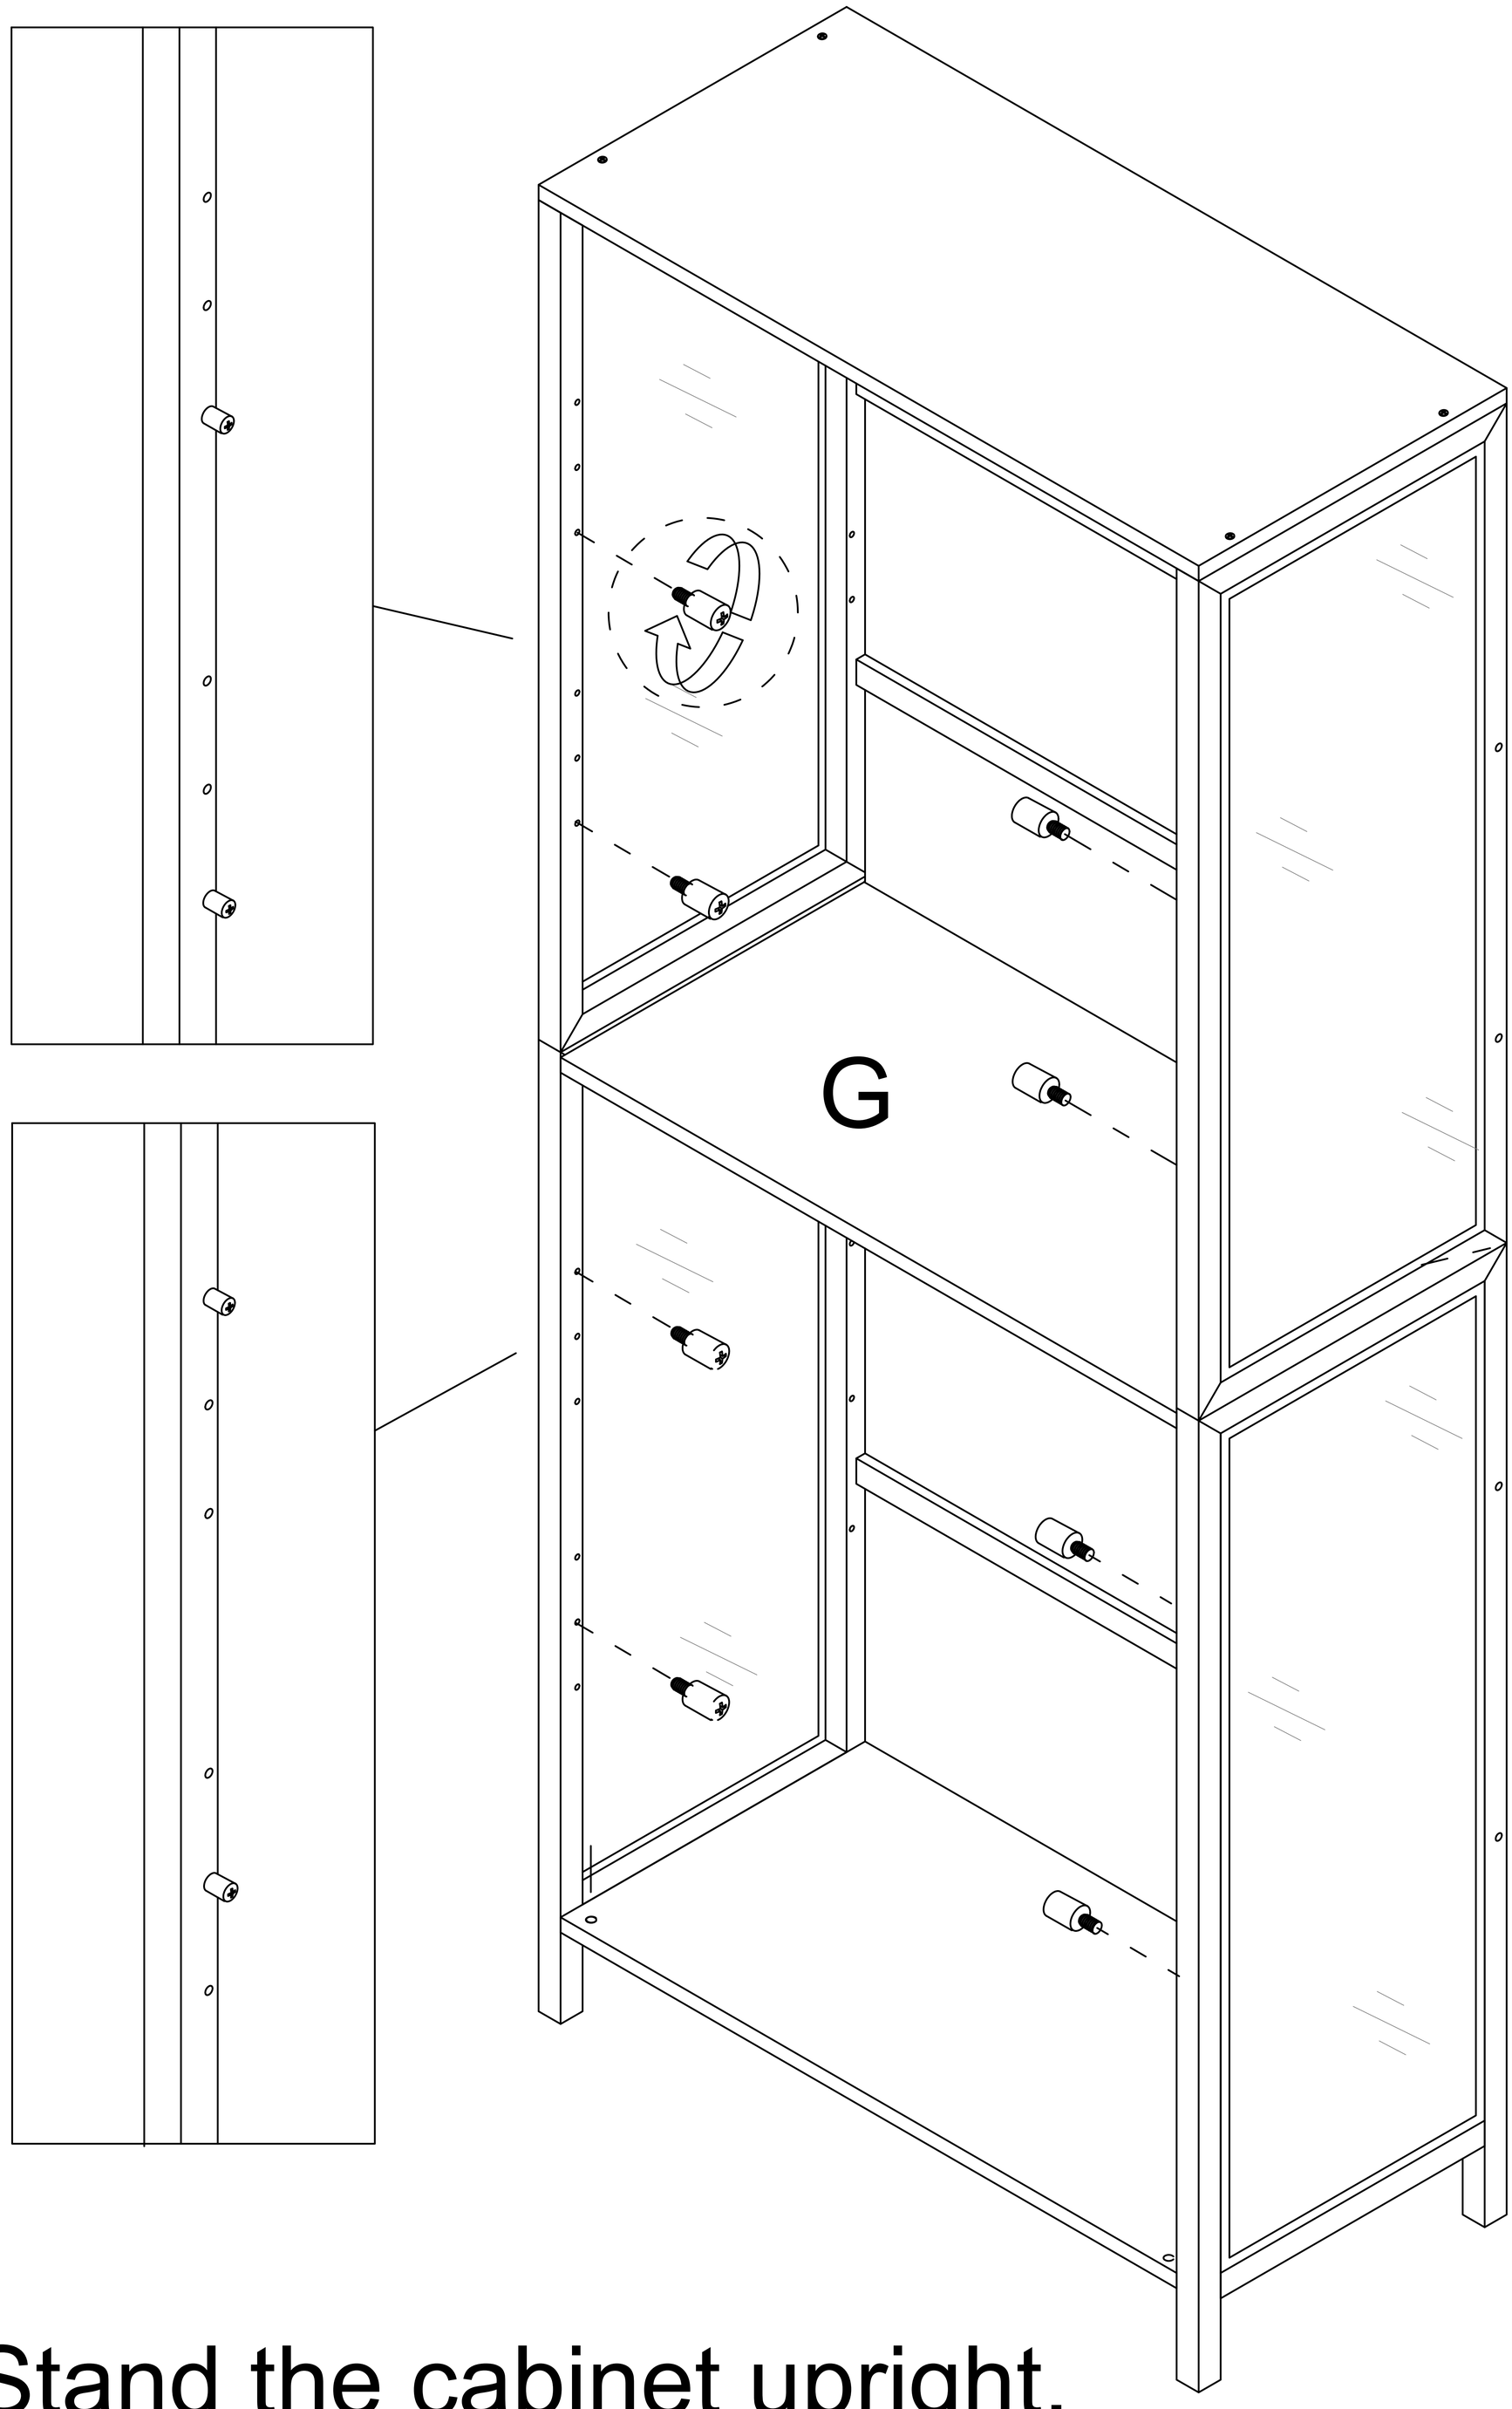



Thread the lamp wire through the wire outlet.

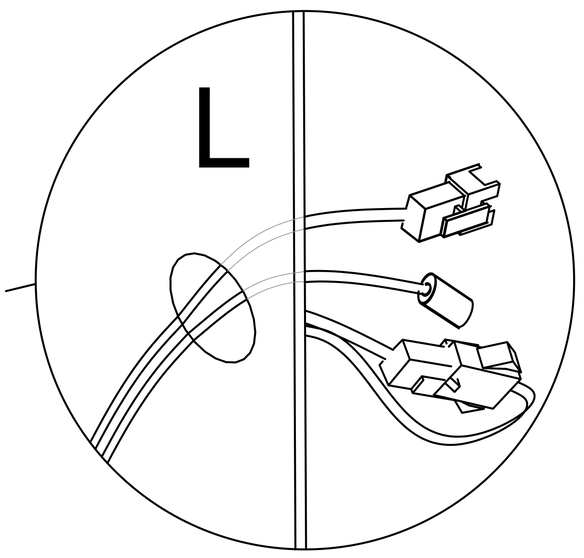

Stand the cabinet upright.


Step 17

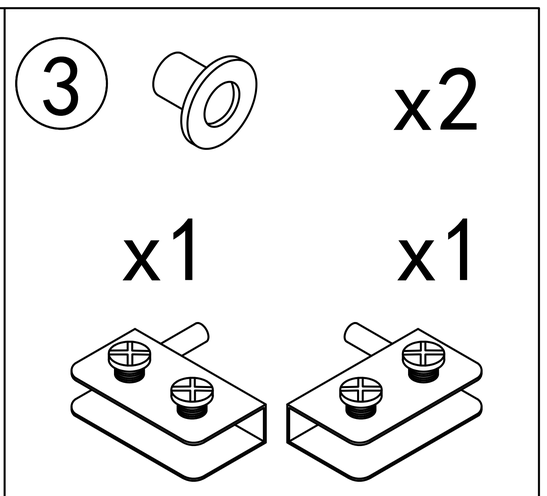

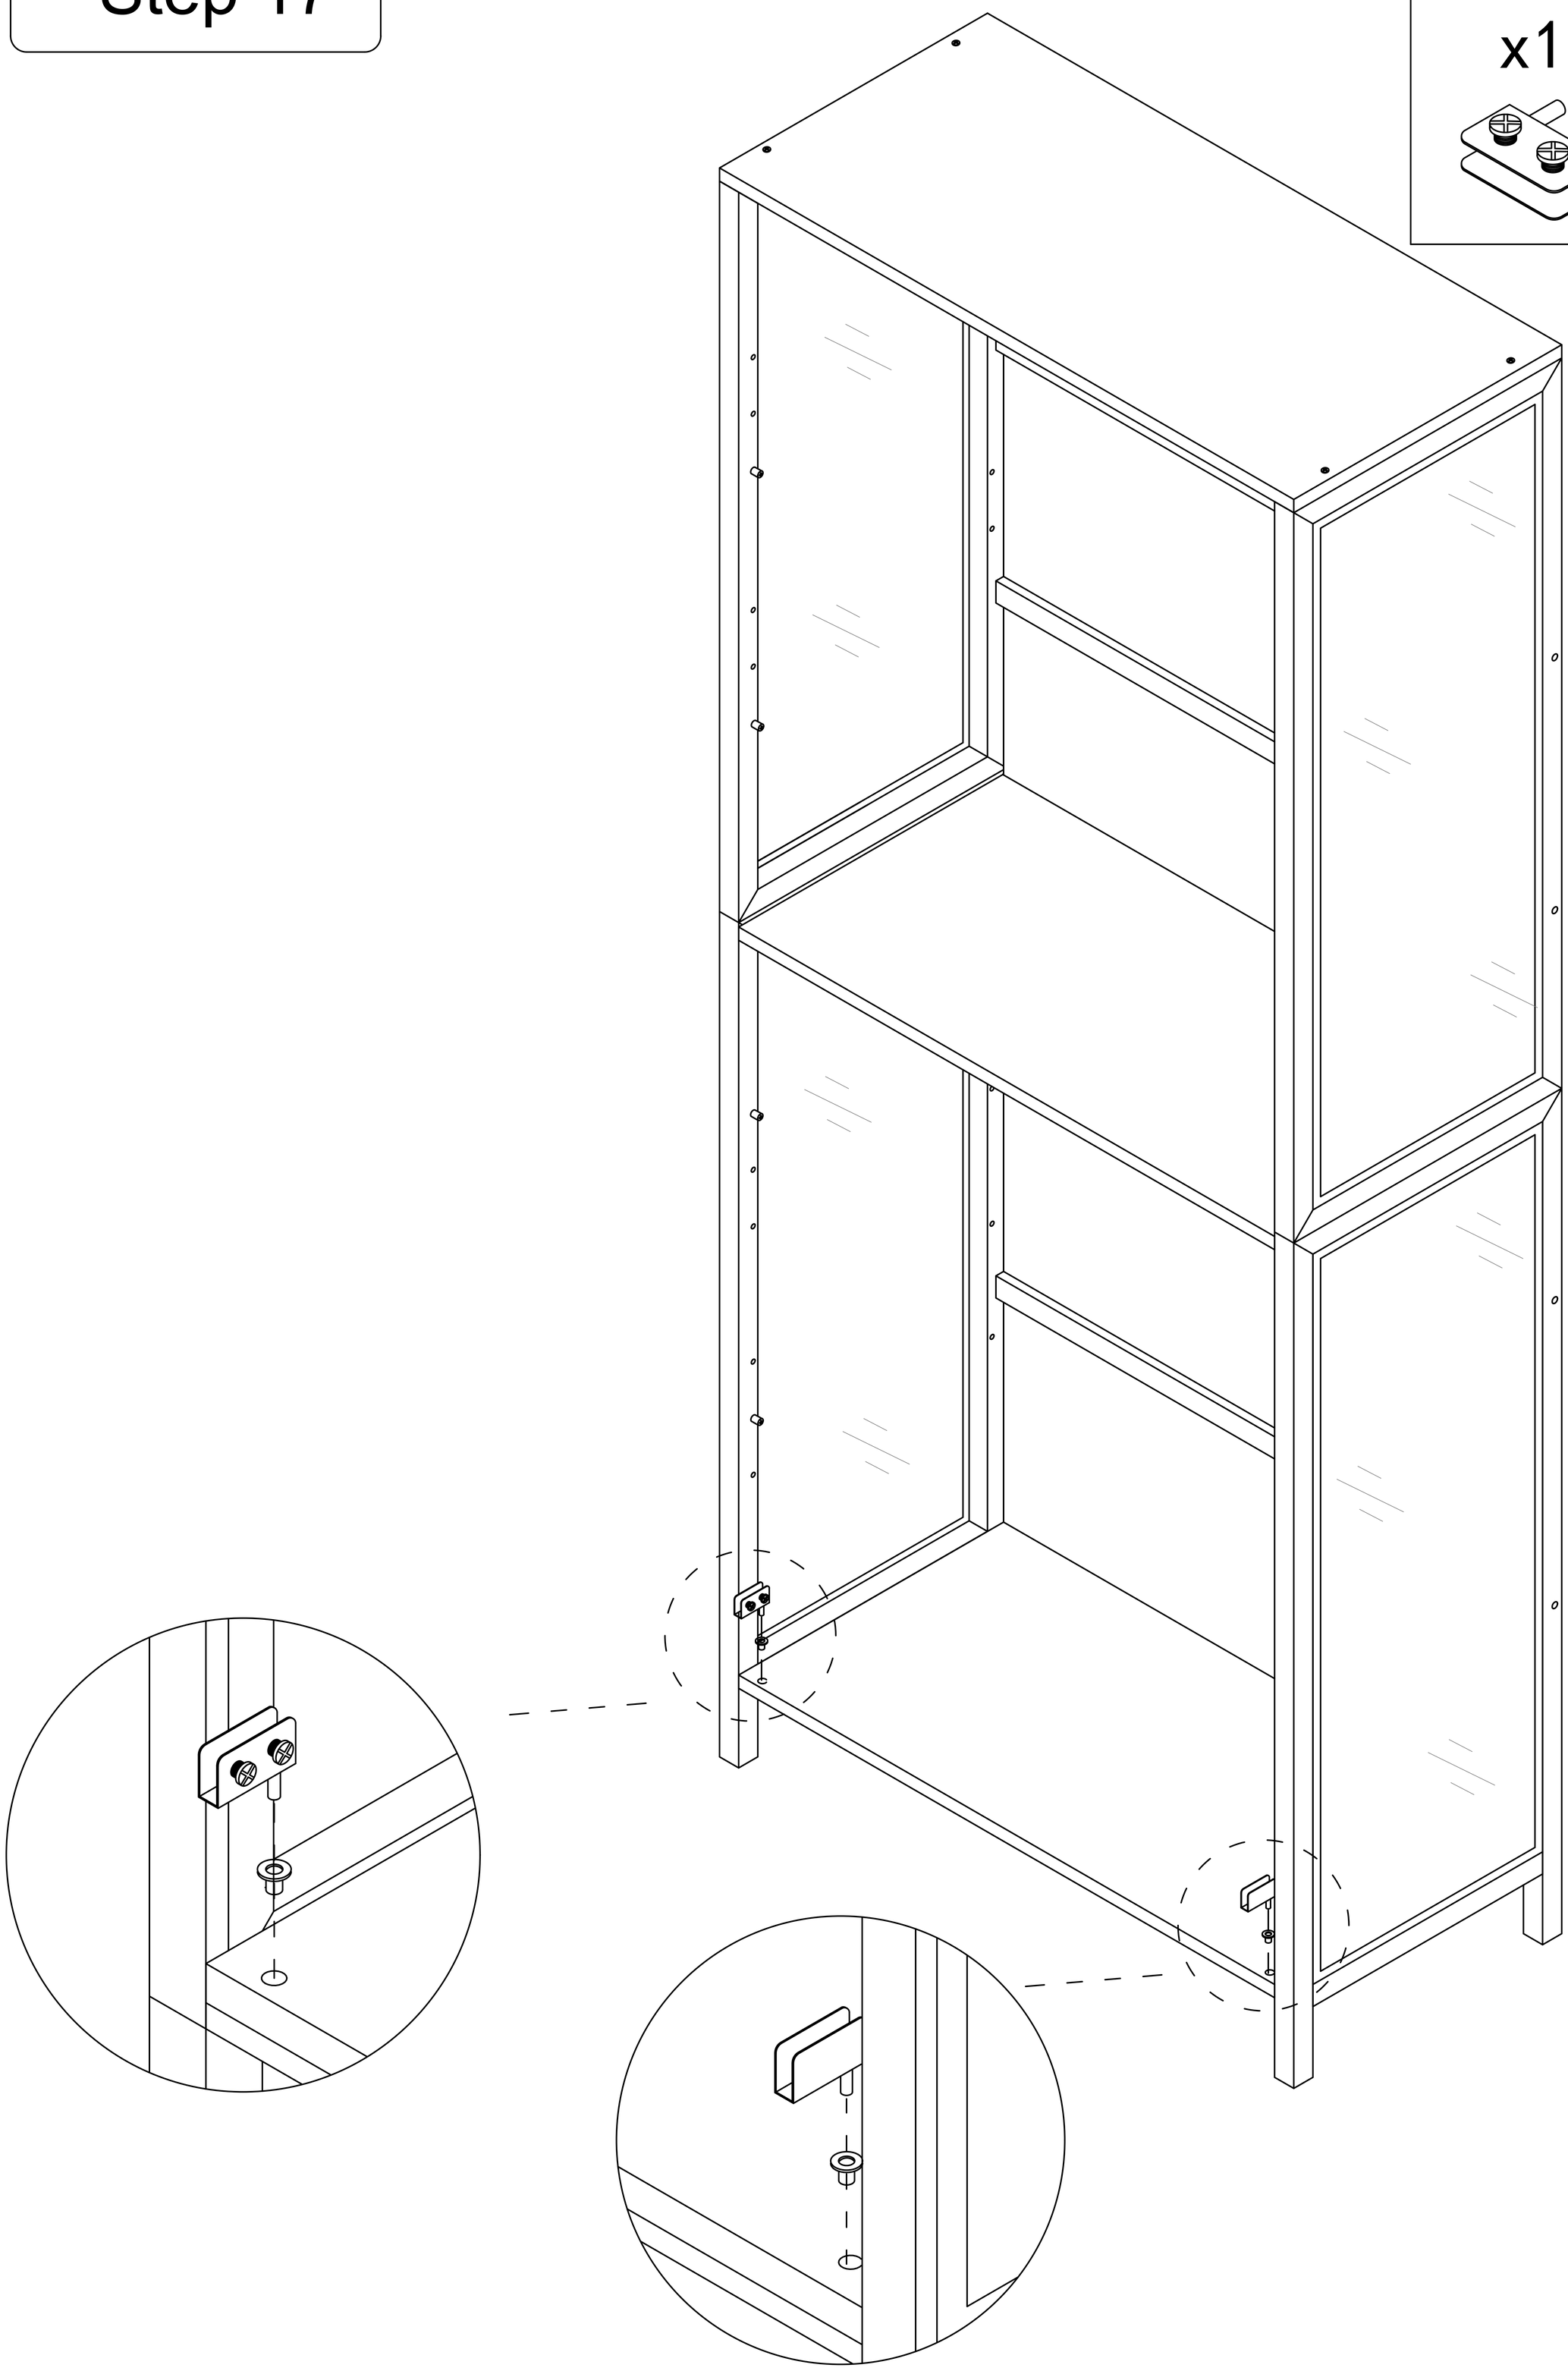


Step 18


First, completely unscrew the screws on the parts

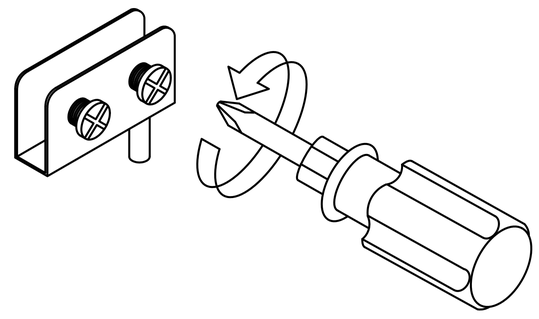


Then take out the black rubber pad from the inside of the part, and the white sponge remains unchanged inside the part.

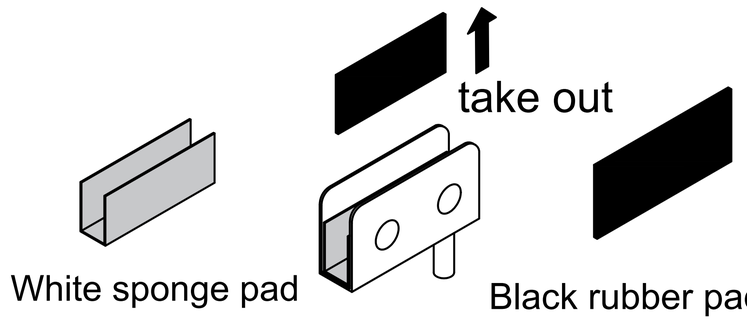

3




x1



x1

Left

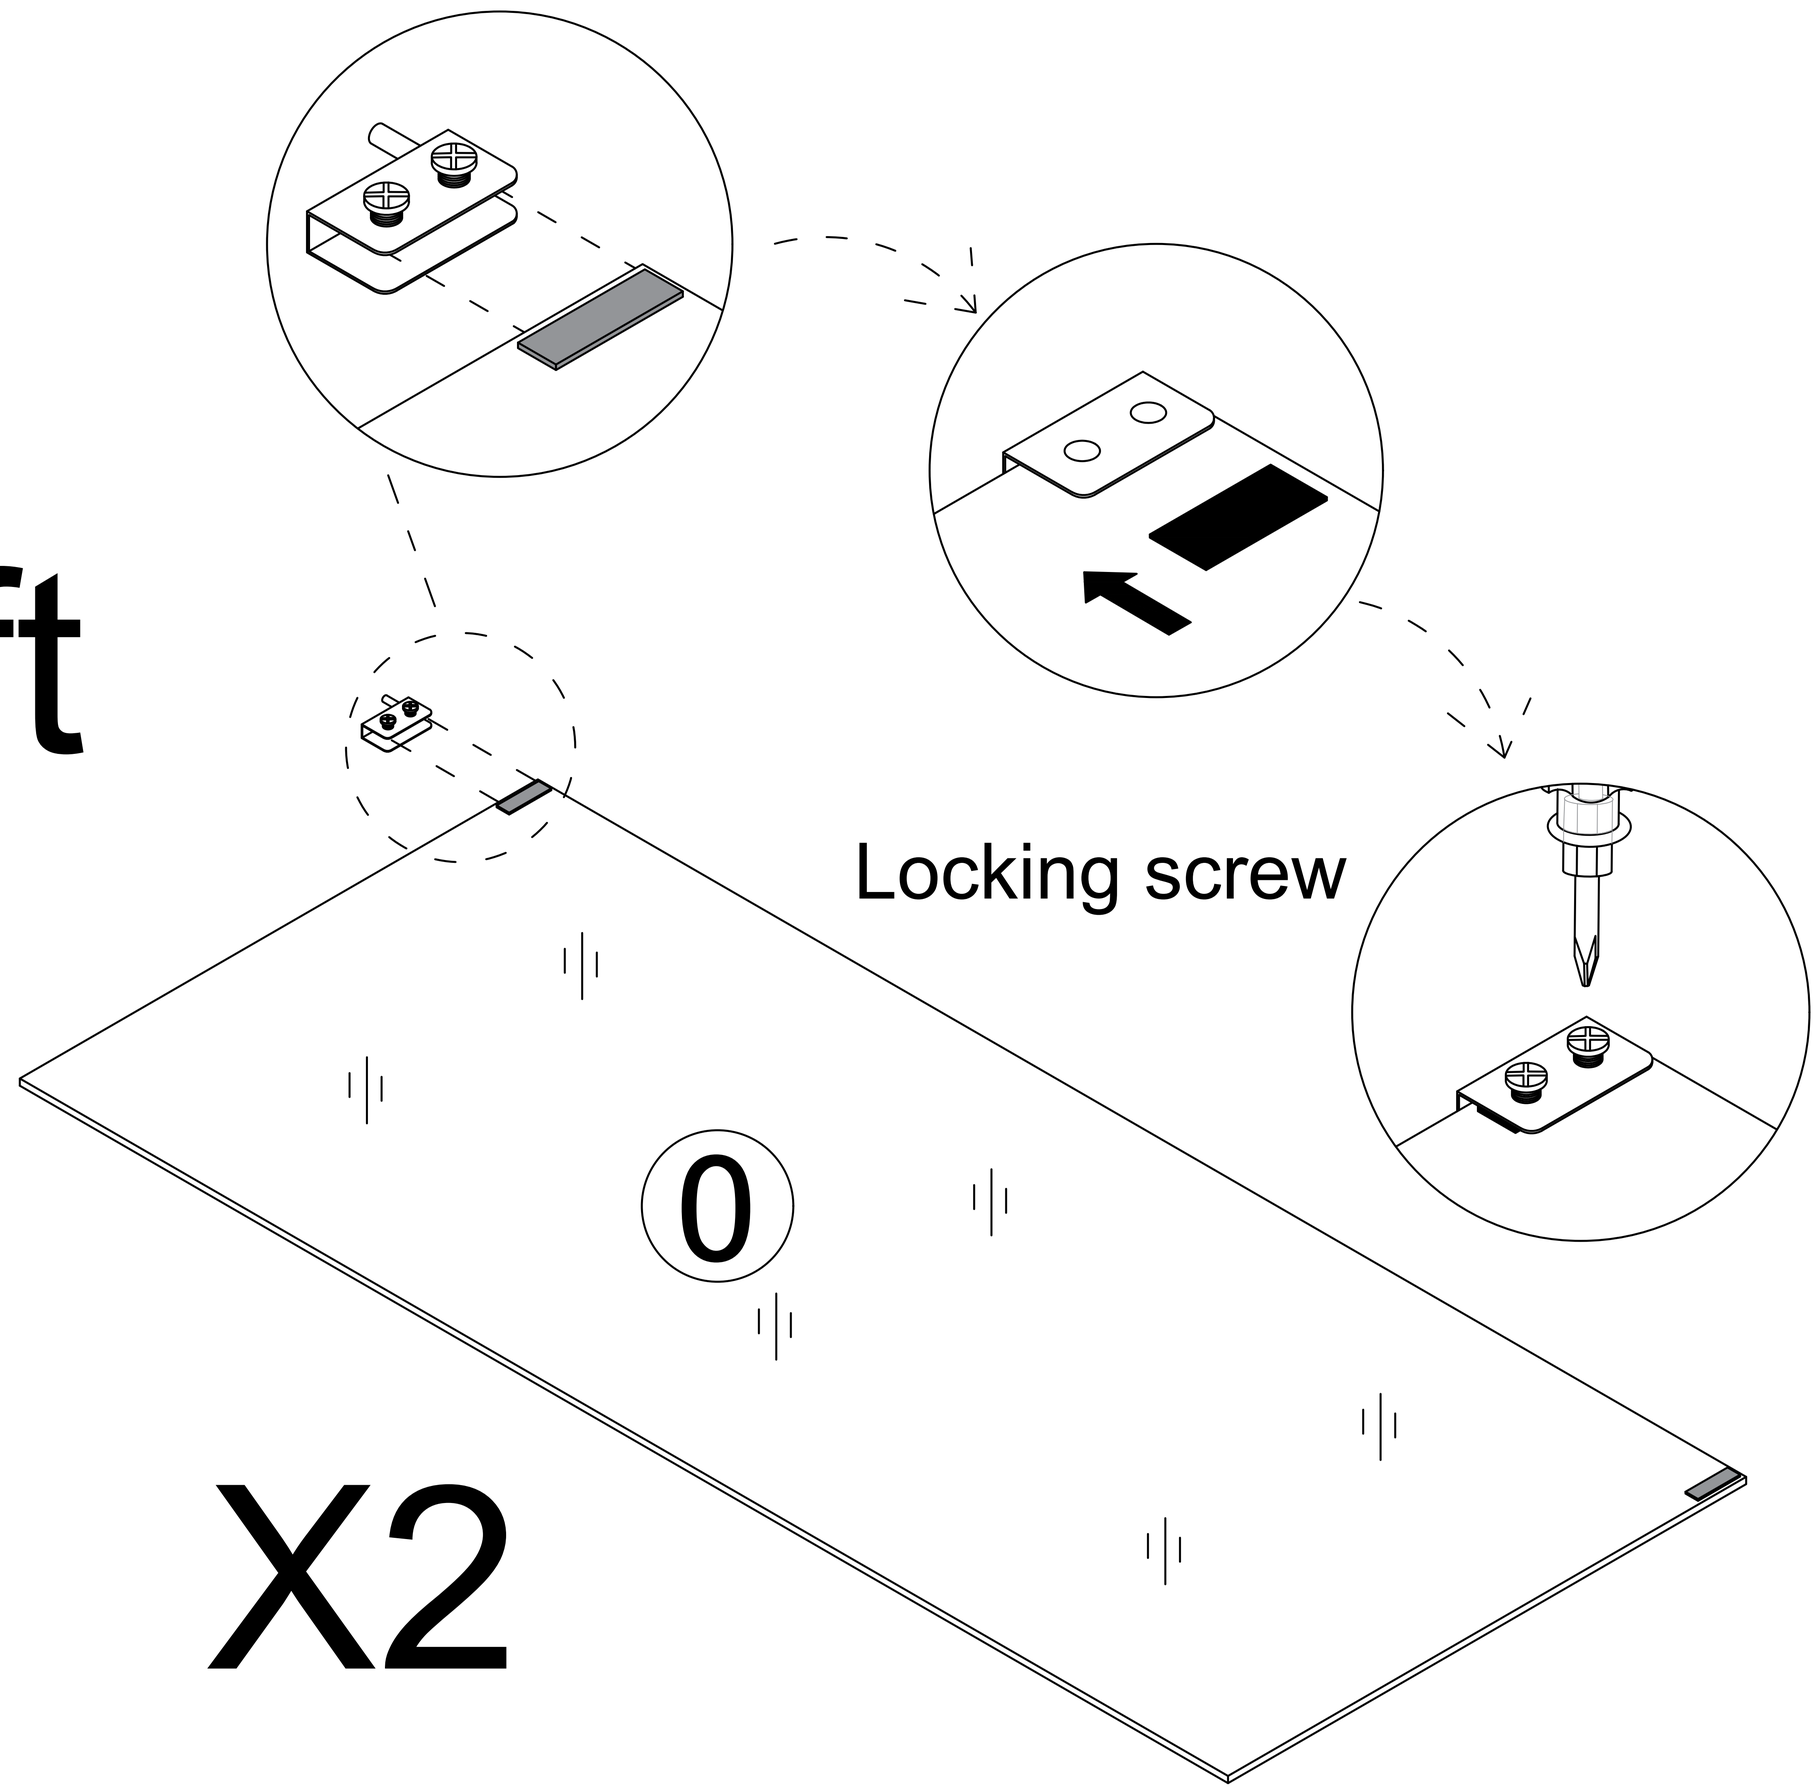


X2

Pay attention to the direction of the door hinge, rotate the screws to compress the black gasket, and do not place it in the opposite direction


Place the black gasket on the side where the screws are installed

Step 19

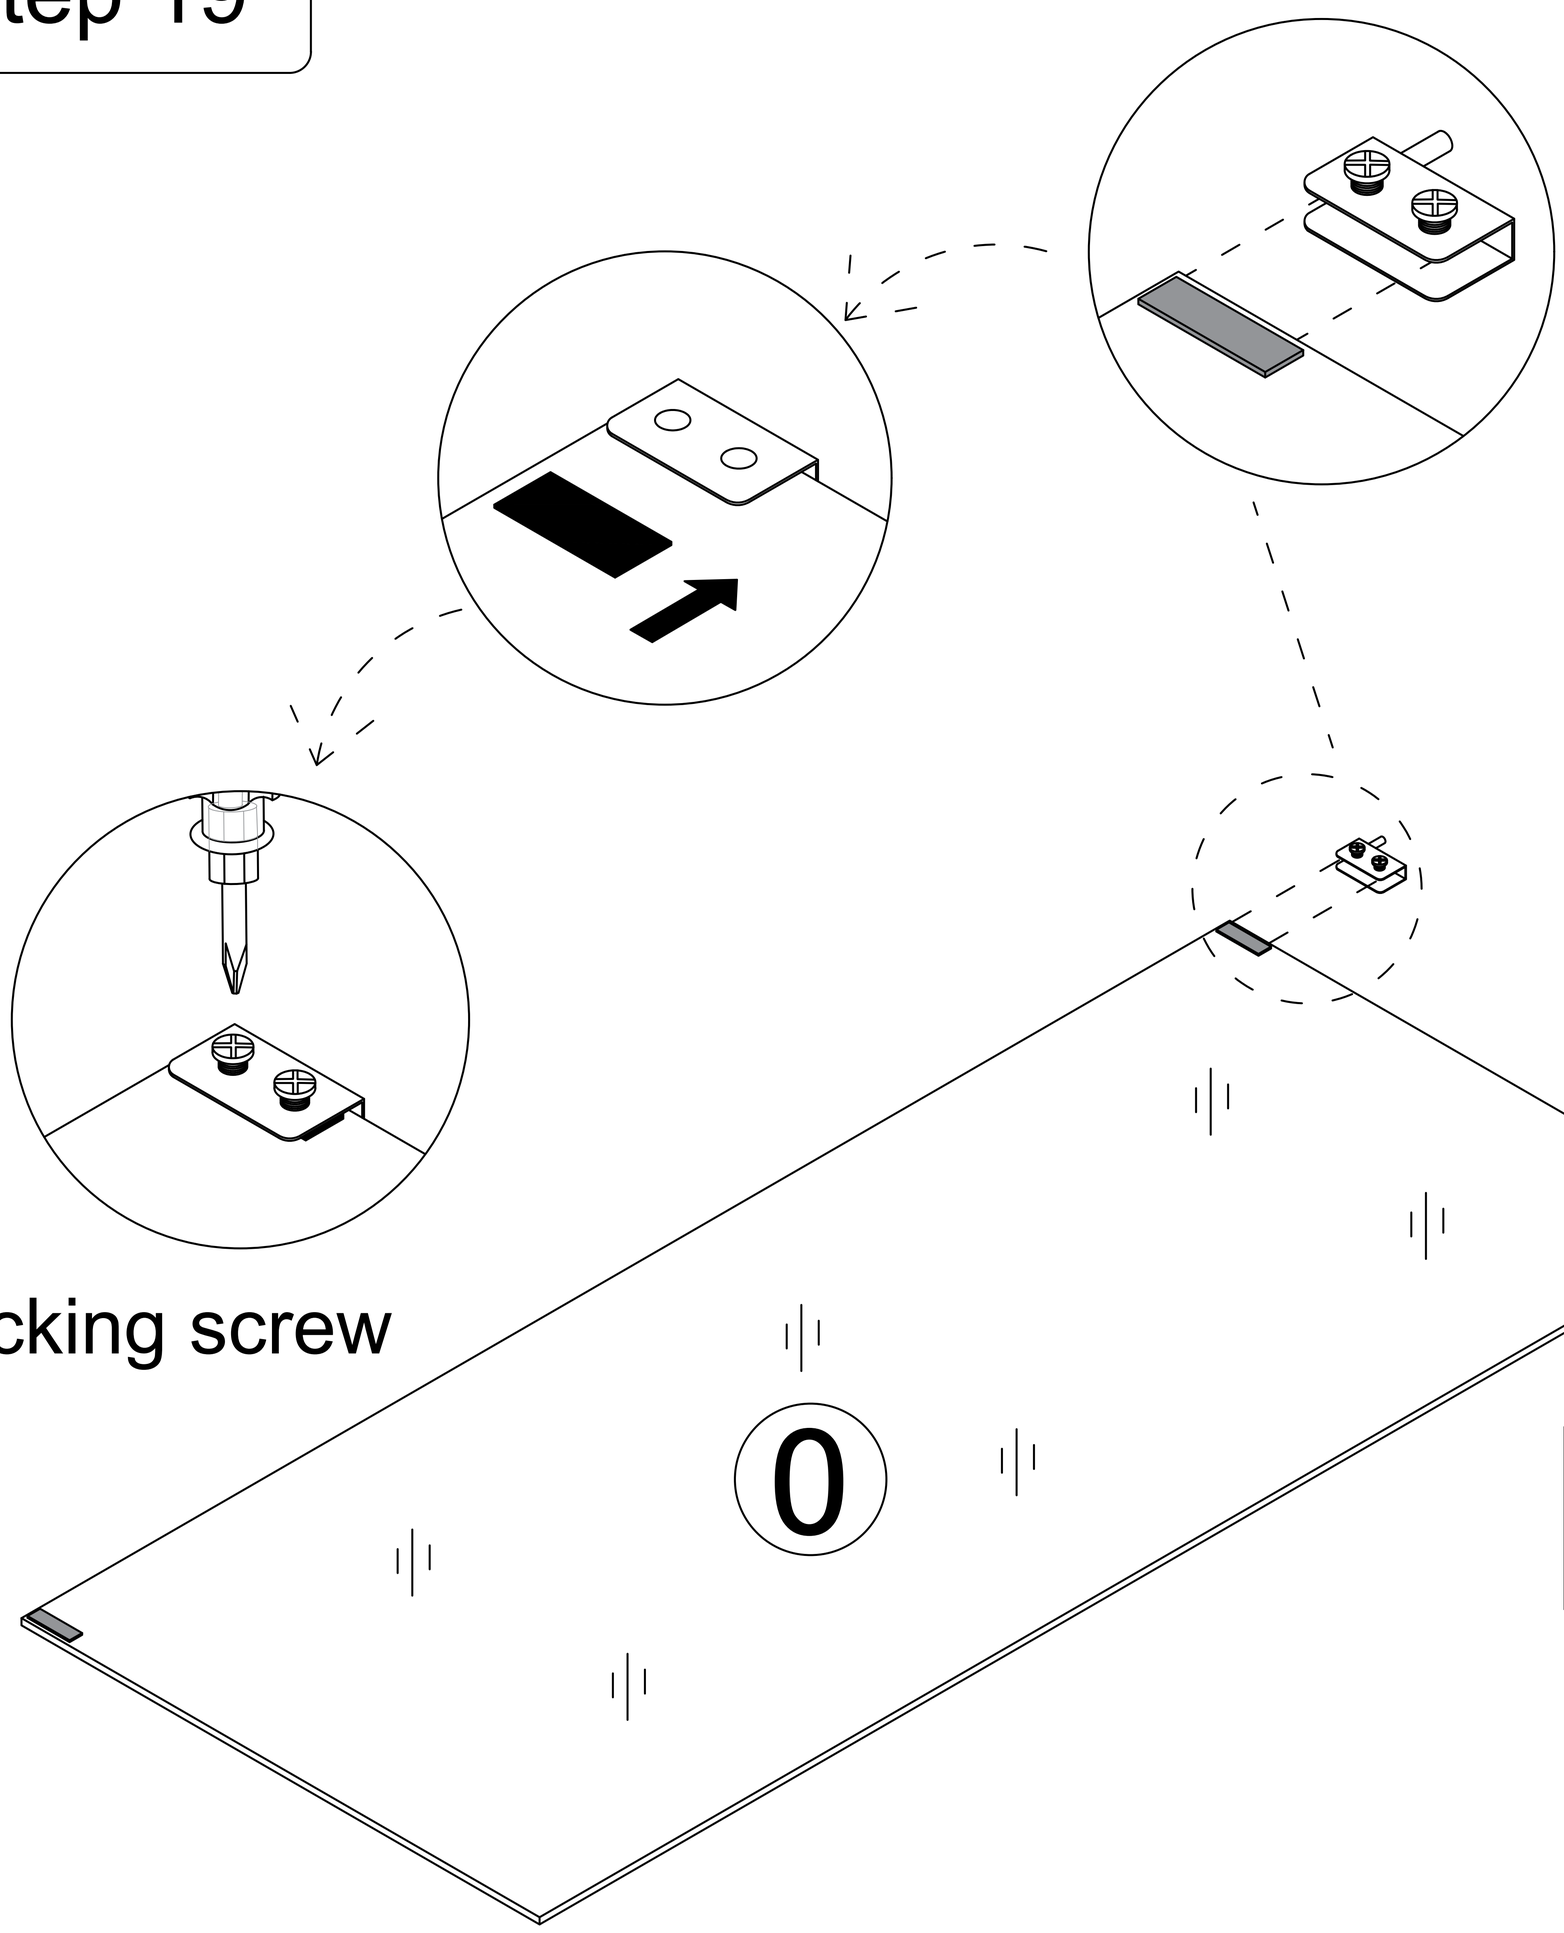


X2

3



x1



x1

Pay attention to the direction of the door hinge, rotate the screws to compress the black gasket, and do not place it in the opposite direction


Place the black gasket on the side where the screws are installed

Step 20


Pay attention to the direction of
the door hinge during installation

3 x2

When installing a glass door, it is recommended to have two people install it to avoid the glass door colliding or hitting oneself.

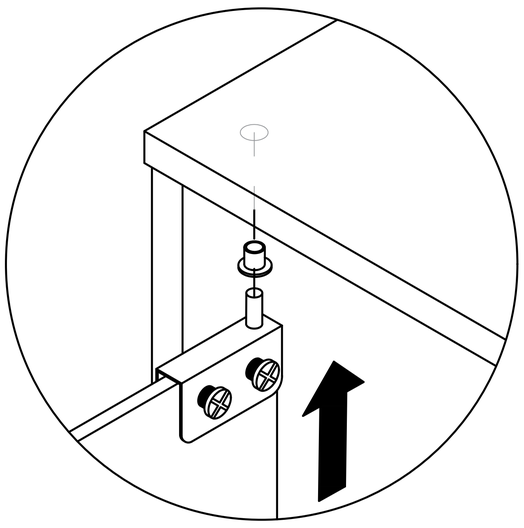


first

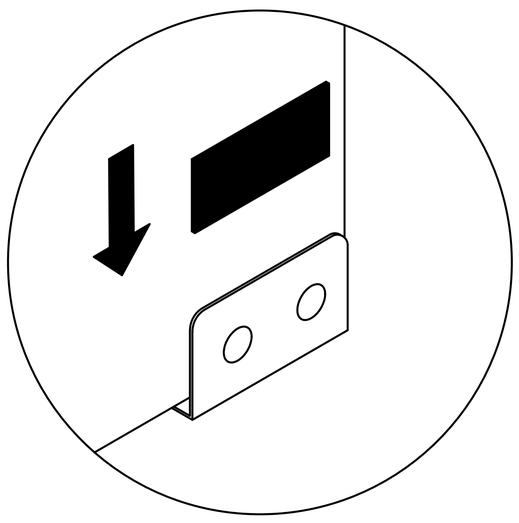


second

After installing the glass door, place the black gasket on the side where the screws are installed

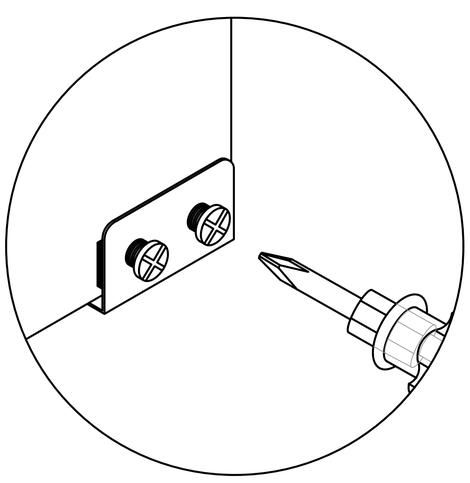


third

Locking screw

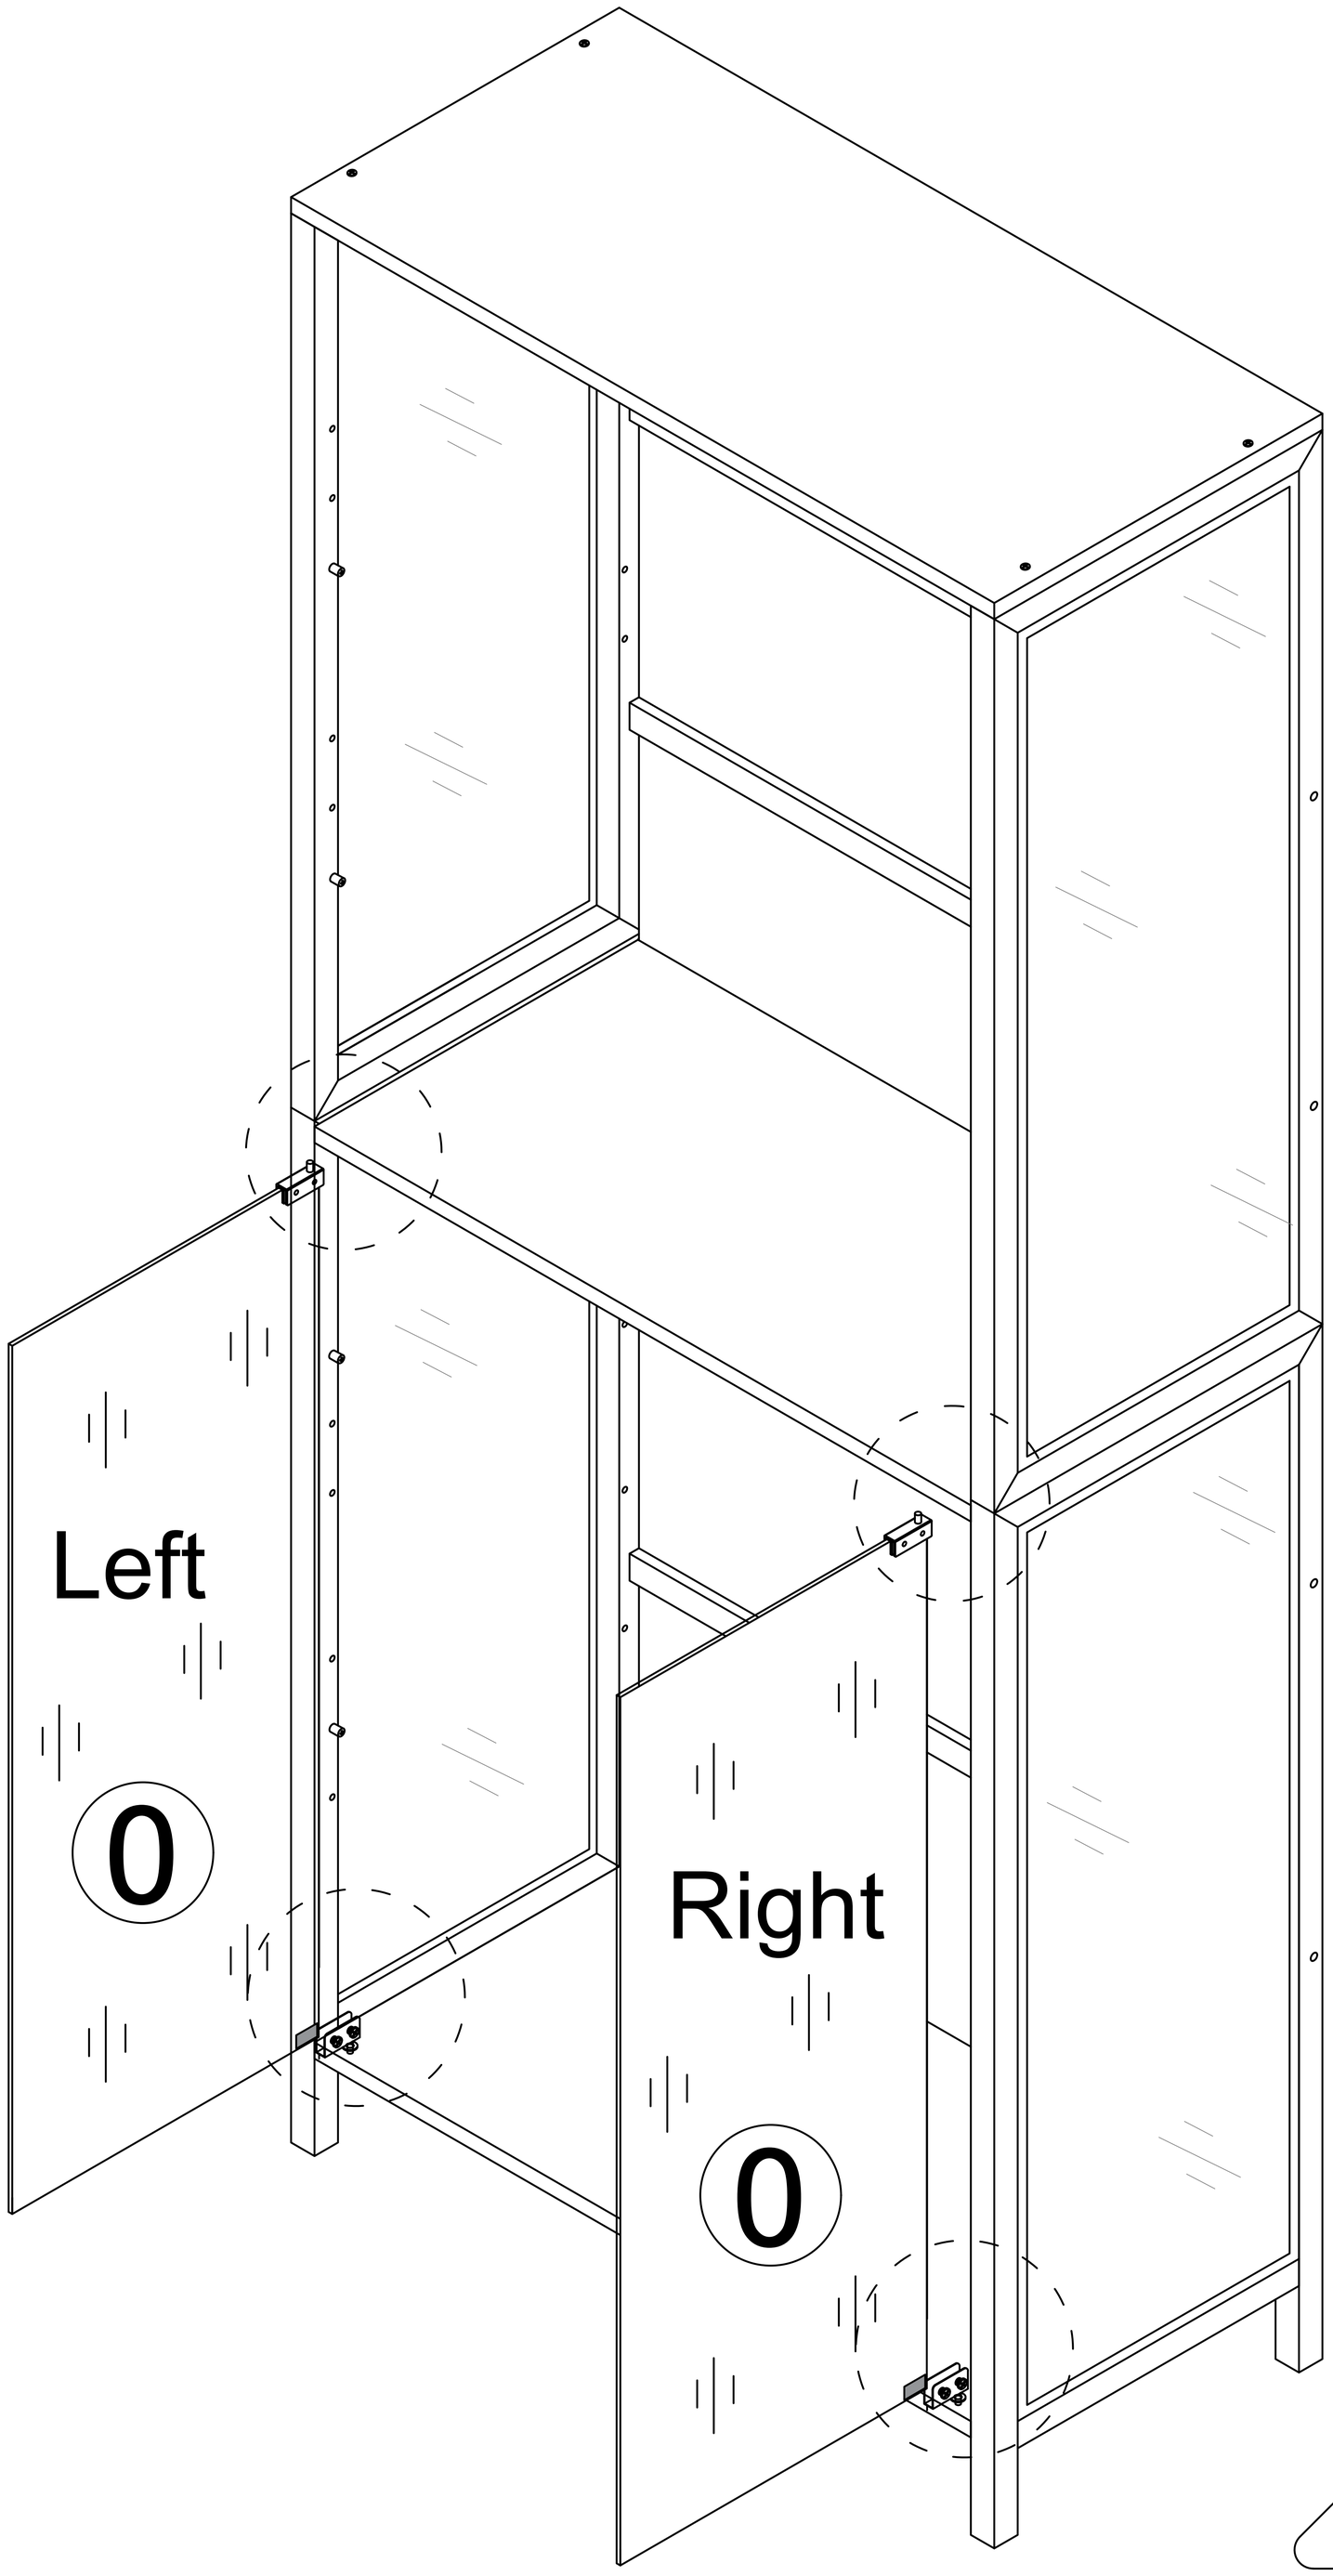


Step 21


3




x2

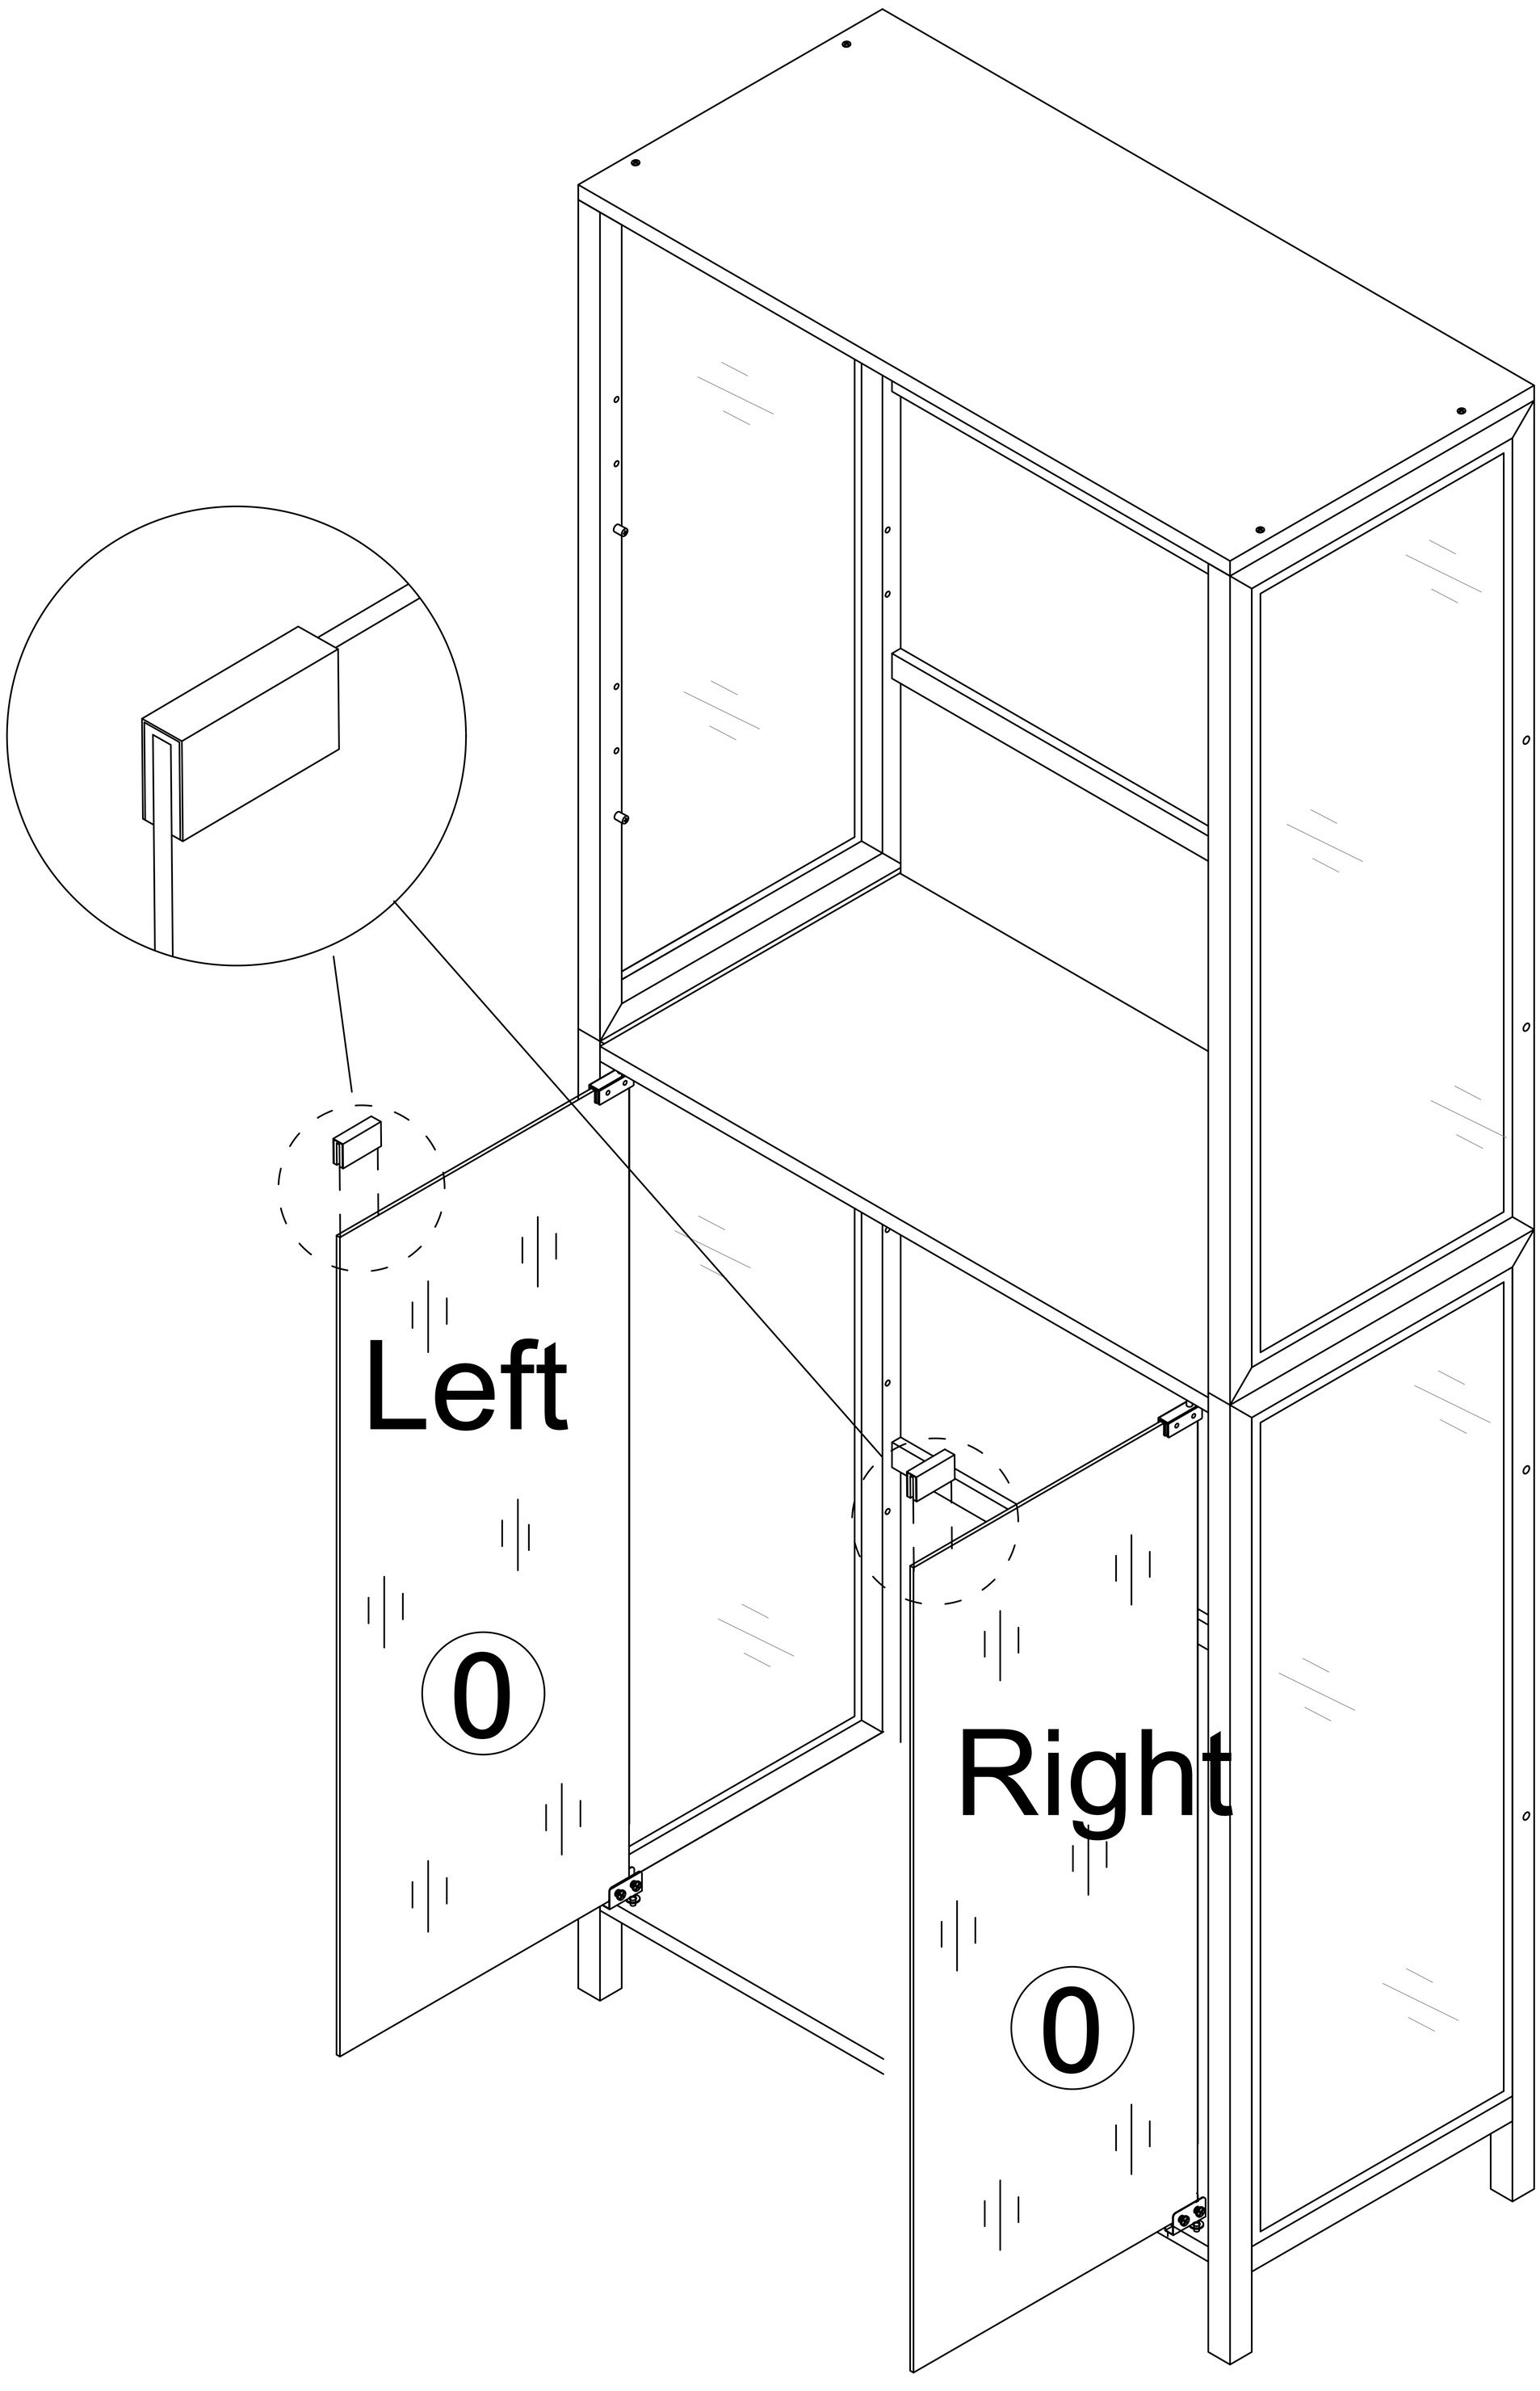


Step 22

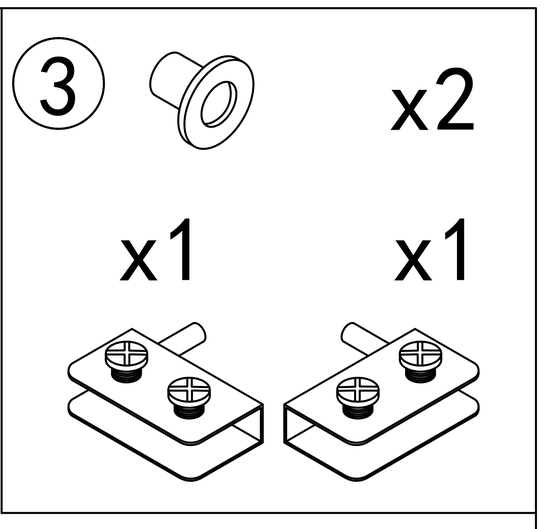

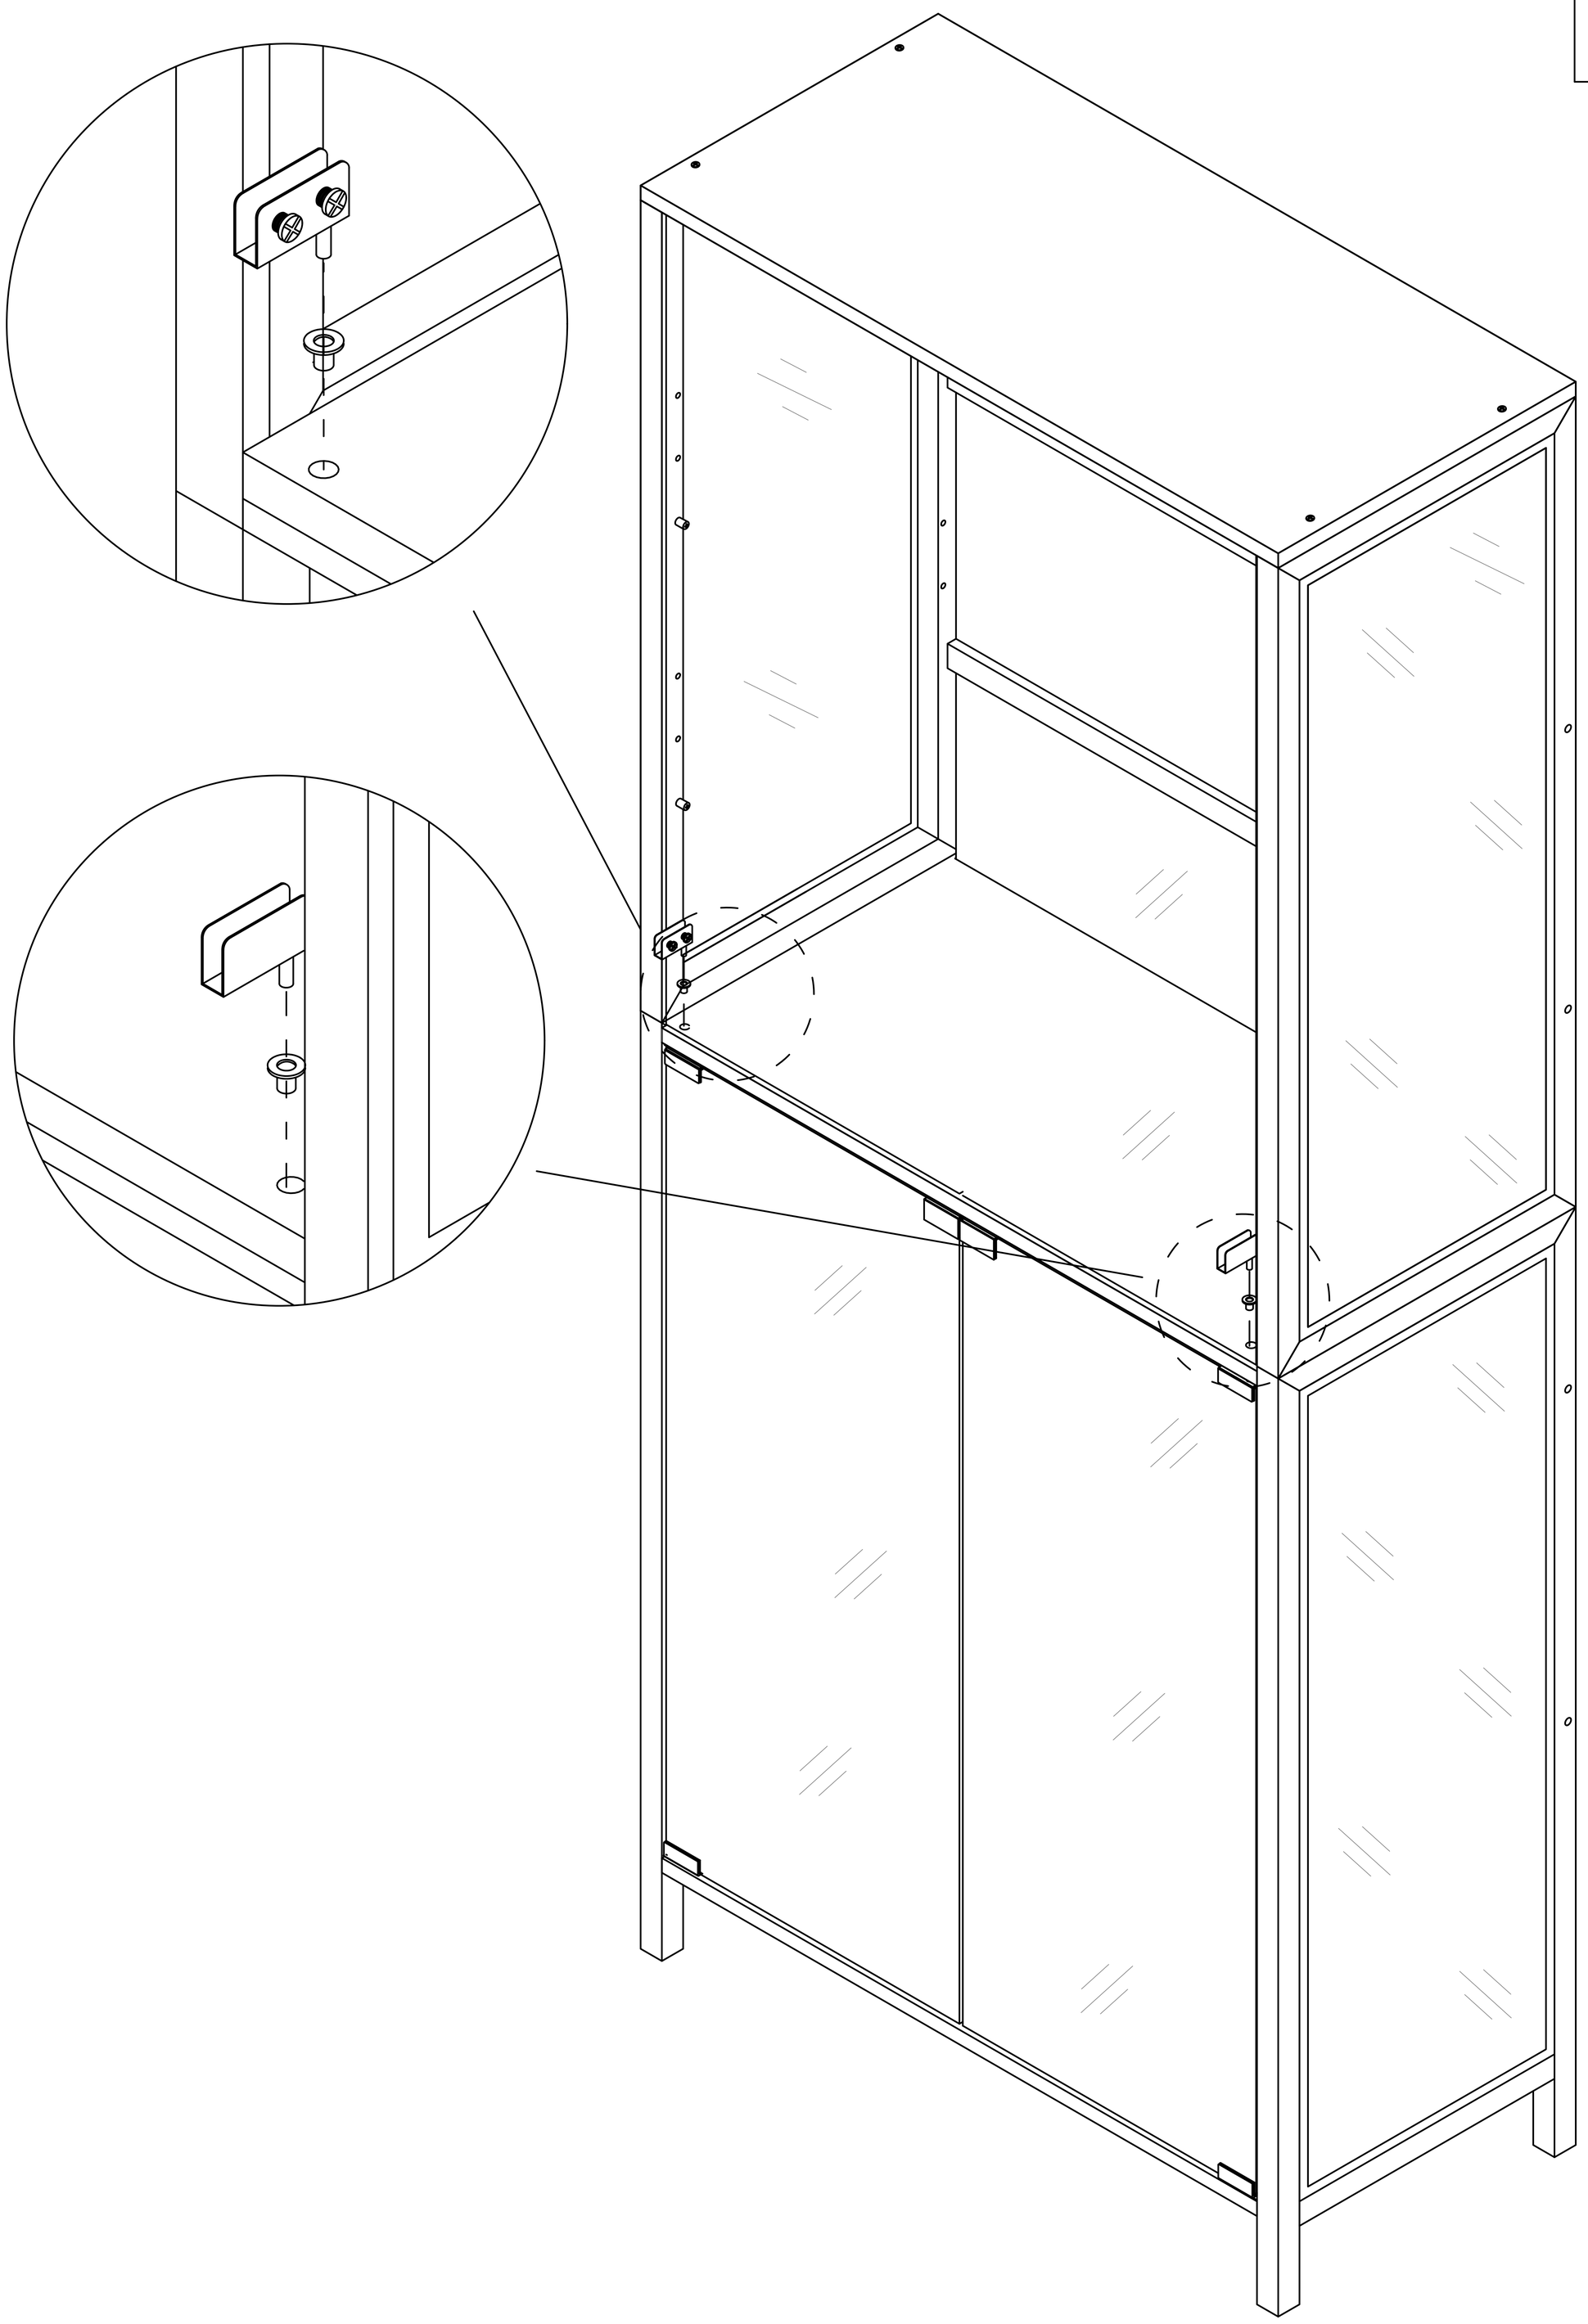


Step 23


Pay attention to the direction of
the door hinge during installation



When installing a glass door, it is recommended to have two people install it to avoid the glass door colliding or hitting oneself.

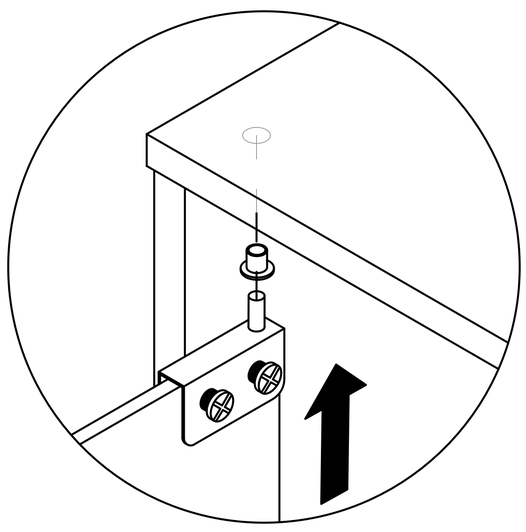


first

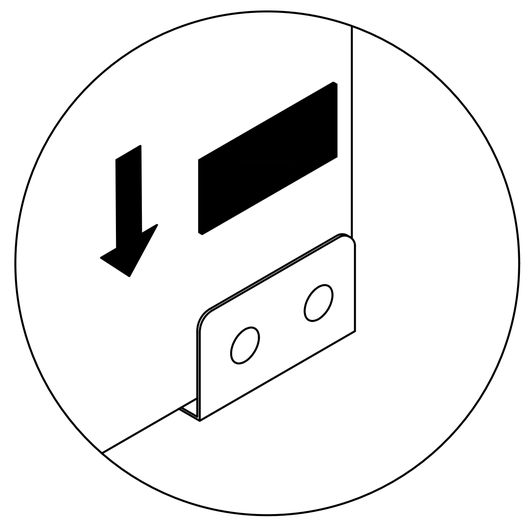


second

After installing the glass door, place the black gasket on the side where the screws are installed

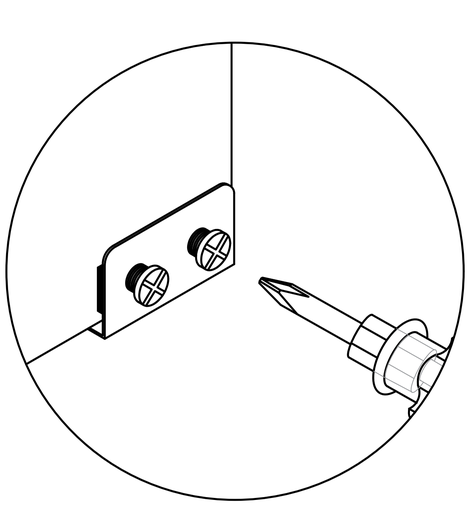


third

Locking screw

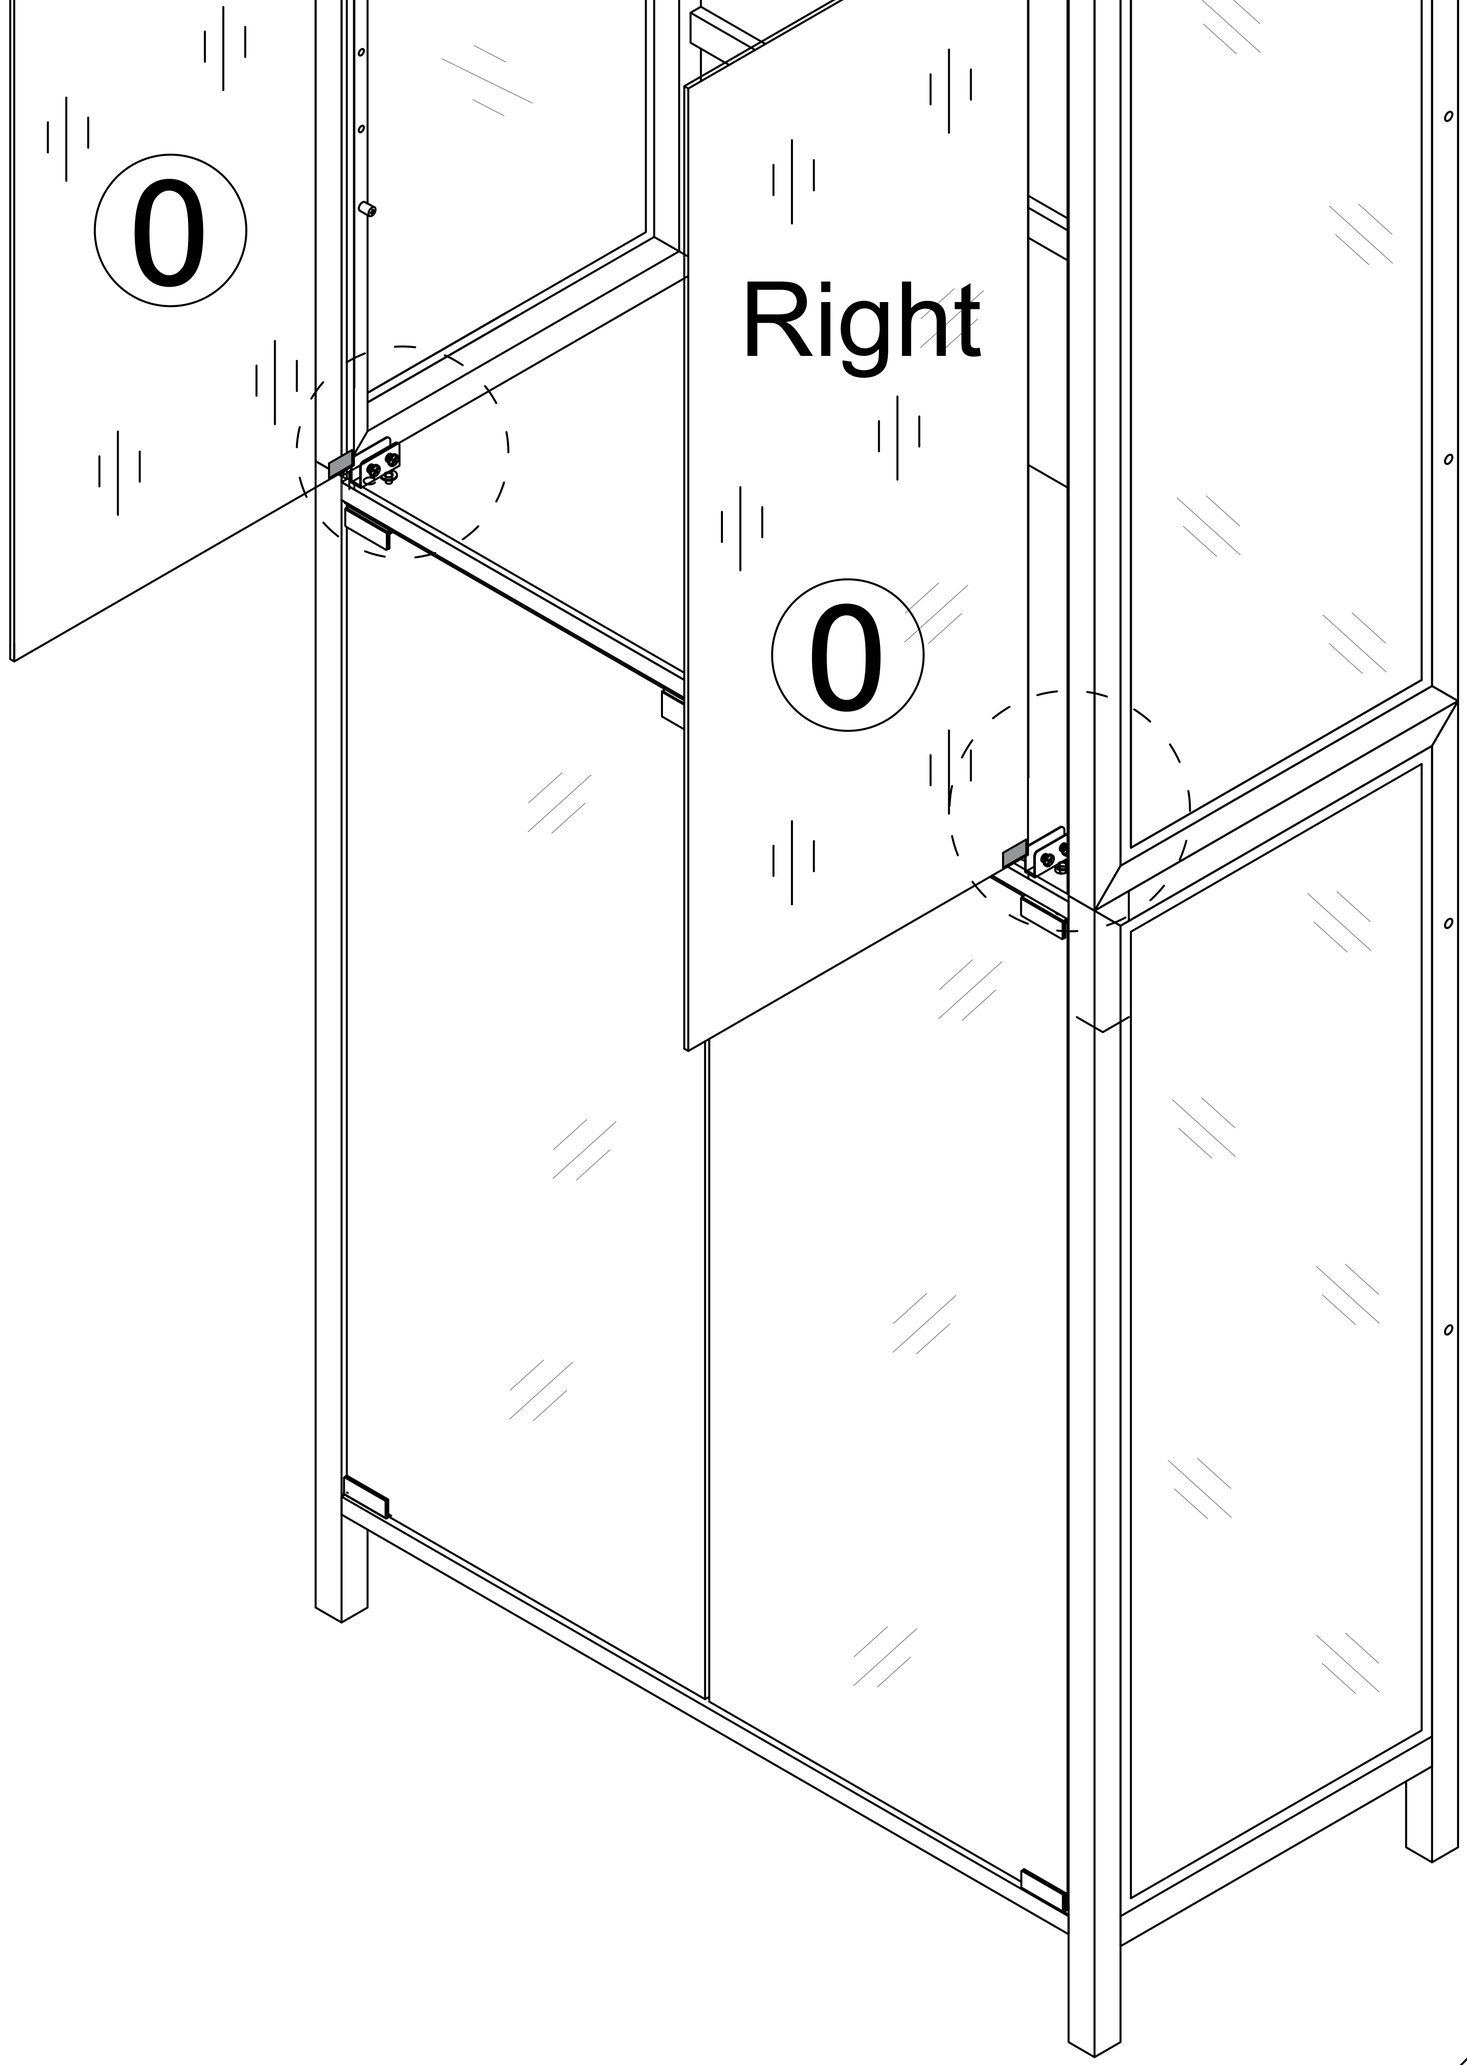


Step 24


3





x2

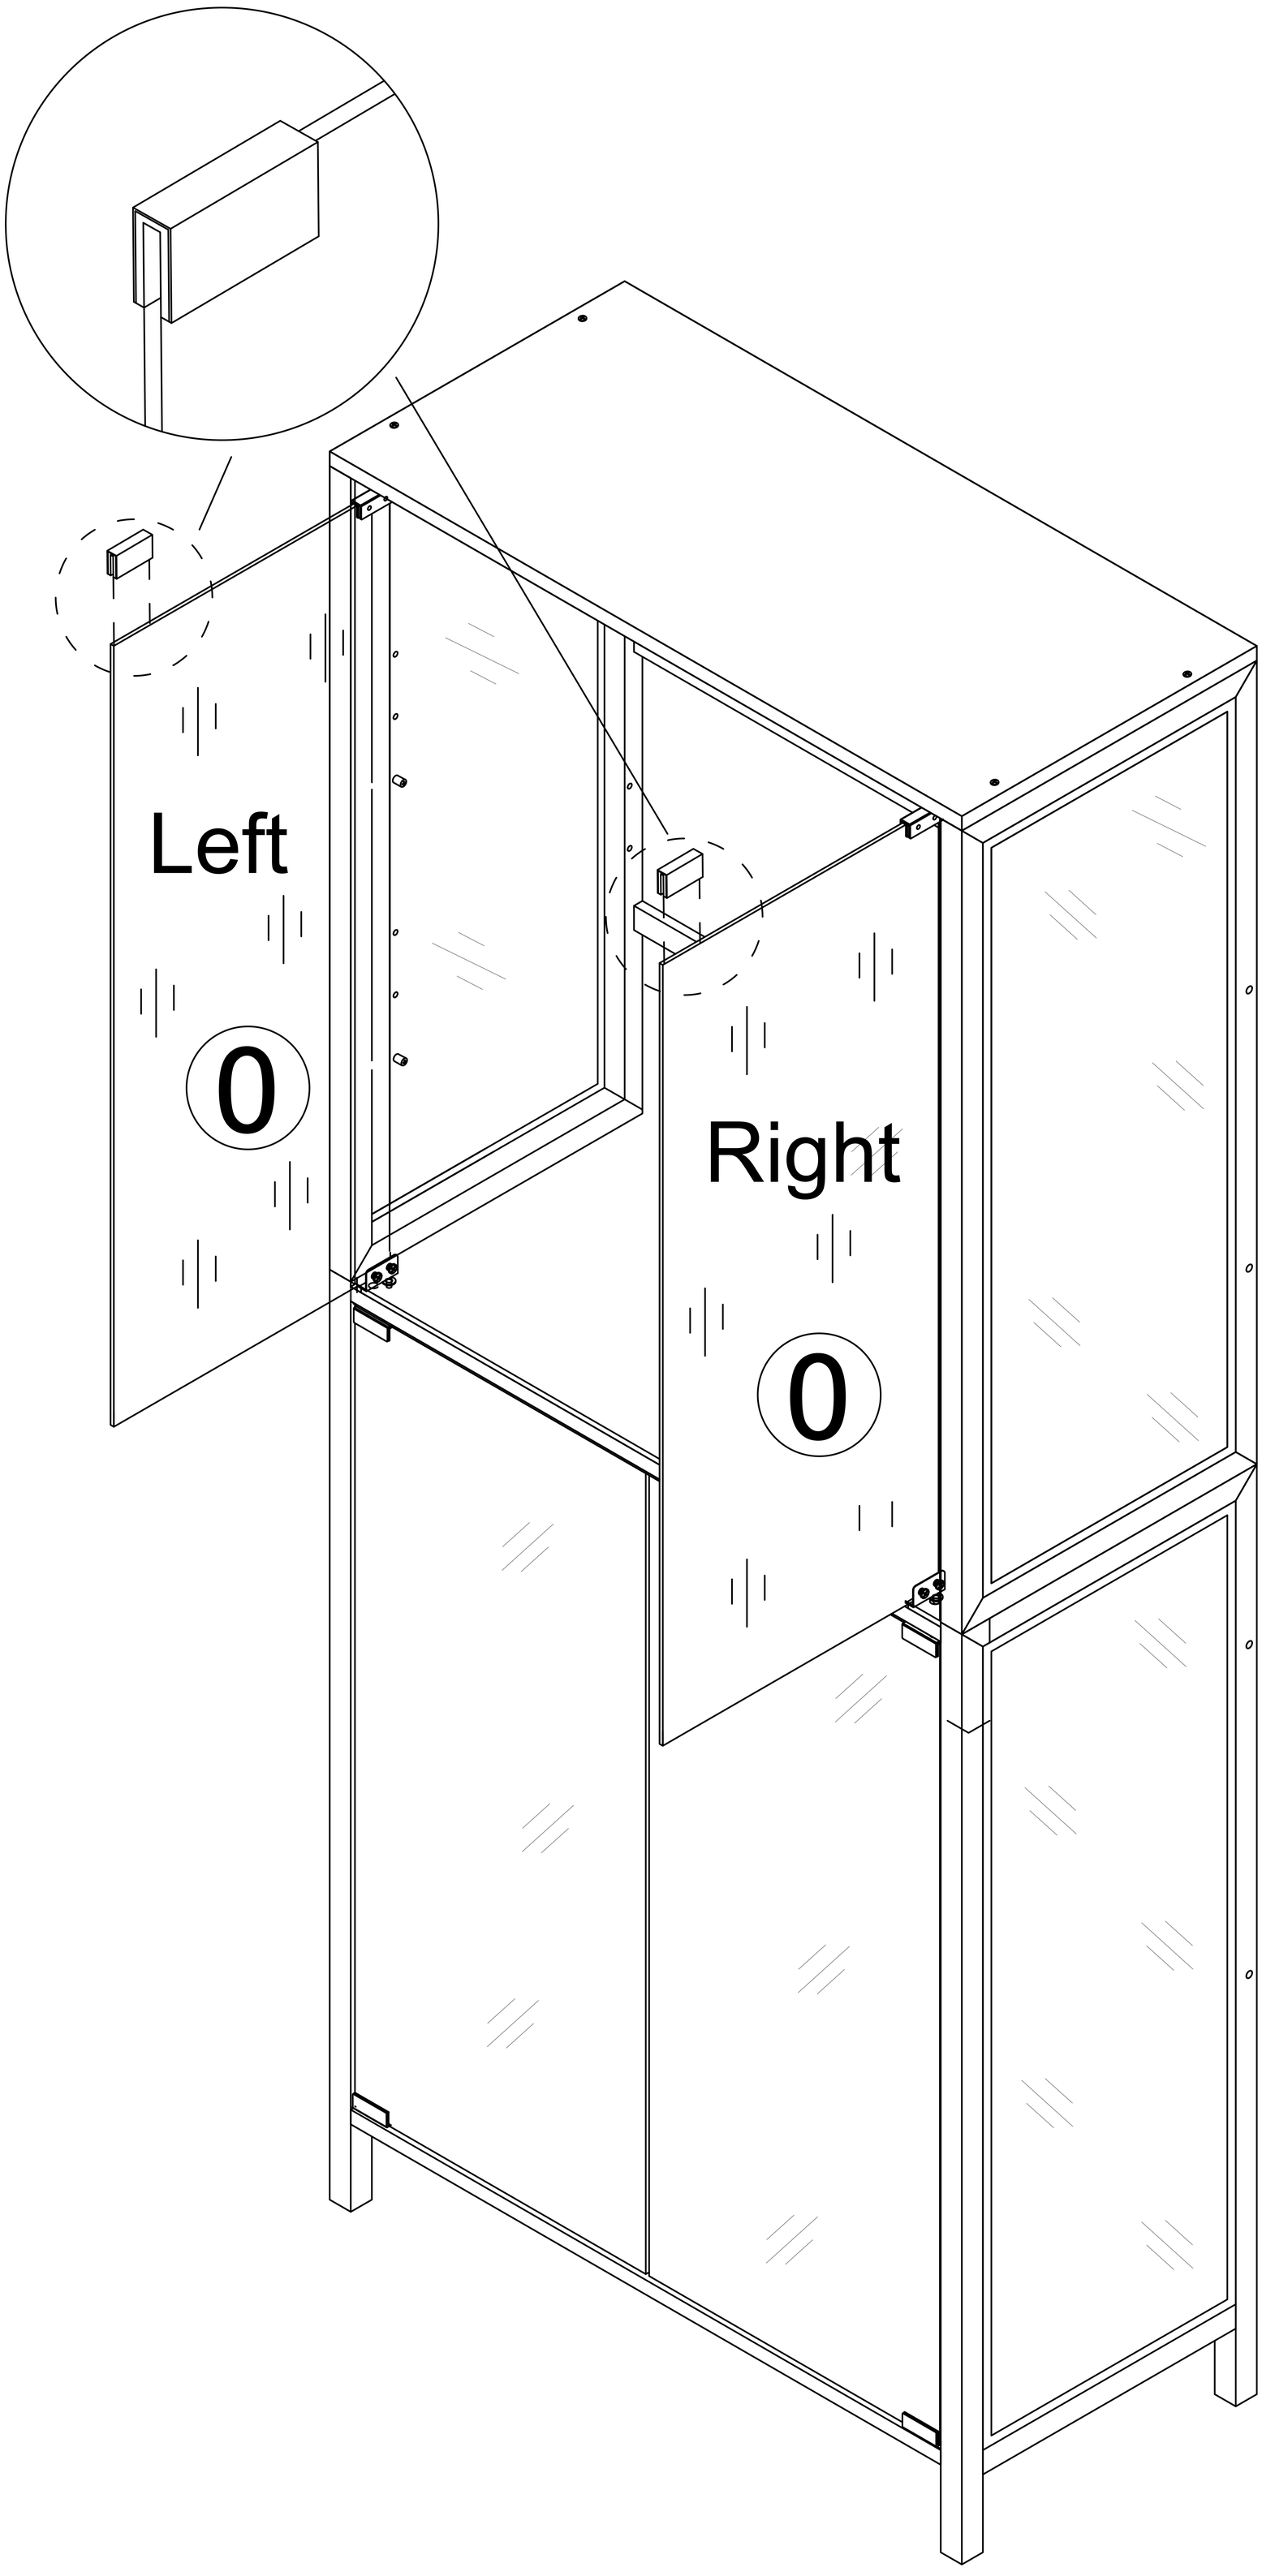


Step 25

9  x1

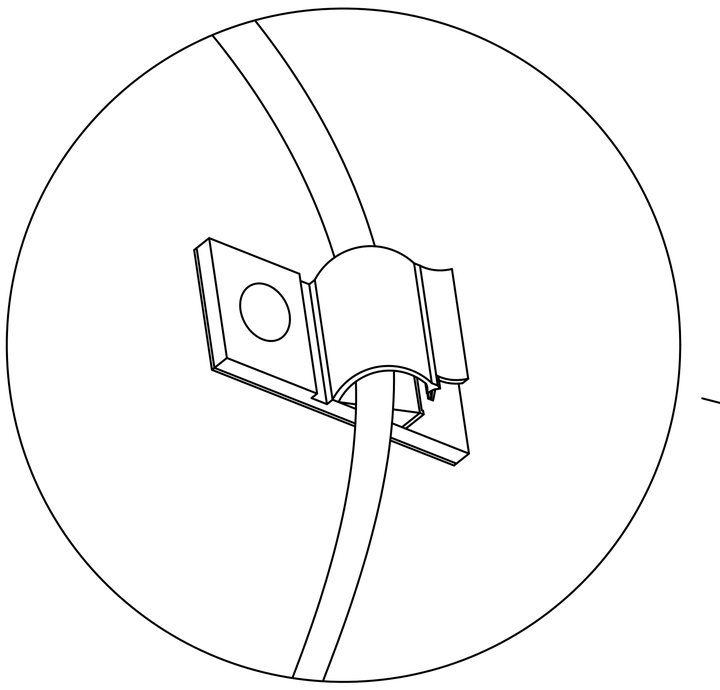

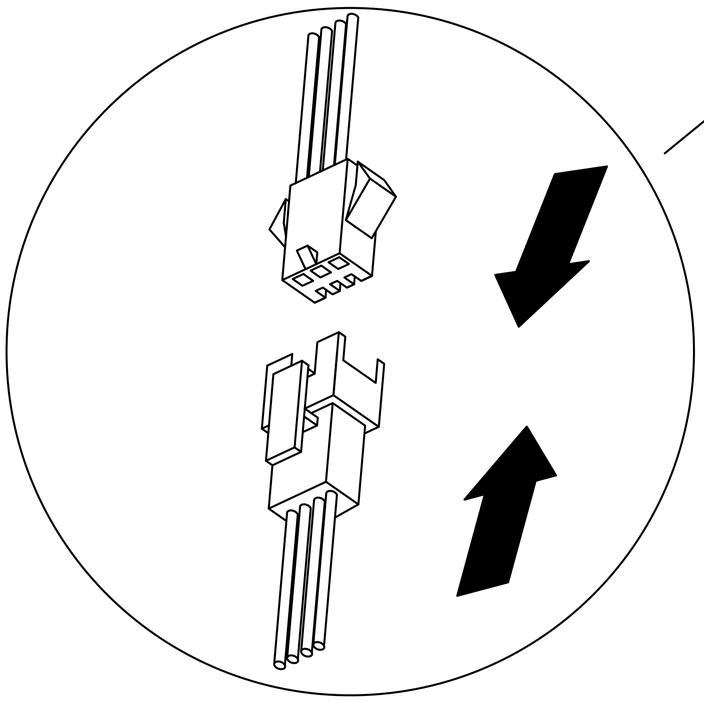

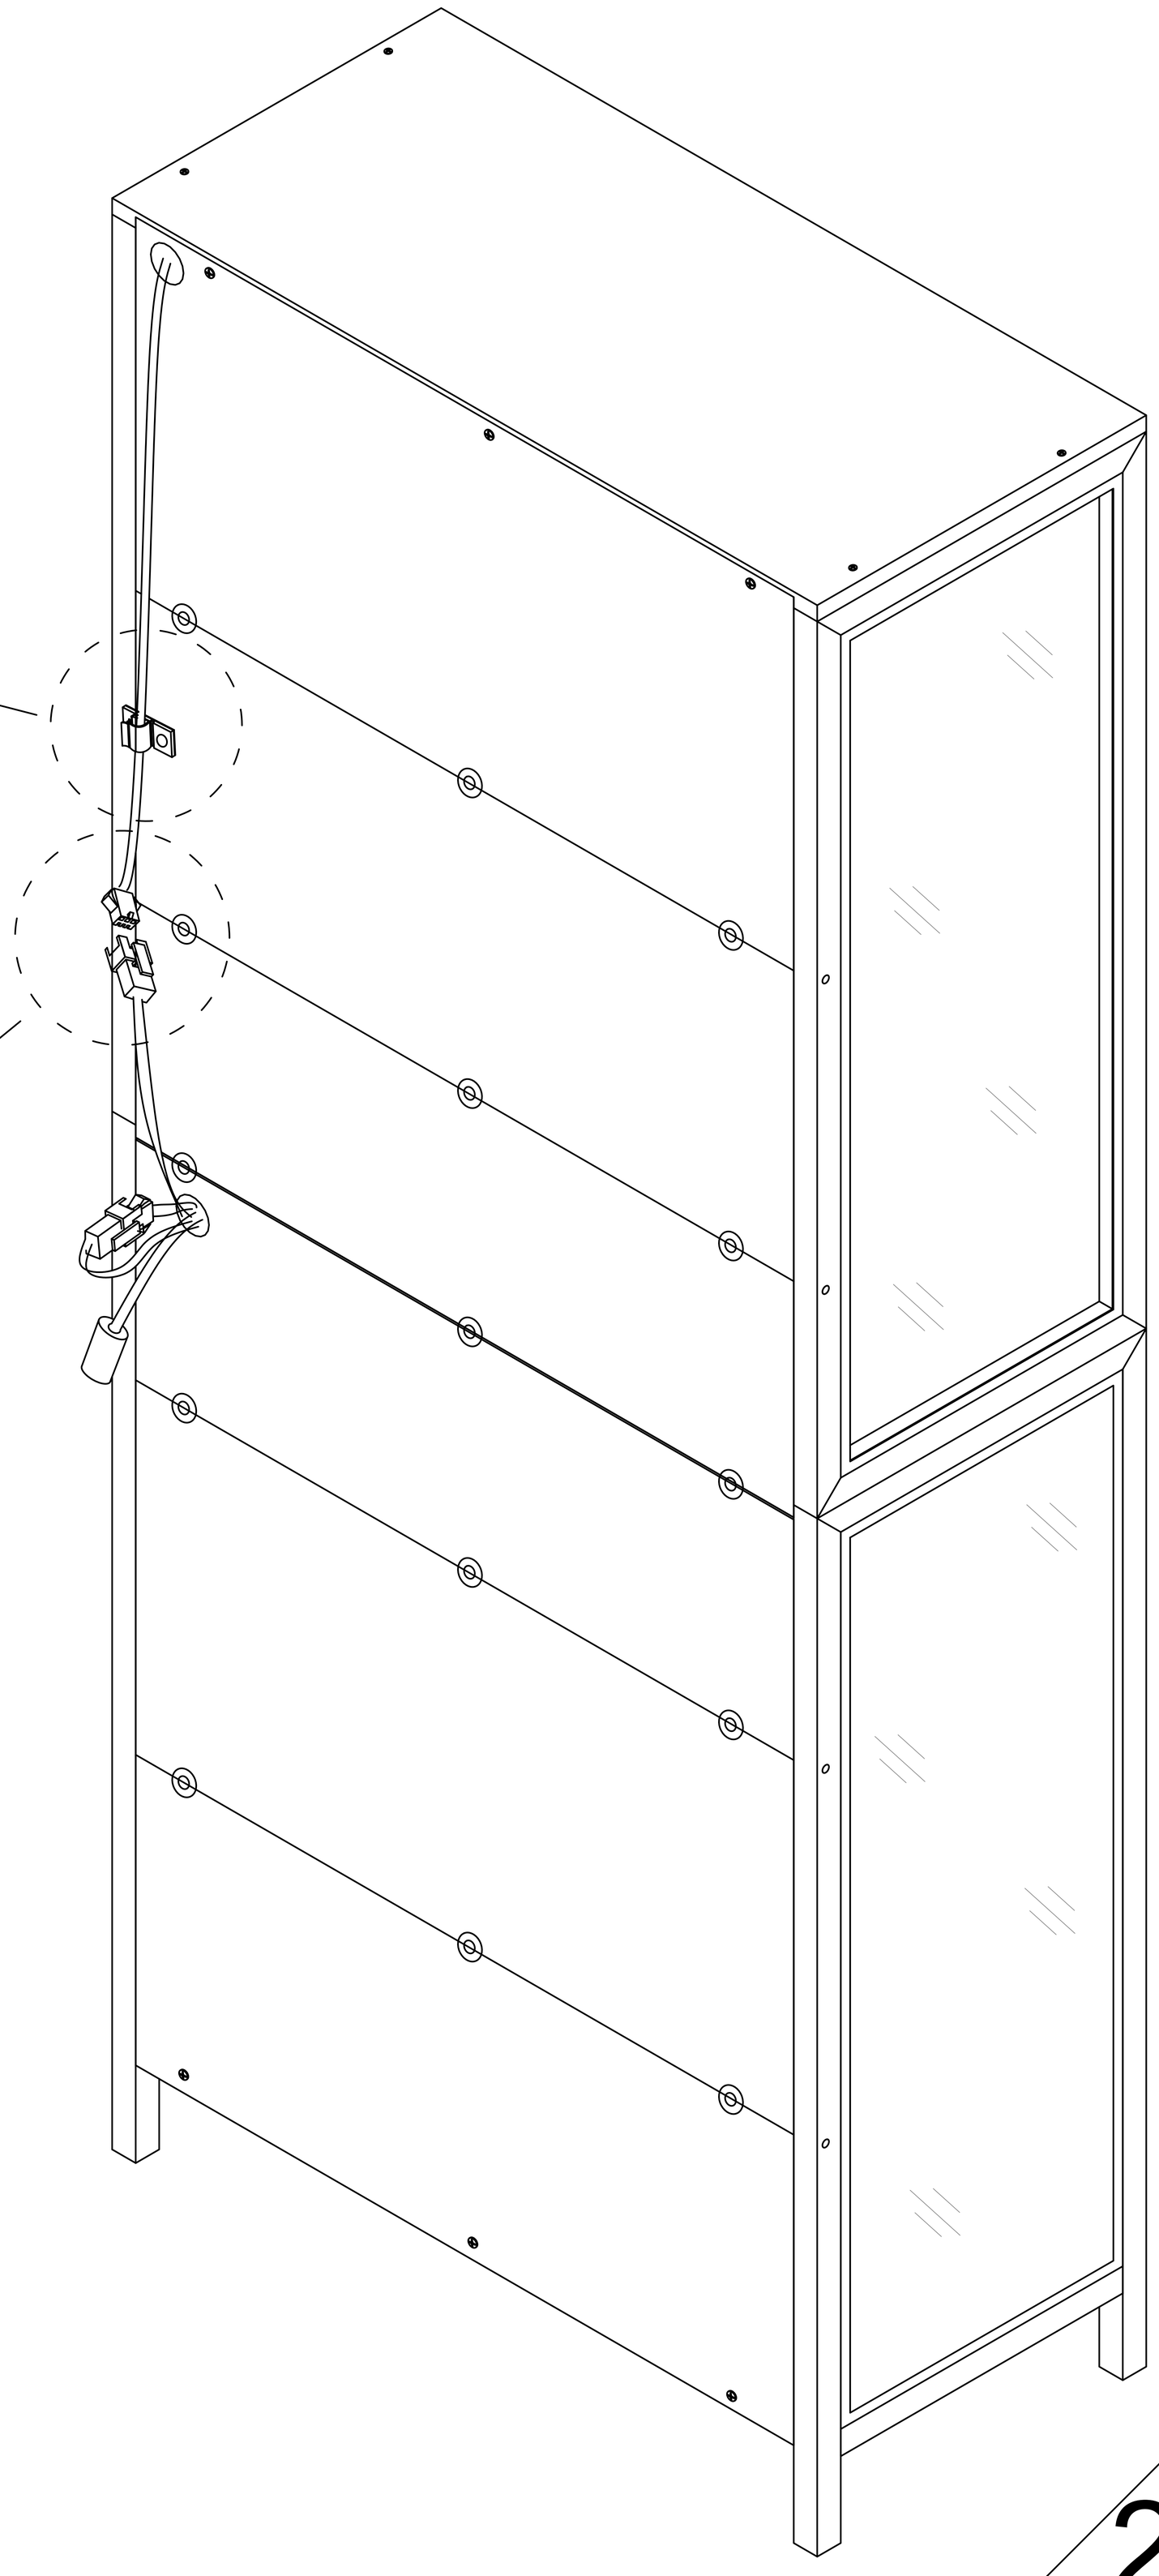


Step 26


Install as required

Install the anti fall hardware on the cabinet as shown in the picture first

8




x2



x2





x2




x1

3.5x14mm



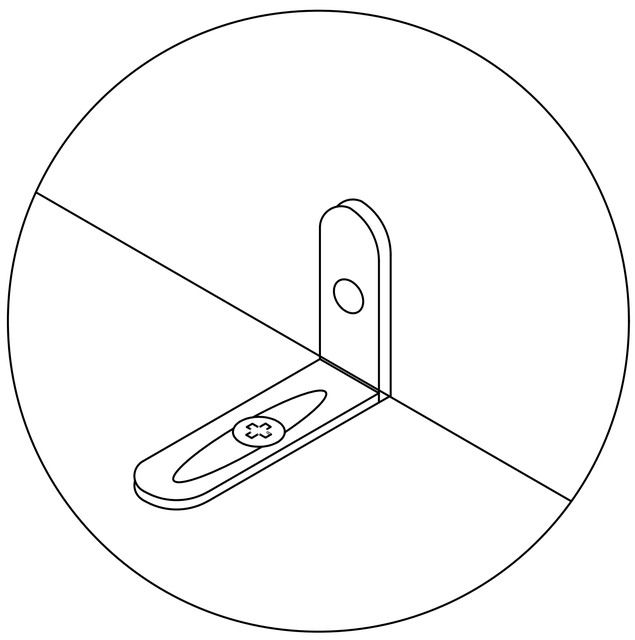

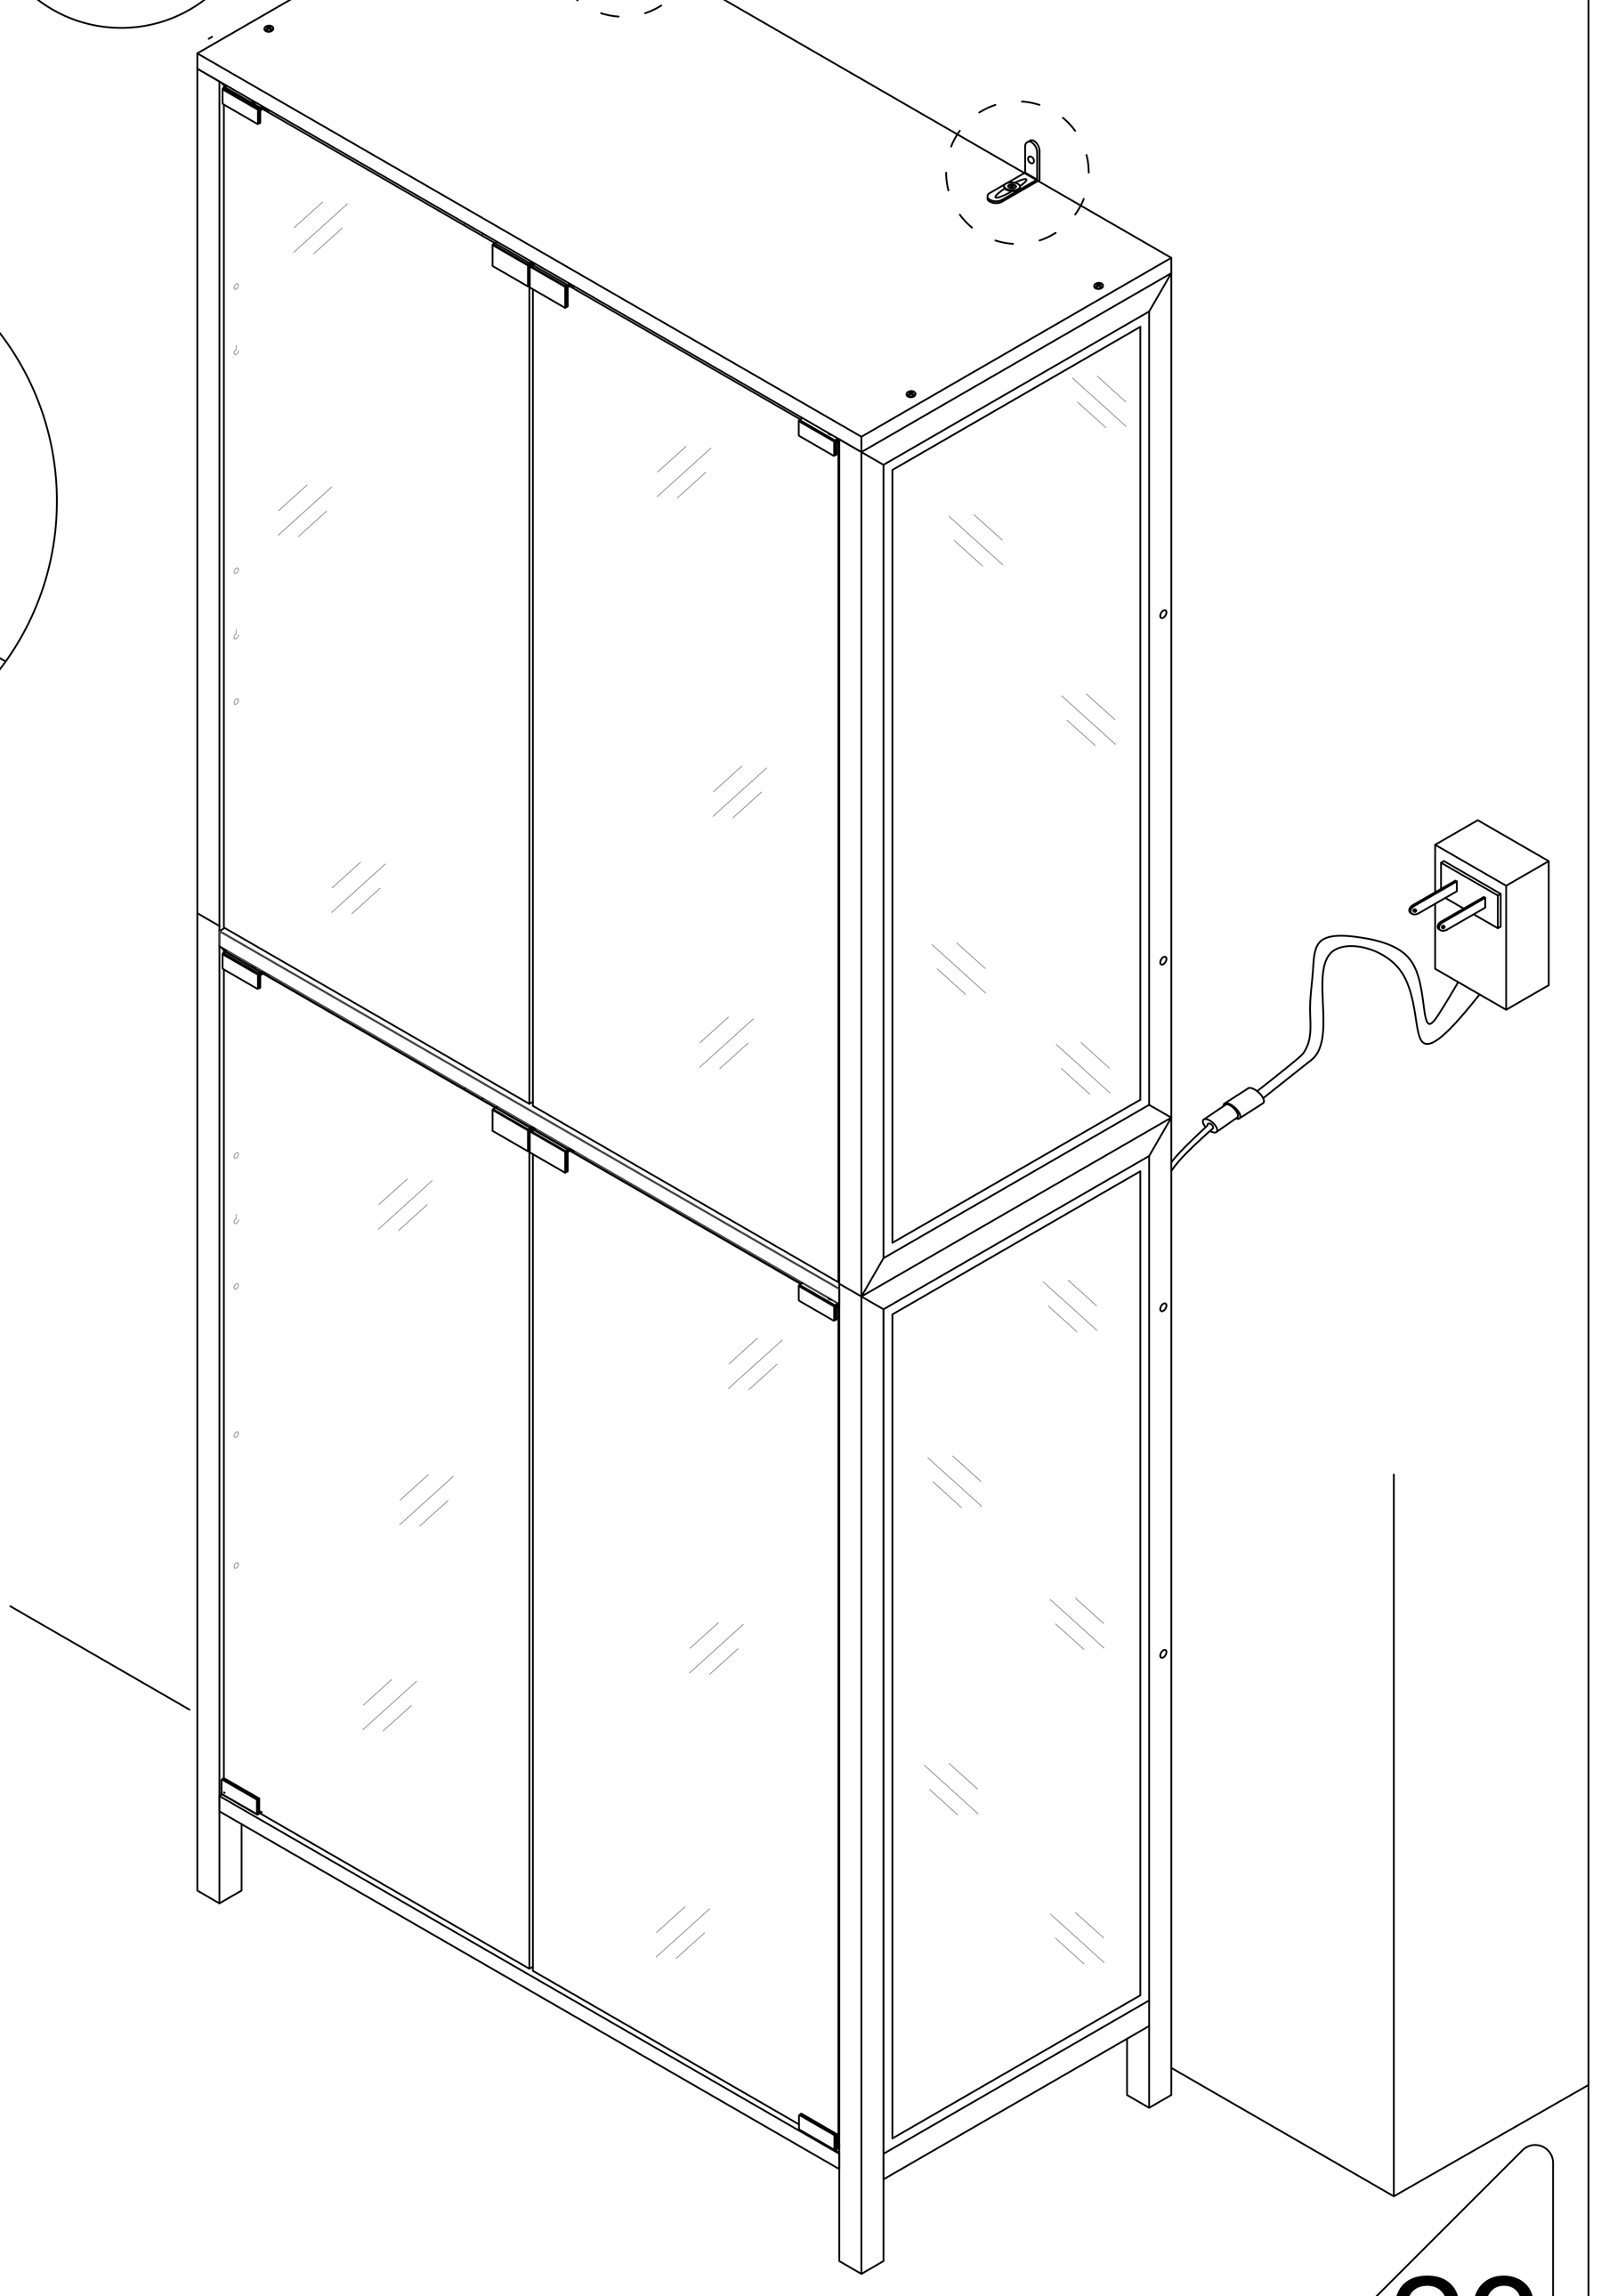


Balance can be adjusted by regulating the bottom adjustment feet.


Step 27


8 x2


x2 x2

Drill the hole with an electric drill and punch in the colloidal particles

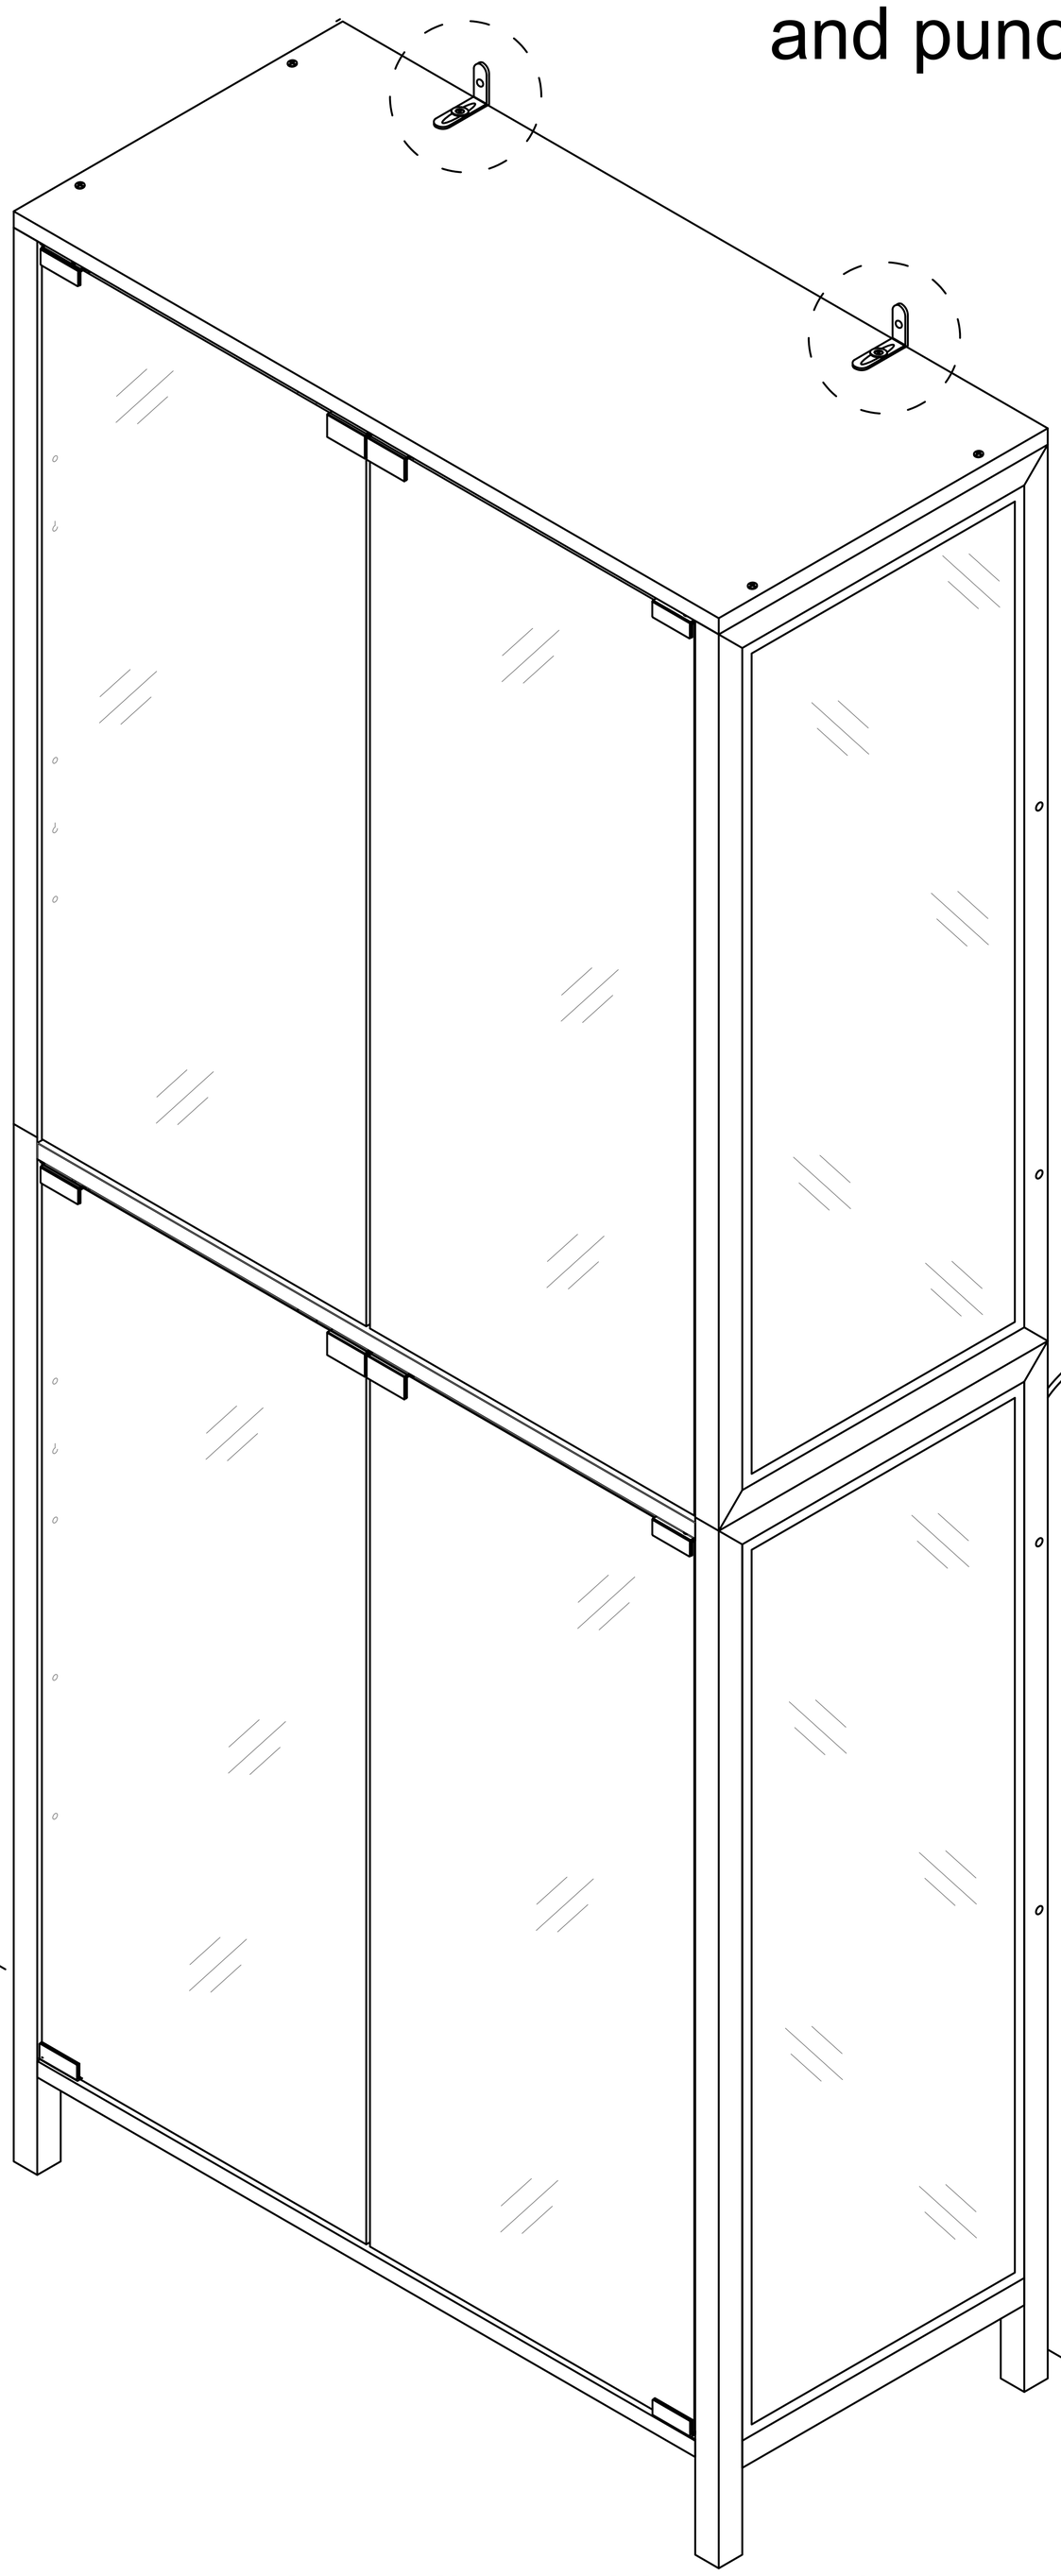

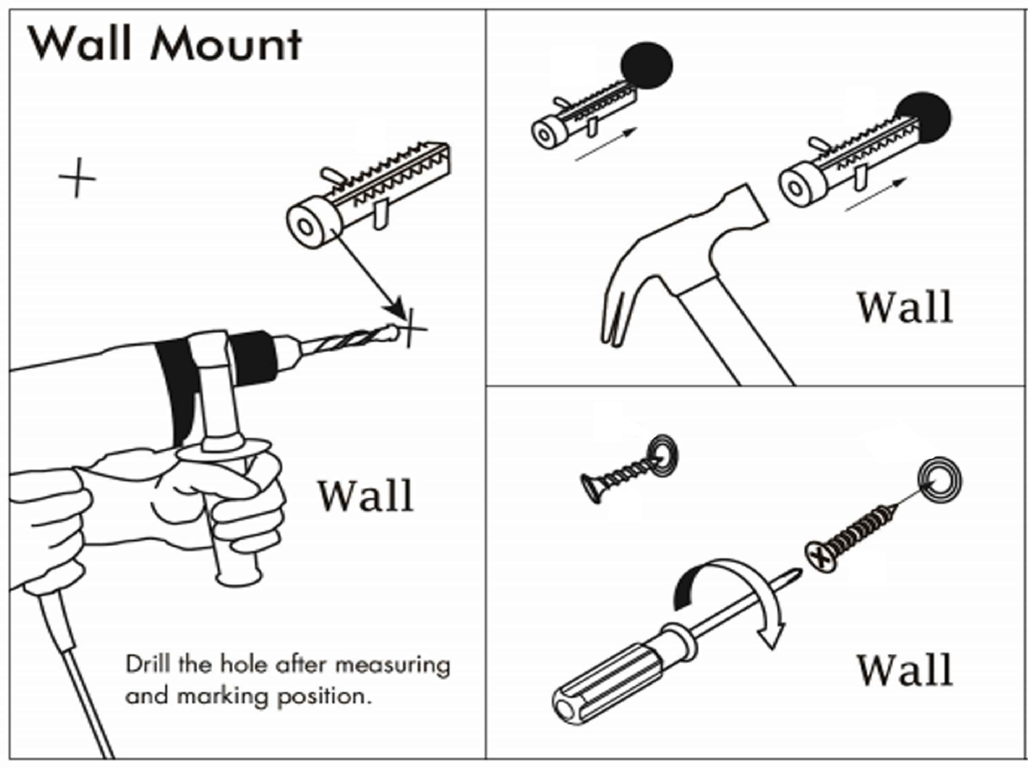

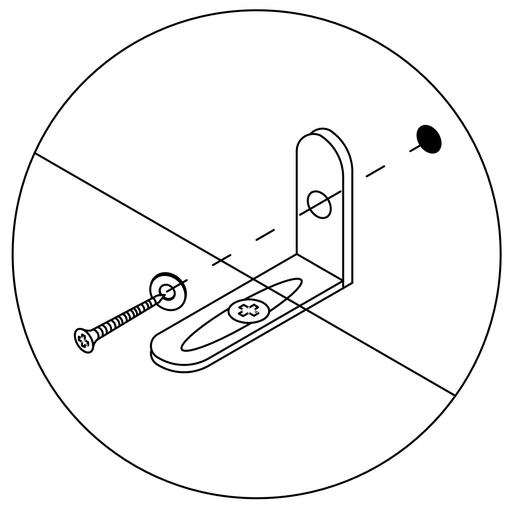

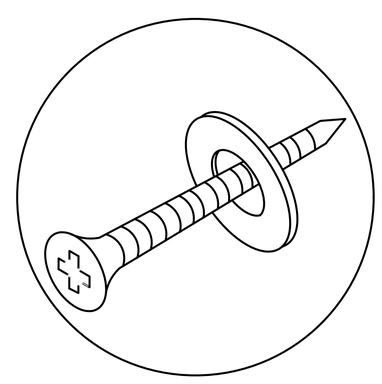

4x45mm


Fix the dressing table to the wall

Balance can be adjusted by regulating the bottom adjustment feet.


Step 28

Insert the glass shelf at an angle.


Insert the glass shelf at an angle.

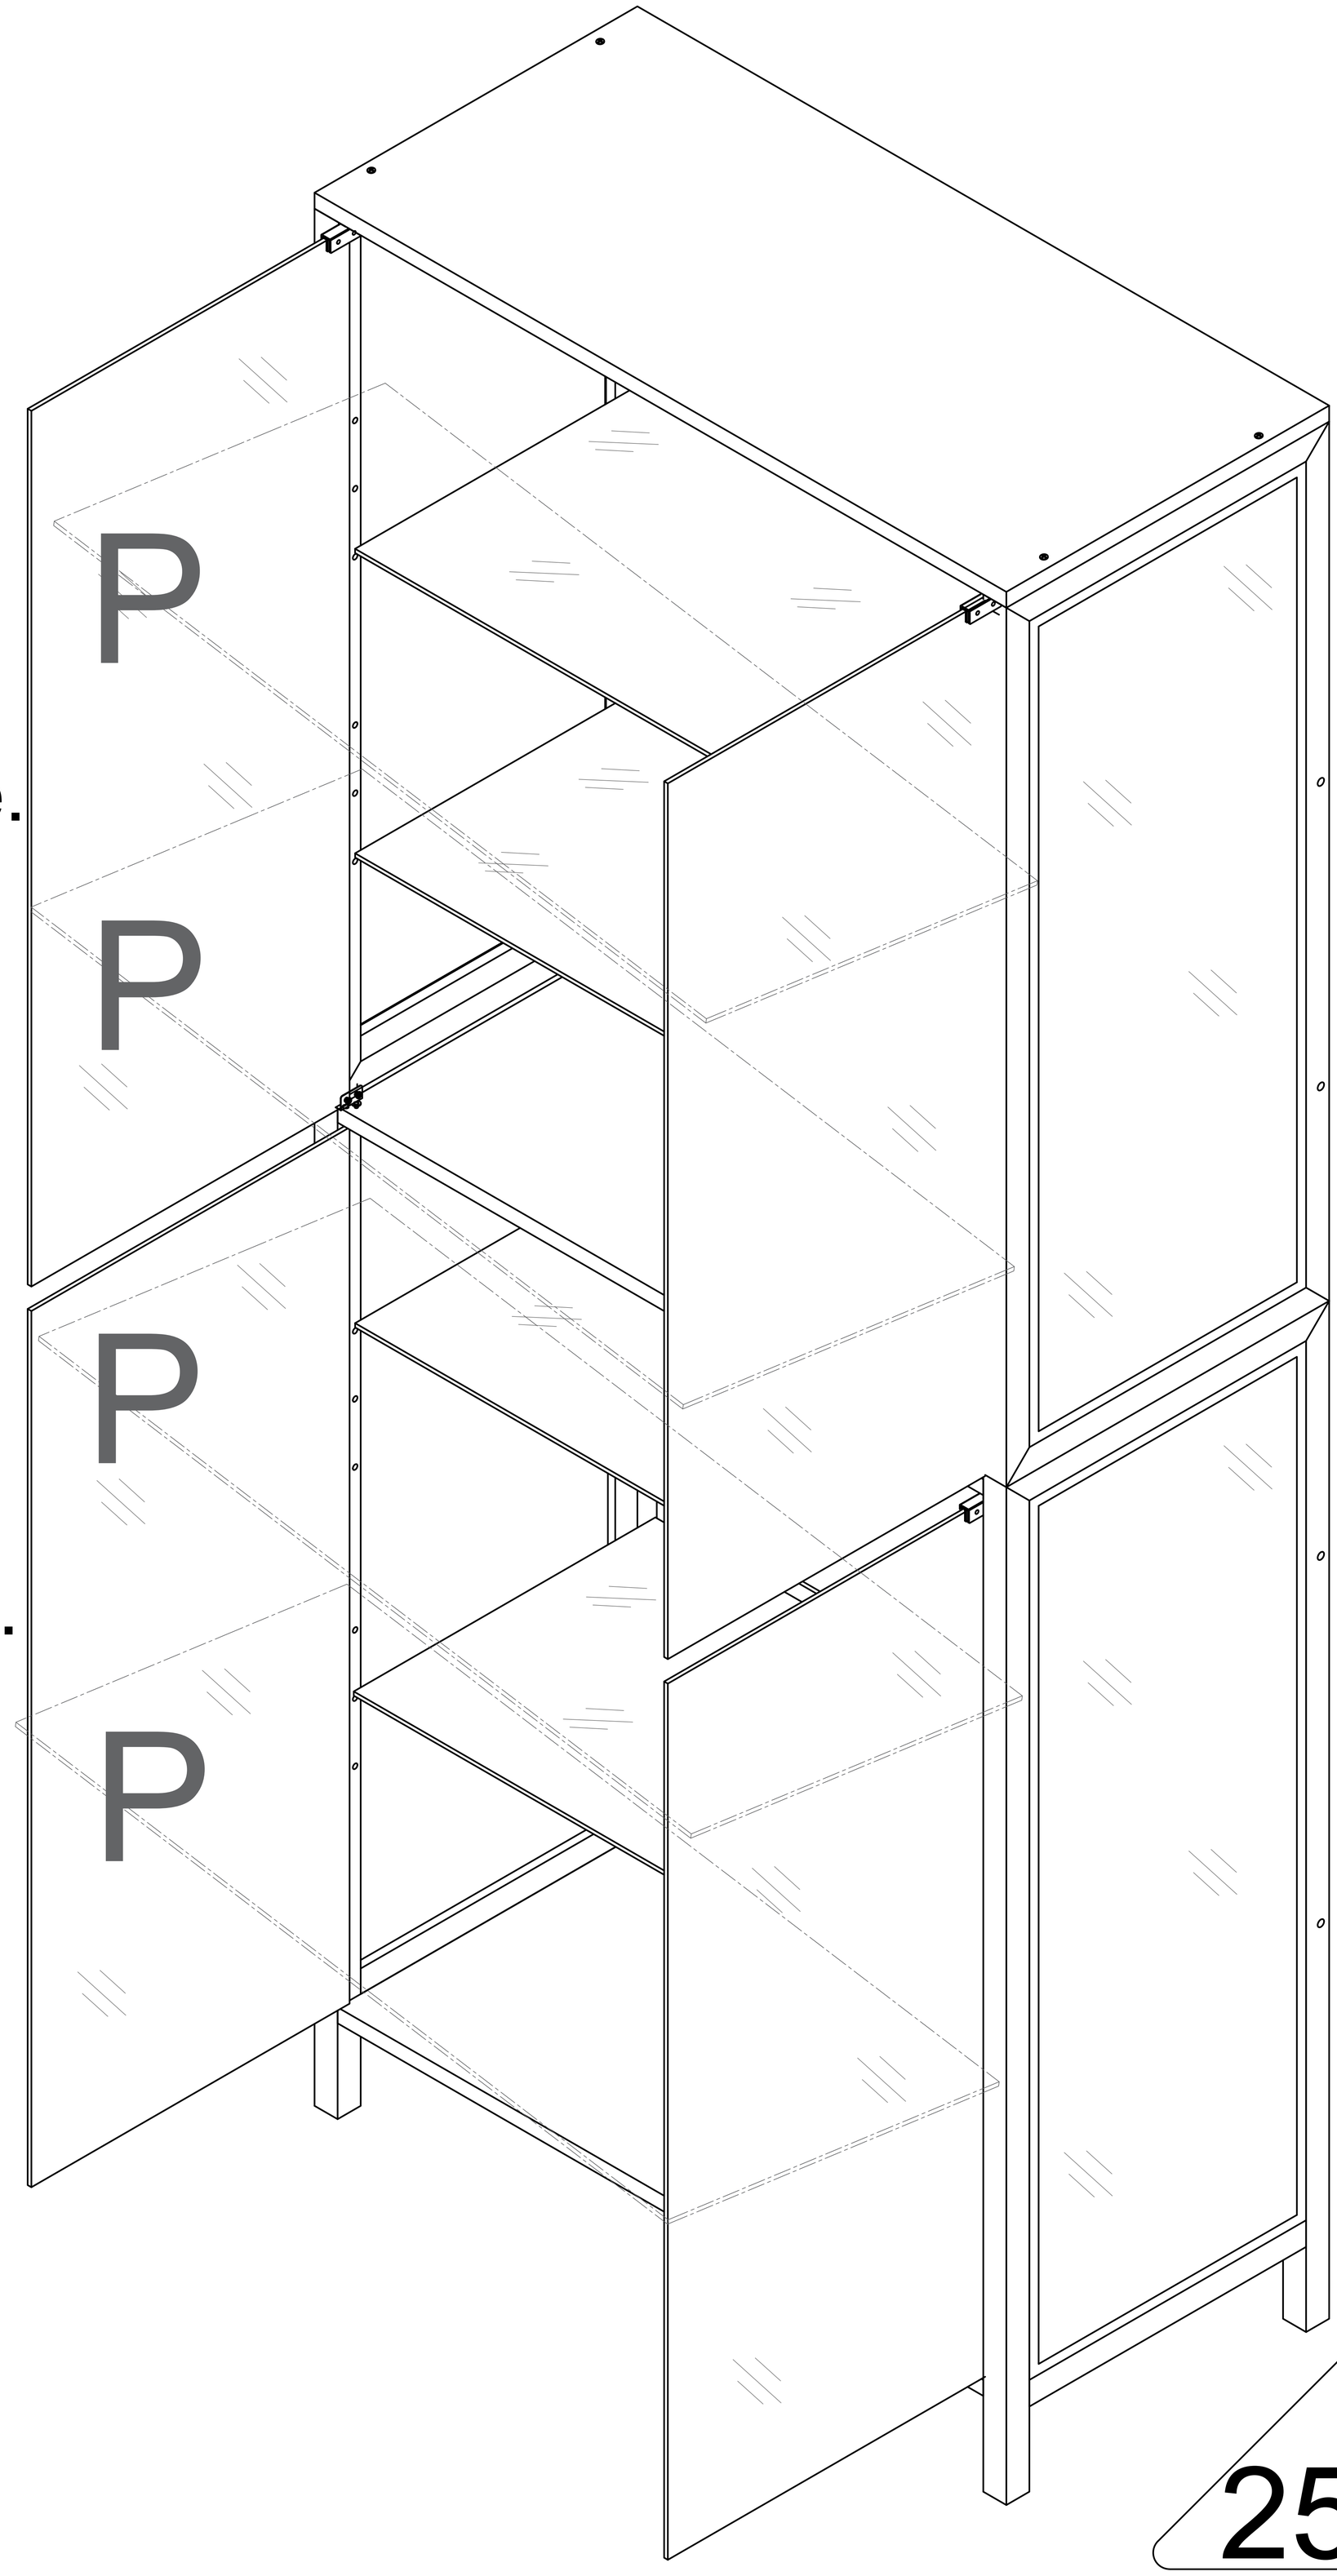

Step 29

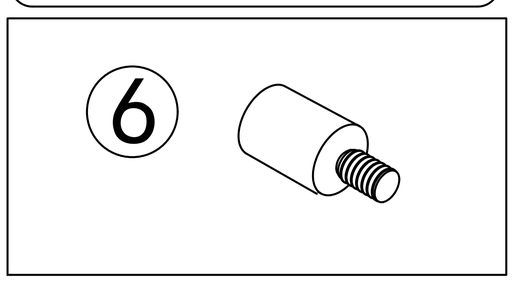



If you need to adjust the height of the glass shelf, install accessory 6 (shelf support) into the holes of the iron tube.

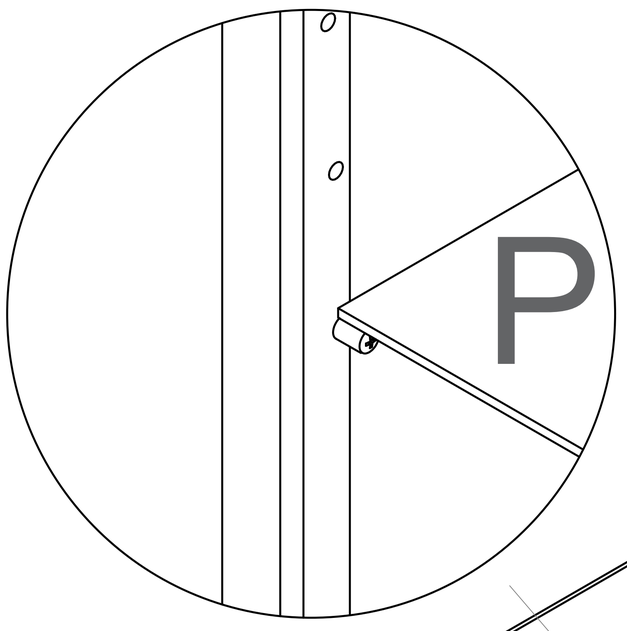

"The height of the shelf bracket mounting holes can be changed."

Place the glass on the iron pipe.

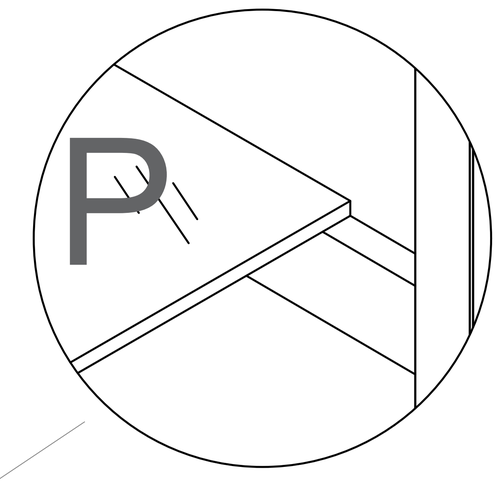

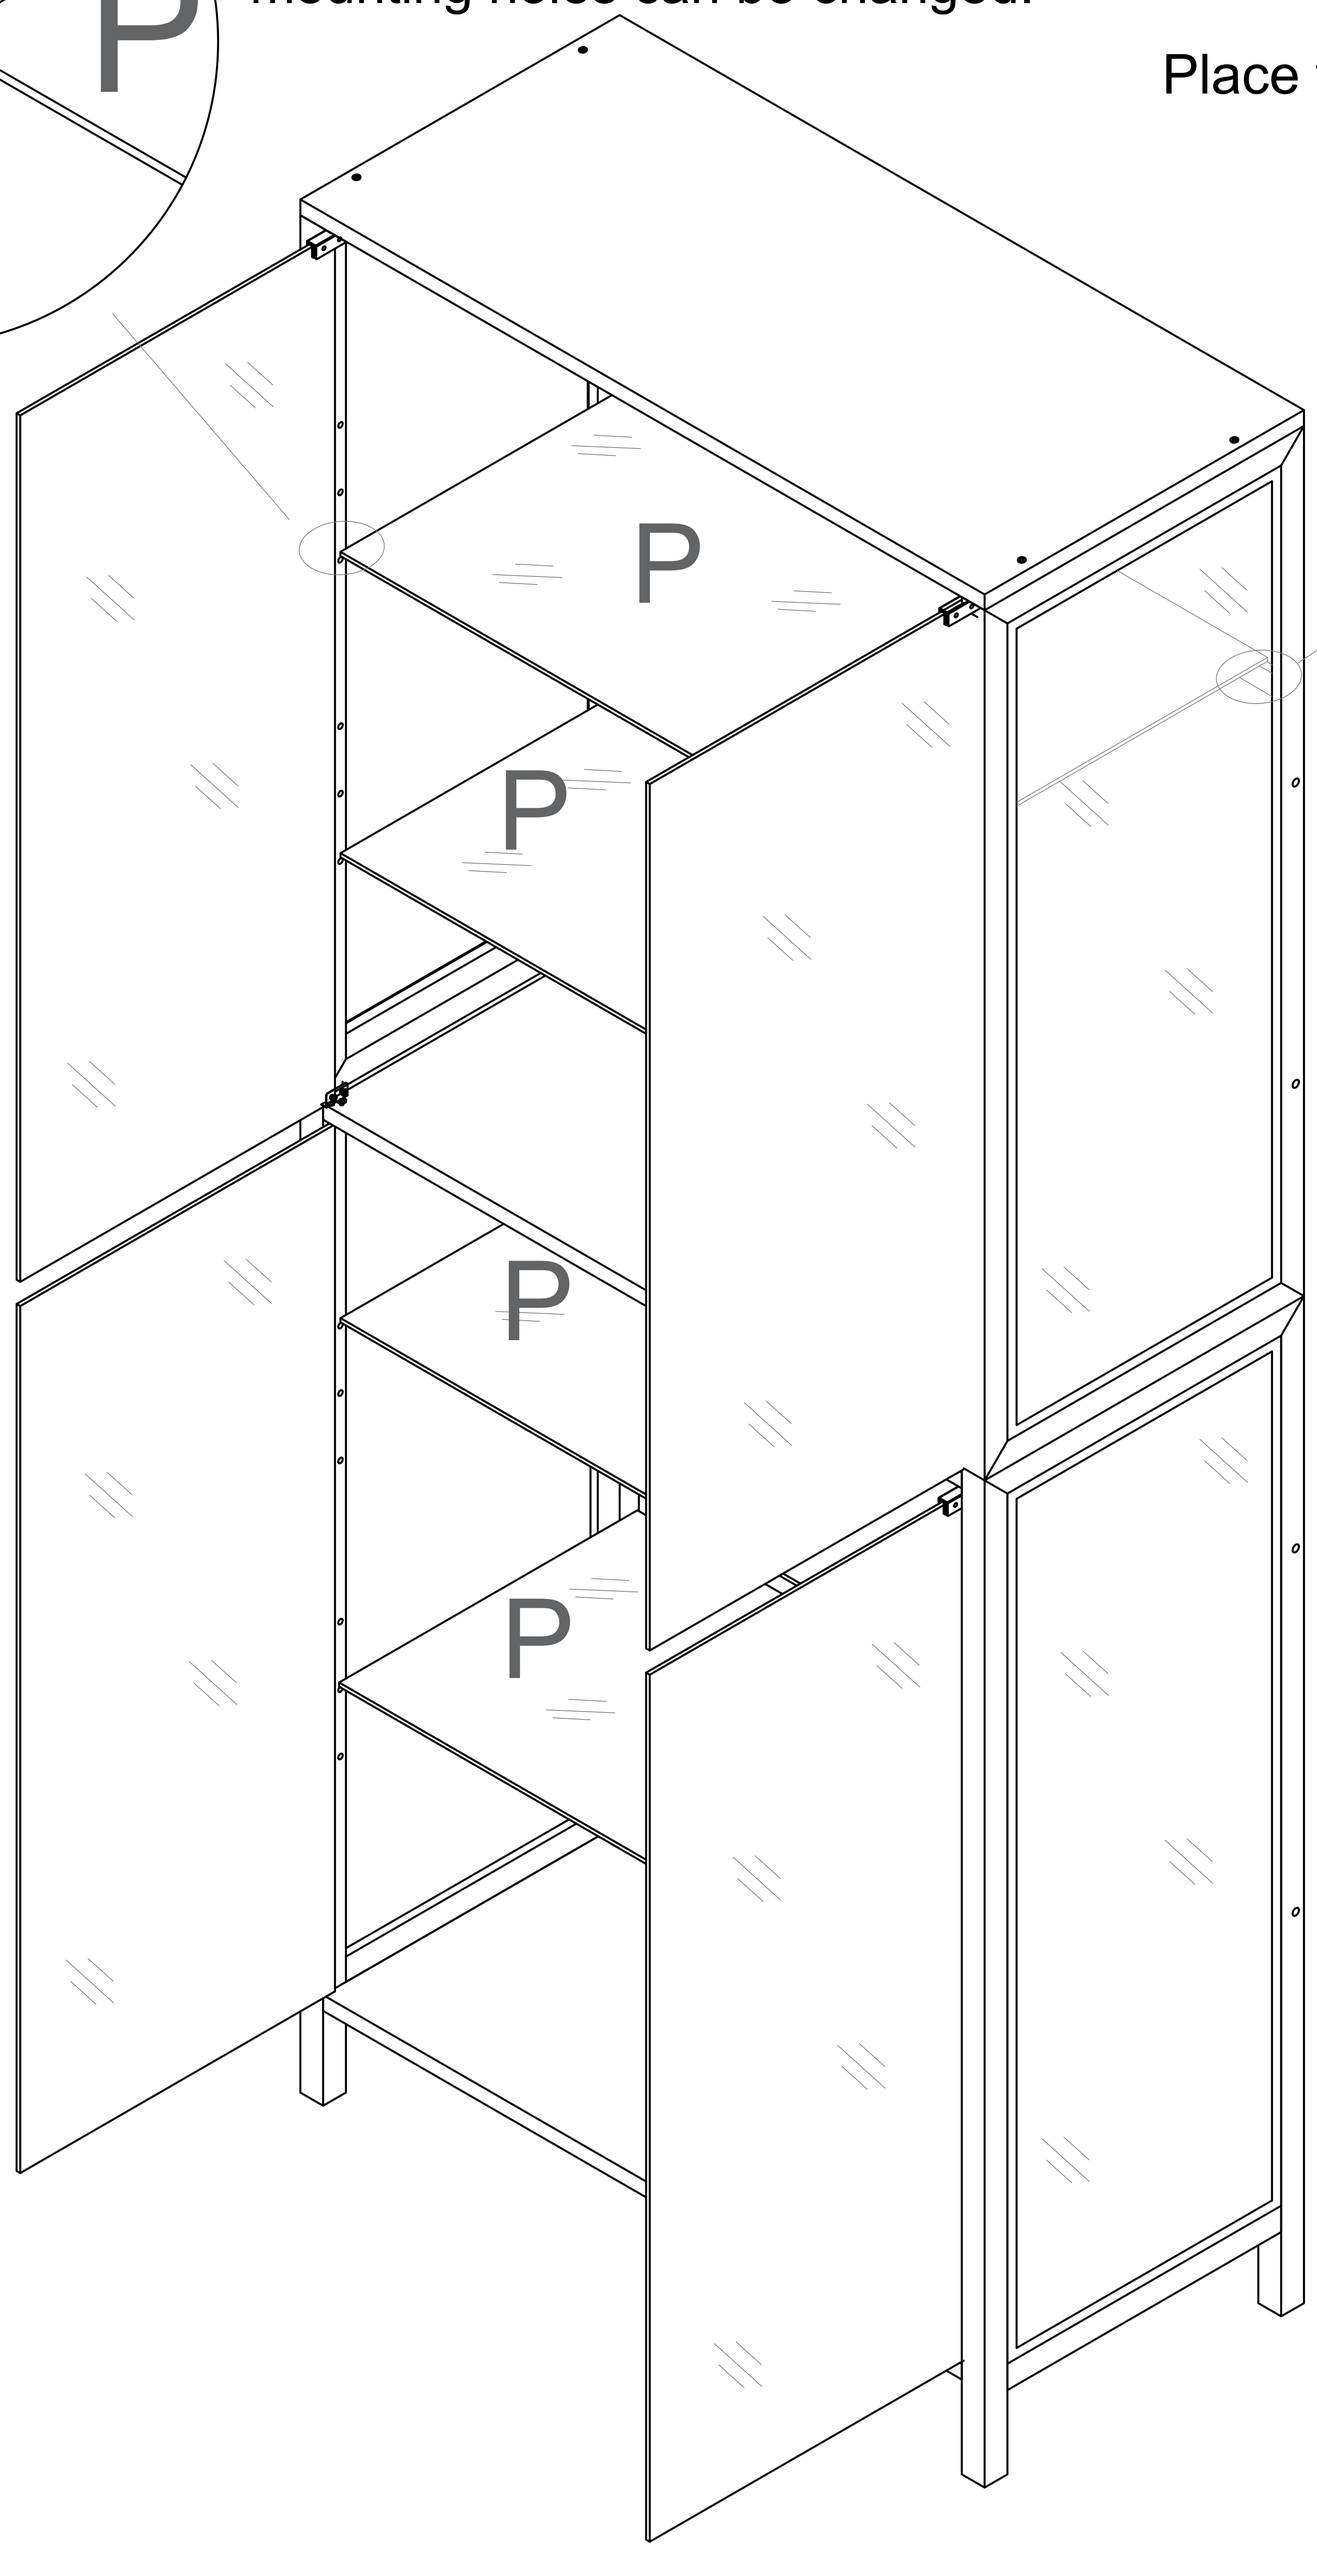


User's Guide

Thank you for purchasing this product. To use this product, please plug it into a 12V DC power supply. Please use if the product works normally after connecting to power.

Introduction

The box is an intelligent controller with 2 touch buttons. It can turn ON/OFF the light, change light colors, and adjust the light luminance.

Product Show

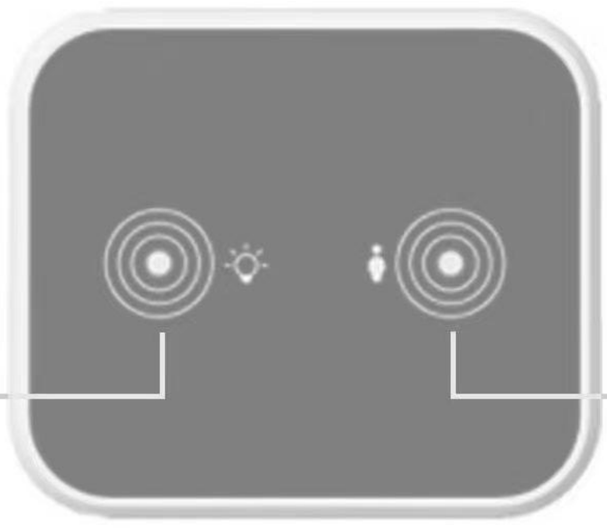

ATTENTION PLEASE

1. If there is no touch response suddenly, Re-plug the power to reset the touch static electricity.
2. If bubbles appear on the panel, remove the protective film.

Operation



This touch button is used to turn on/off, change colors, and adjust brightness.

A. Short touch -> lighting on -> short touch -> change light color -> short touch -> change light color -> short touch -> lighting off. **B**. Long touch -> adjust the luminance



This touch button is used to turn on/off the induction function.

A. Short touch to turn on the induction function. It can auto-turn on the light when people are close to the controller in 1 meters. It can auto power off the light when the body is far away from the controller after 30 seconds.

B. Long touch to turn off the induction function.

C. Note: When you touch the light button to change the light modes, the induction function will automatically turn off. It is best to turn on this function after selecting the light color and adjusting the brightness you want.