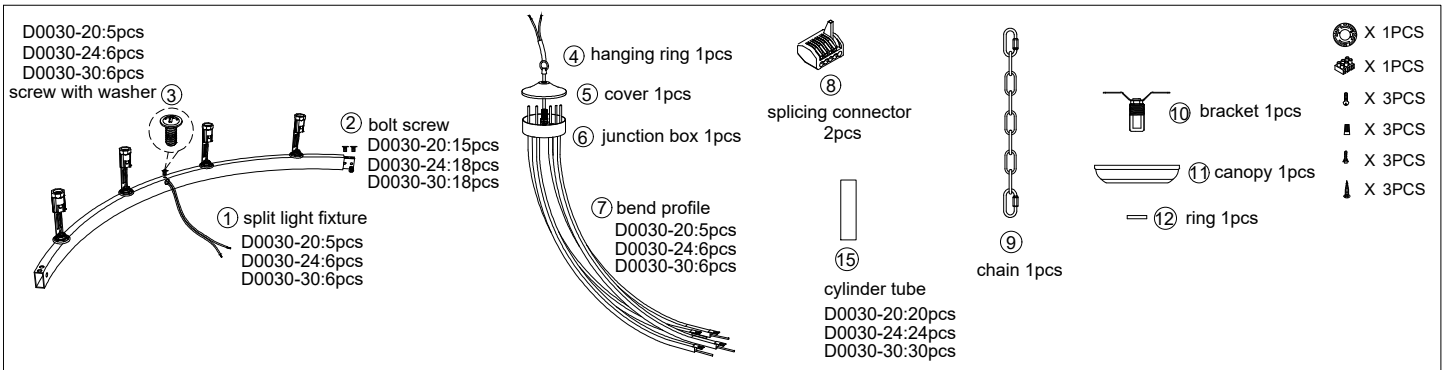

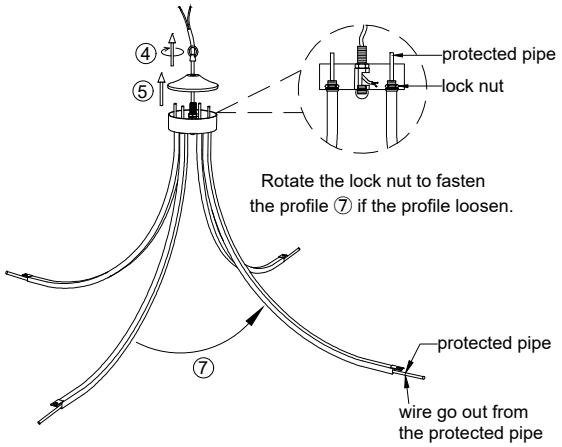

1.Adjust the bend profile ⑦ to suitable position like picture shown.
2.Rotate to remove out the ring ④ and cover ⑤.

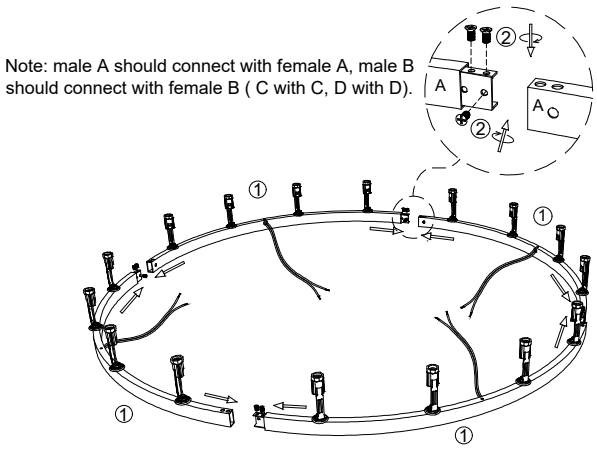

3.Combine the split light fixture ① together and fasten it with screw ②.(fisrtly should push the parts together tighten enough and fix with screw ② at last.)

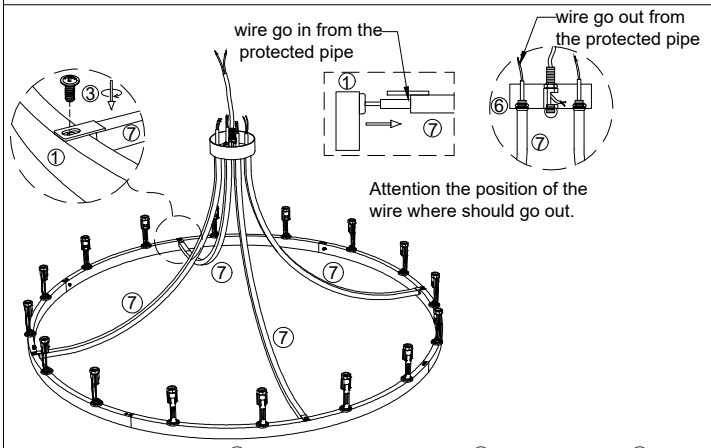

4.Let the wire of the fixture ① go through the bend profile ⑦,install the profile ⑦ to the fixture with screw ③.(please don't tighten the screws ③ until all screws are ready in the holes，rotate to fix the screw ③ at last.)

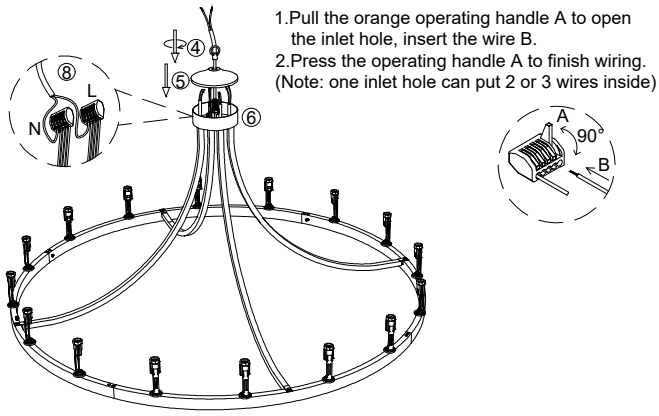

5.Connect all the wires by parallel with connectors ⑧(all live line-L use one connector, and neutral Line-N use another connector),close the cover ⑤ to the junction box ⑥ by rotate the ring ④.

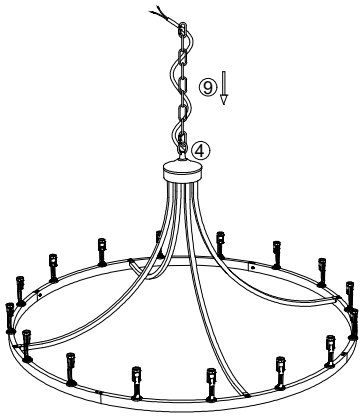

6.Install the chain ⑨ to the fixture, let the wire go through the chain ⑨.

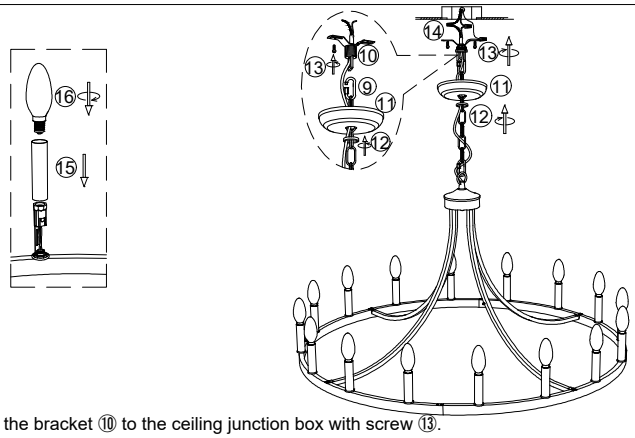

7.Install the bracket ⑩ to the ceiling junction box with screw ⑬.
8.Let the wire and chain ⑨ go through the ring ⑫, canopy ⑪, and hang the chain ⑨ to the bracket ⑩.
9.Connec the wire to your home line with cap connector ⑭.
10.Install the canopy ⑪ to the bracket ⑩ with ring ⑫.
11.Put the cylinder tube ⑮ on top of bulb holder, install the bulb ⑯.

D0030-20/D0030-24/D0030-30

Please read carefully before installation!!!

Note : Please make sure that the electricity is powered off during installation !

Only a professional electrician should install this kind of product !