

Warning: If any special control devices are used with this fixture, follow the instructions carefully to assure full compliance with N.E.C.requirements. If there are any questions, contact a qualified electric contractor.

Warning: California Residents Proposition 65
This product contains lead, a chemical known to
the state of California to cause cancer and birth
defects or other reproductive harm. Do not place
the product in your mouth. Wash your hands after
handling this product.


Caution: It is highly recommended to get an electrician to install this light. Please make sure to turn the electricity off at the main circuit breaker before beginning installation. All glass is fragile. Use care when handling glass component(s) and/or lamp(s).

Step1

1A. Lock the crossbar to the junction box of the ceiling by using 2 pcs of 5/32 screws in the accessories bag.

1B.Connect the wires. The hot/positive wire (+) has an "L" label on it. The other one is the negative wire (-). And the bare cooper is the ground wire.

1C.Attach the canopy to the ceiling with screws

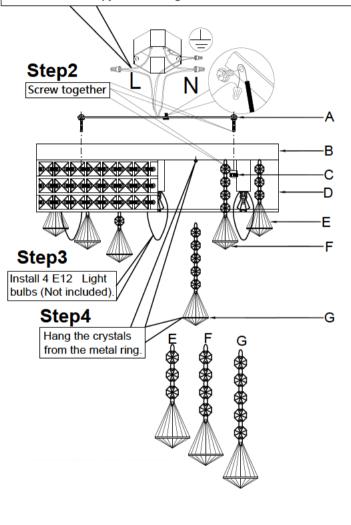

WIRE CONNECTION DIAGRAM

Wires meeting safety standards are required to connect the electrical circuit.

CAUTION: Risk of fire



Please read all instructions carefully. Before you proceed to install, make sure that the power supply is turned off and remains off until installation is completed.

PARTS INCLUDED

Code	Part Description	QTY
Α	Mounting Bracket	1
В	Canopy	1
С	Cover Nut	2
D	Lamp shade	1
Е	Crystal string	18
F	Crystal string	12
G	Crystal string	6

(Rated 110V/60Hz, bu b 60W maximum.)

Applicable bulbtype:

B10、CA10

(Not included)