

HOLSAG CANADA

Seating Manufacturer

Specifications: Carlo Stacking Chair

Description: The stylish, modern Carlo chair is unbeatable in its exceptional value. This stacking chair is built to withstand constant use so it is suited for many high traffic areas such as schools, conference rooms and restaurants.

Dimensions: Chair

Overall Height	31.50"	80.01 cm
Overall Depth	19.00"	48.26 cm
Overall Width	19.00"	48.26 cm
Seat Height	18.00"	45.72 cm
Seat Depth	16.00"	40.64 cm
Seat Width	16.25"	41.28 cm
Chair Weight	12 lbs	5.4 kg
Carton Weight		
With 1 chair	17 lbs	7.7 kg
With 2 chairs	24 lbs	11 kg
Carton Size for 1 Chair		
19.5" x 22" x 37.5"		
49.5 cm x 56 cm x 95.25 cm		
Carton Volume for 1 Chair		
9.3 cubic feet		
Carton Size for 2 Chairs		
19.5" x 22" x 37.5"		
49.5 cm x 56 cm x 95.25 cm		
Carton Volume for 2 Chairs		
9.3 cubic feet		
<i>Note: Carton is based on the shipping method.</i>		

The Carlo Chair stacks well to six chairs high.

Fabric for upholstered seats:
COM (Customer's Own Material) fabric require:
.36 yard (.33 m) per chair

Note: Fabric amount is estimated on 54" (137 cm) wide material. The actual amount required may vary depending on special pattern matching and the width of the material.

Cushion Foam: High density foam on seat

Wood:

Species: 100% European Beech Hardwood (uniform layers inside and out).

Legs and arms: Made of 21 plys to a finished thickness of 1 - 1/16".

Seat and back supports: Made of 21 plys with a finished thickness of 1 - 1/16".

Leg rail: Made of solid beech hardwood 3/4"

Seat panel: Made of 8 plys to a finished thickness of 3/8". The front edge is rounded for comfort.

Chair back: Made of 8 plys to a finished thickness of 3/8".

Construction:

The chair is reinforced with metal to metal hardware coated in Loctite and reinforced with high solids glue.


Stain Colours:

Current standard wood colours are all Natural, Black frame with Natural seat and back, Black frame with Wild Cherry seat and back or Black frame with Orange seat and back.

7-Step Wood Finishing Process:

1. The bare wood components of the chair are thoroughly sanded using 150 grit paper.
2. One coat of stain is sprayed onto all sides of the wood components.
3. One coat of acrylic sealer is sprayed onto all wood parts to completely seal the wood.
4. Once dry, the sealer is sanded using 240 grit paper.
5. An acrylic lacquer is sprayed on.
6. The wood components are then assembled

7. A final inspection is performed prior to packaging to ensure a high level of quality control.

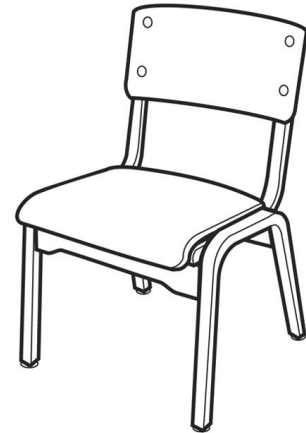

Note: Specifications are subject to change without notice.



Holsag Canada

164 Needham Street
Lindsay, Ontario Canada
K9V 5R7
(705) 878-1970
(888) 745-0721 (U.S. & Canada)
Fax: (705) 878-1864

www.holsag.com