

INSTALLATION INSTRUCTIONS


IMPORTANT SAFETY INSTRUCTIONS:

1. Please read through all the instructions carefully and completely before beginning assembly and installation.
2. This product must be installed in accordance with installation instructions and all safety and building codes. It is strongly suggested that all direct wired fixtures be installed by a licensed electrician.
3. Be sure the electricity to the wires you are working on is shut off, either the fuse is removed or the circuit breaker is turned off. Turning the power off using the light switch is not sufficient to prevent electrical shock.
4. **WARNING:** This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

MOUNTING AND WIRING

WARNING:

Improper installation may cause electrical shock, fire or equipment damage. The person performing the installation must be familiar with the construction and operation of the product and associated hazards.

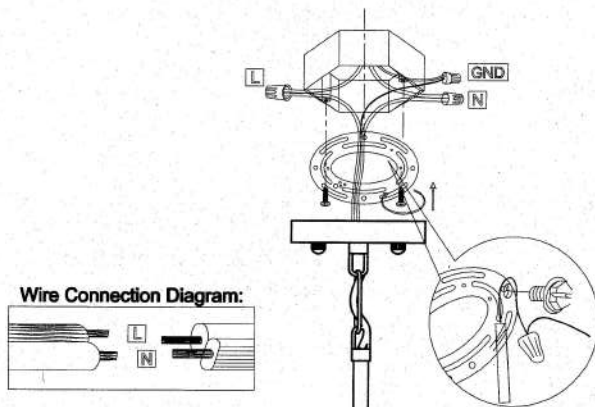

Please proceed in an alphabetical order:


Release the fasteners from the canopy.

Attach the crossbar to the existing electrical junction box, using the two crossbar screws.

Pass the main wire and ground wire through the hang ring down, hanging ring, fastener ring, the canopy, the hang ring up and the crossbar until the end of the main wire reaches the electrical box, where you can make the appropriate connections. Be sure when connecting the wire, use electrician approved junction caps. Stow the excess wire in the electrical box. Raise the canopy up to the crossbar and fasten it by the Fasteners.

PART LIST AND ASSEMBLY ILLUSTRATION

Note : Some parts may be pre-installed or pre-assembled.

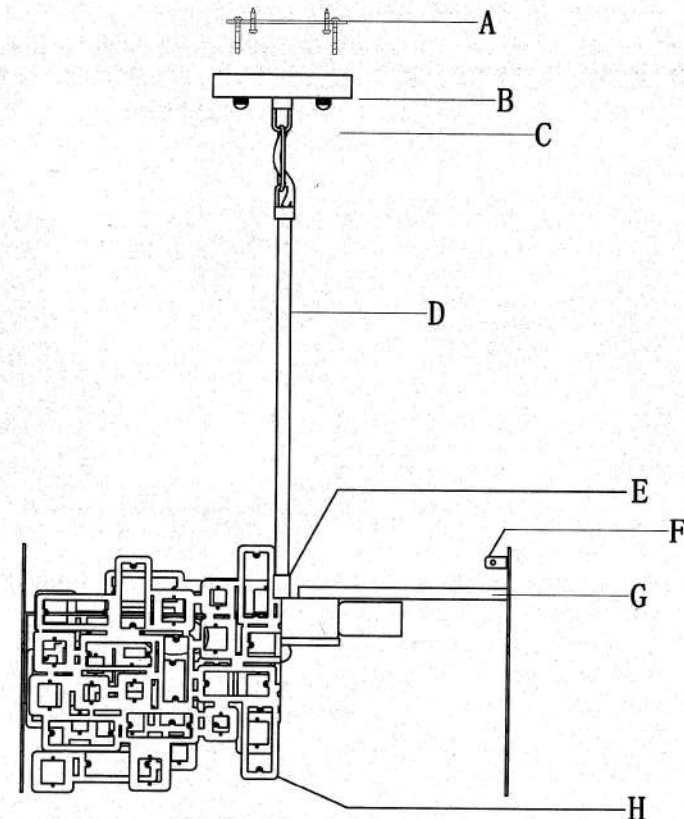

A. MOUNTING BRACKET

B. CANOPY

C. FASTENERS


D. HANG ROD

E. ROD JOINT

F. L FITTING

G. SQUARE TUBE


H. CRYSTAL SHEET

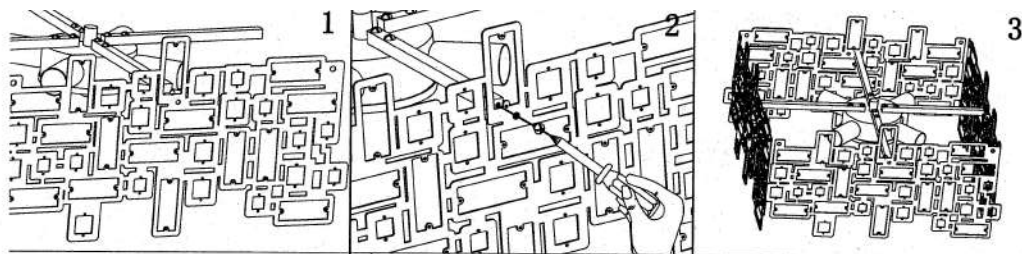

1. Attach the crystal sheet to the Square tube of the lamp body.

2. Fasten the crystal sheet by the screws.

3. Fasten all the other crystal sheet to the lamp body.

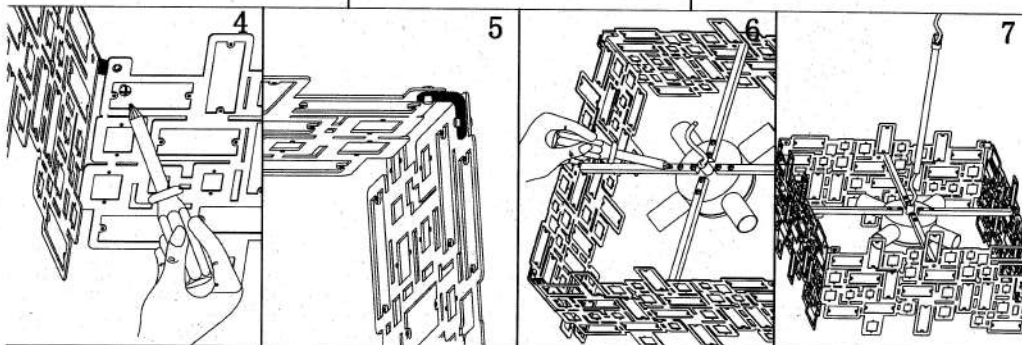


4. Attach "L" fitting the corner of the crystals sheet, fasten it by the screw.

5. Connect the other crystal sheet with the "L" fitting, fasten it by the screw.


6. Please adjust the square tube on the cylinder, and fasten it by the screws while you find the lamp not straight.

7. Install the hang rod.

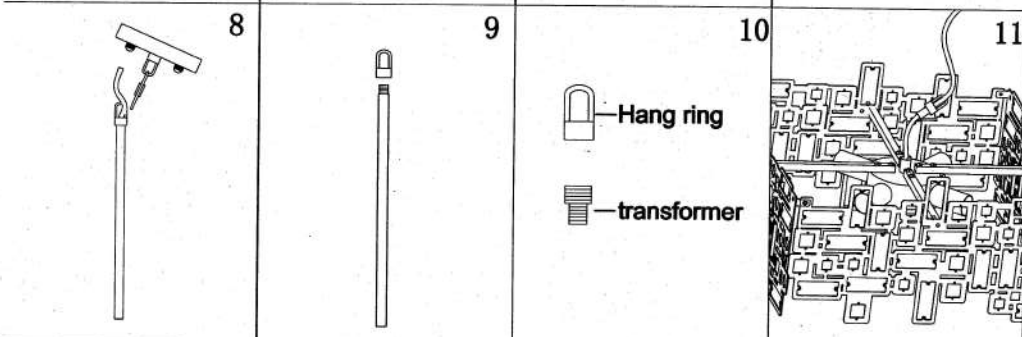

8. Attach the canopy to the hang ring of the hang rod, lock them with the quick link.

9. You can release the hang ring from the hang rod, install the transformer to the hang ring to make it a ceiling lamp.

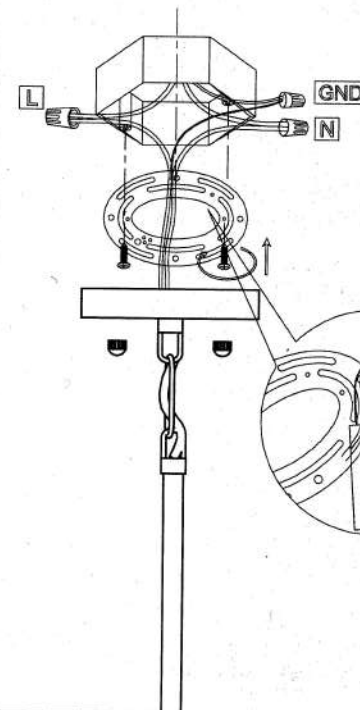


10. Release the Fasteners(C) from the Canopy(B).

11. Take out the Mounting bracket(A) and fasten it to the junction box of the ceiling.

12. Connect the wire.

13. Position Canopy(B) over Mounting Bracket(A) then fasten the Fasteners.

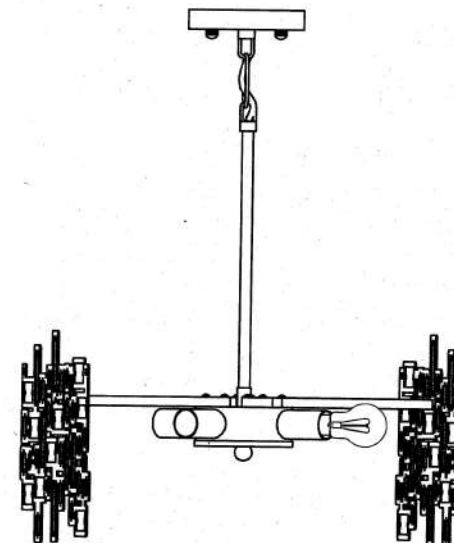

14. Install the bulbs. E12 x 4 pcs, Max 60 W per socket, Type A.