


Dog Kennel Run

Assembly Instructions

3.05 X 1.83 X 2.33M



Please read this entire guide before assembly.

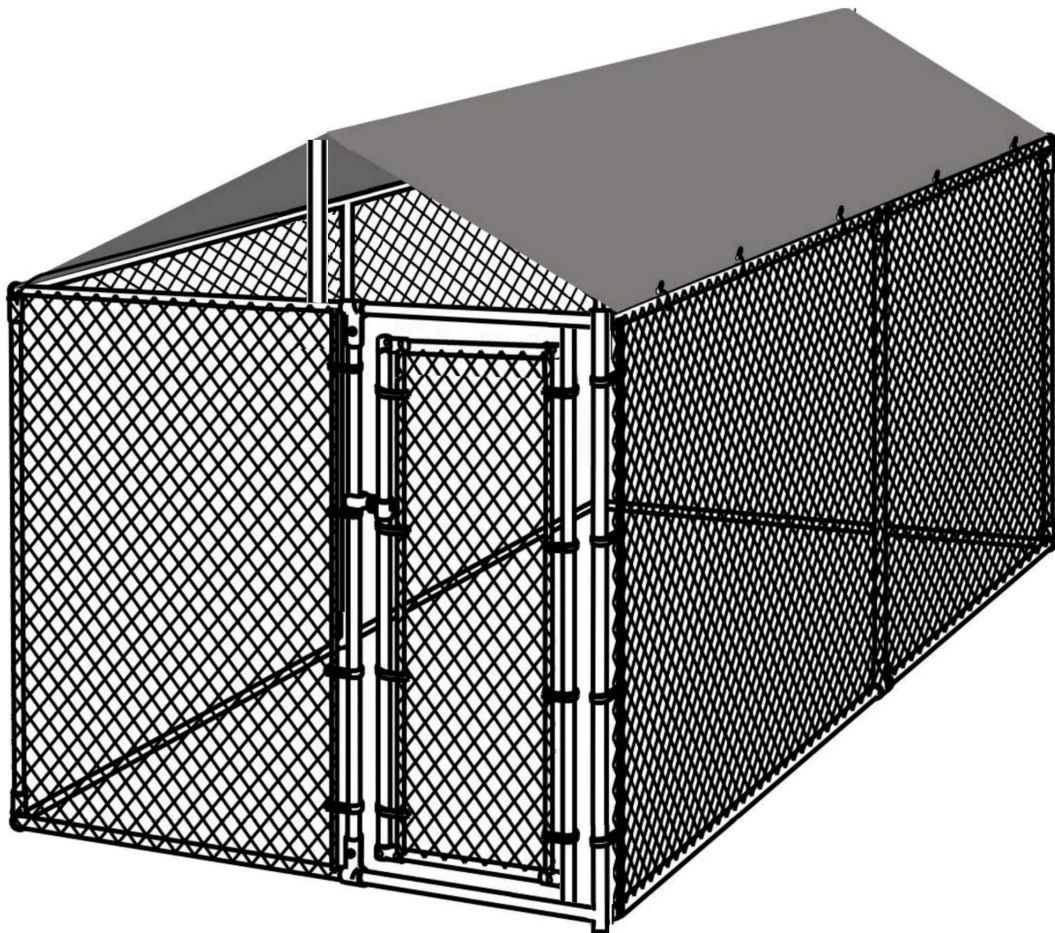









CHAIN LINK DOG KENNEL ASSEMBLY INSTRUCTIONS




SIZE: 3.05 X 1.83 X 2.33M

TOOLS NEEDED

Adjustable Wrench	Pliers	Hammer	Tape Measure
			


CHECK THE PARTS BEFORE ASSEMBLY

SKETCH	LENGTH	DESCRIPTION
	1830MM	Corner Post A X 3
	1830MM	Corner Post for Gate B X 1
	1425MM	Connection Tube C X 8
	1680MM	Connection Tube C1 X 2
	1680MM	Connection Tube C2 X 2
	1830MM	Middle Post D X 2
	1690MM	Right Gate Frame Tube E X 1
	1630MM	Left Gate Frame Tube F X 1
	410MM	Short Gate Frame Tube G X 2
	1685MM	Gate Post H X 1
	1600MM	Tension Rod for Gate I X 2
	*** **	Mesh Piece for Gate J X 1
	1800MM	Tension Rod for Mesh K X 2
	*** **	Mesh Roll L X 1
		Support Tube M X 2
		Rail Tube N X 1
		Rail Tube O X 1
		Sideling Tube P X 2


Clamp X 12	Bolt & Nuts X 7	Clip X 16	Tie Wire X 1	Latch X 1	Tarpaulin X 1	Elastic Ball Strip X 16
						

STEP 1. Gather 3 X Corner Post “A”, 1 X Corner Post for Gate “B”, 2 X Middle Post “D”, 4 X Connection Tube “C” and 2 X Connection Tubes “C1”.

Place the Connection Tubes in between the “A”, “B” and “D” as the following.

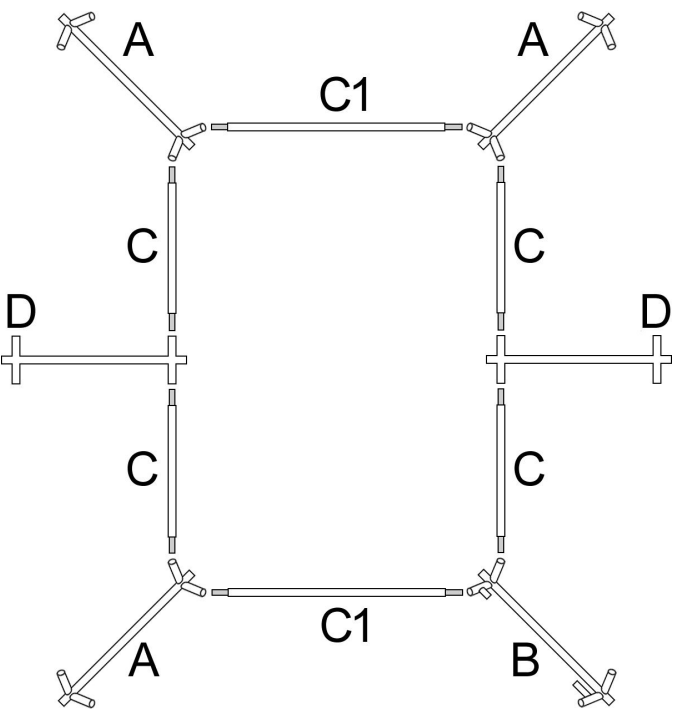


Push these Tubes together. Please make sure that the end with a longer hinge tube of Post for Gate " B" is on the top .

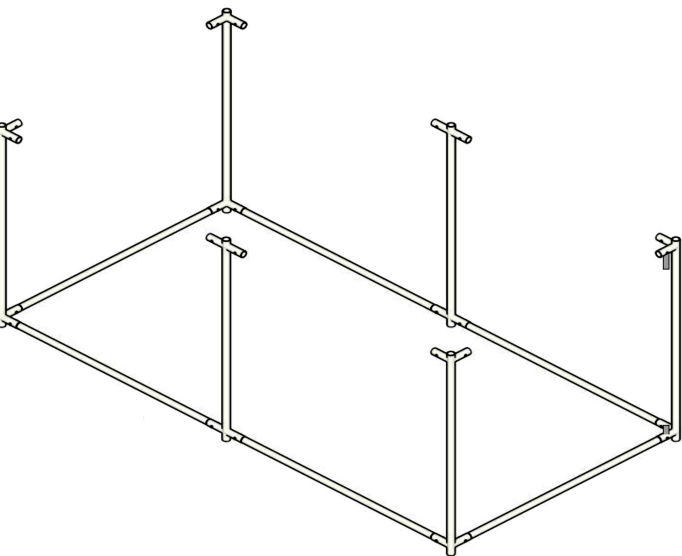

STEP 2, Gather 4 Connection Tube “C” and 2 Connection Tube “C2”.

Install the “C” and “C2” Tubes in between the “A”, “B” and “D”.

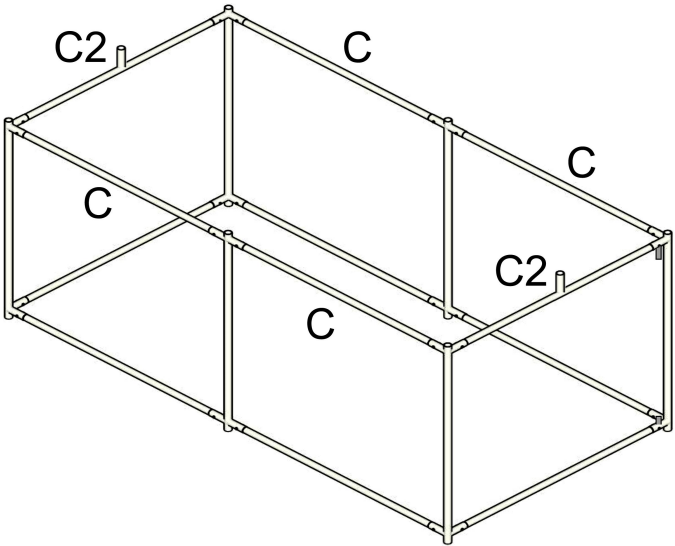


STEP 3 Assemble the Gate.

Gather the following items:

Right Gate Frame Tube E X 1	Left Gate Frame Tube F X 1
Short Gate Frame Tube G X 2	Tension Rod for Gate I X 2
Mesh Piece for Gate J X 1	Clip X 8
Tie wire	



Assembling the Gate Frame.

Make up the gate frame with 1 X Right Frame Tube “E”, 1 X Left Frame Tube “F” and 2 X Short Gate Frame Tube “G”.

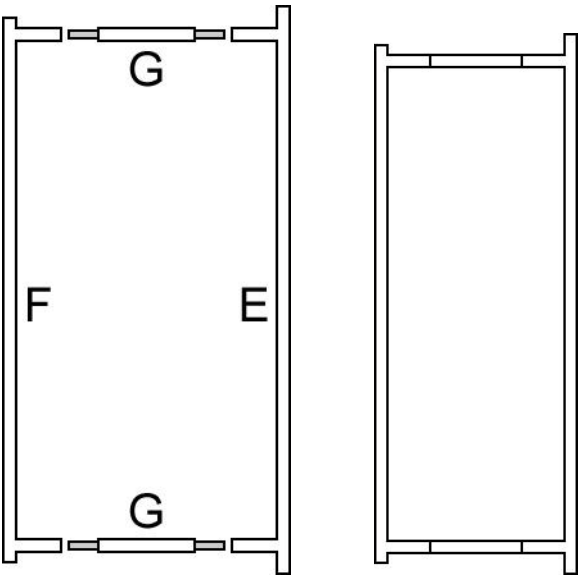


Please notice: the Right Frame Tube”E” is with a longer end.

Install the Mesh Piece to the Gate Frame with 2 Tension Rods “I” and 8 Clips. Slip a Tension Rod down through the first diamonds of the Mesh Piece.

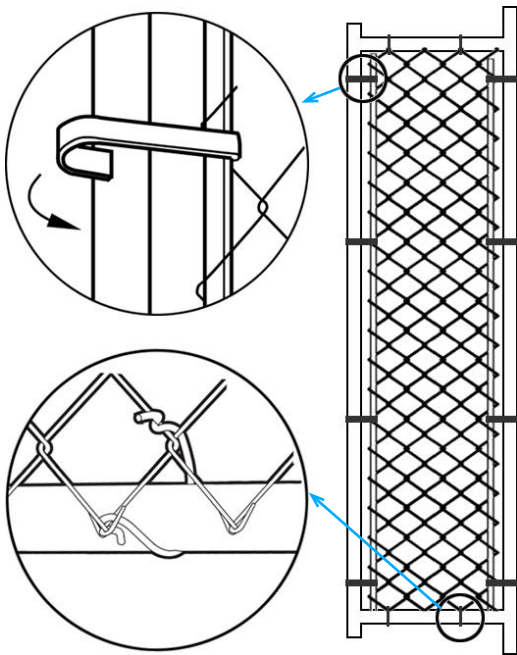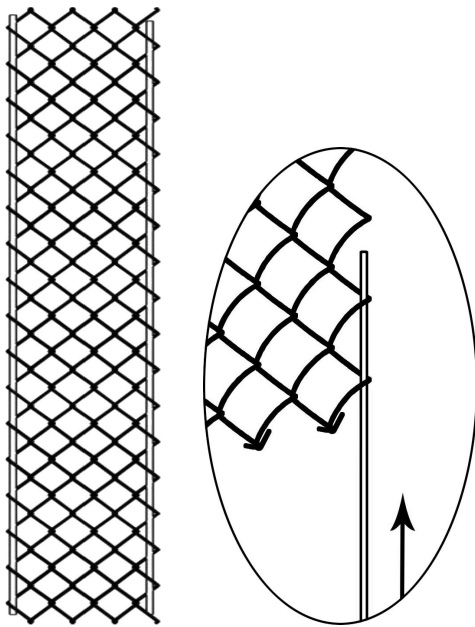


STEP 4, Installing the Gate to the frame.

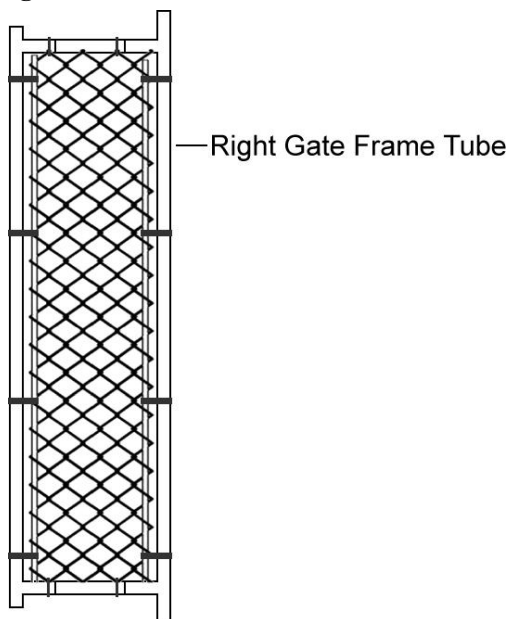


Firstly, orient the one end of the Right Frame Tube "E"


toward the upper hinge tube on the Corner Post for Gate "B" and then make the hinge tube inserted.

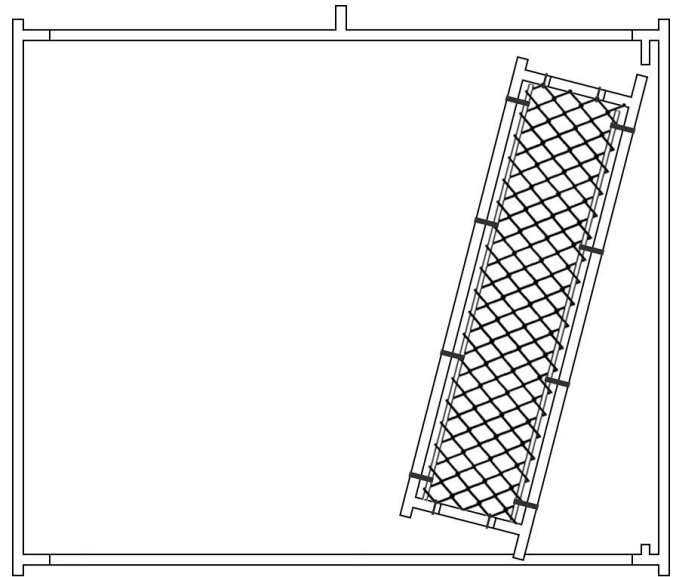

There is the gap between the bottom of the Gate Tube "E" and the lower hinge tube on Post "B" if the upper hinge tube is fully in.

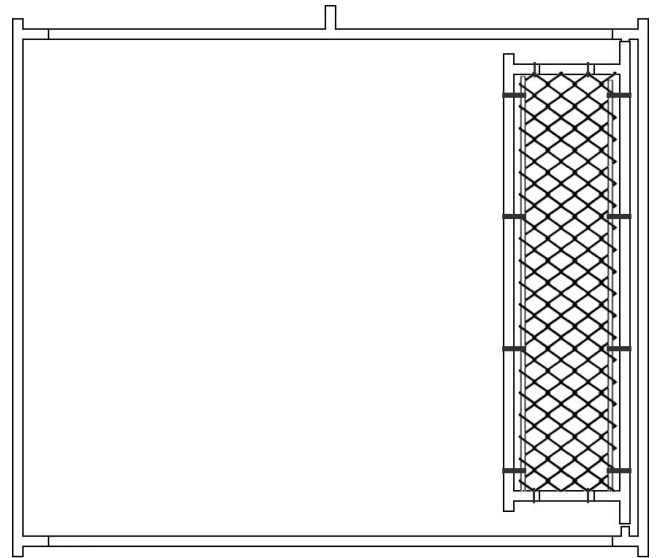


Make the lower hinge tube of "B" inserted in the bottom end of the Tube "E". Put the bolt into the hole in the upper hinge tube "B", and with nuts.

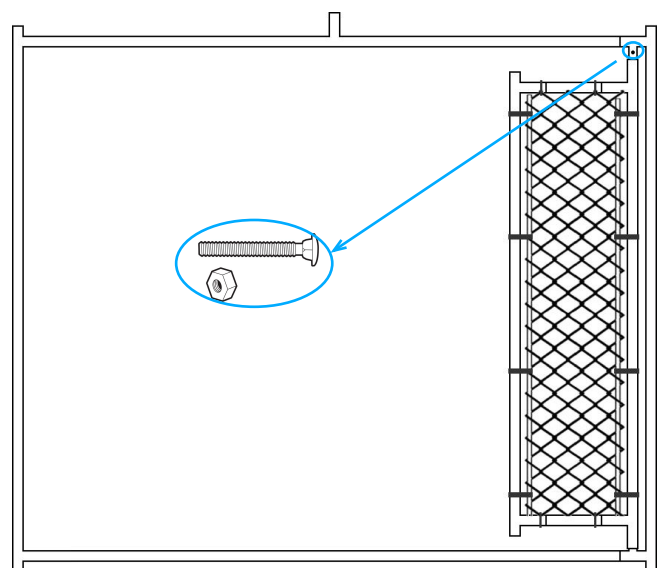

Step 5. Installing the Gate Post.

Install Gate Post Tube “H” on the frame with 4 Clamps and 2 Bolts and Nuts.

Tips: Please make sure that the Gate Post “H” is parallel to the corner posts while vertical to the Connection Tubes. In that way the Gate can be opened and closed smoothly. Set the gate Latch at your desired height on the latch post and tighten.

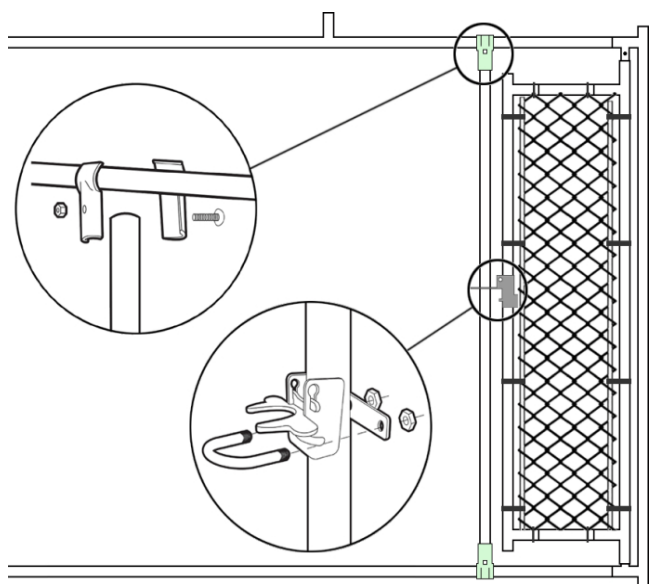


STEP 6, Add fence fabric.



Gather the following items:

8 X Clips	2 X Tension Rod “K”
Tie Wires	1 X Mesh Roll

Slip the Tension Rod “K” down through the first diamonds of the Mesh Roll Fabric.

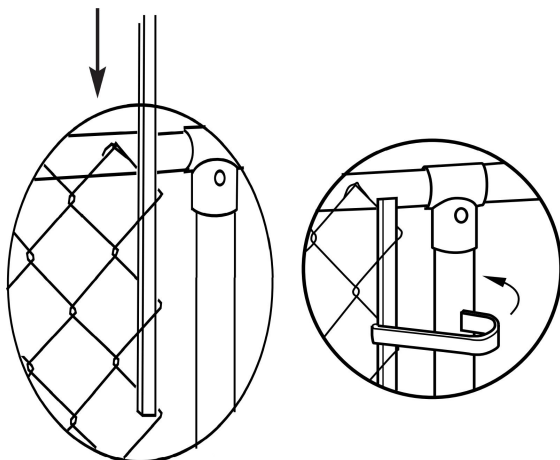


Start at a post next to the gate. Connect the Mesh Roll Fabric to the Gate Post Tube by clipping the Tension Rod to the post. Unroll the fabric around the kennel. Loosely add a tie wire to the top frame about every 5 feet to keep the fabric from falling down.

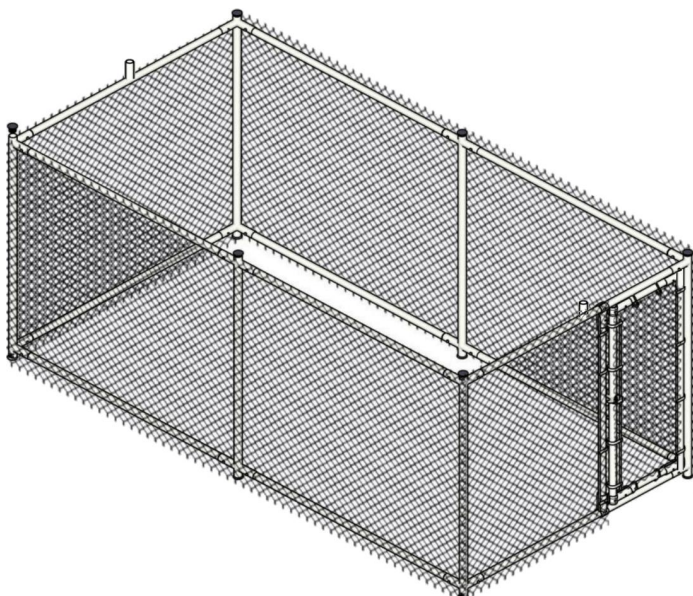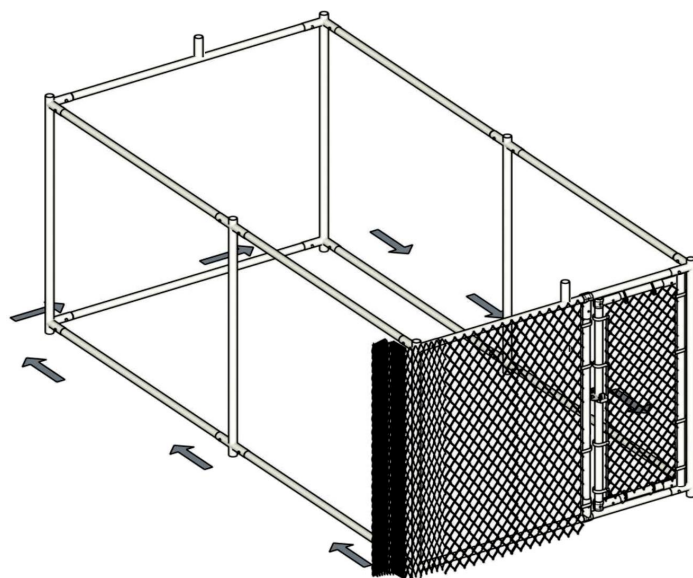


STEP 7: Stretch the Fabric.

Fasten the chain link to the frame at every vertical post using the Tie Wire provided. It's suggested to use 5 ties per vertical post and 4-5 ties between each post on the bottom and top.

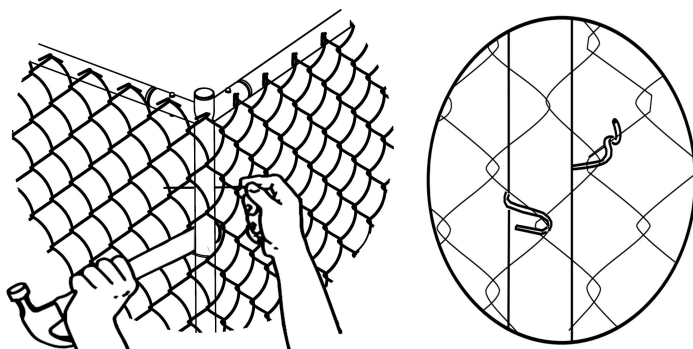


You may have excess chain link picket when you reach the end of the kennel frame. if so, detach excess chain link by using a pair of pliers to straighten knuckle at the top and bottom of the chain link and twist out picket. To terminate, slip the Tension Rod “K” through the end of the chain link, have the 4 clips ready on the tension bar and clip around the hinge post.

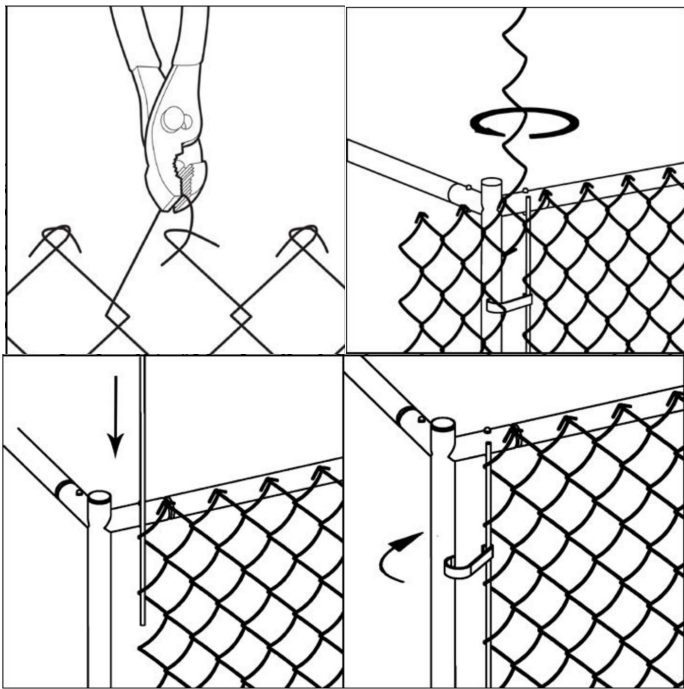

STEP 8,


Secure the fabric to the framework using the Aluminum Tie Wires provided. Attach one end of a tie wire to the fabric. Wrap the tie around the framework and back to a different link in the fabric.

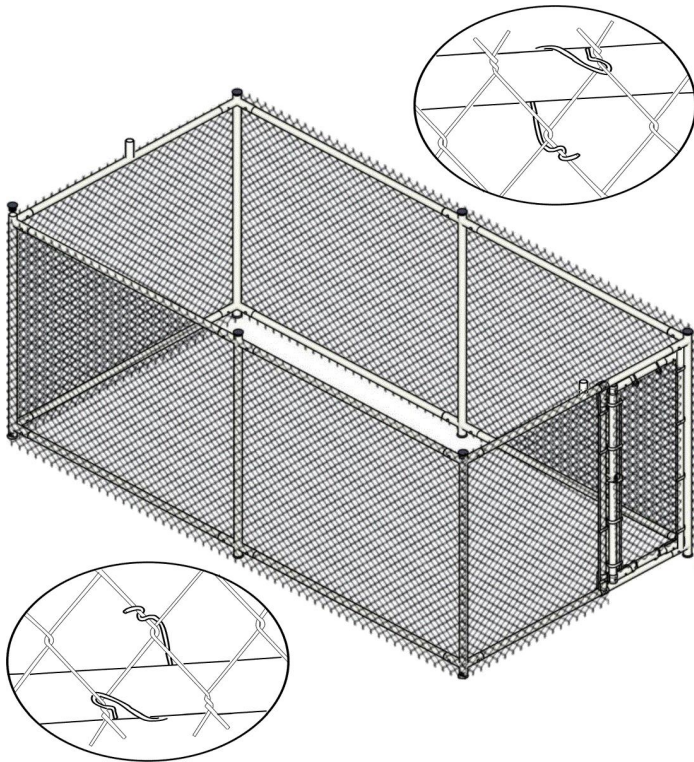


STEP 9, Installing the Roof.

Gather 2 X Support Tube "M" and 1 X Rail Tube "N" and 1 X Rail Tube "O".


Put the swaged end of the Support Tube "M" into the joint tube of the Connection Tube "C2".




Make up the long top rail tube with the Rail Tubes "N" and "O".

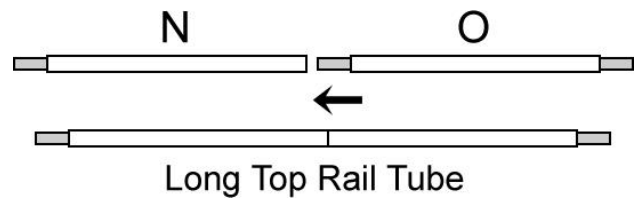

Install the long top rail tube between the Support Tubes as following.

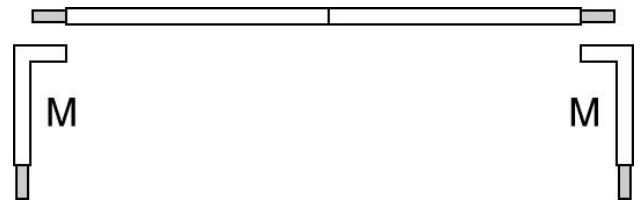

Add 2 x Sideling Tubes "P" with 8 Clamps and 4 Bolt and Nuts.

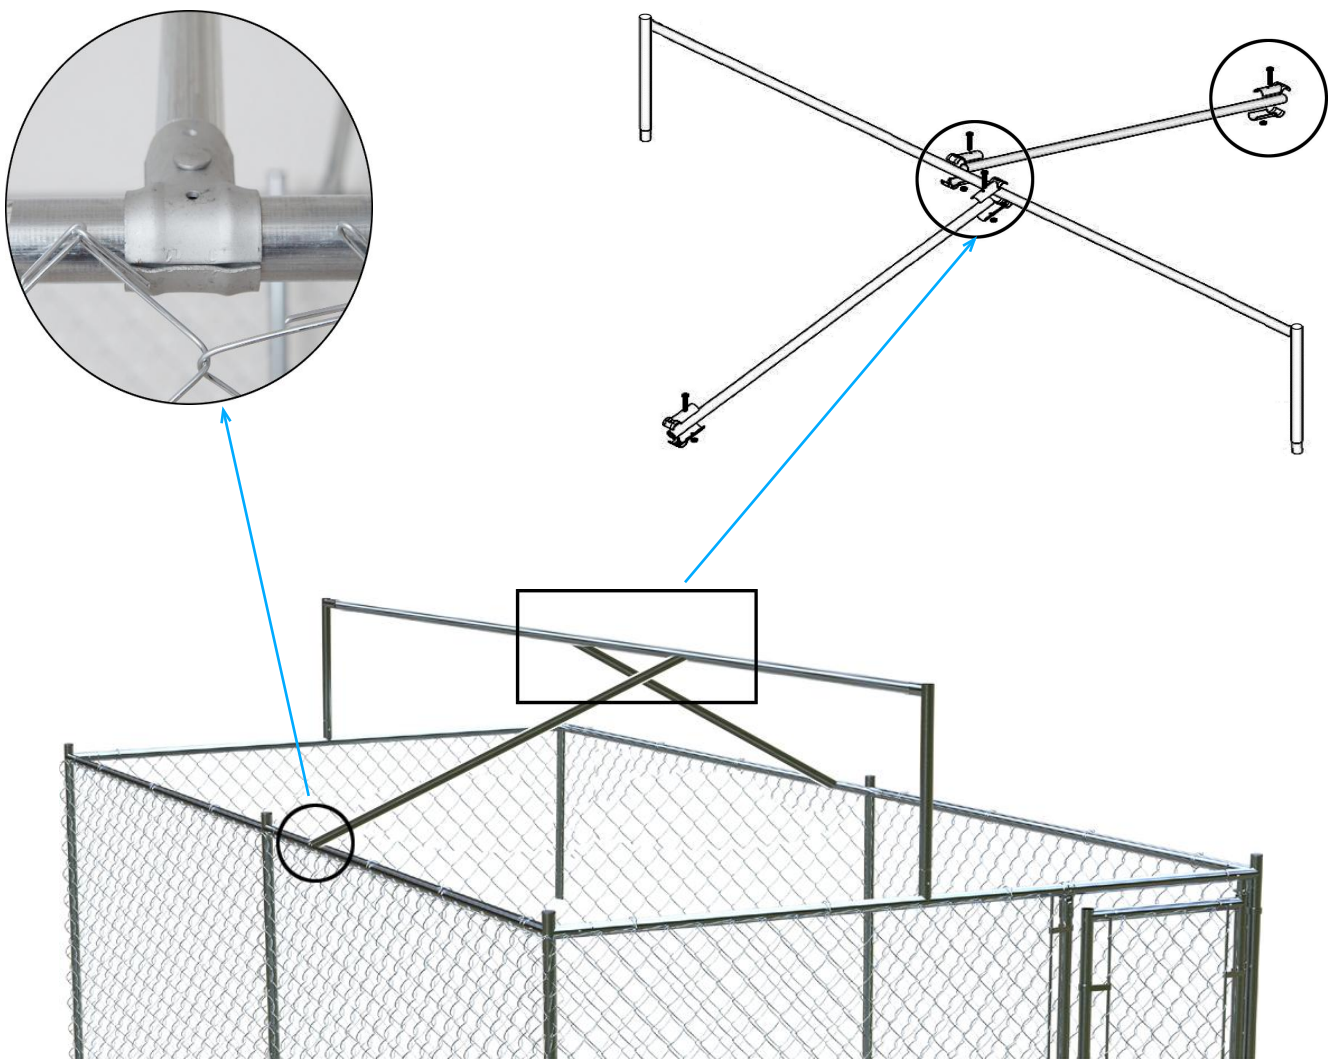

Step 10. Cover the frame with the tarp and tied with bungee ball.

Tips: Stretch the cover to make sure there is no concavity in each slope.

