



Triton® | K-8040-2N

0.5 gpm shelf-back commercial bathroom sink faucet with pop-up drain and standard handles

Features

- Valvet® valves
- Pop-up drain with lift rod and tailpiece
- Standard handles
- 1-1/4" (32 mm) spout
- Lower flow aerator options are available
- 0.5 gpm (1.9 lpm) maximum flow rate at 60 psi (4.14 bar)



Codes/Standards

ASME A112.18.1/CSA B125.1
 NSF/ANSI/CAN 372
 NSF/ANSI/CAN 61
 DOE - Energy Policy Act 1992
 California Energy Commission (CEC)
 NSF/ANSI/CAN 61|NSF/ANSI/CAN 372

Technical Information

All product dimensions are nominal.

Handle

Handle Style/Type: Lever

Spout

Spout Reach: 1-1/4" (32 mm)

Flow Rate

Faucet Flow Rate: 0.5 gpm (1.9 l/min)

Material

- Brass
- Brass valve bodies

Recommended Products/Accessories

K-23726 Drain treatment


K-23723 Faucet cleaner

Warranty

See website for detailed warranty information.

KOHLER® One-Year Limited Warranty



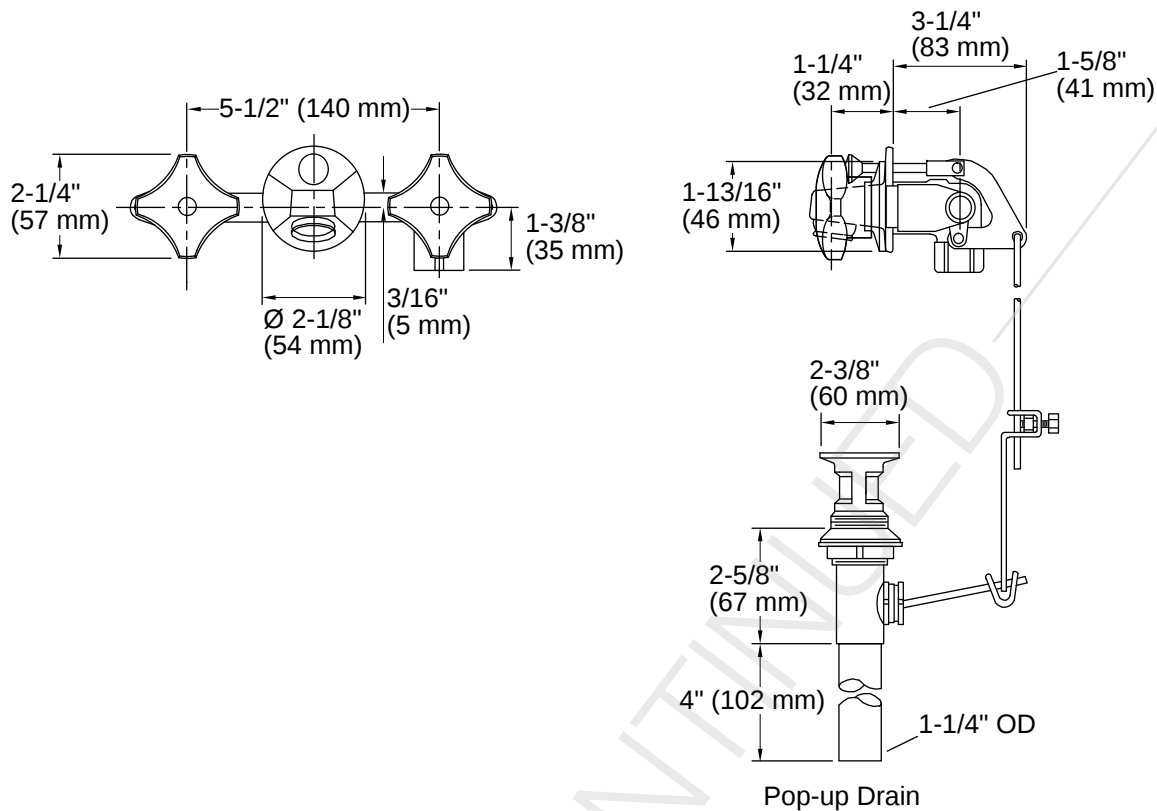

Installation

- For 5-1/2" (140 mm) centers

Installation Notes

Install this product according to the installation instructions.

