


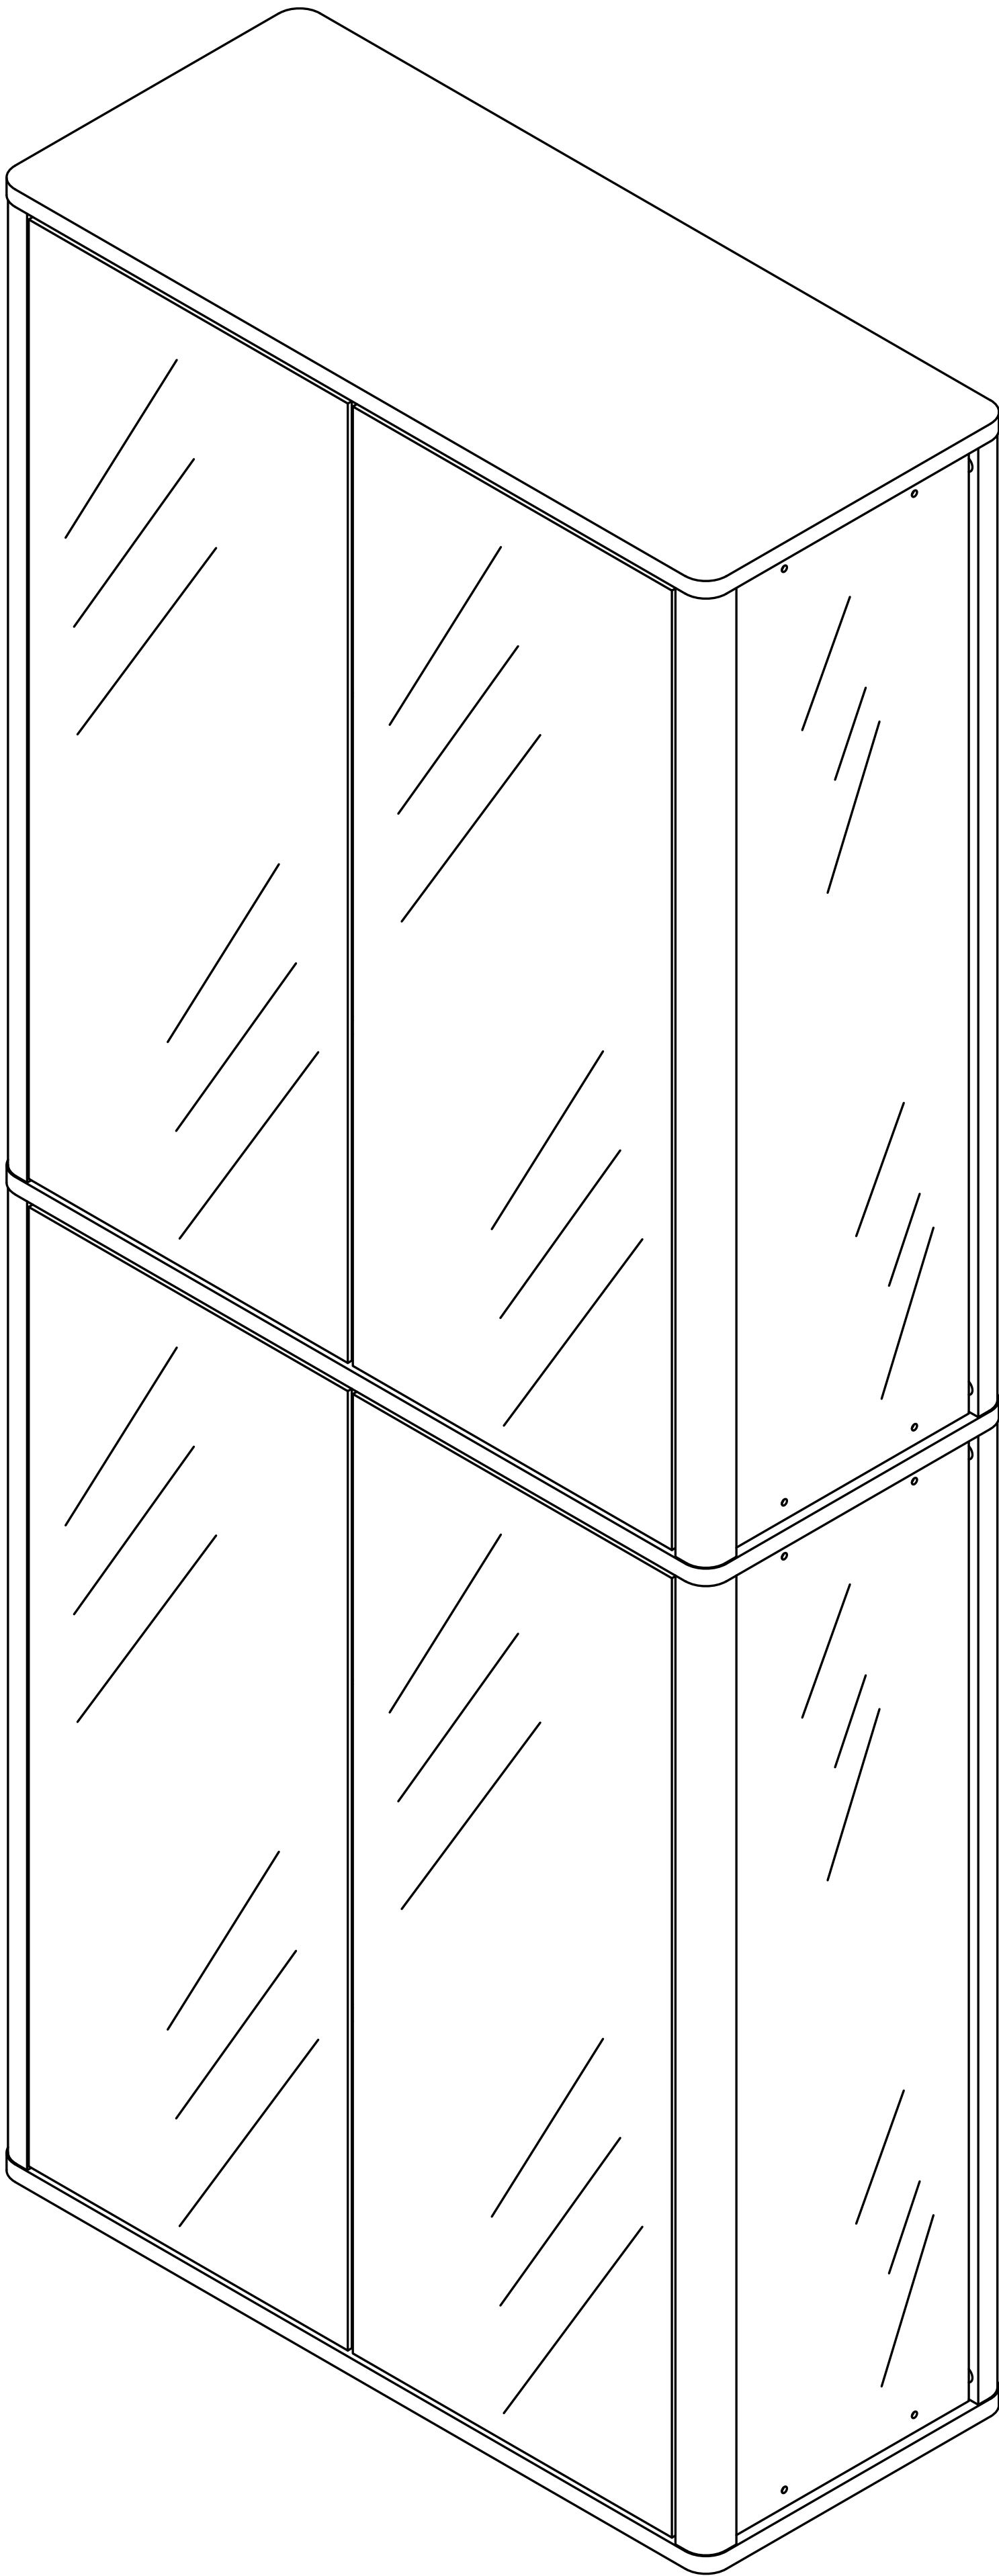



Product Installation Instructions

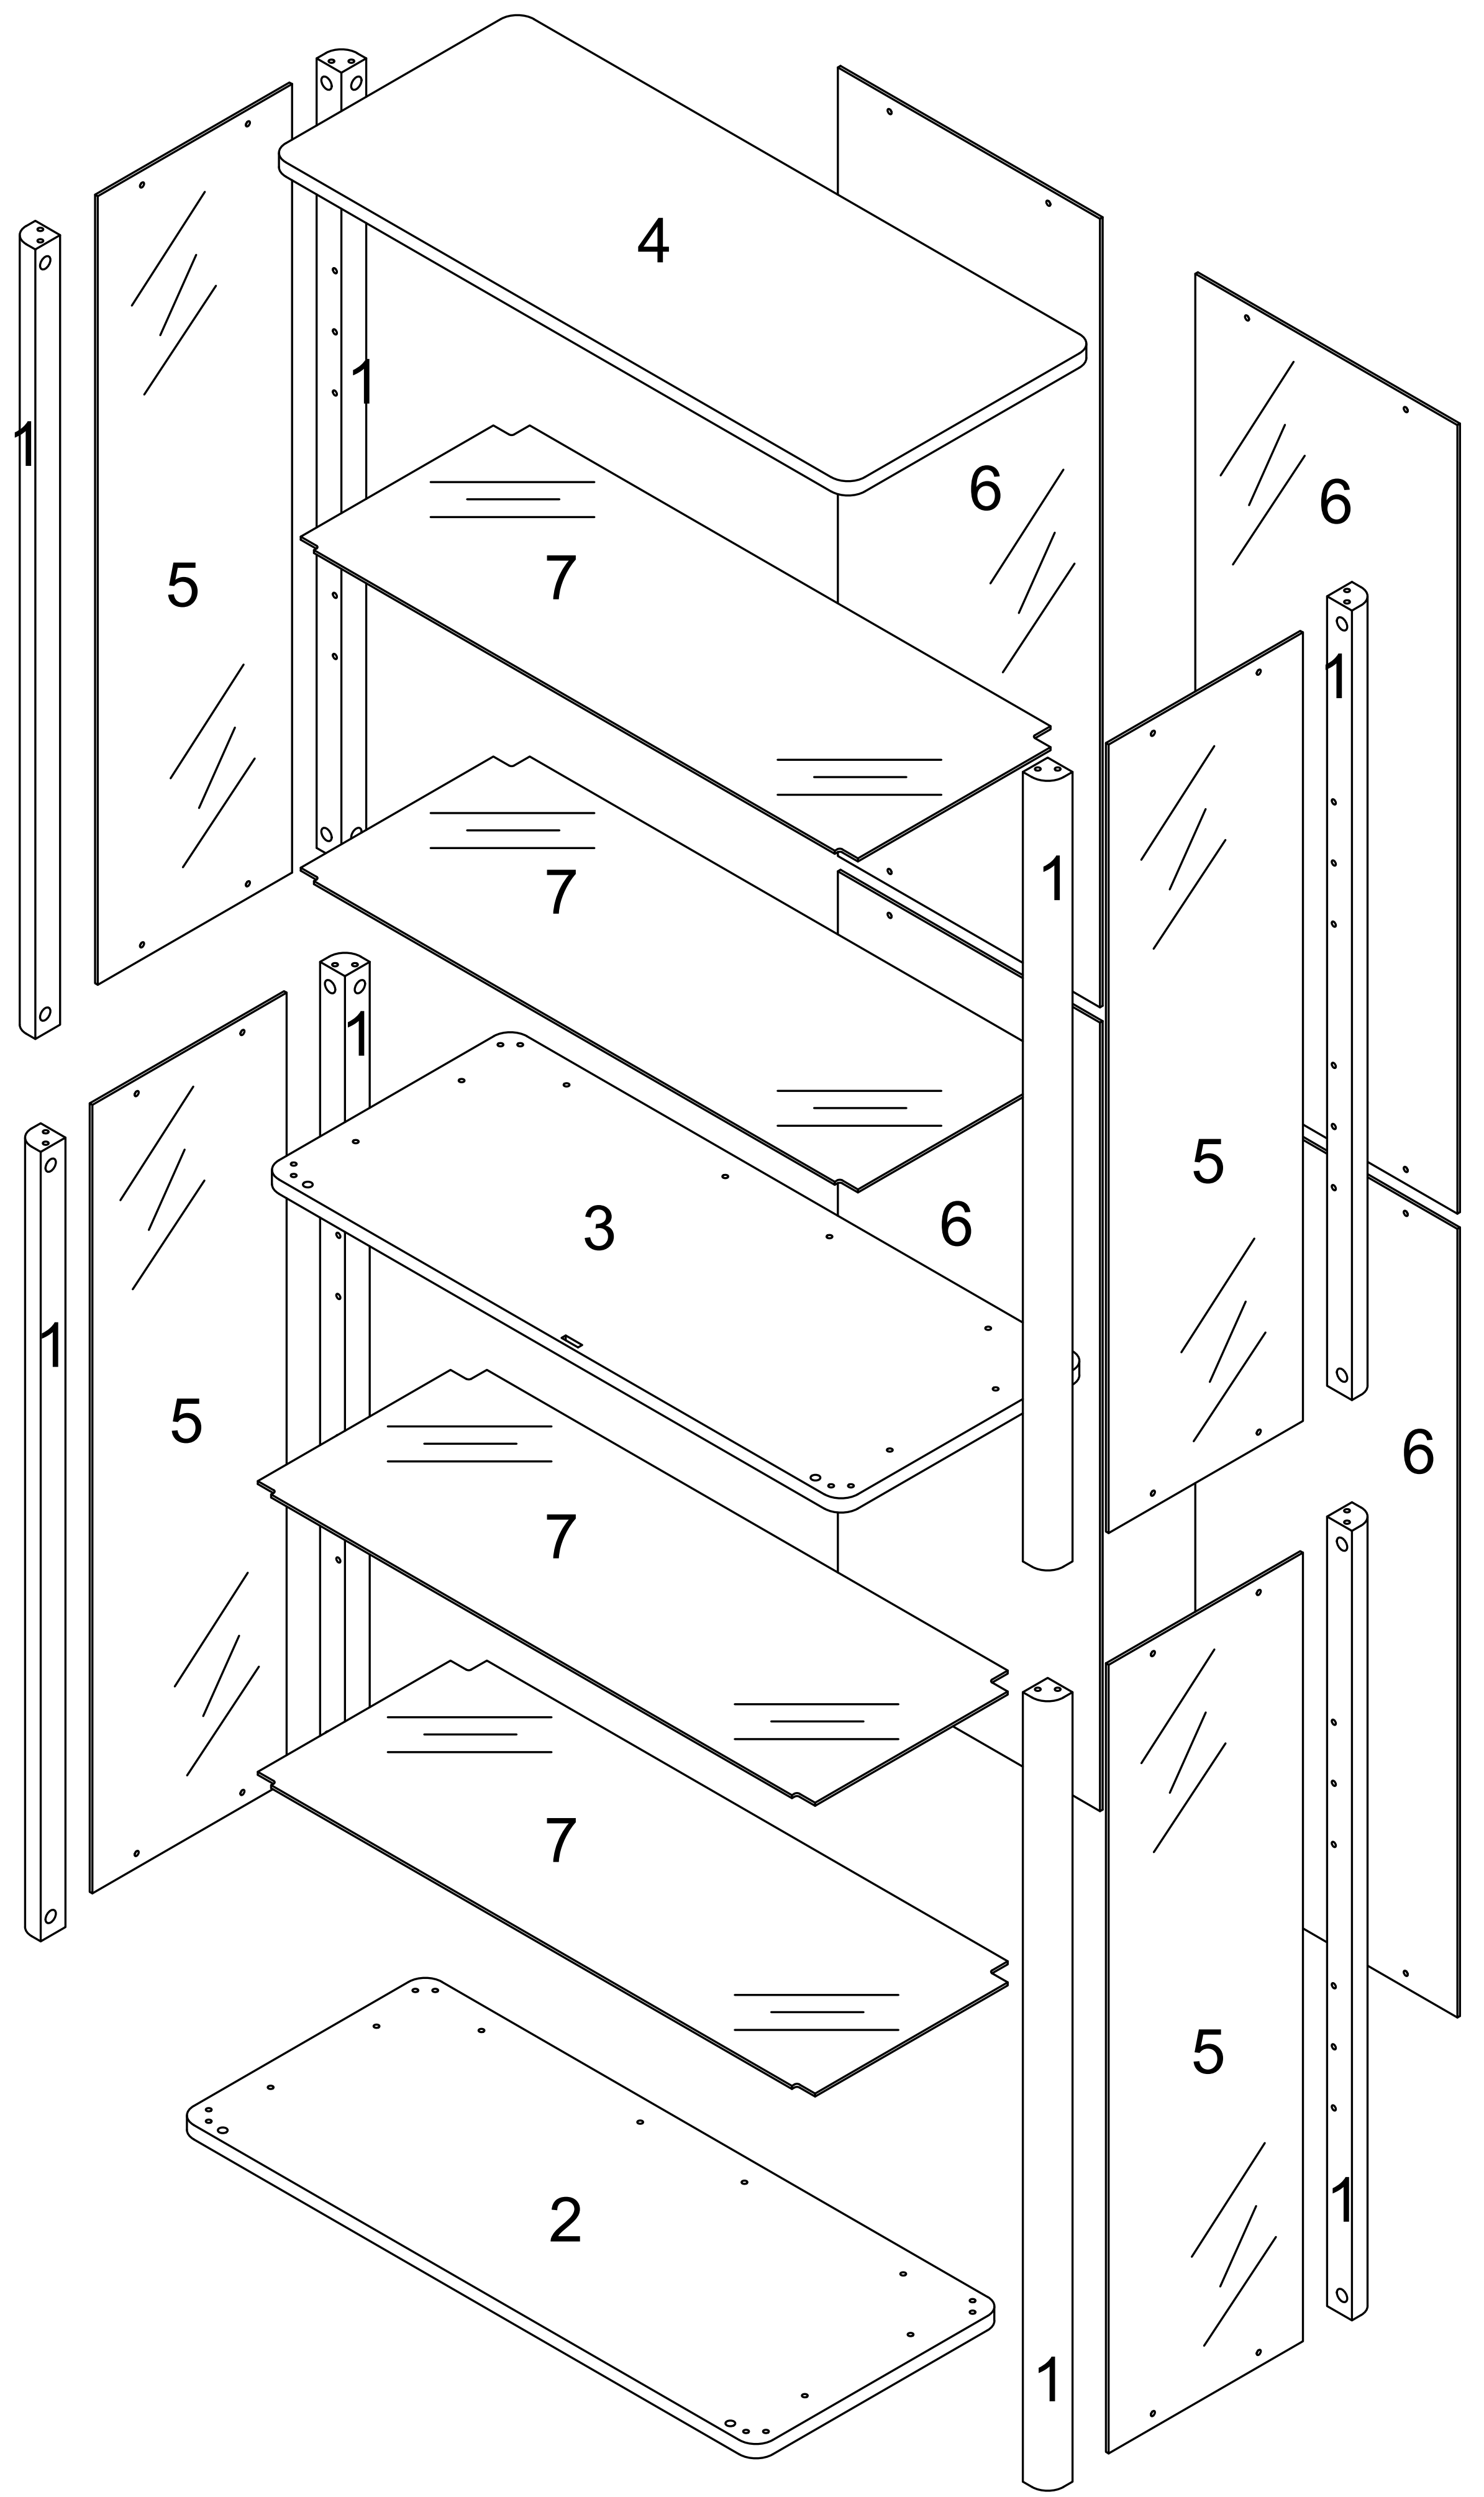

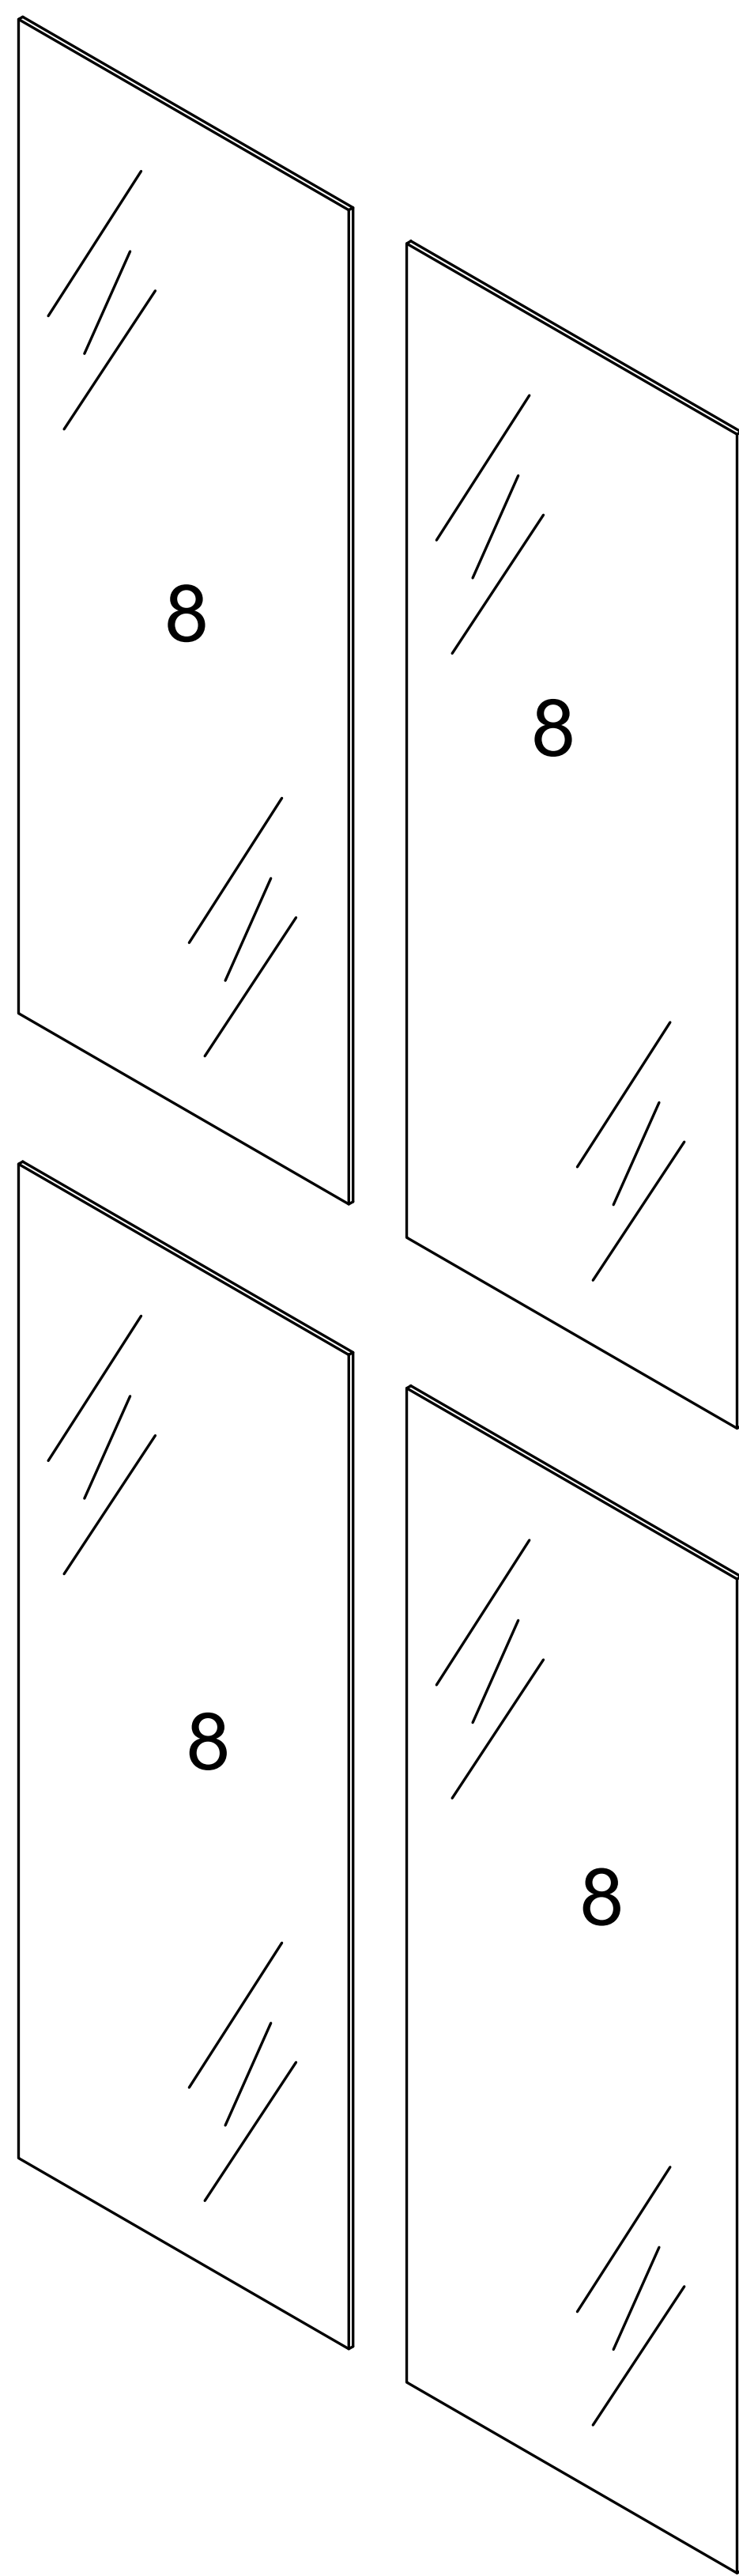





1x8

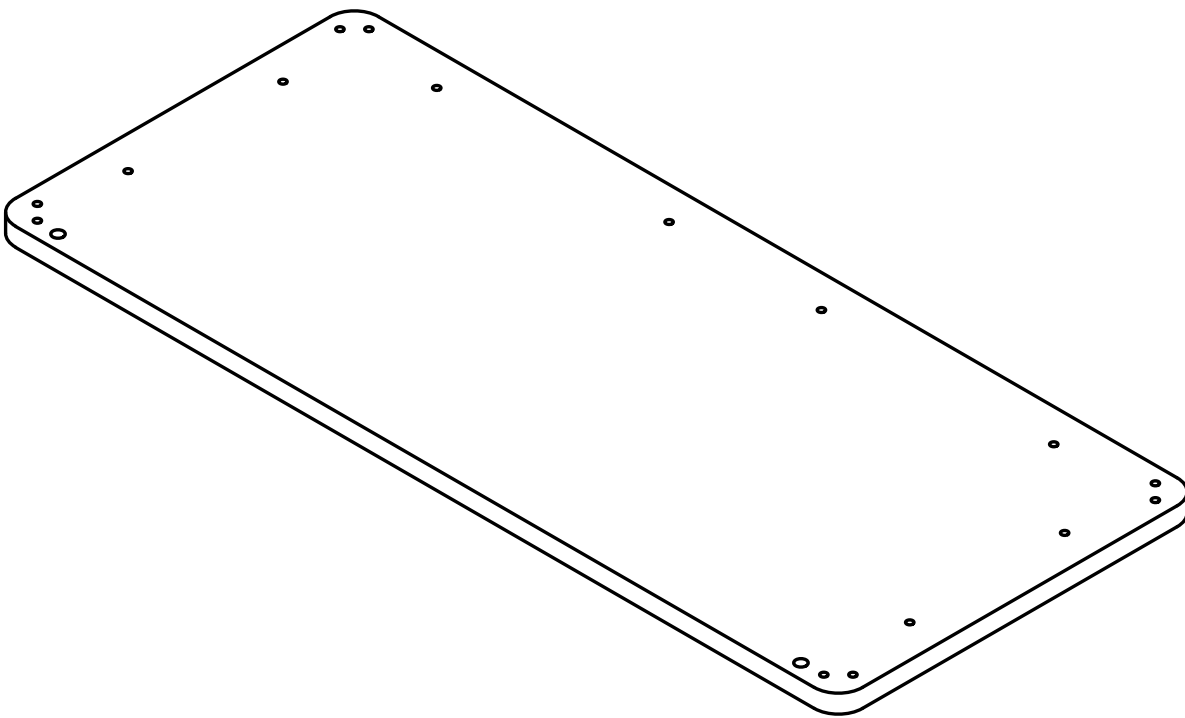


2x1

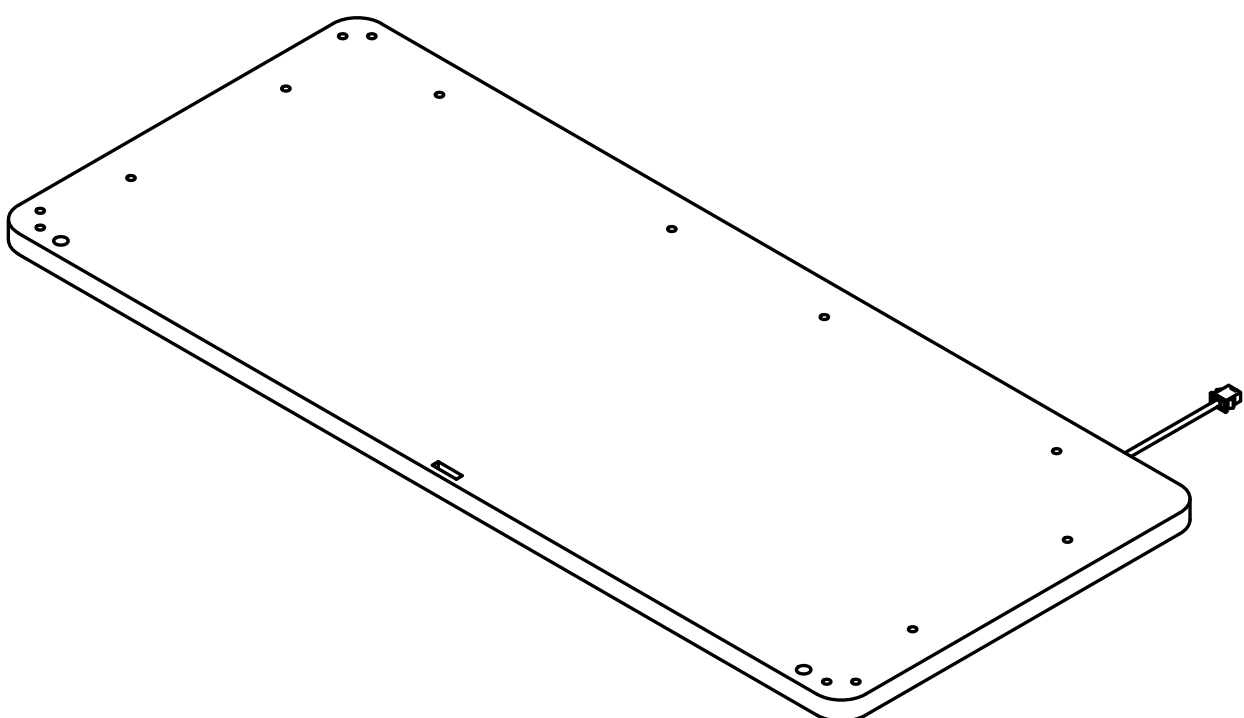


3x1

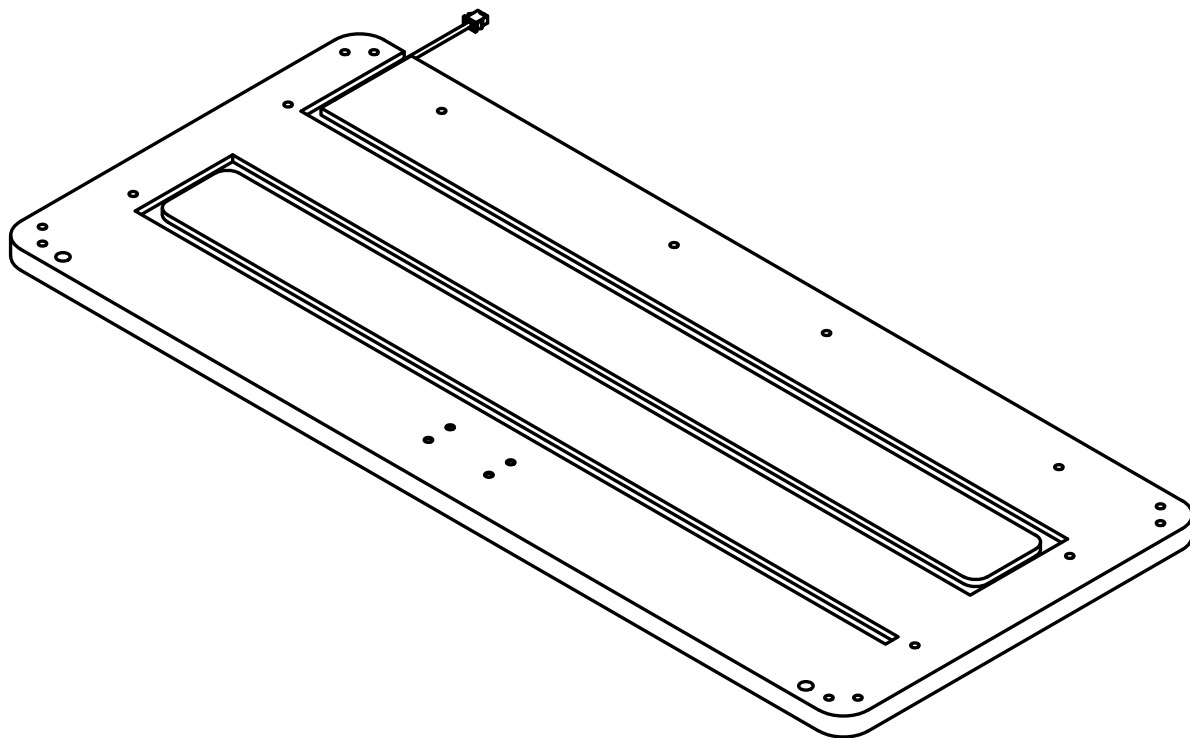


4x1

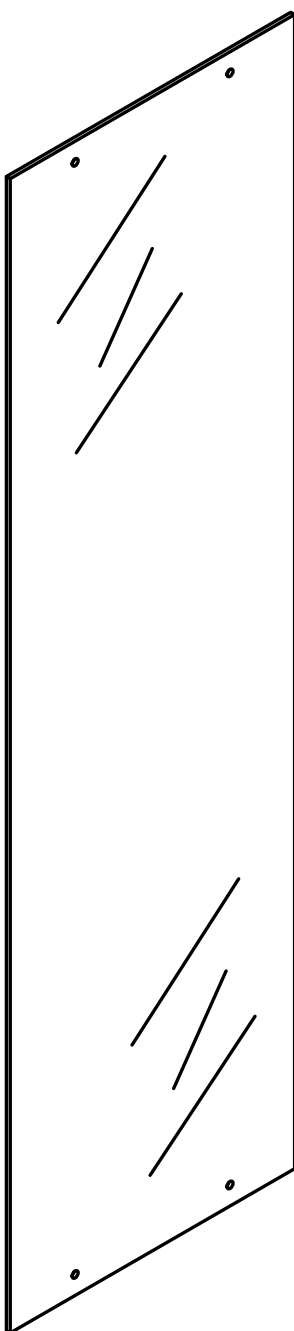


5x4

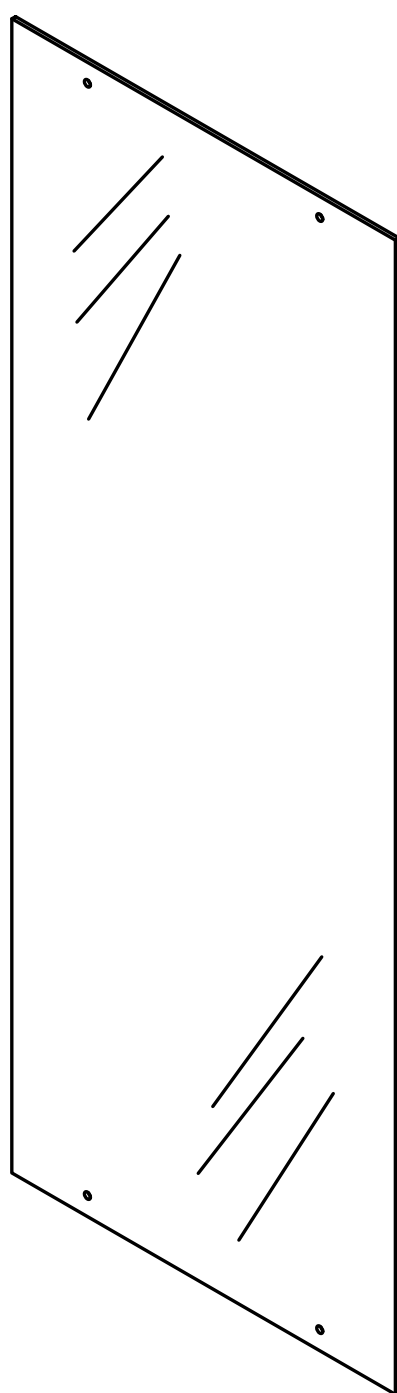


6x4

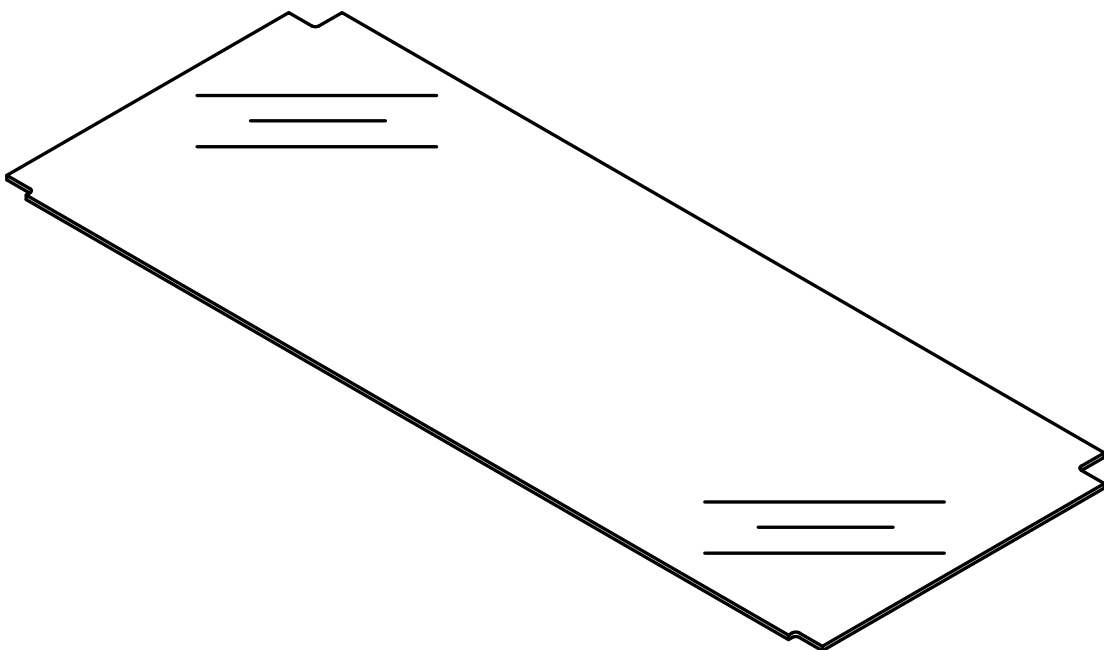
























7x4

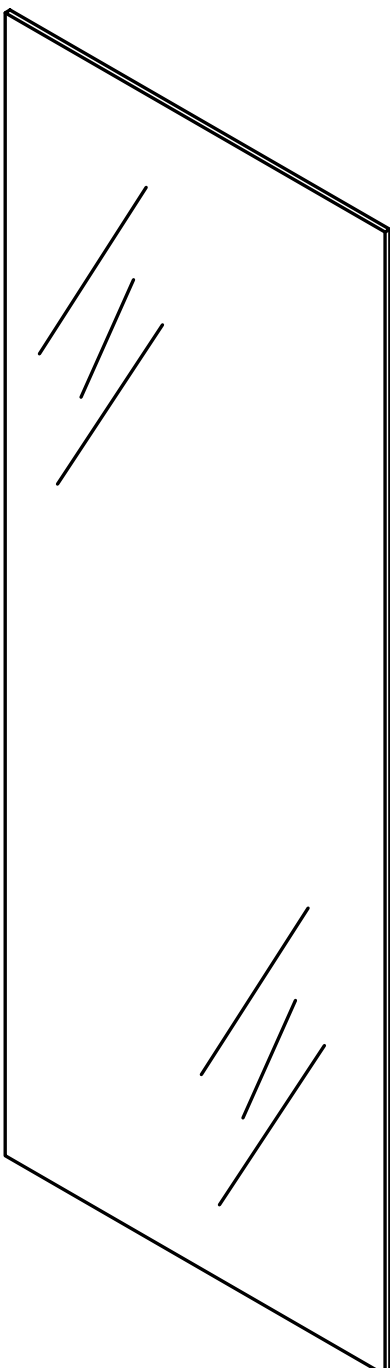

8x4

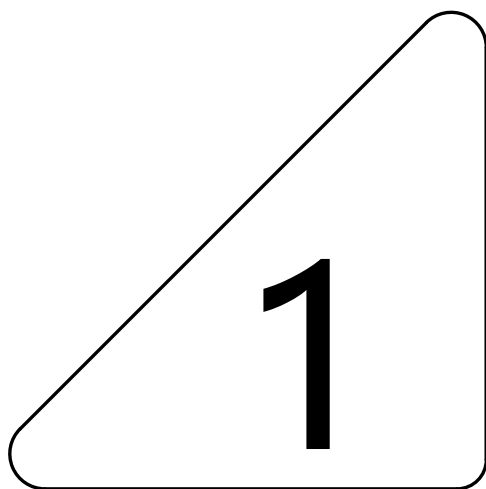


1

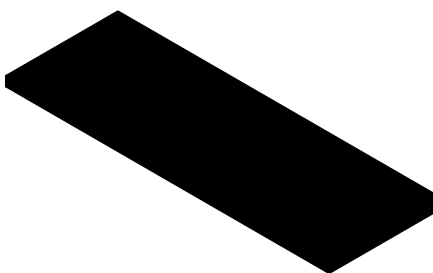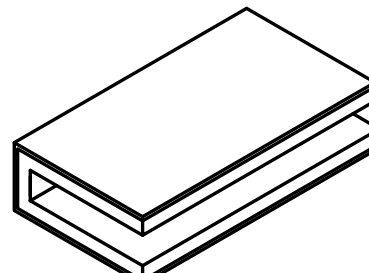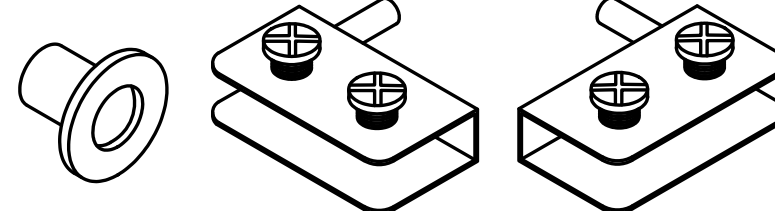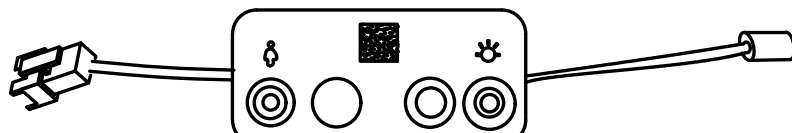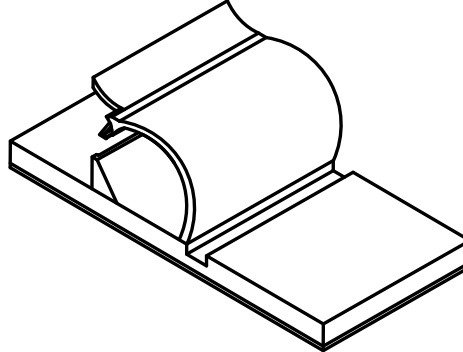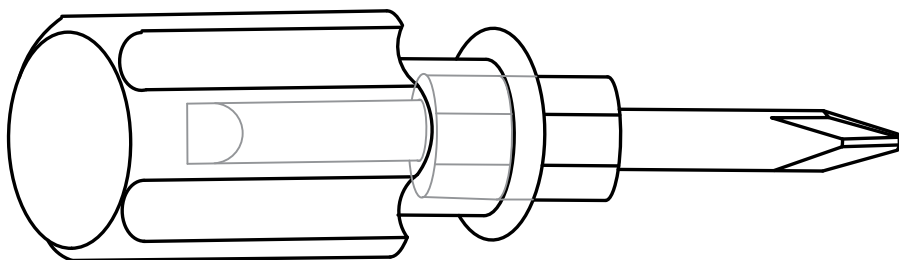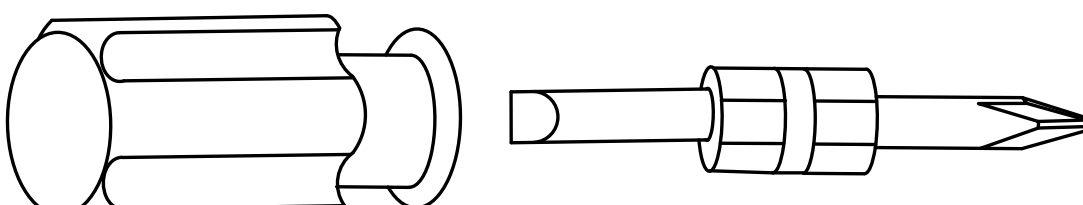
A				Non-slip pads (50x10mm)		4pcs +2pcs		
B	 x1  x1  x2			Corner Bracket,,Screw (4x8mm)		32pcs +4pcs		
C				Two In One Nut (10x12mm)		32pcs +4pcs		
D				Laminate support nail		16pcs +4pcs		
E	 			Rebound device & Screw (3x16mm)		8pcs +2pcs 2pcs		
				Iron sheet		4pcs		
				Hinge		8pcs 4pcs 4pcs		
F				LED Strip Controlle		1pcs		
G				AC/DC Adapter (12V==3. 0A)		1pcs		
H	 x2 (3. 5x14mm)  x2  x2  x4  x2 (4x45mm)			Anti Fall Hardware				
I				Two In One Screw (6x28mm)		32pcs +4pcs		
J				Clamp		3pcs +1pcs		
K				Dual-port cable		1pcs		
L				Double door glass lock Key		1pcs	2pcs	1pcs +1pcs
 1pcs  Double-head screwdriver, use as required 2								

Use parts A and B




Step1

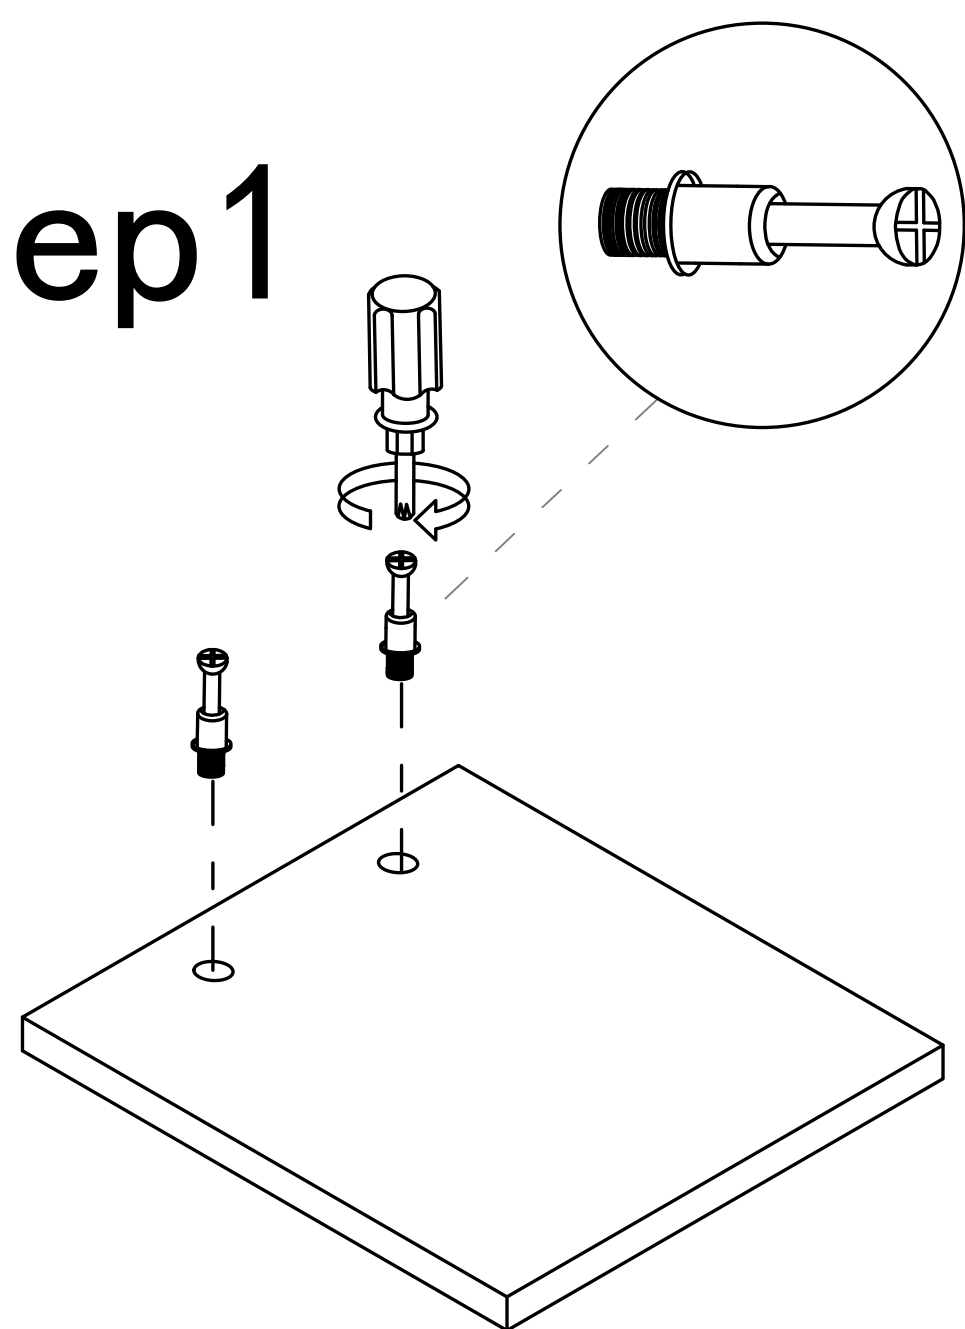

Step2

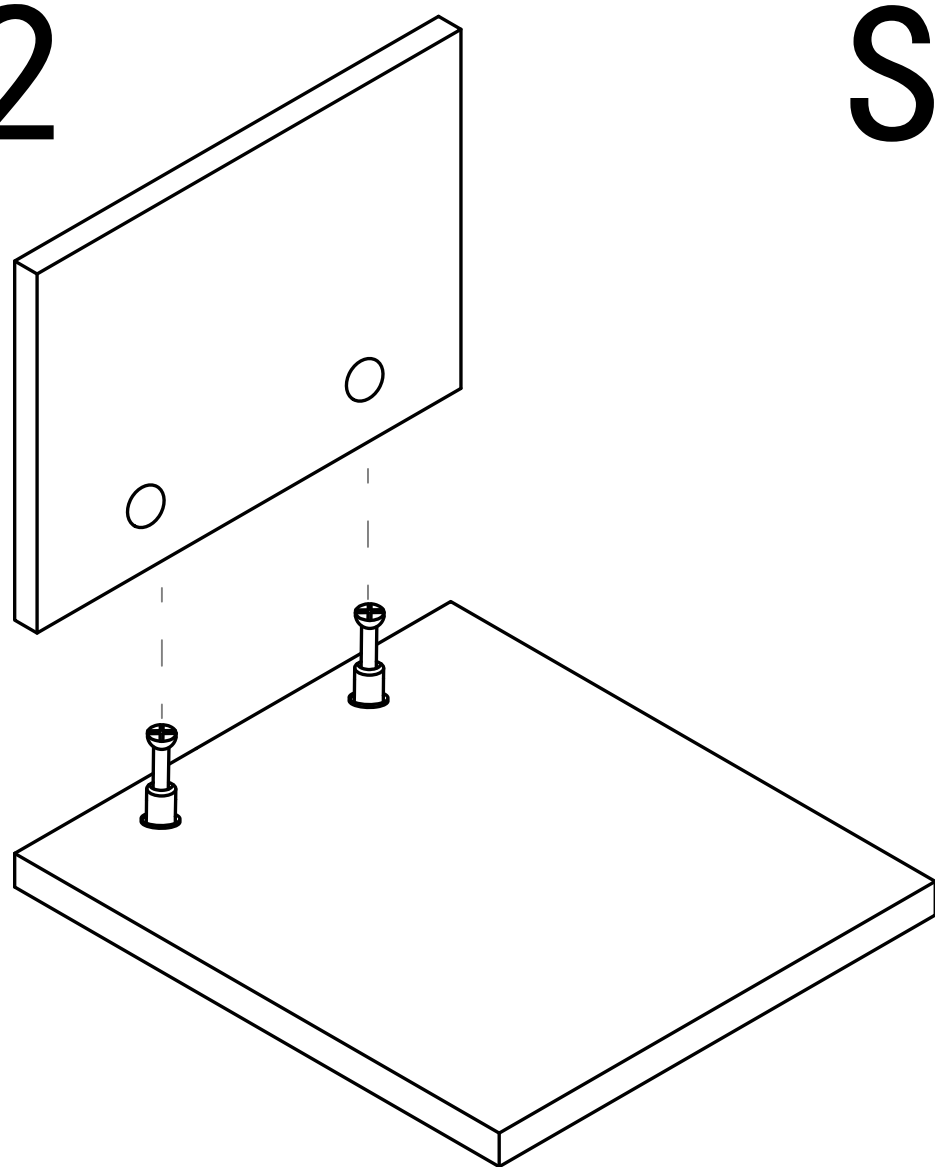


Step3

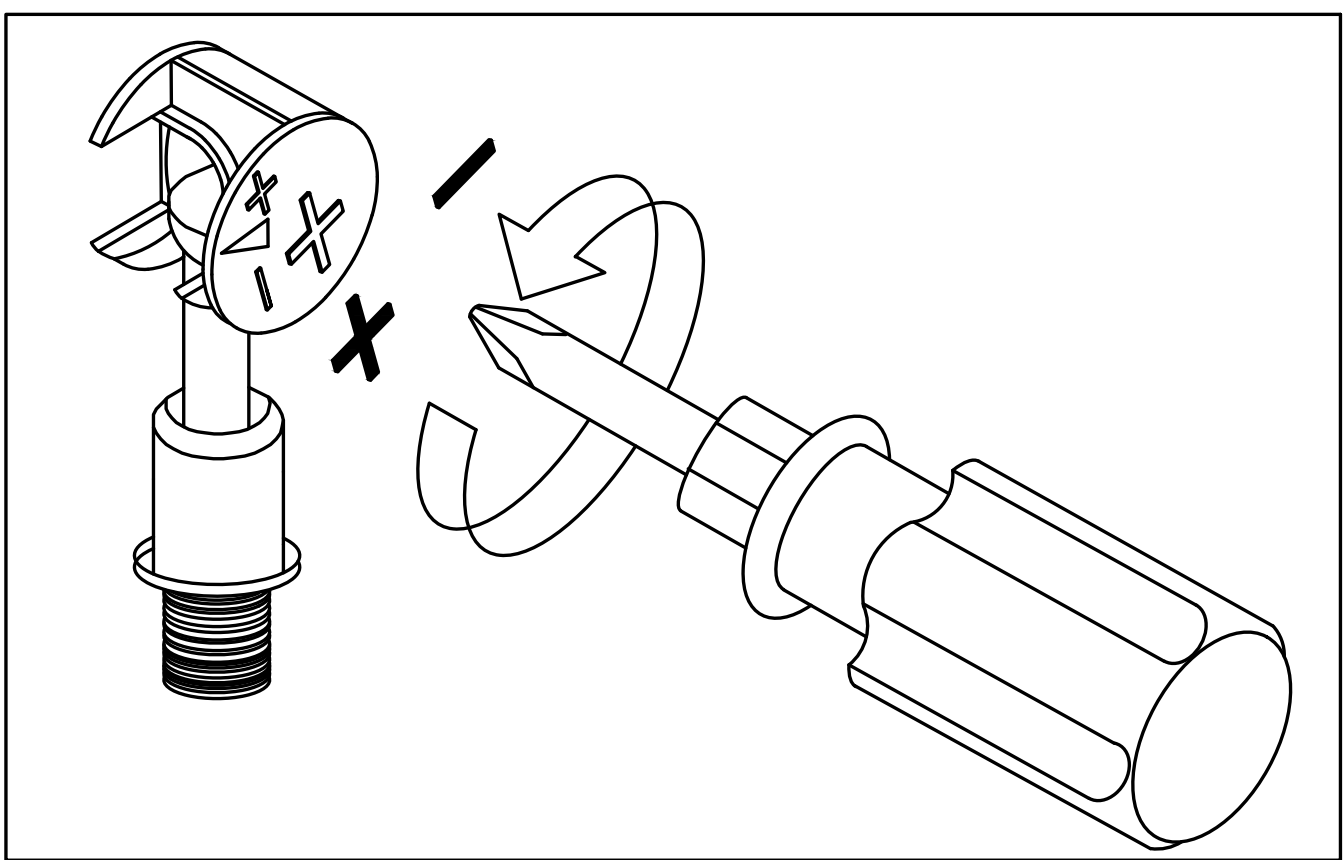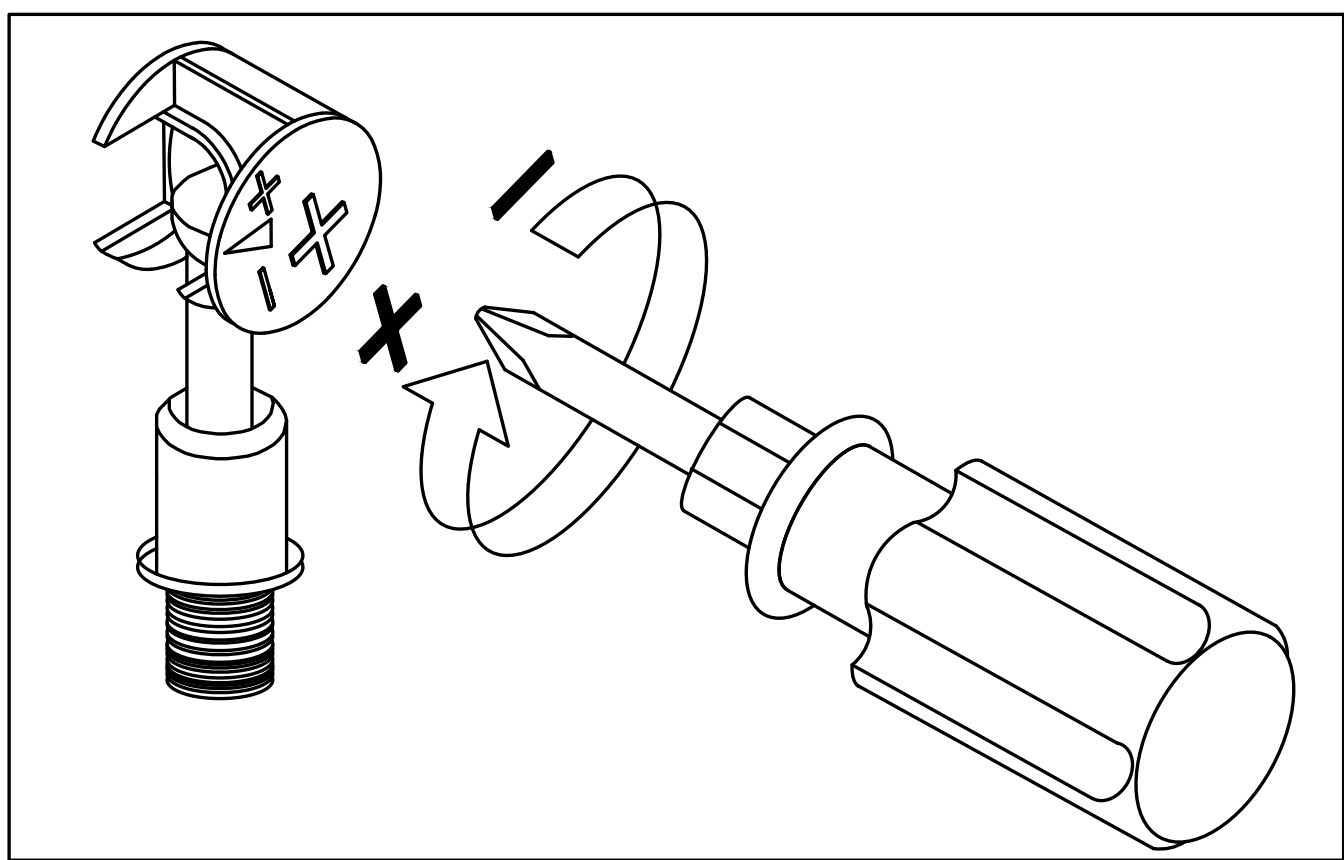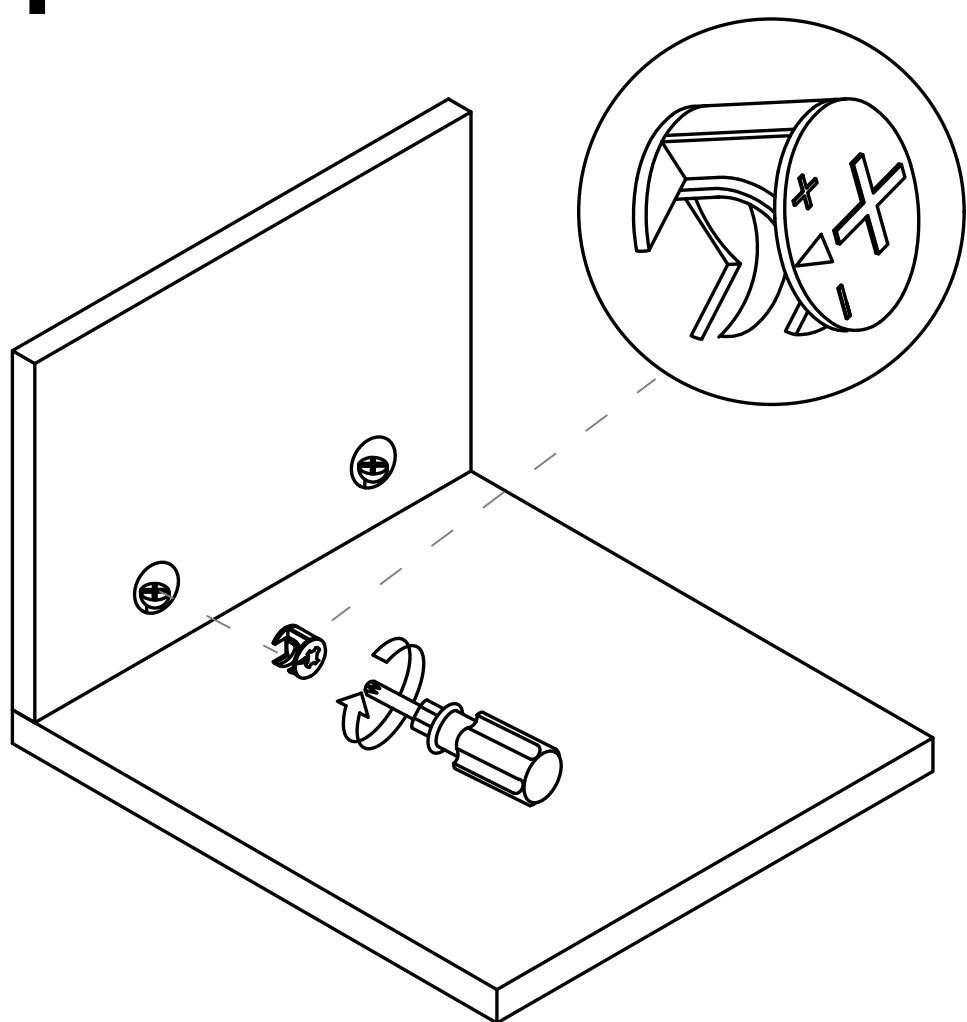



Use a screwdriver to lock in the direction of the "+" sign

Disassemble along the direction of "-" sign

Step 1

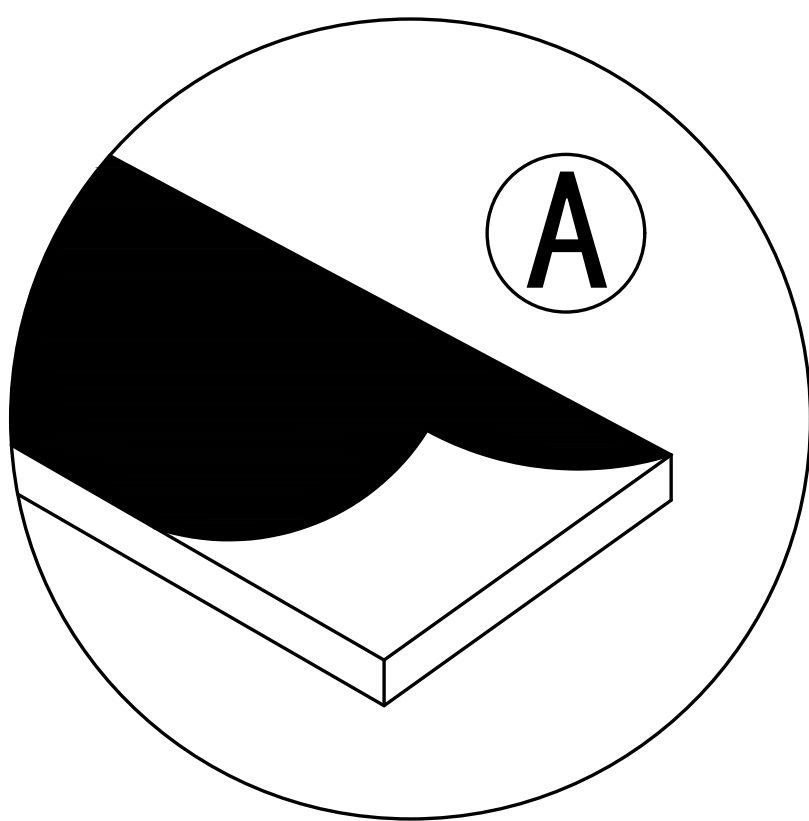


Remove the protective film before installation

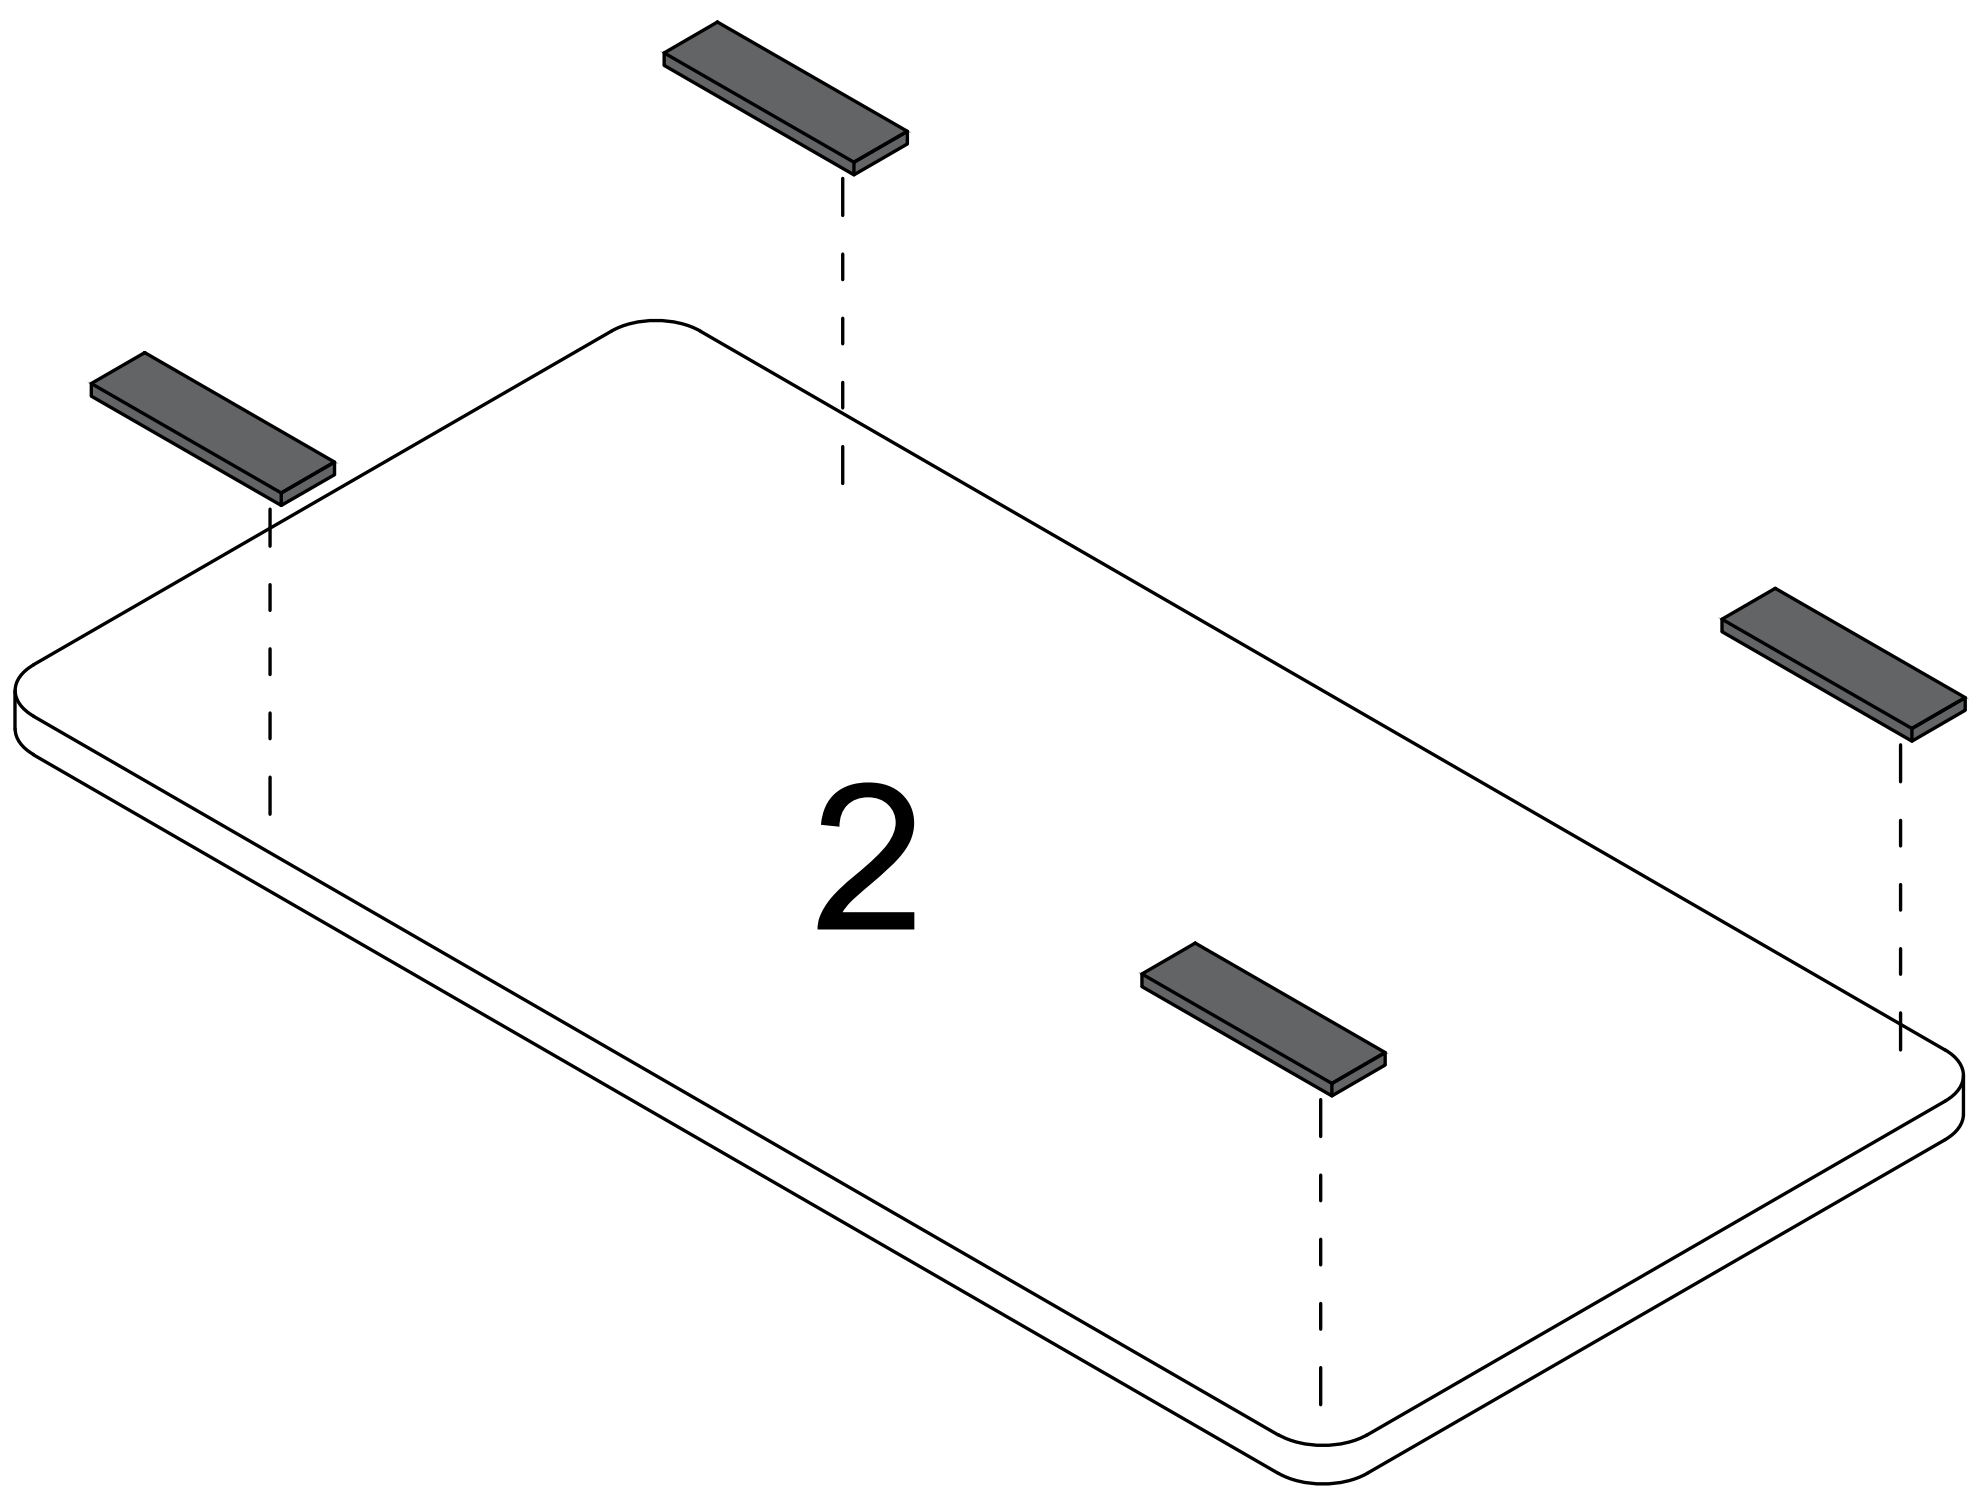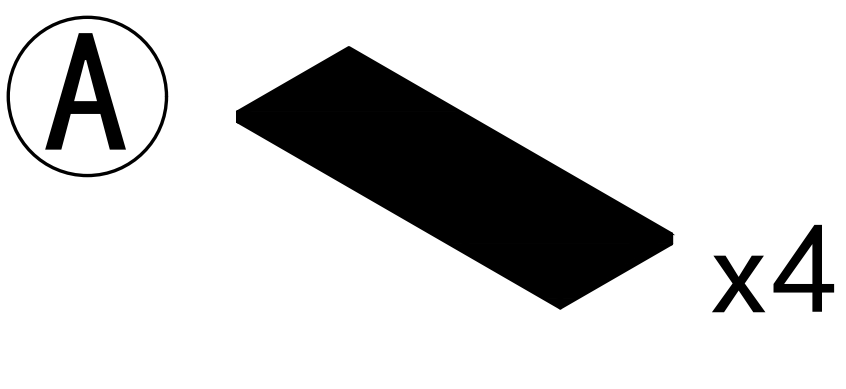

3


Step 2

I

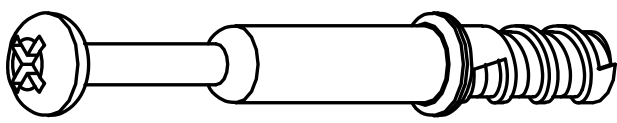


x 8


B




x 8



x 8

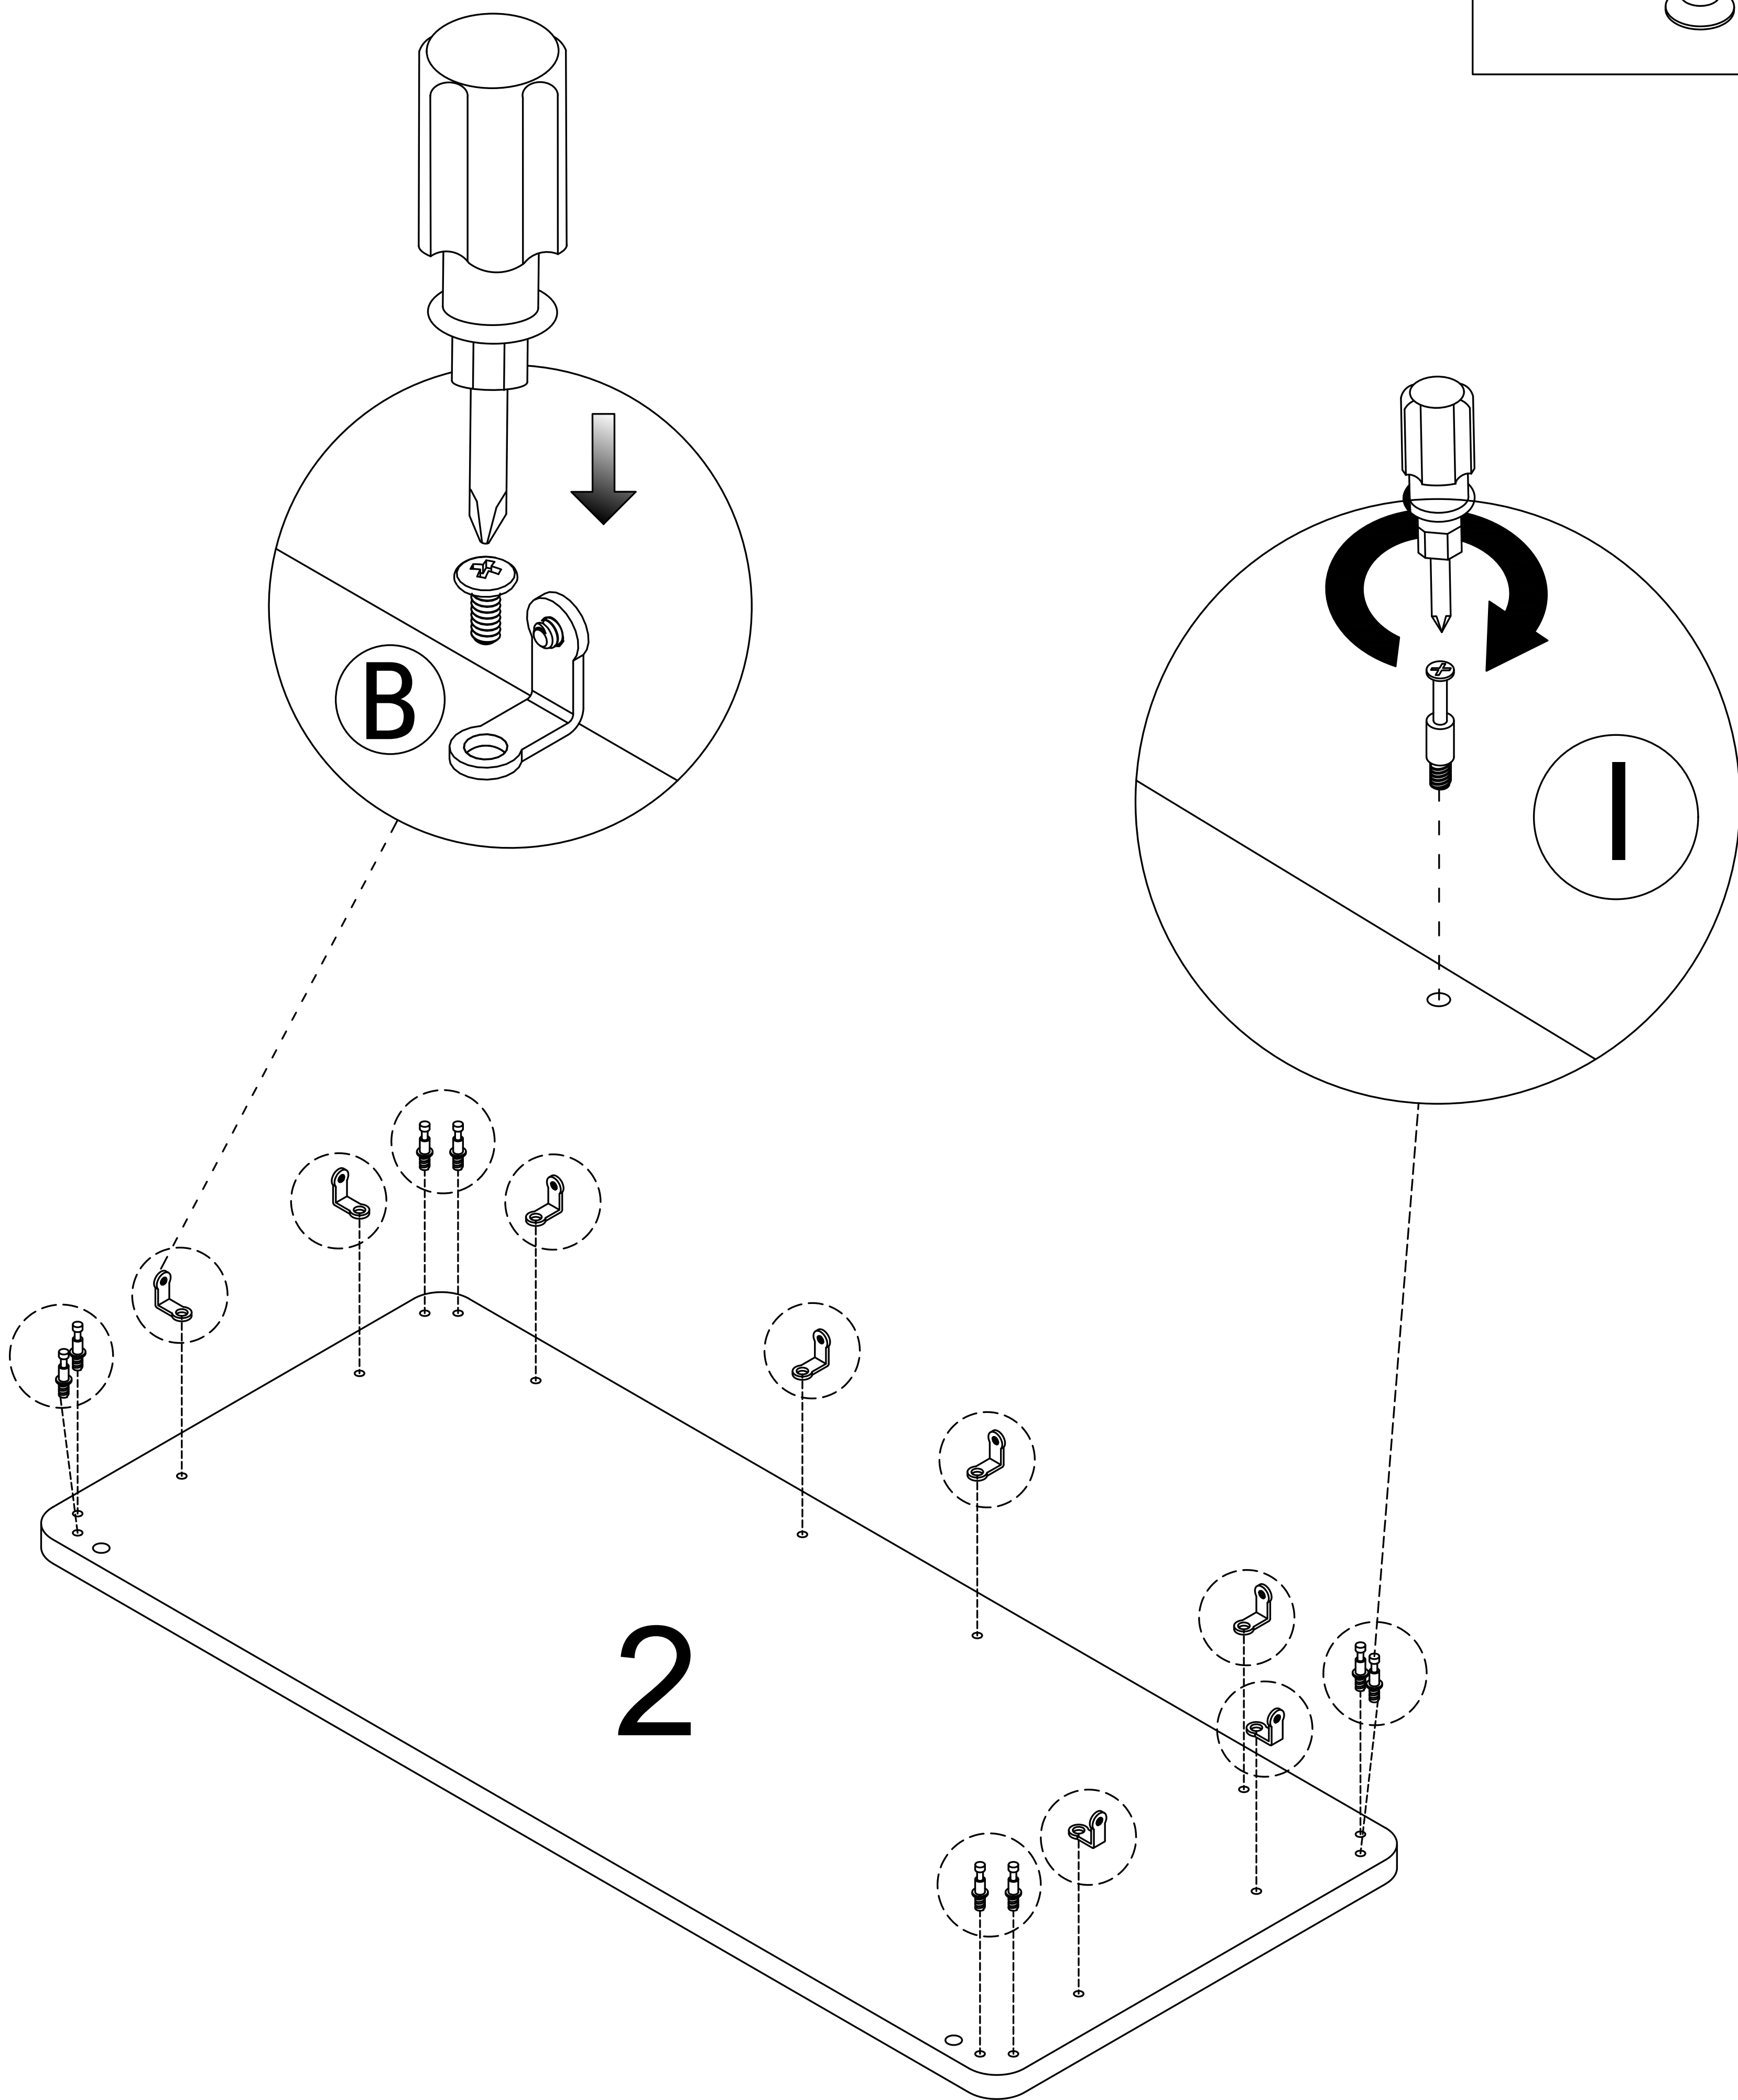


Install this hole

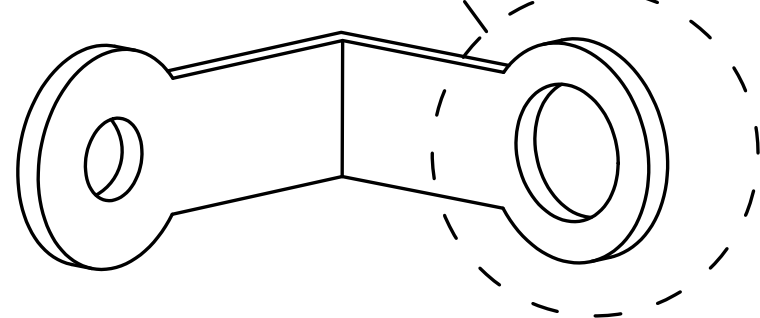


Step 3

C




x 8

Please note: Installation must be performed using the hole-to-hole alignment method.

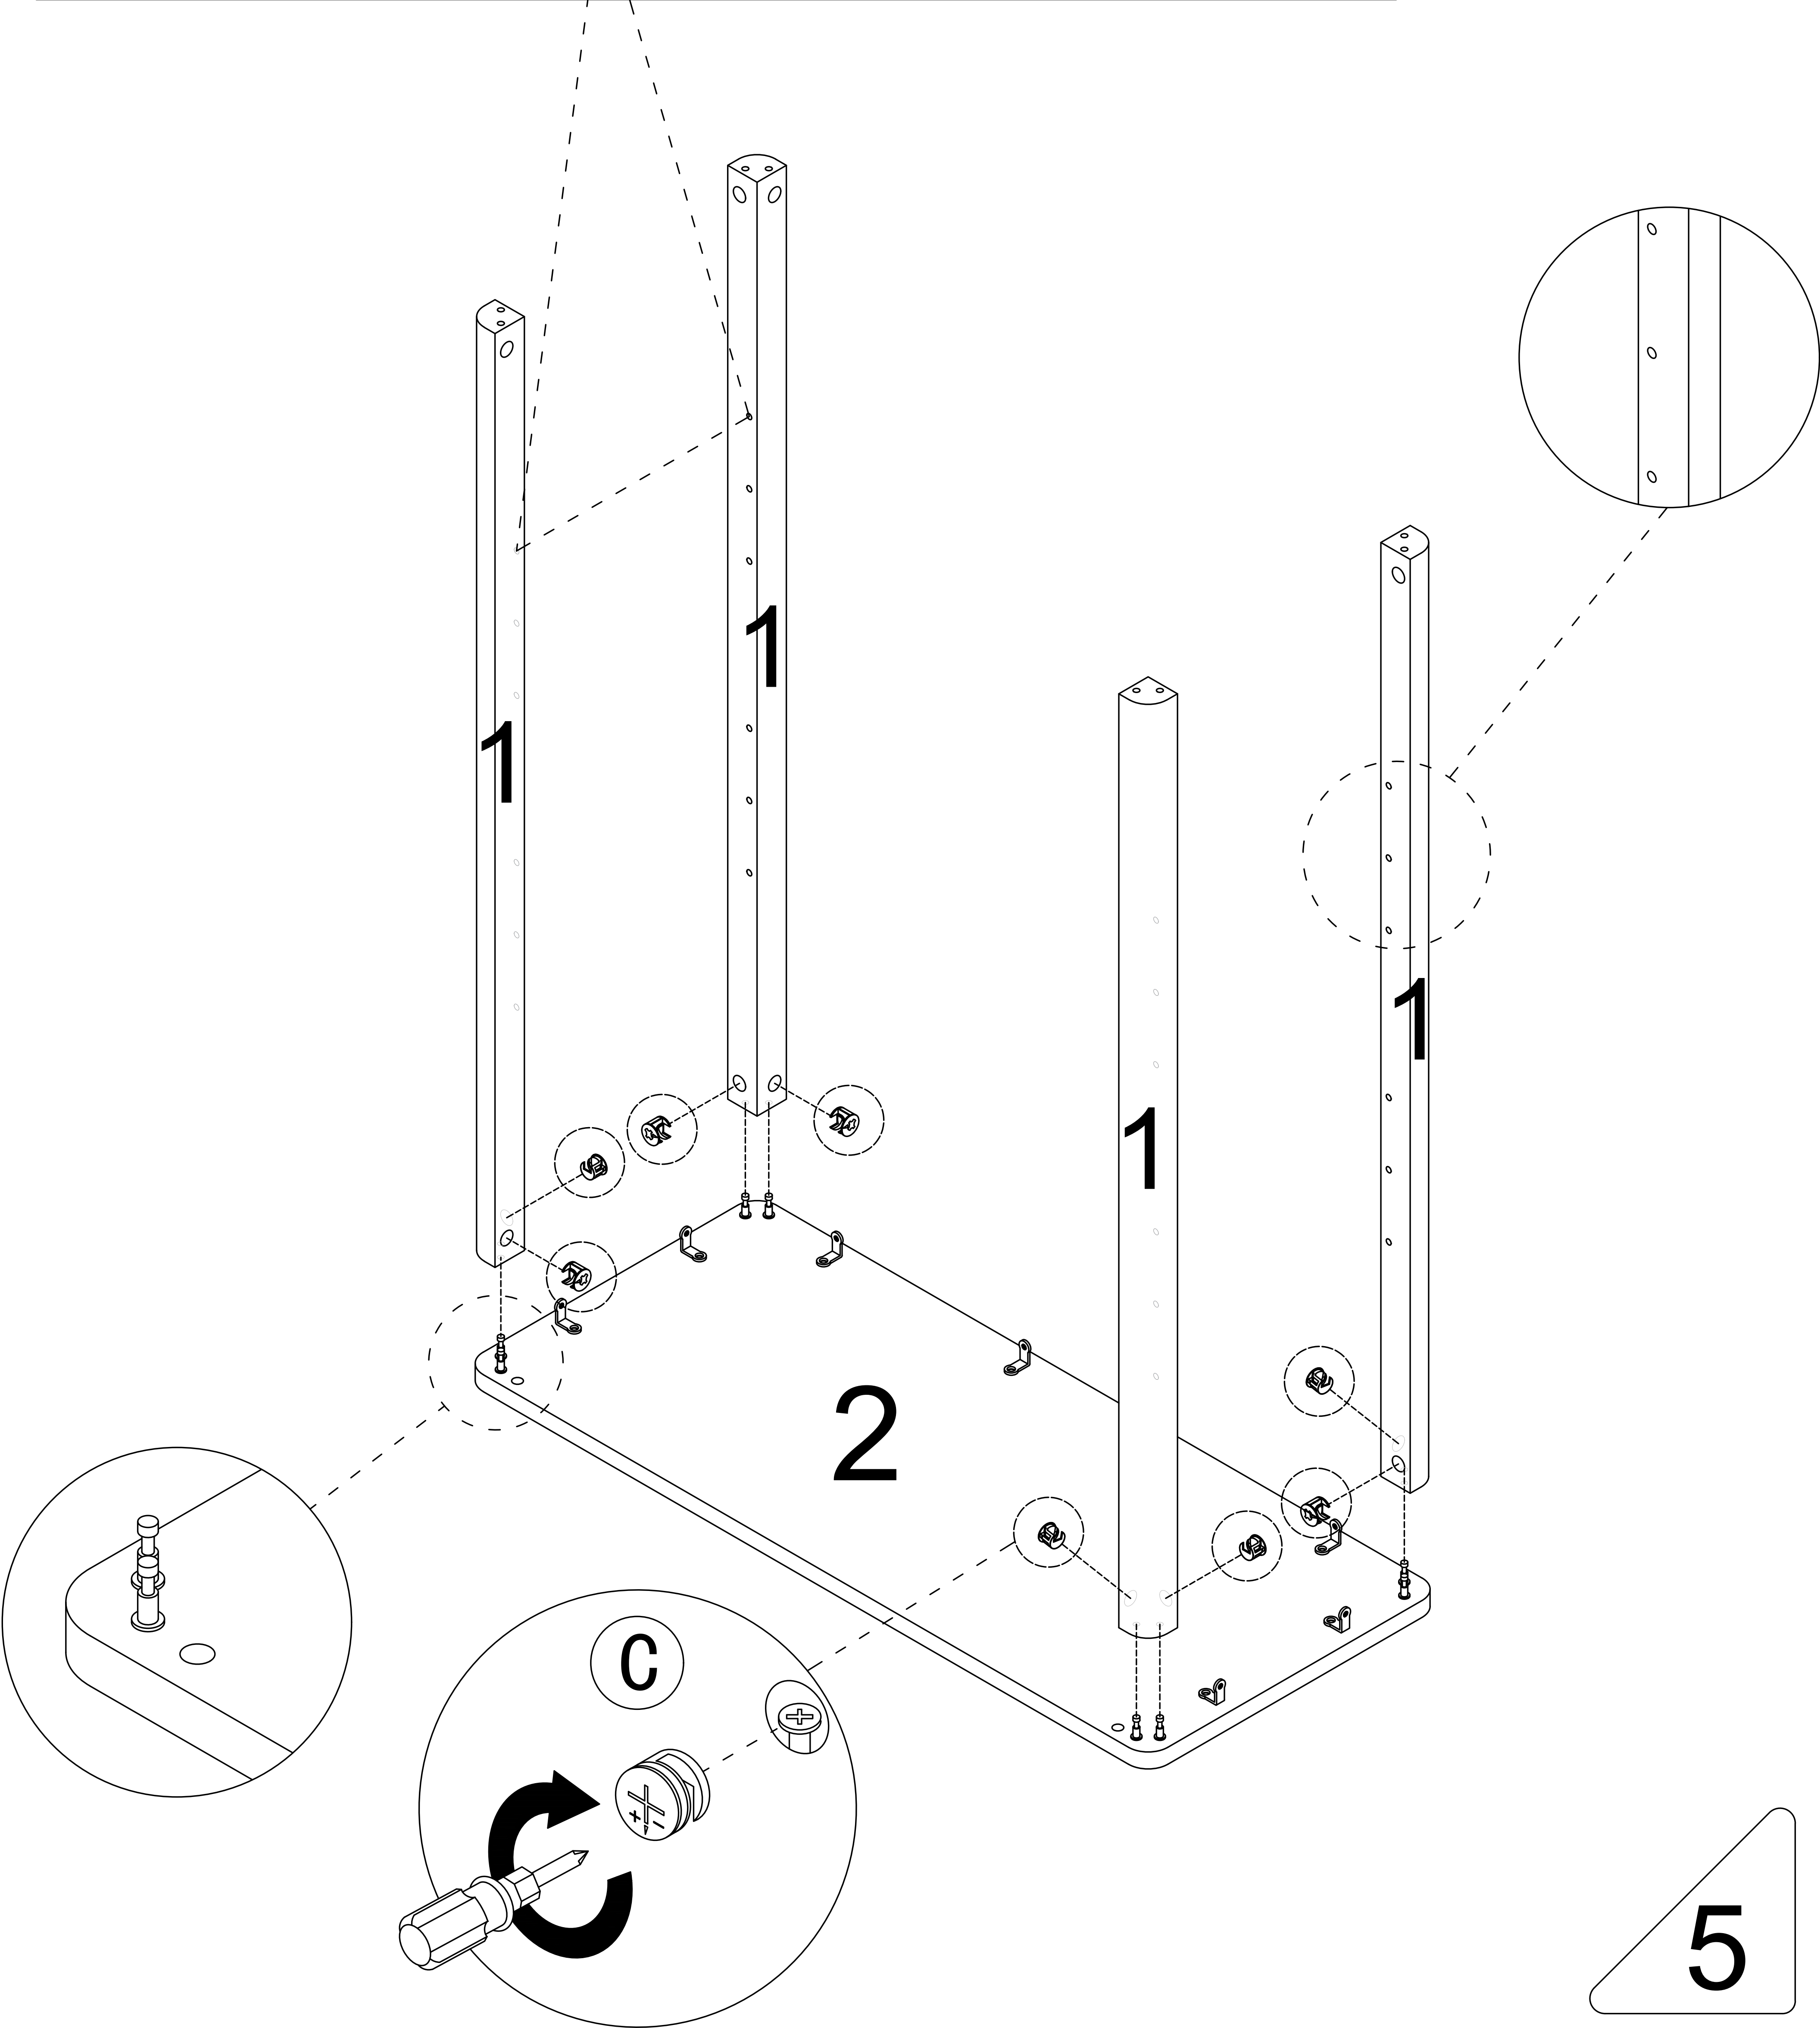


Step 4

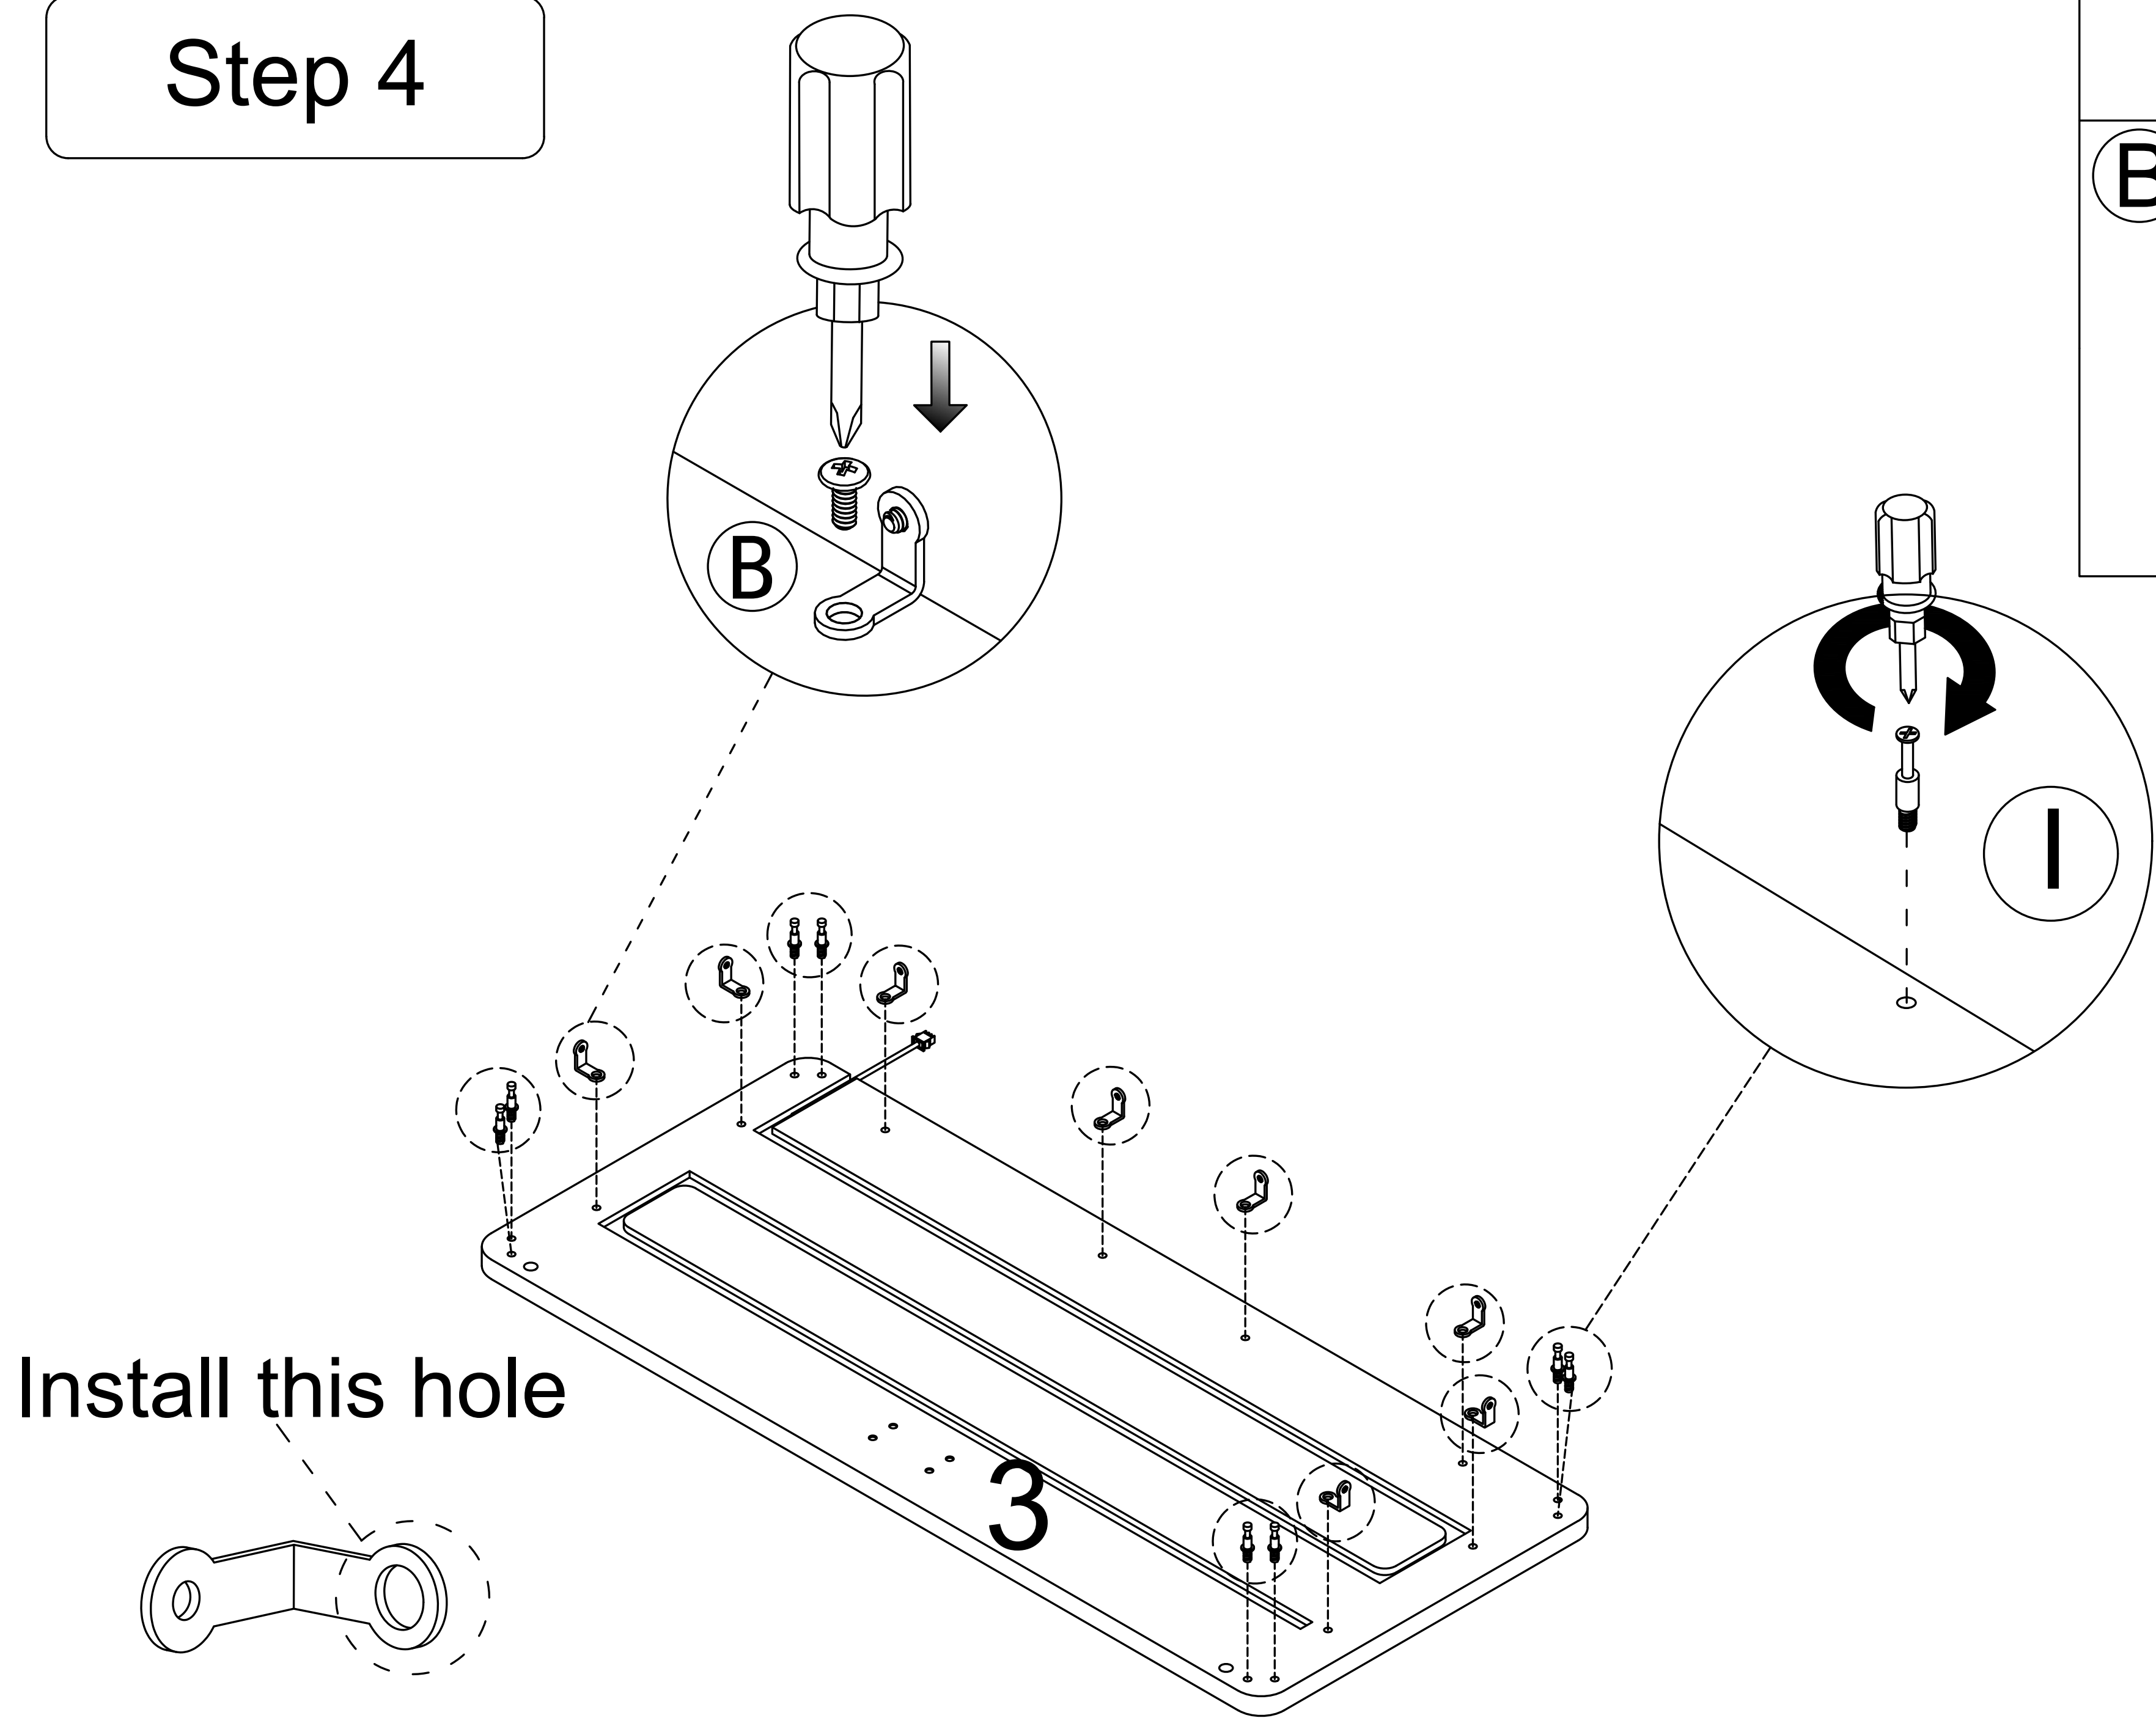




- I x 8
- B x 8
- x 8

Step 5

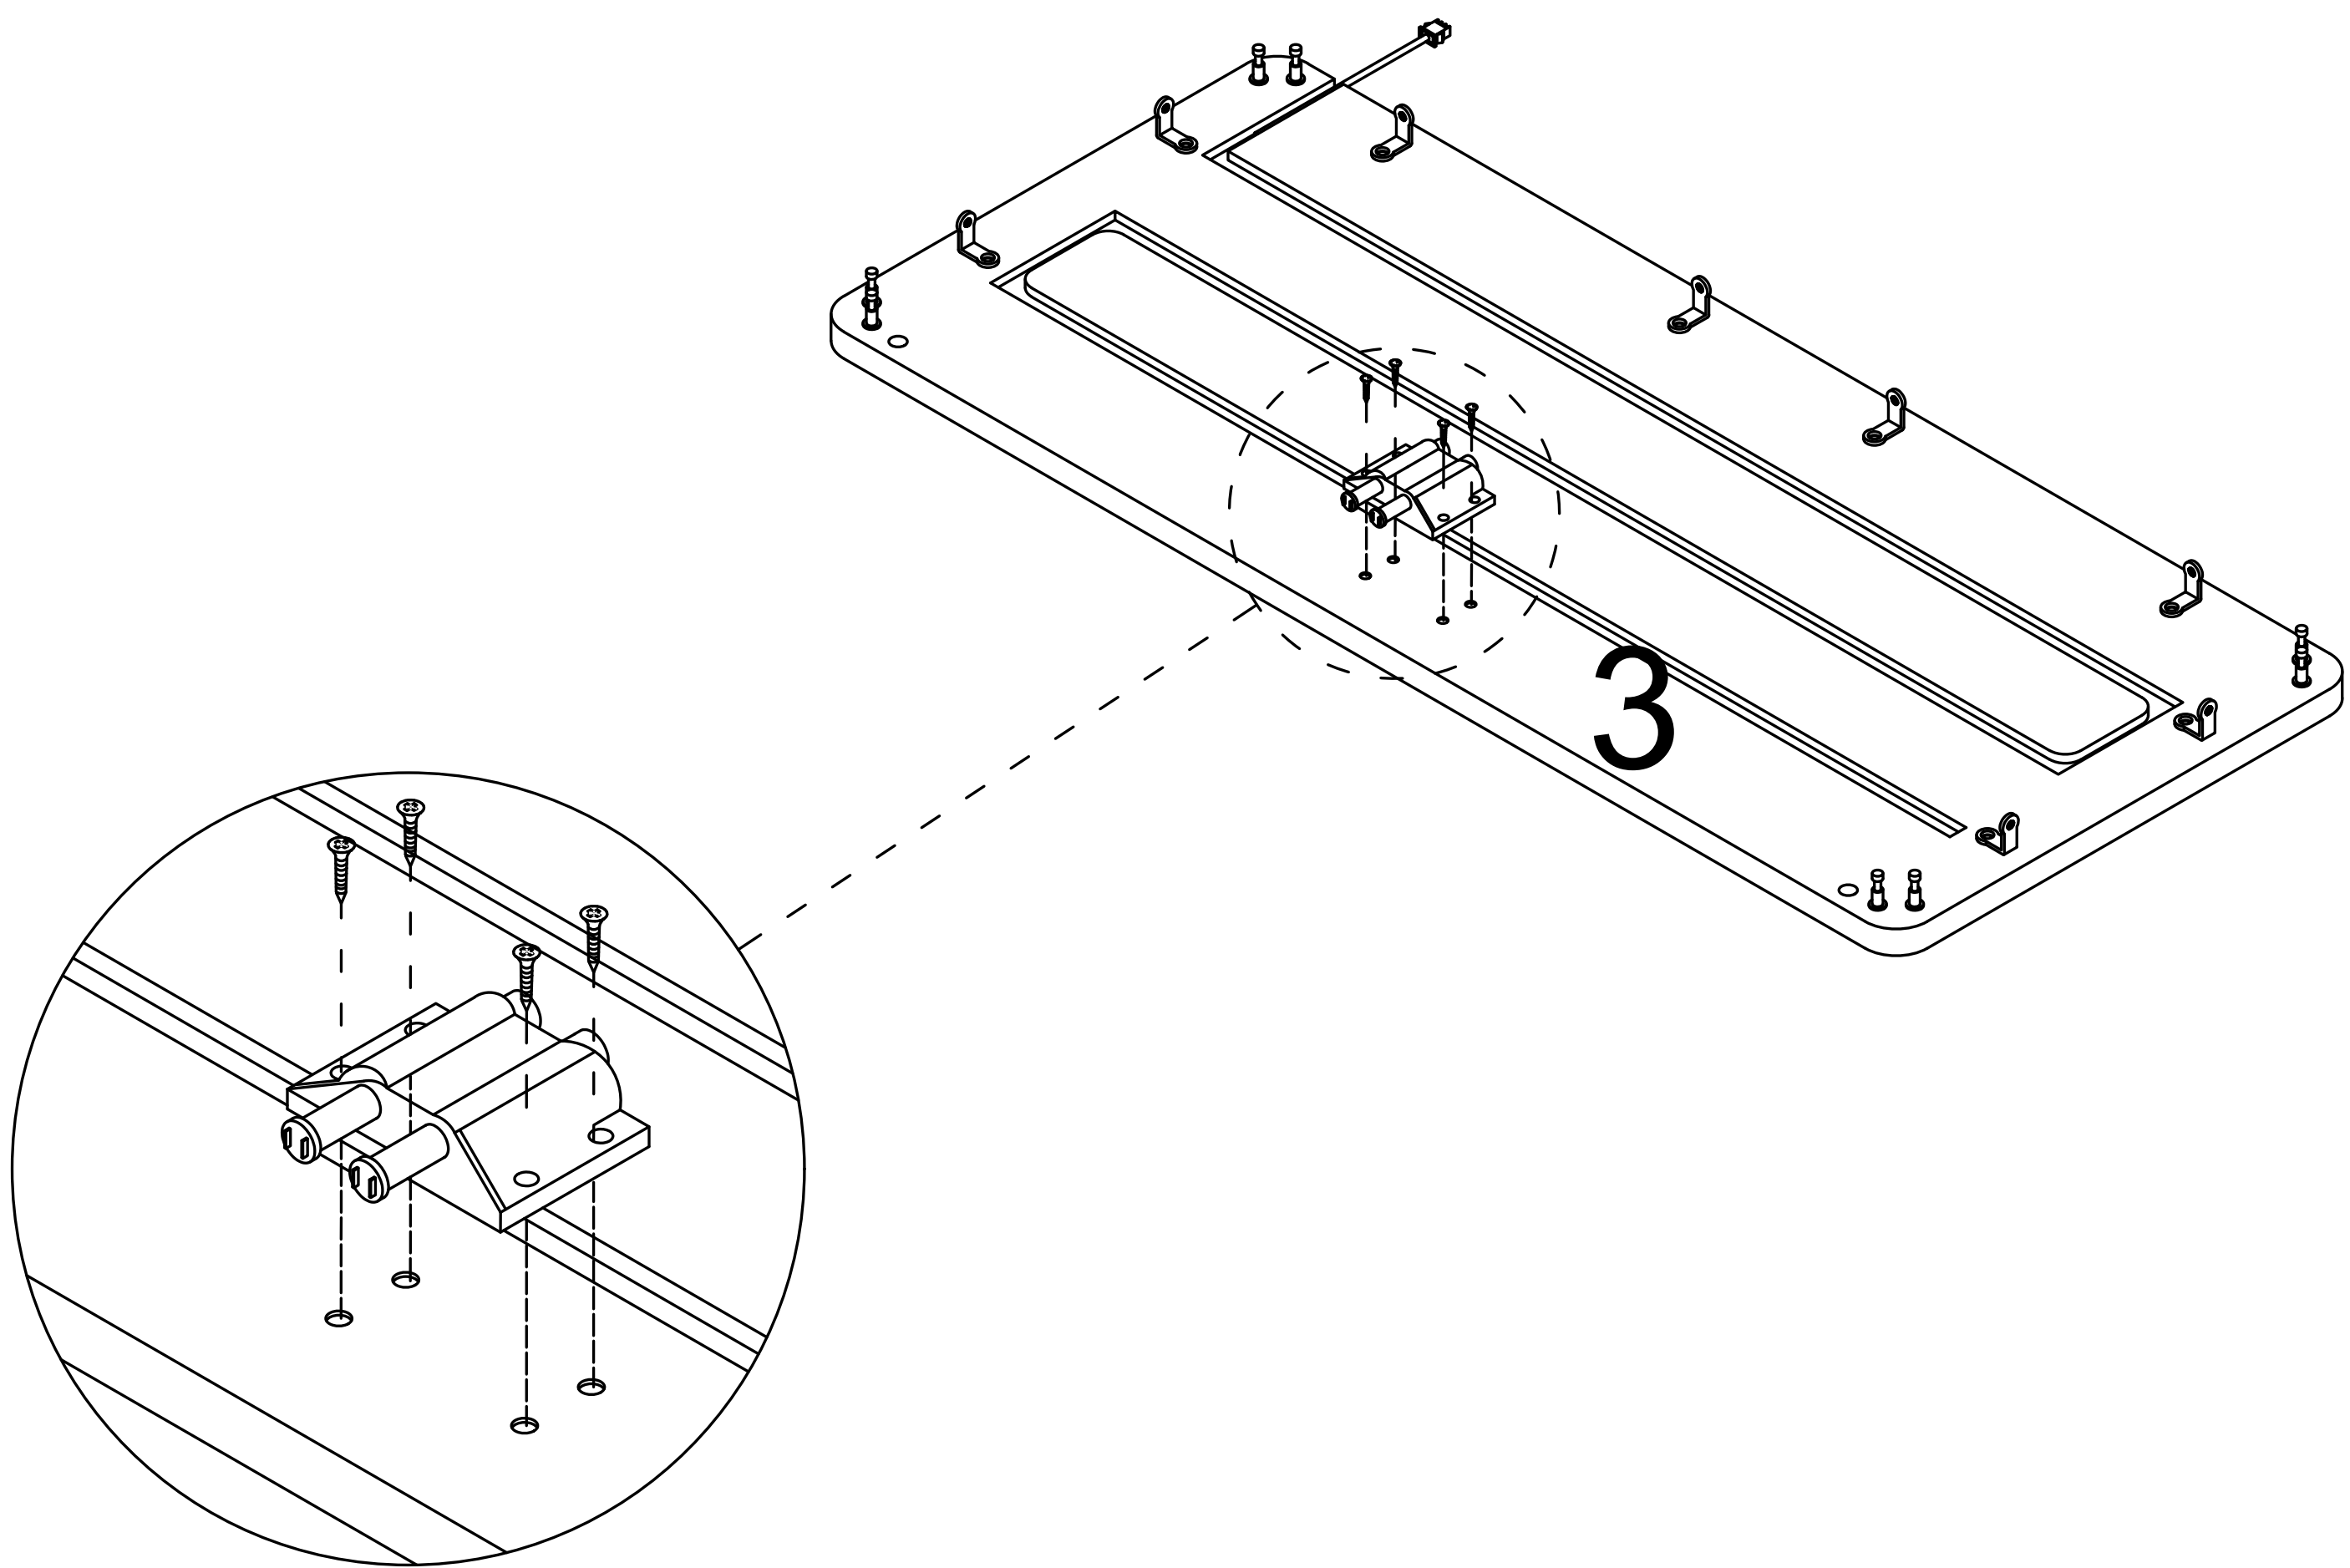


- E x1
- x4




Step 6

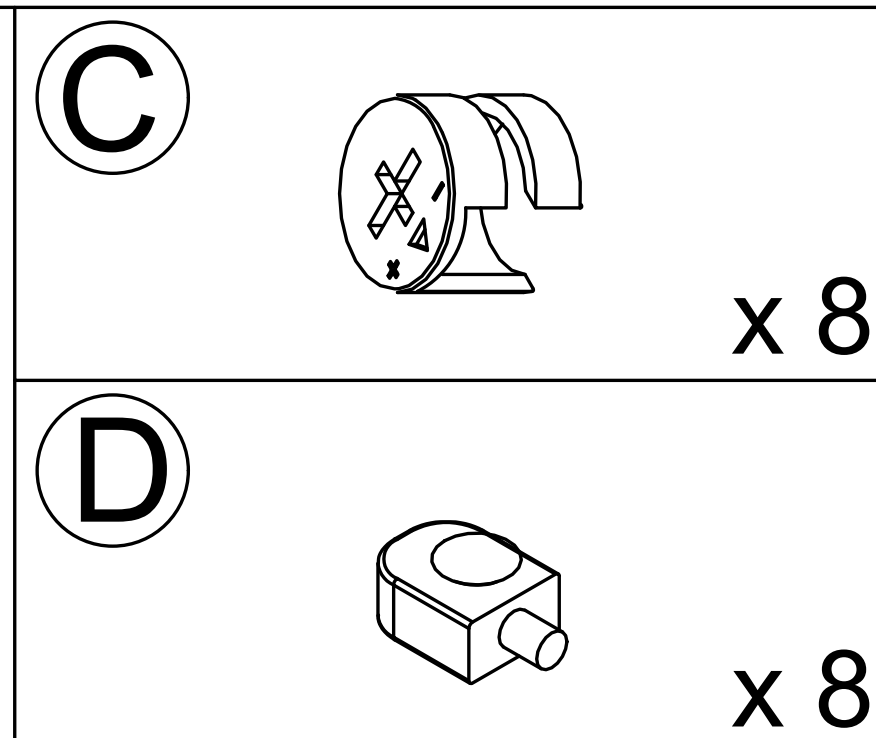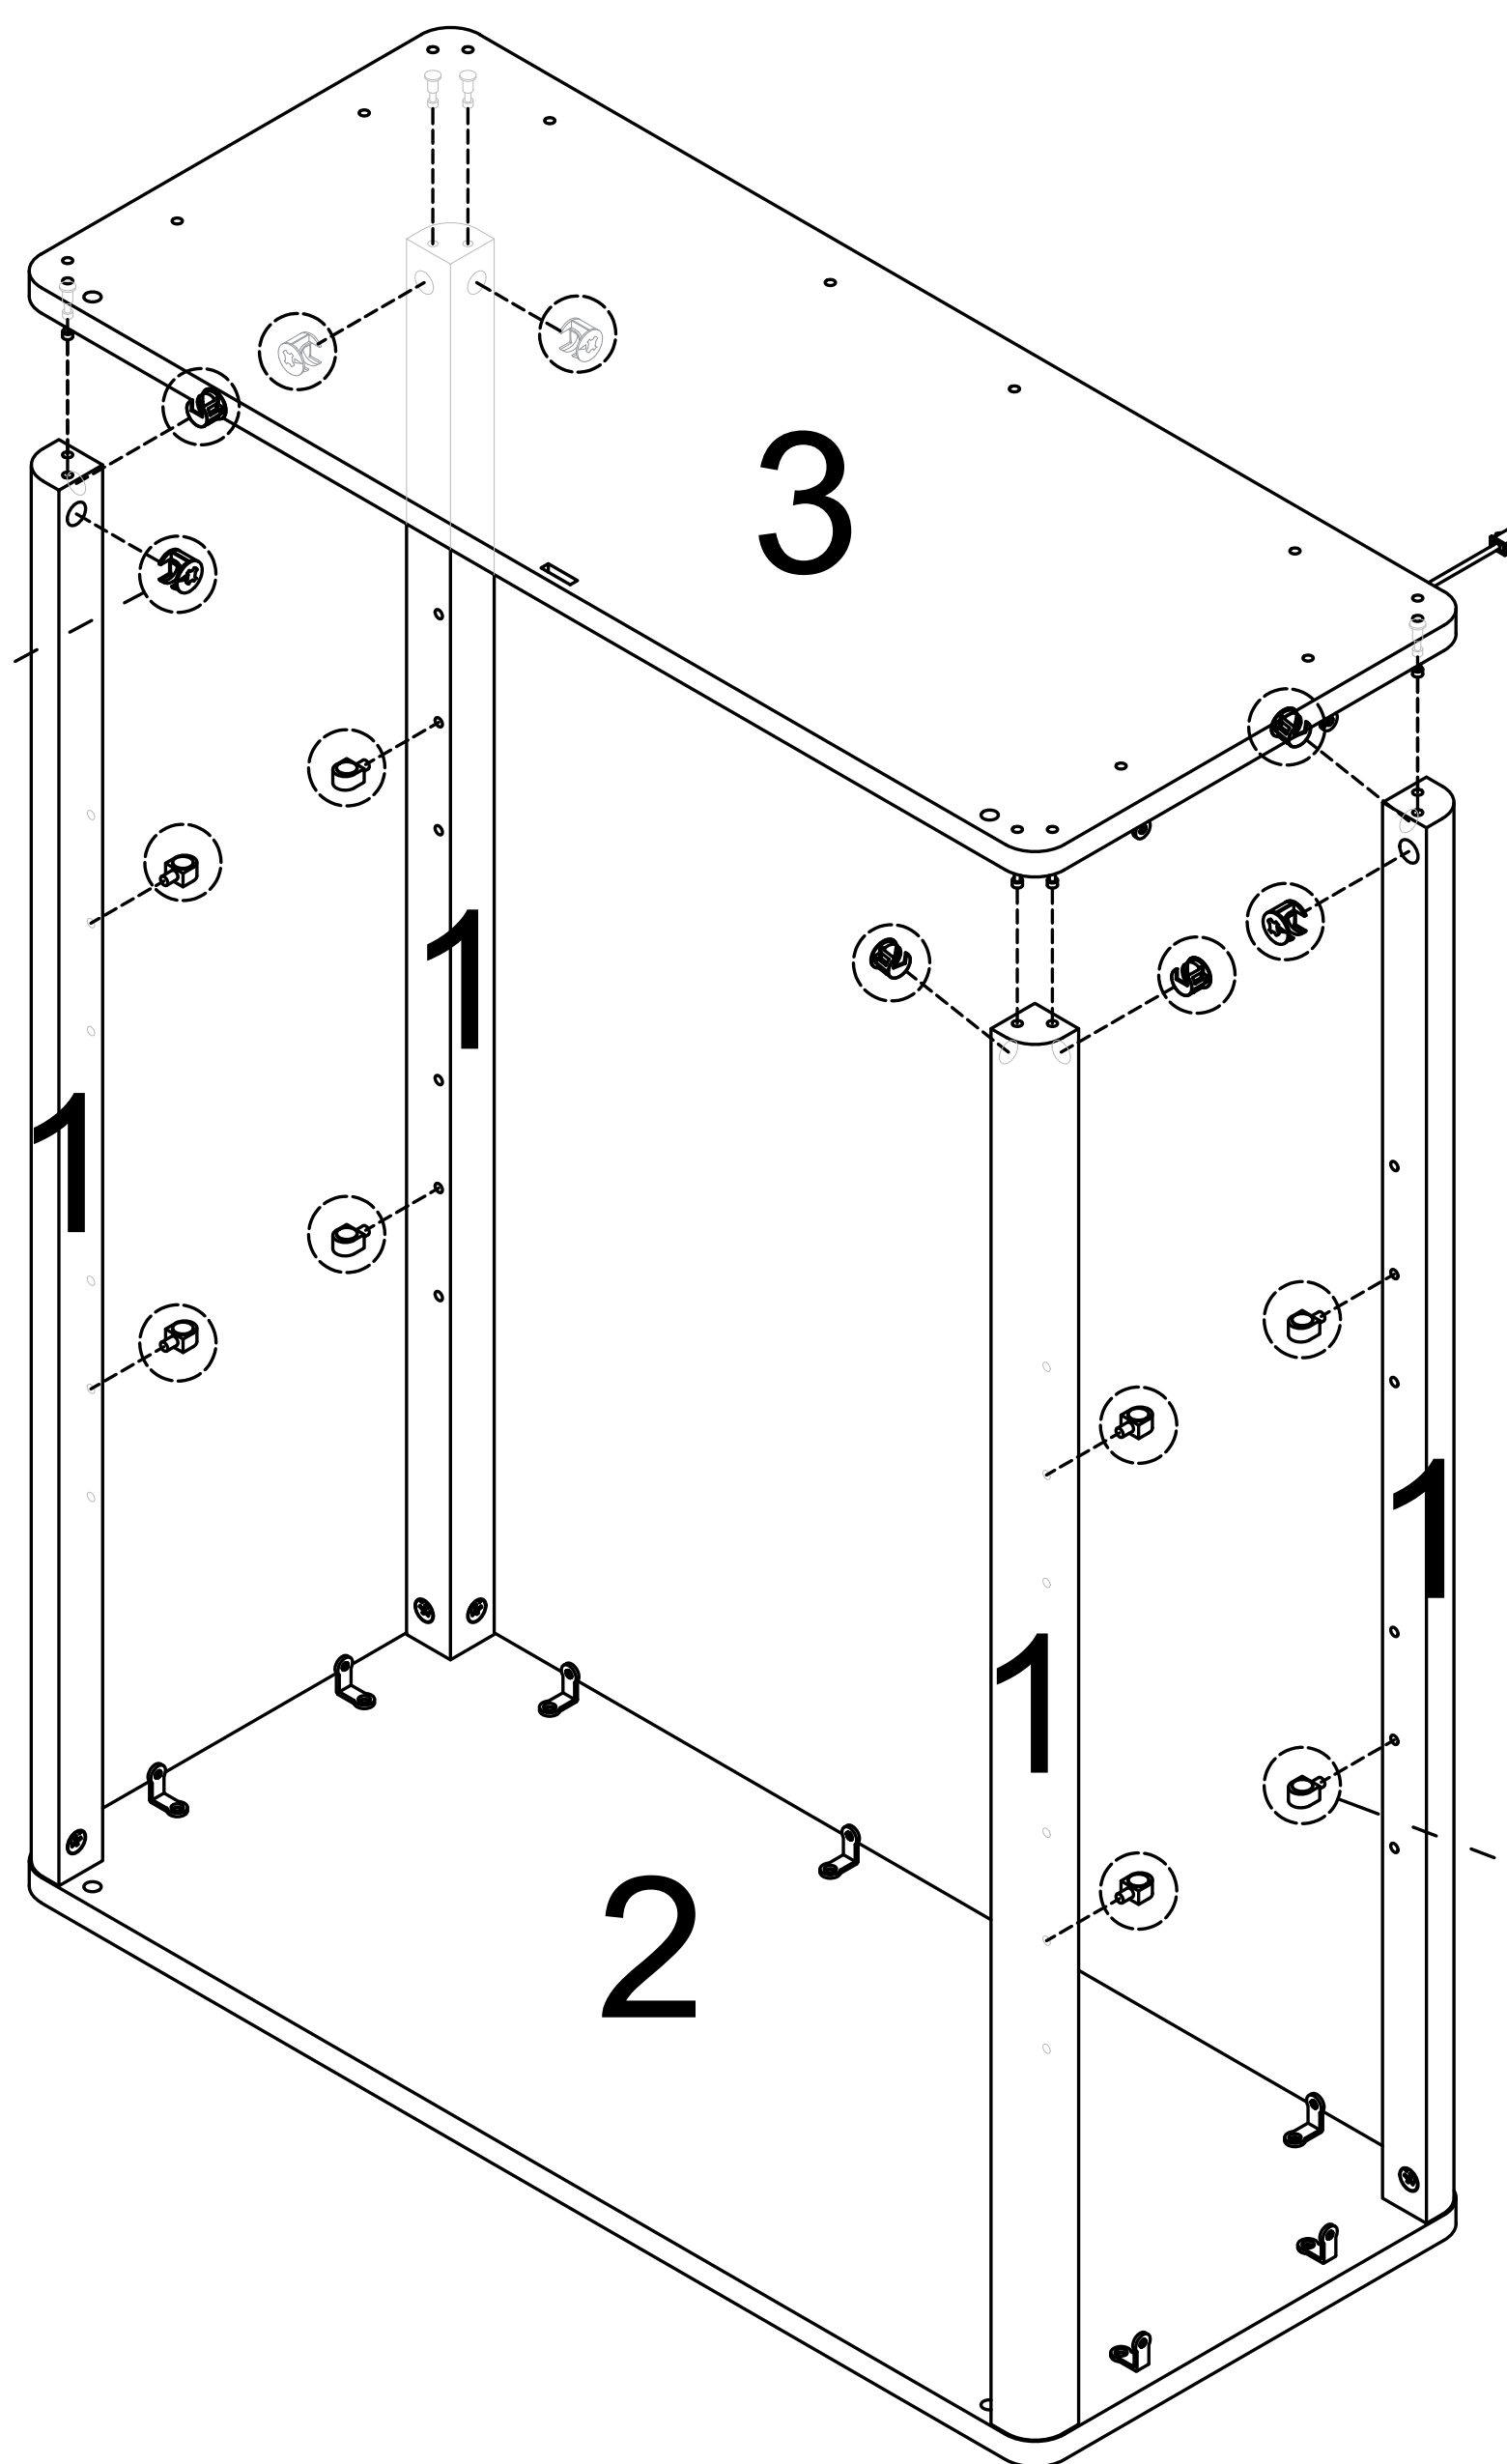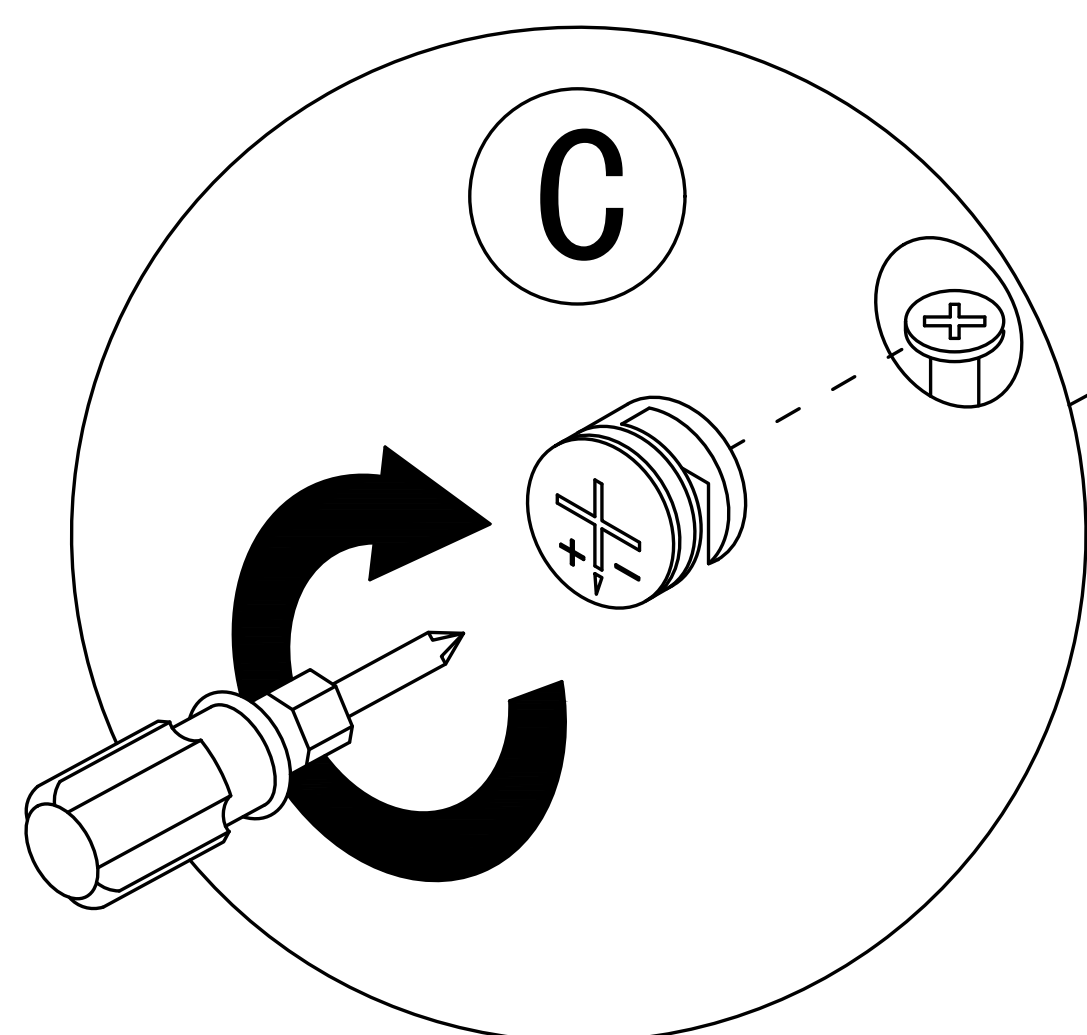

Adjustable up
and down as
needed

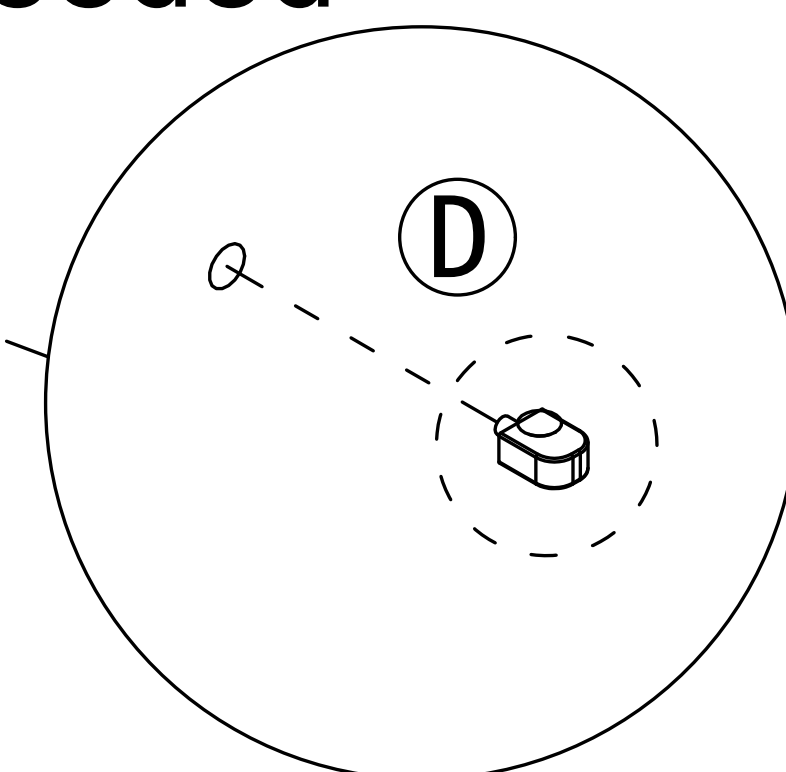


Step 7

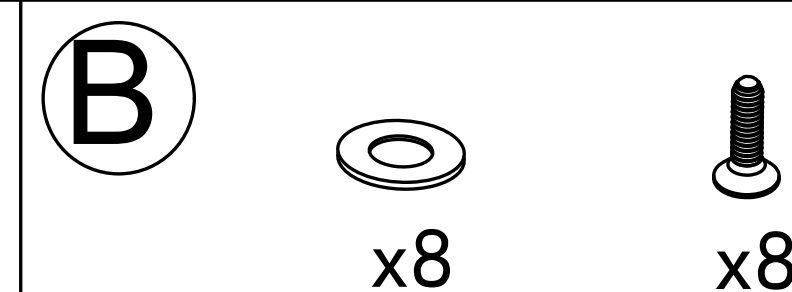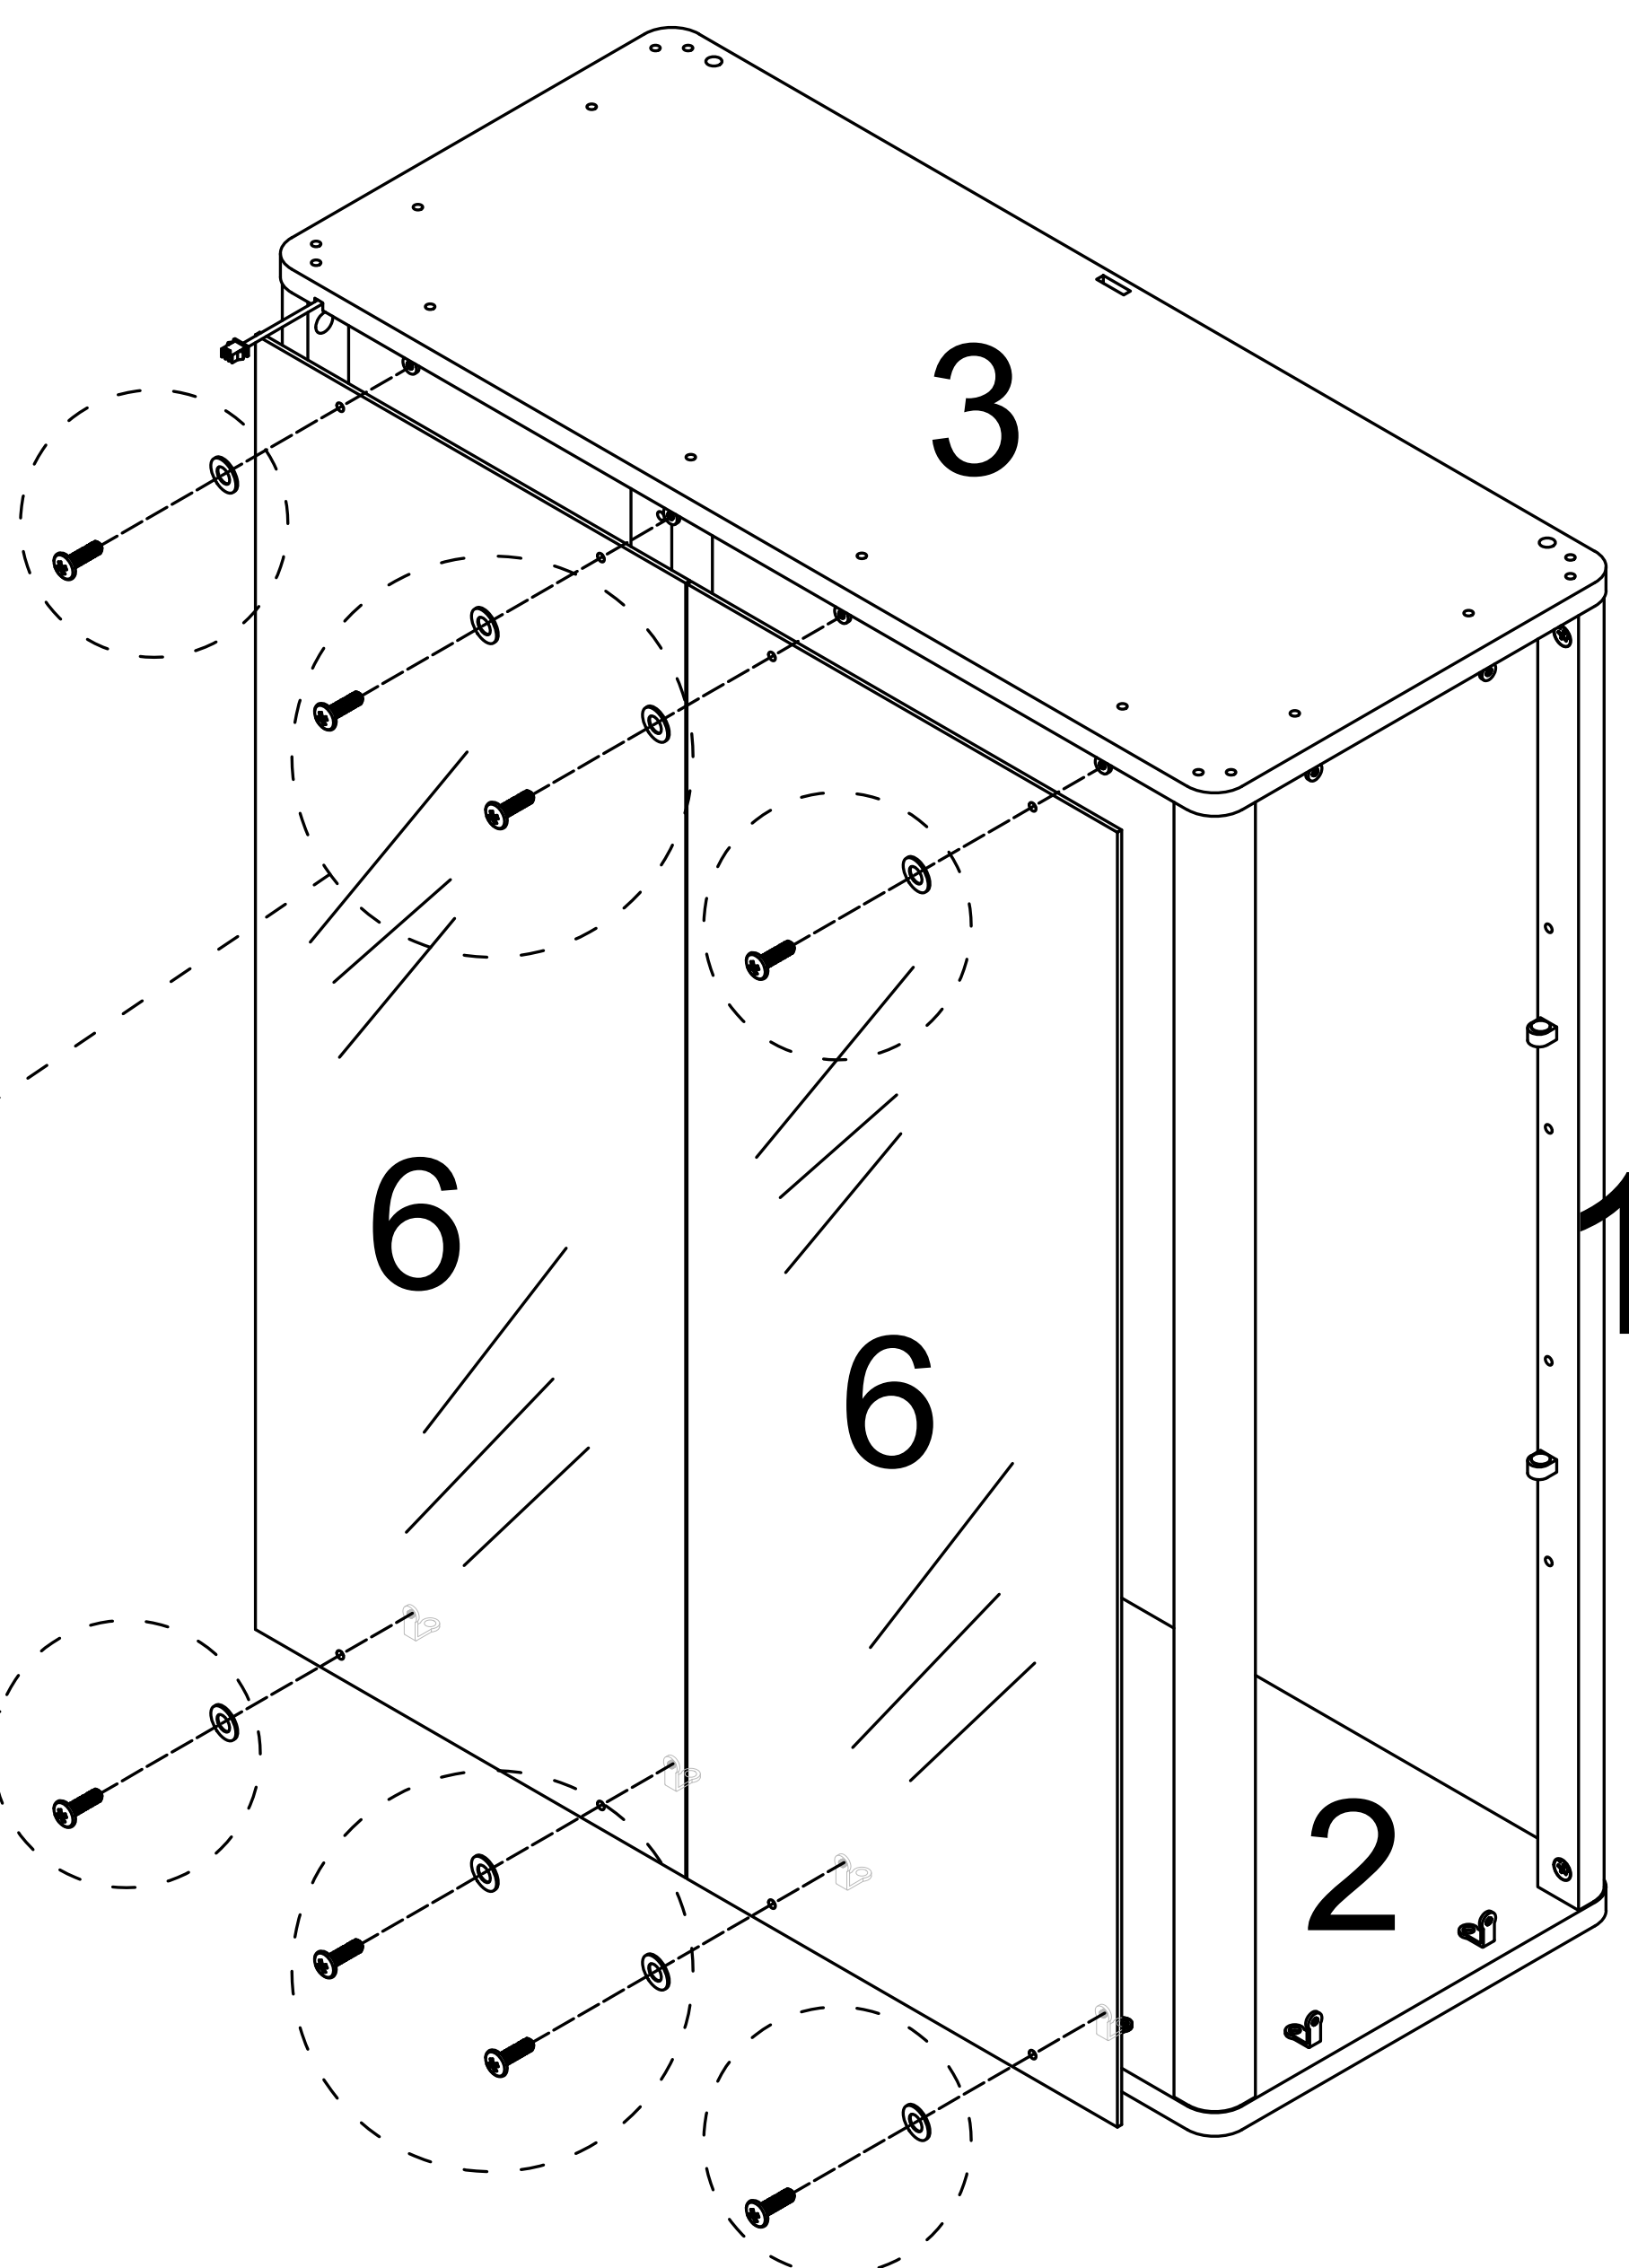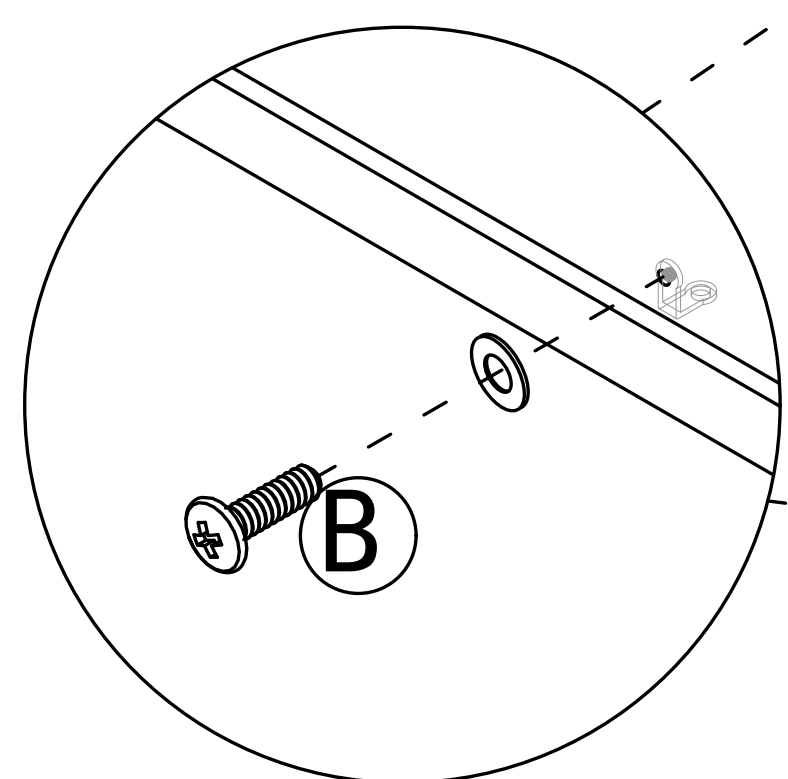

Please note: Do not
use an electric drill
when installing glass.

It is recommended to have two people
assist with the installation.



Step 8

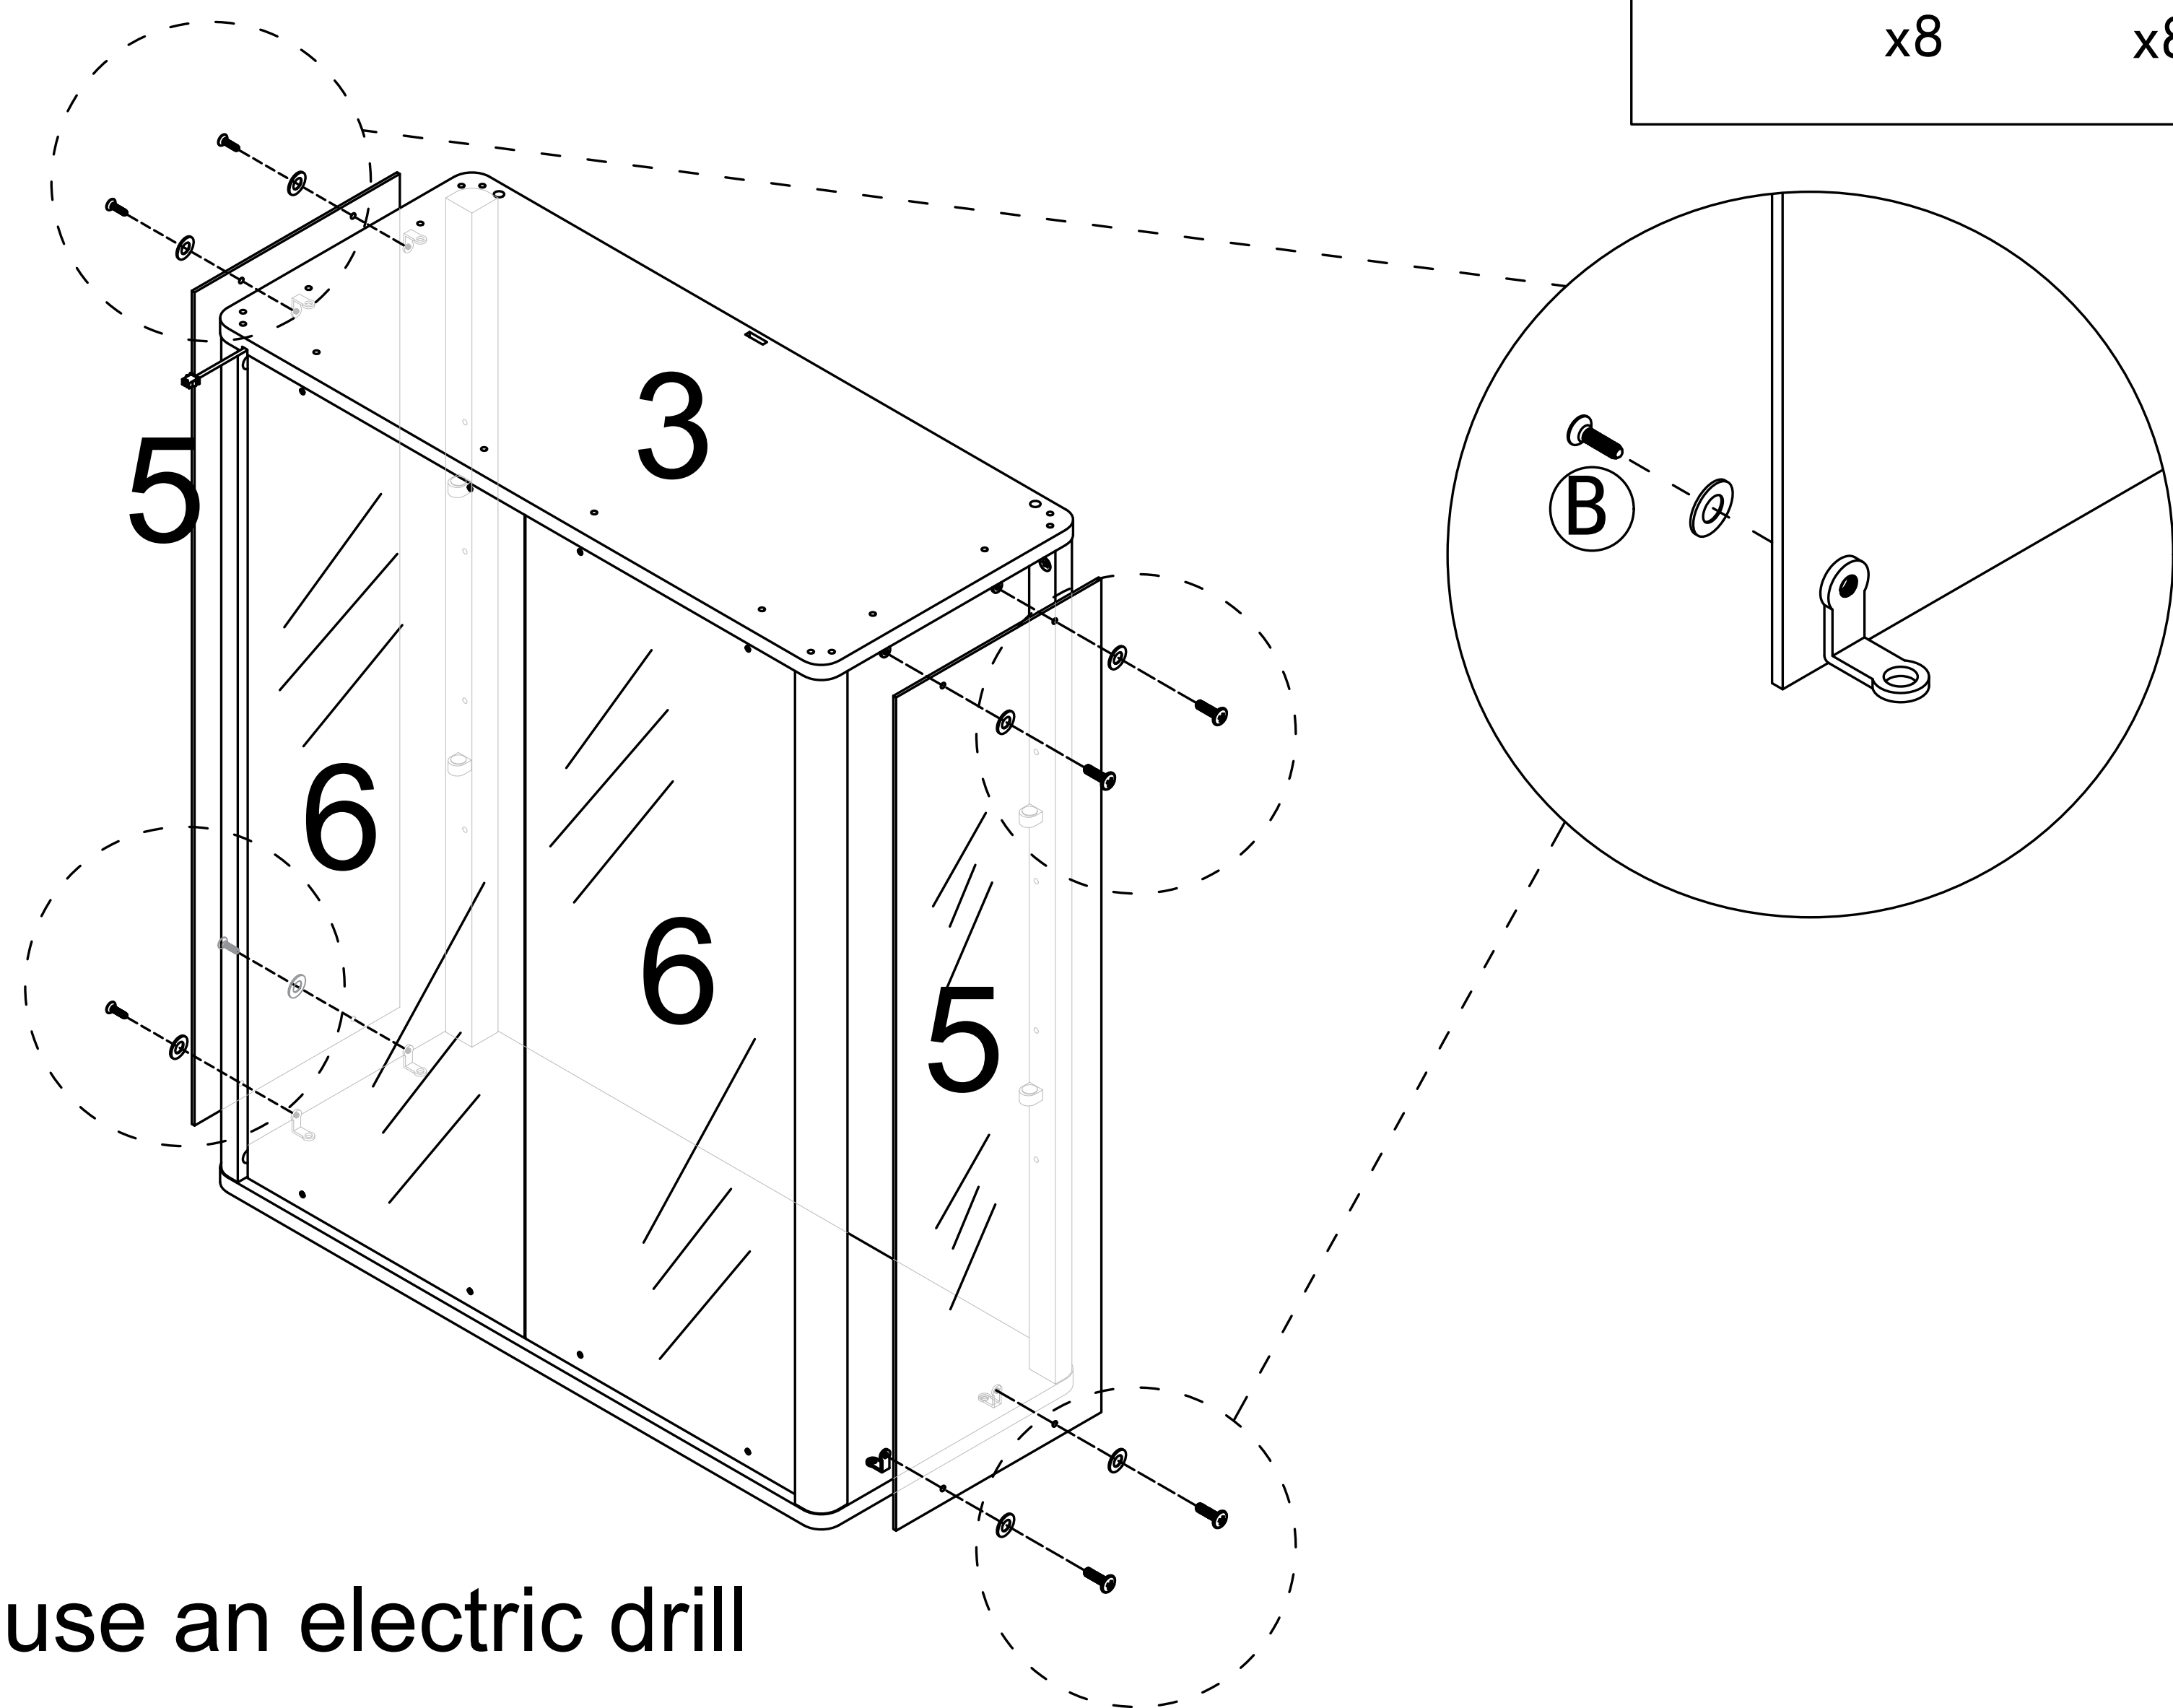

Please note: Do not use an electric drill when installing glass.


It is recommended to have two people assist with the installation.

Step 9

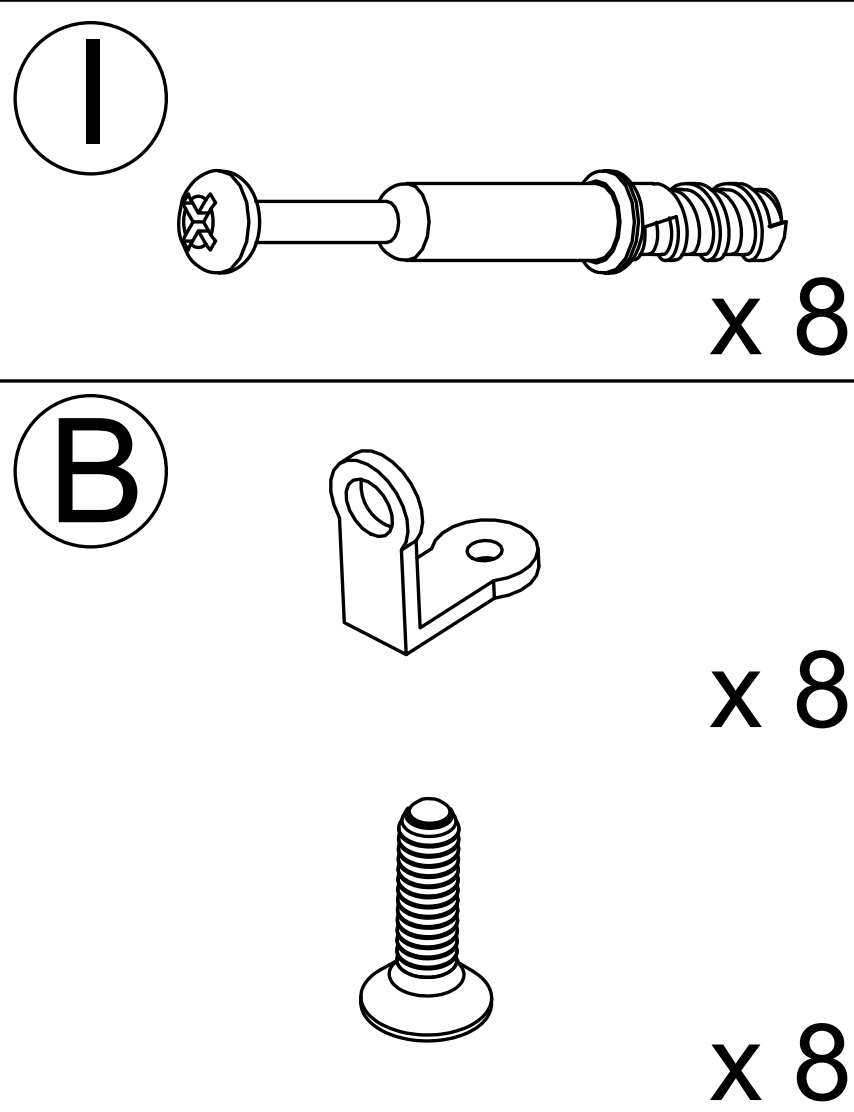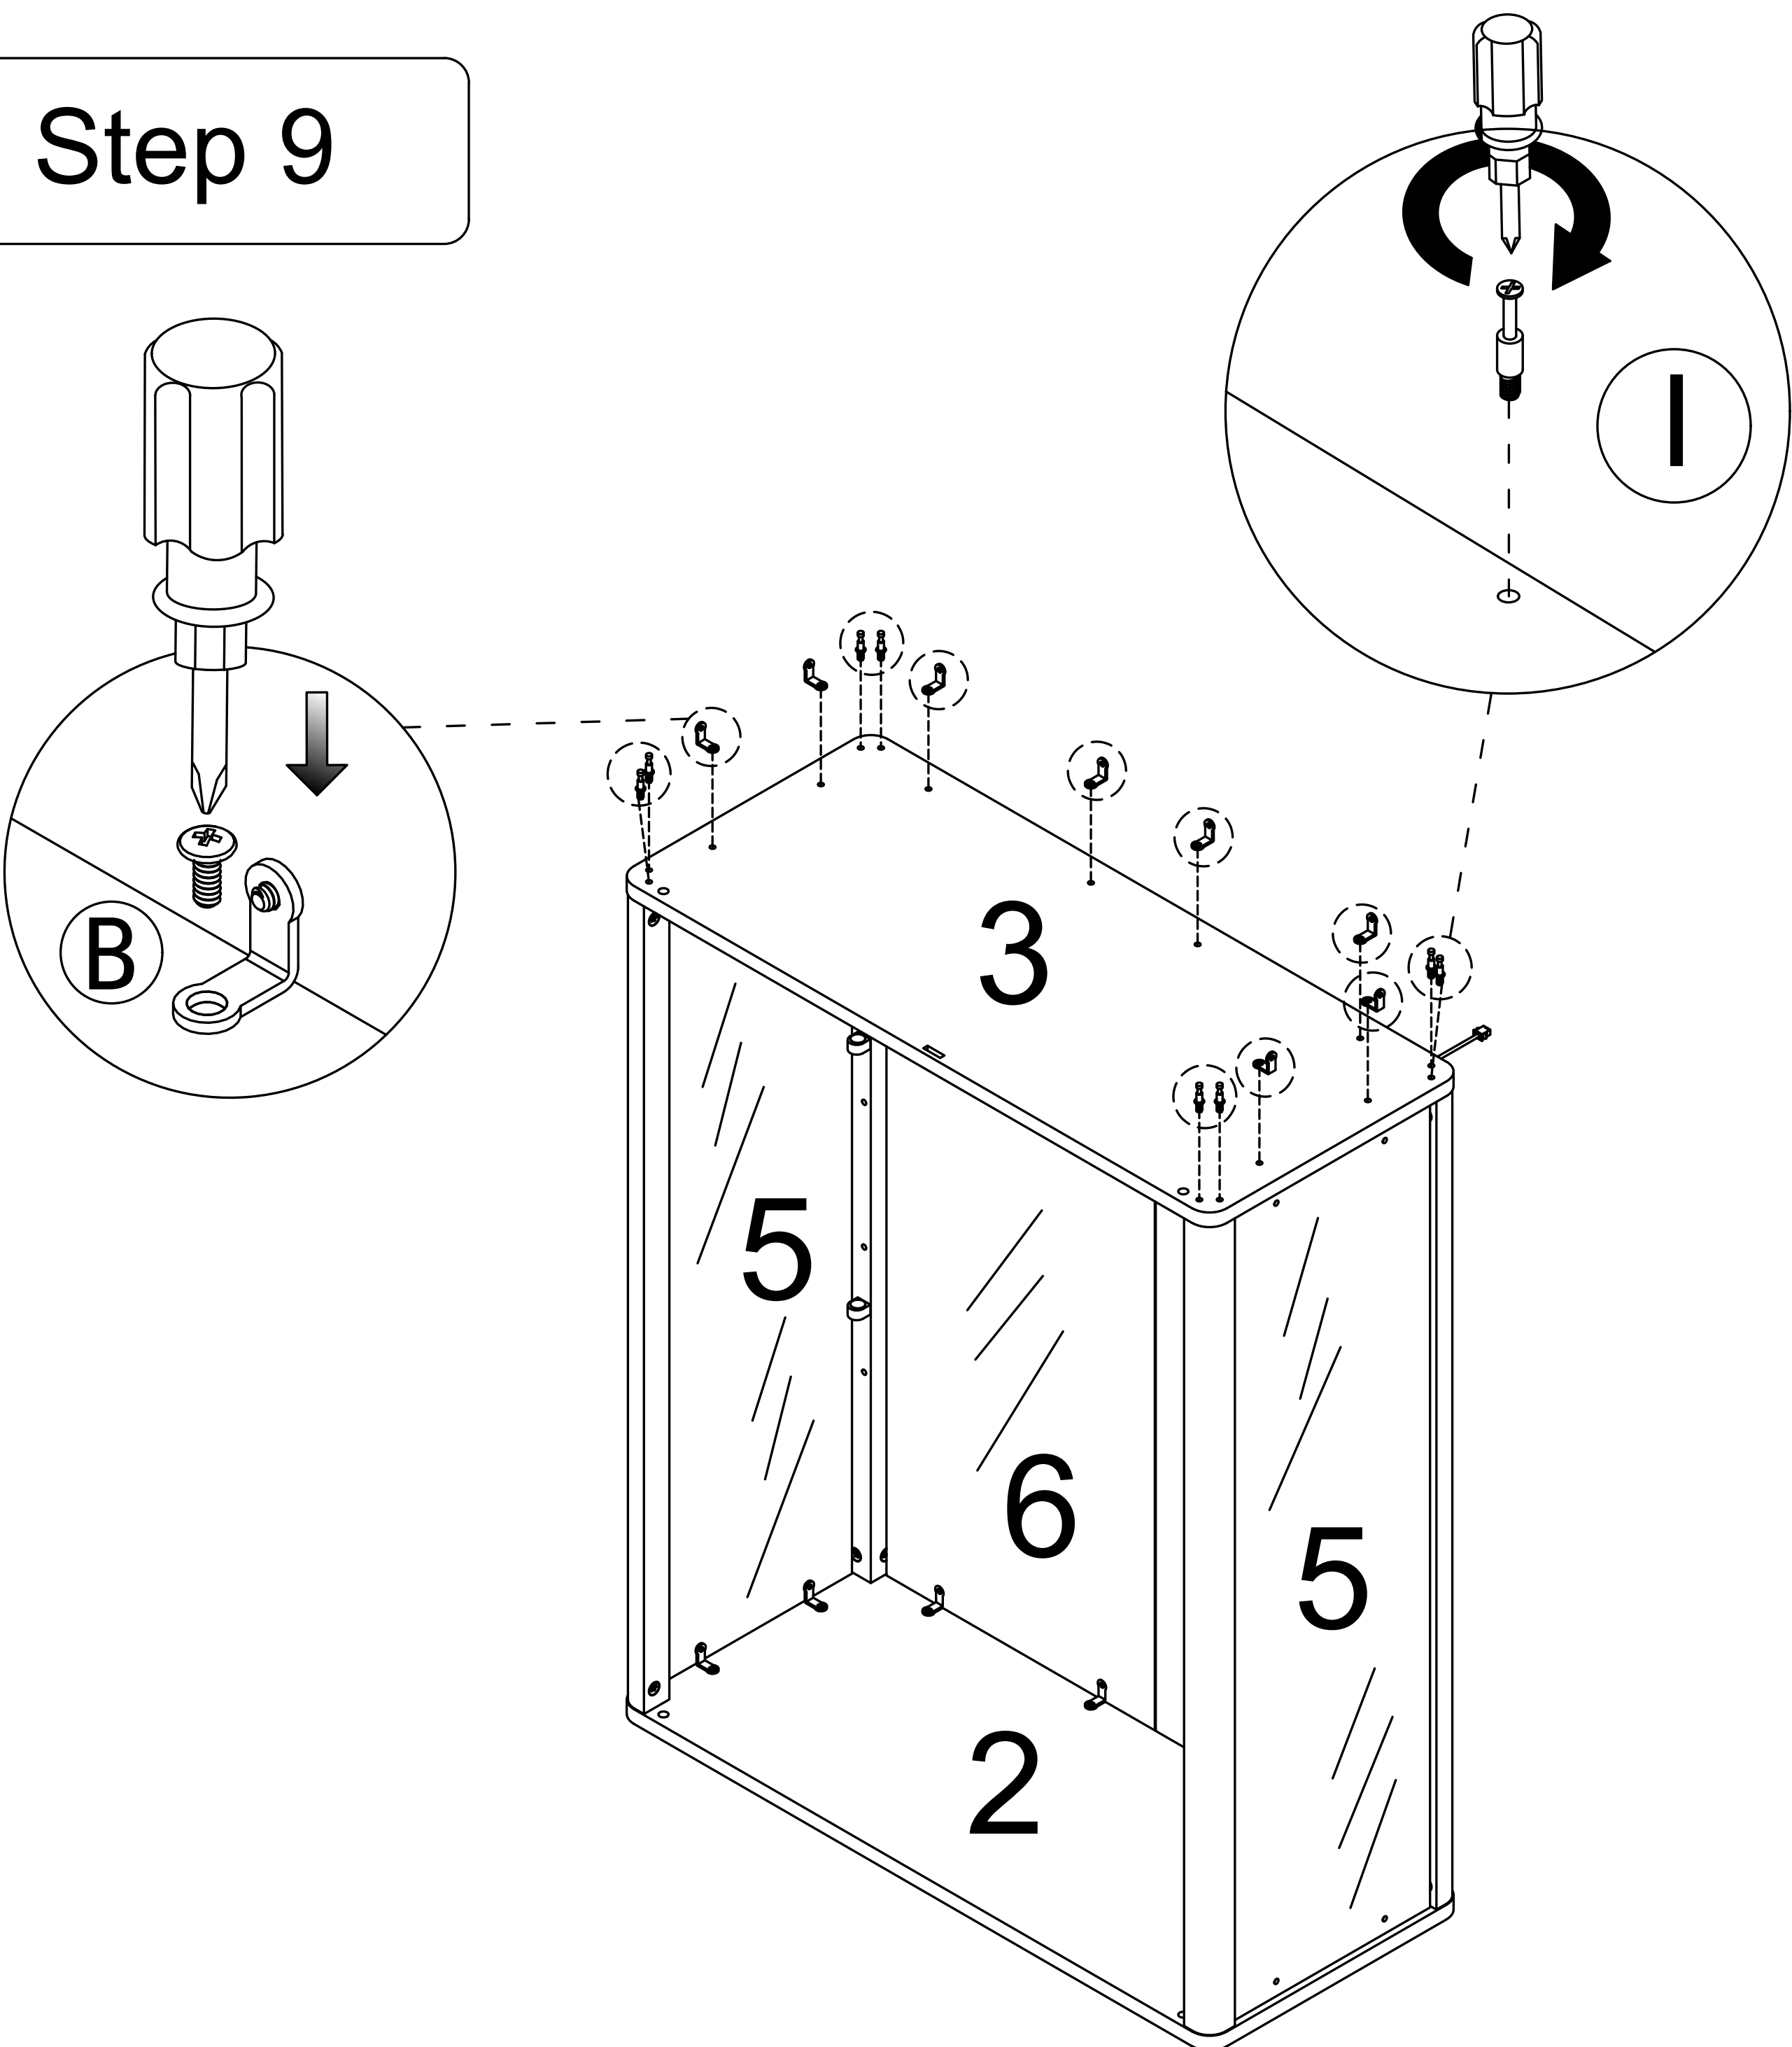


Step 10

C




x 8


Please note: Installation must be performed using the hole-to-hole alignment method.


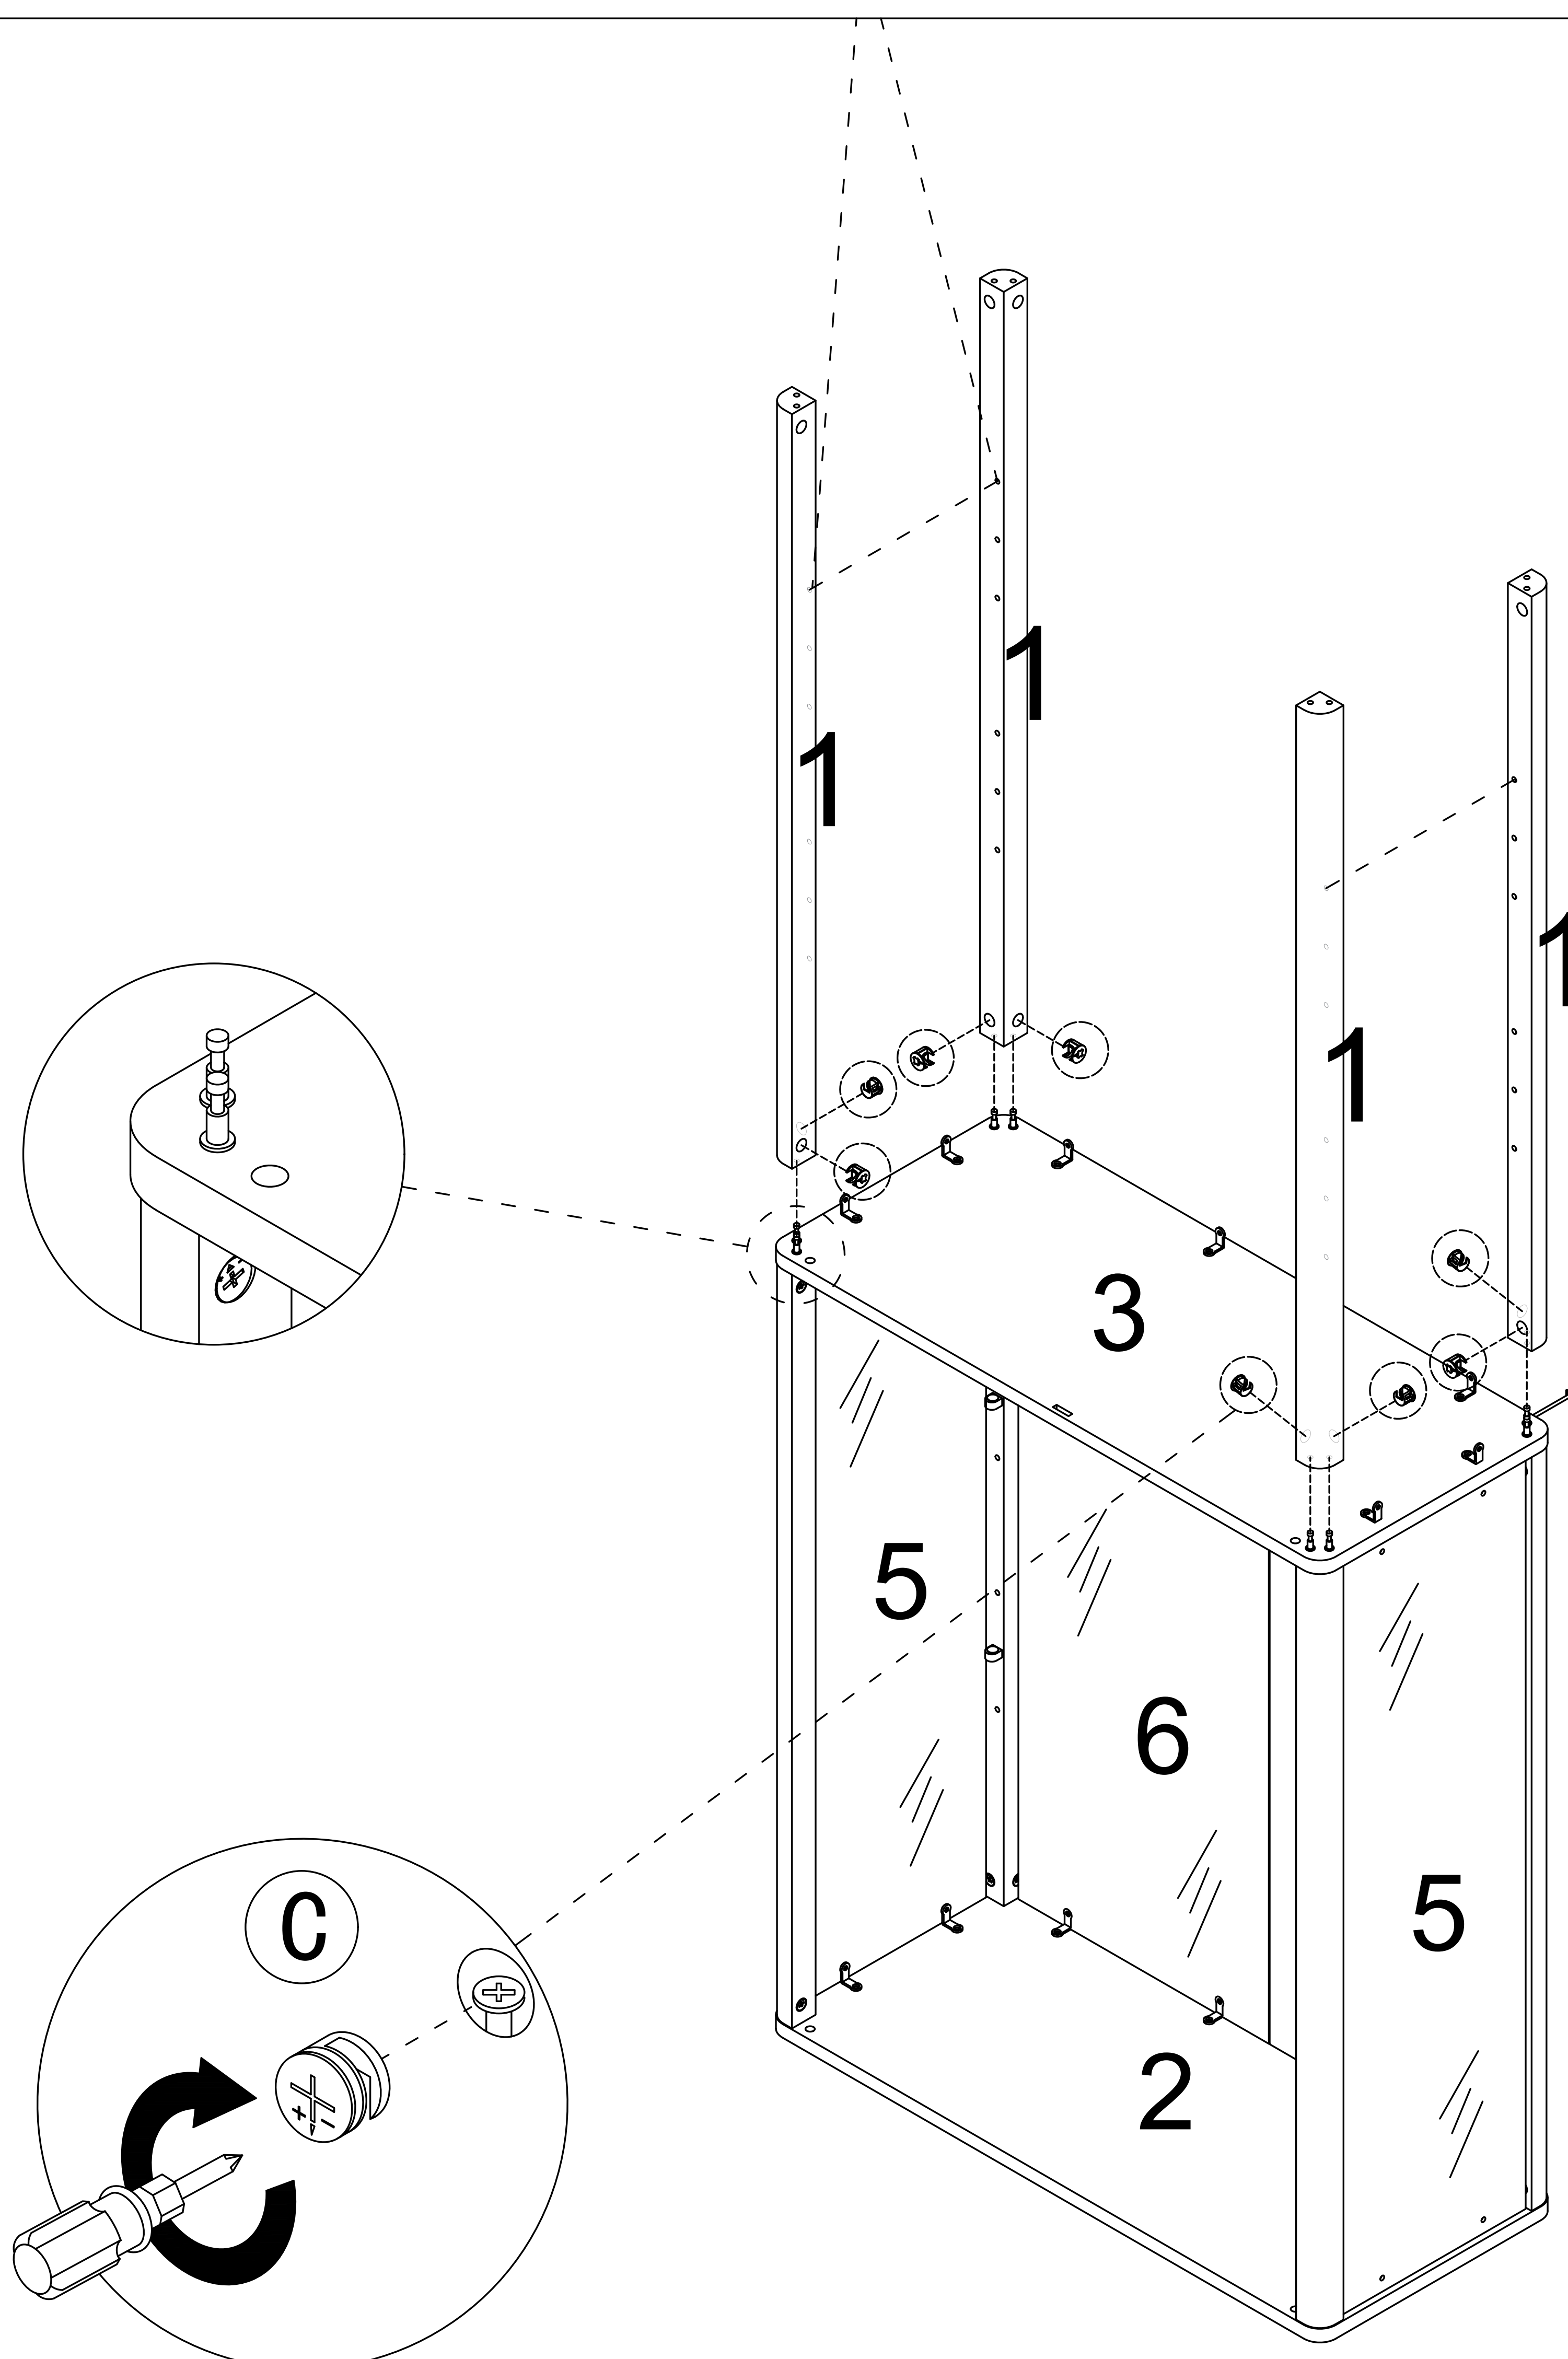


Step 11

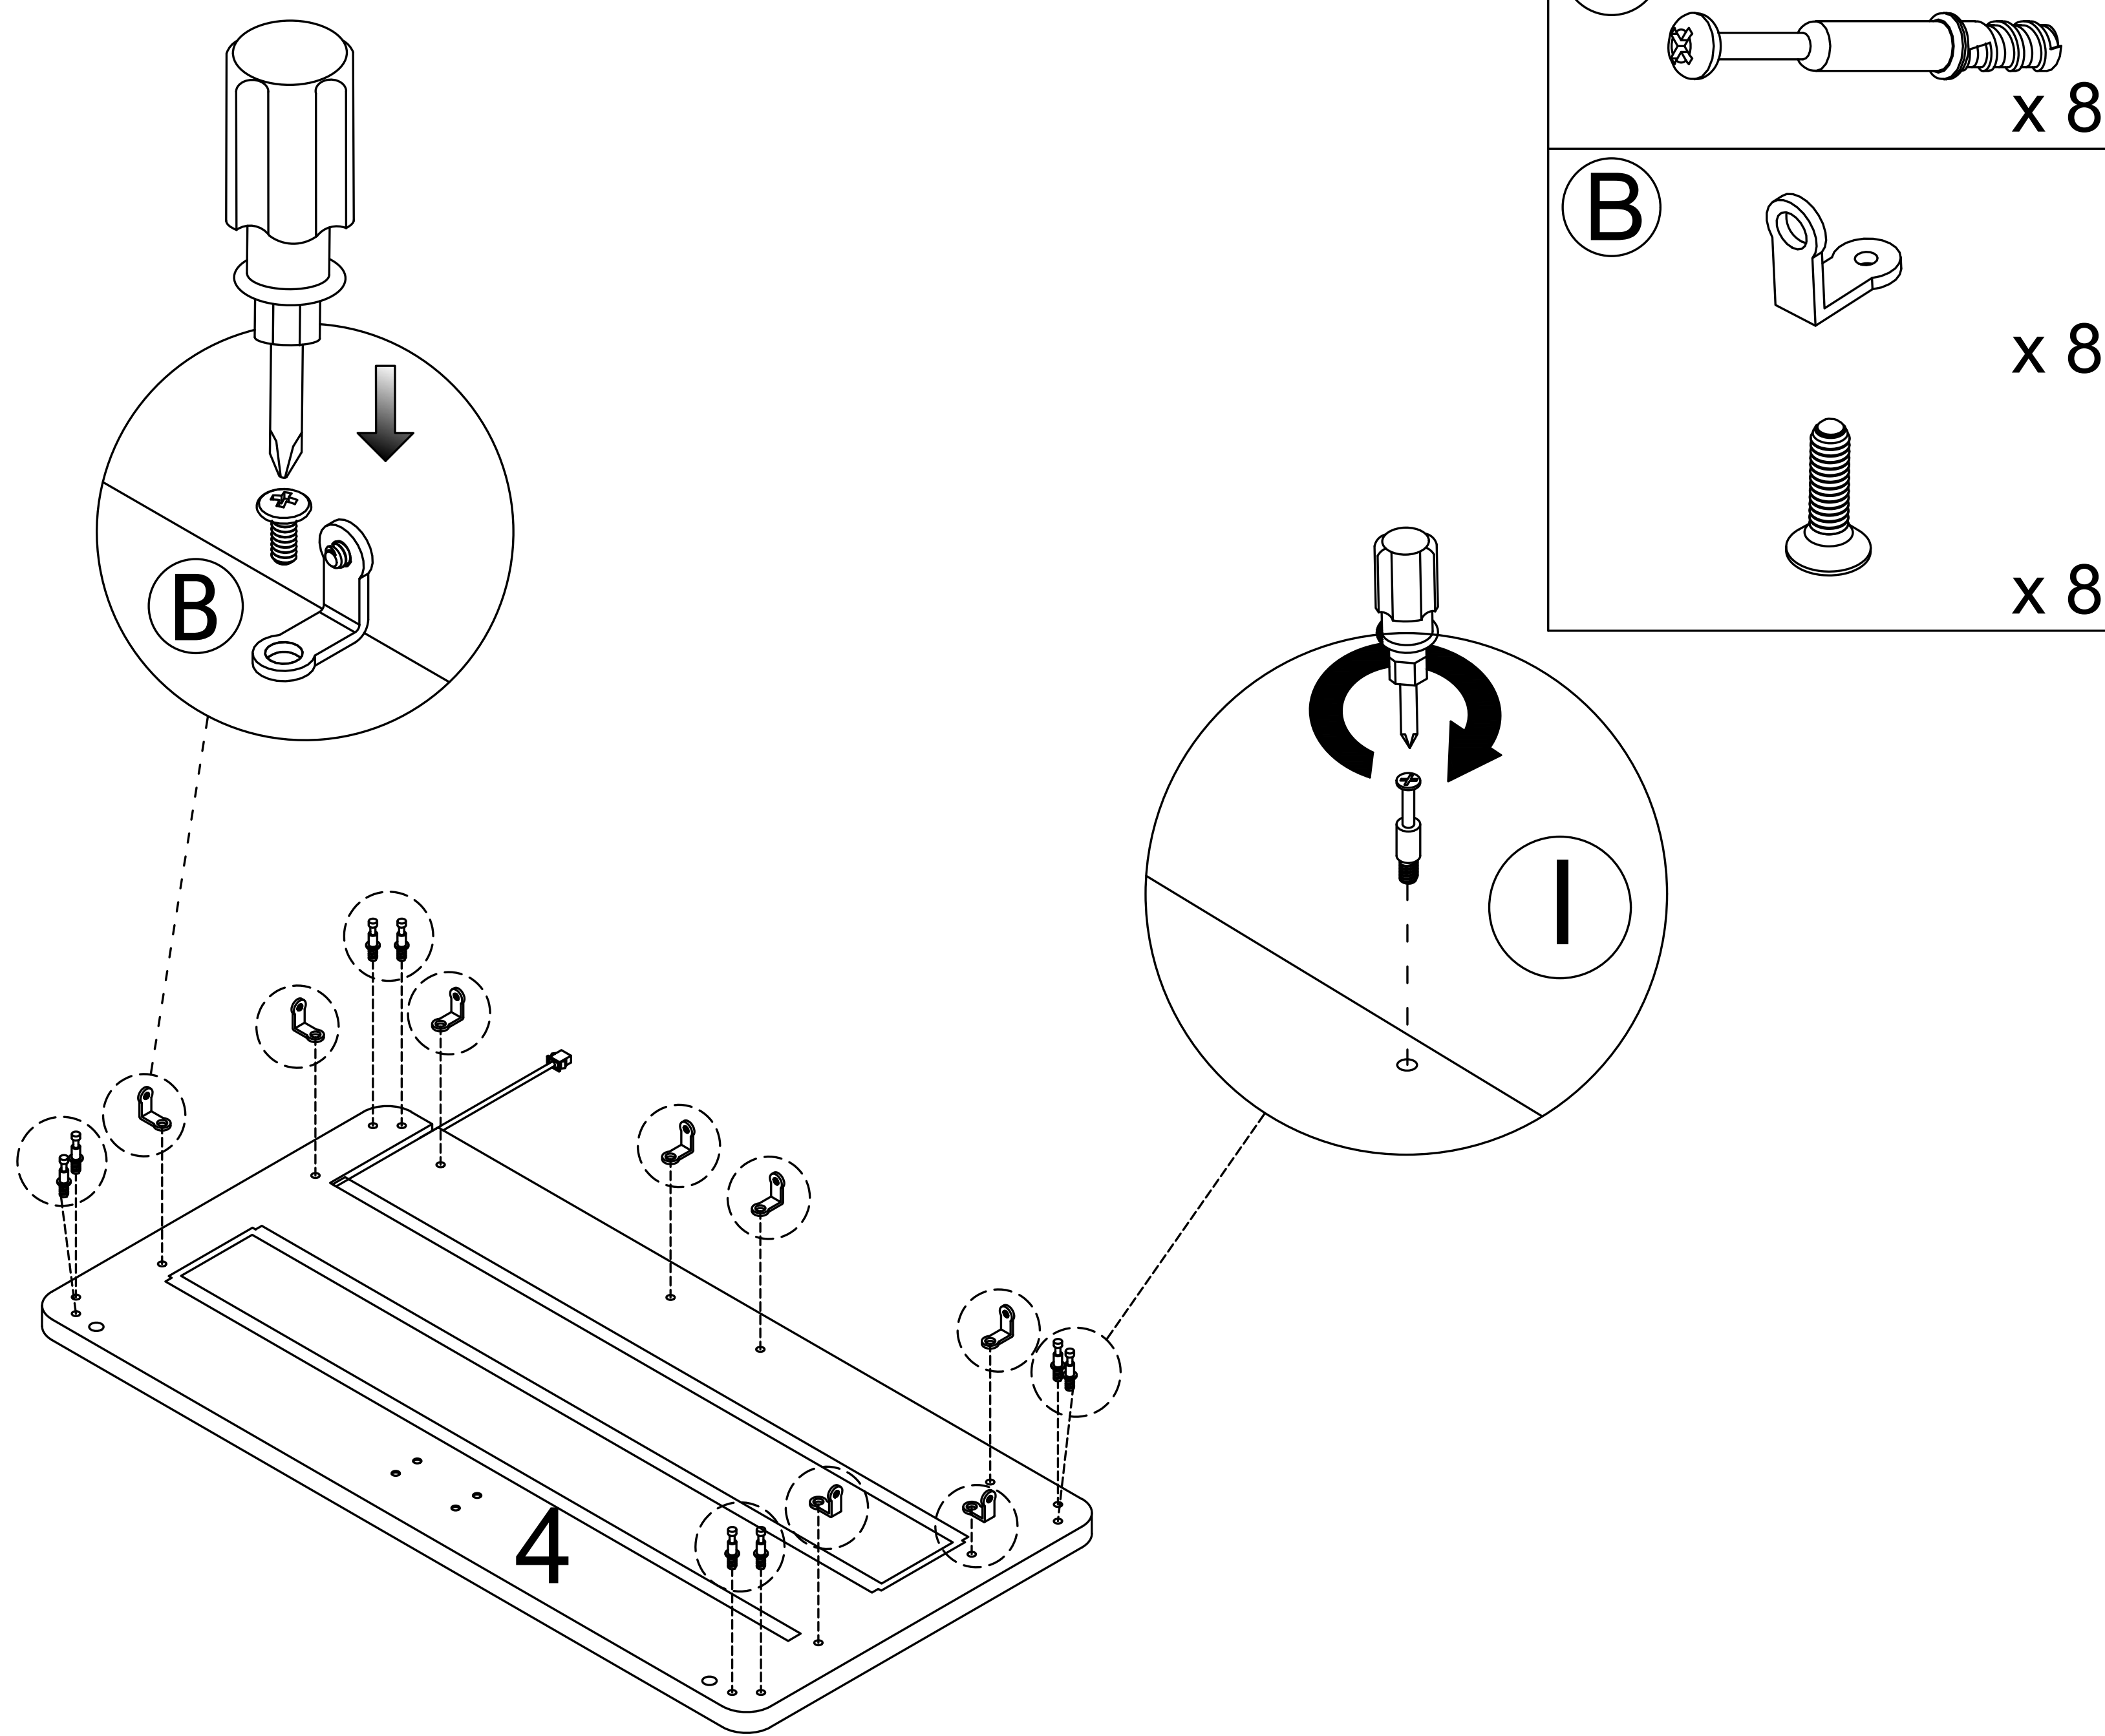


Step 12

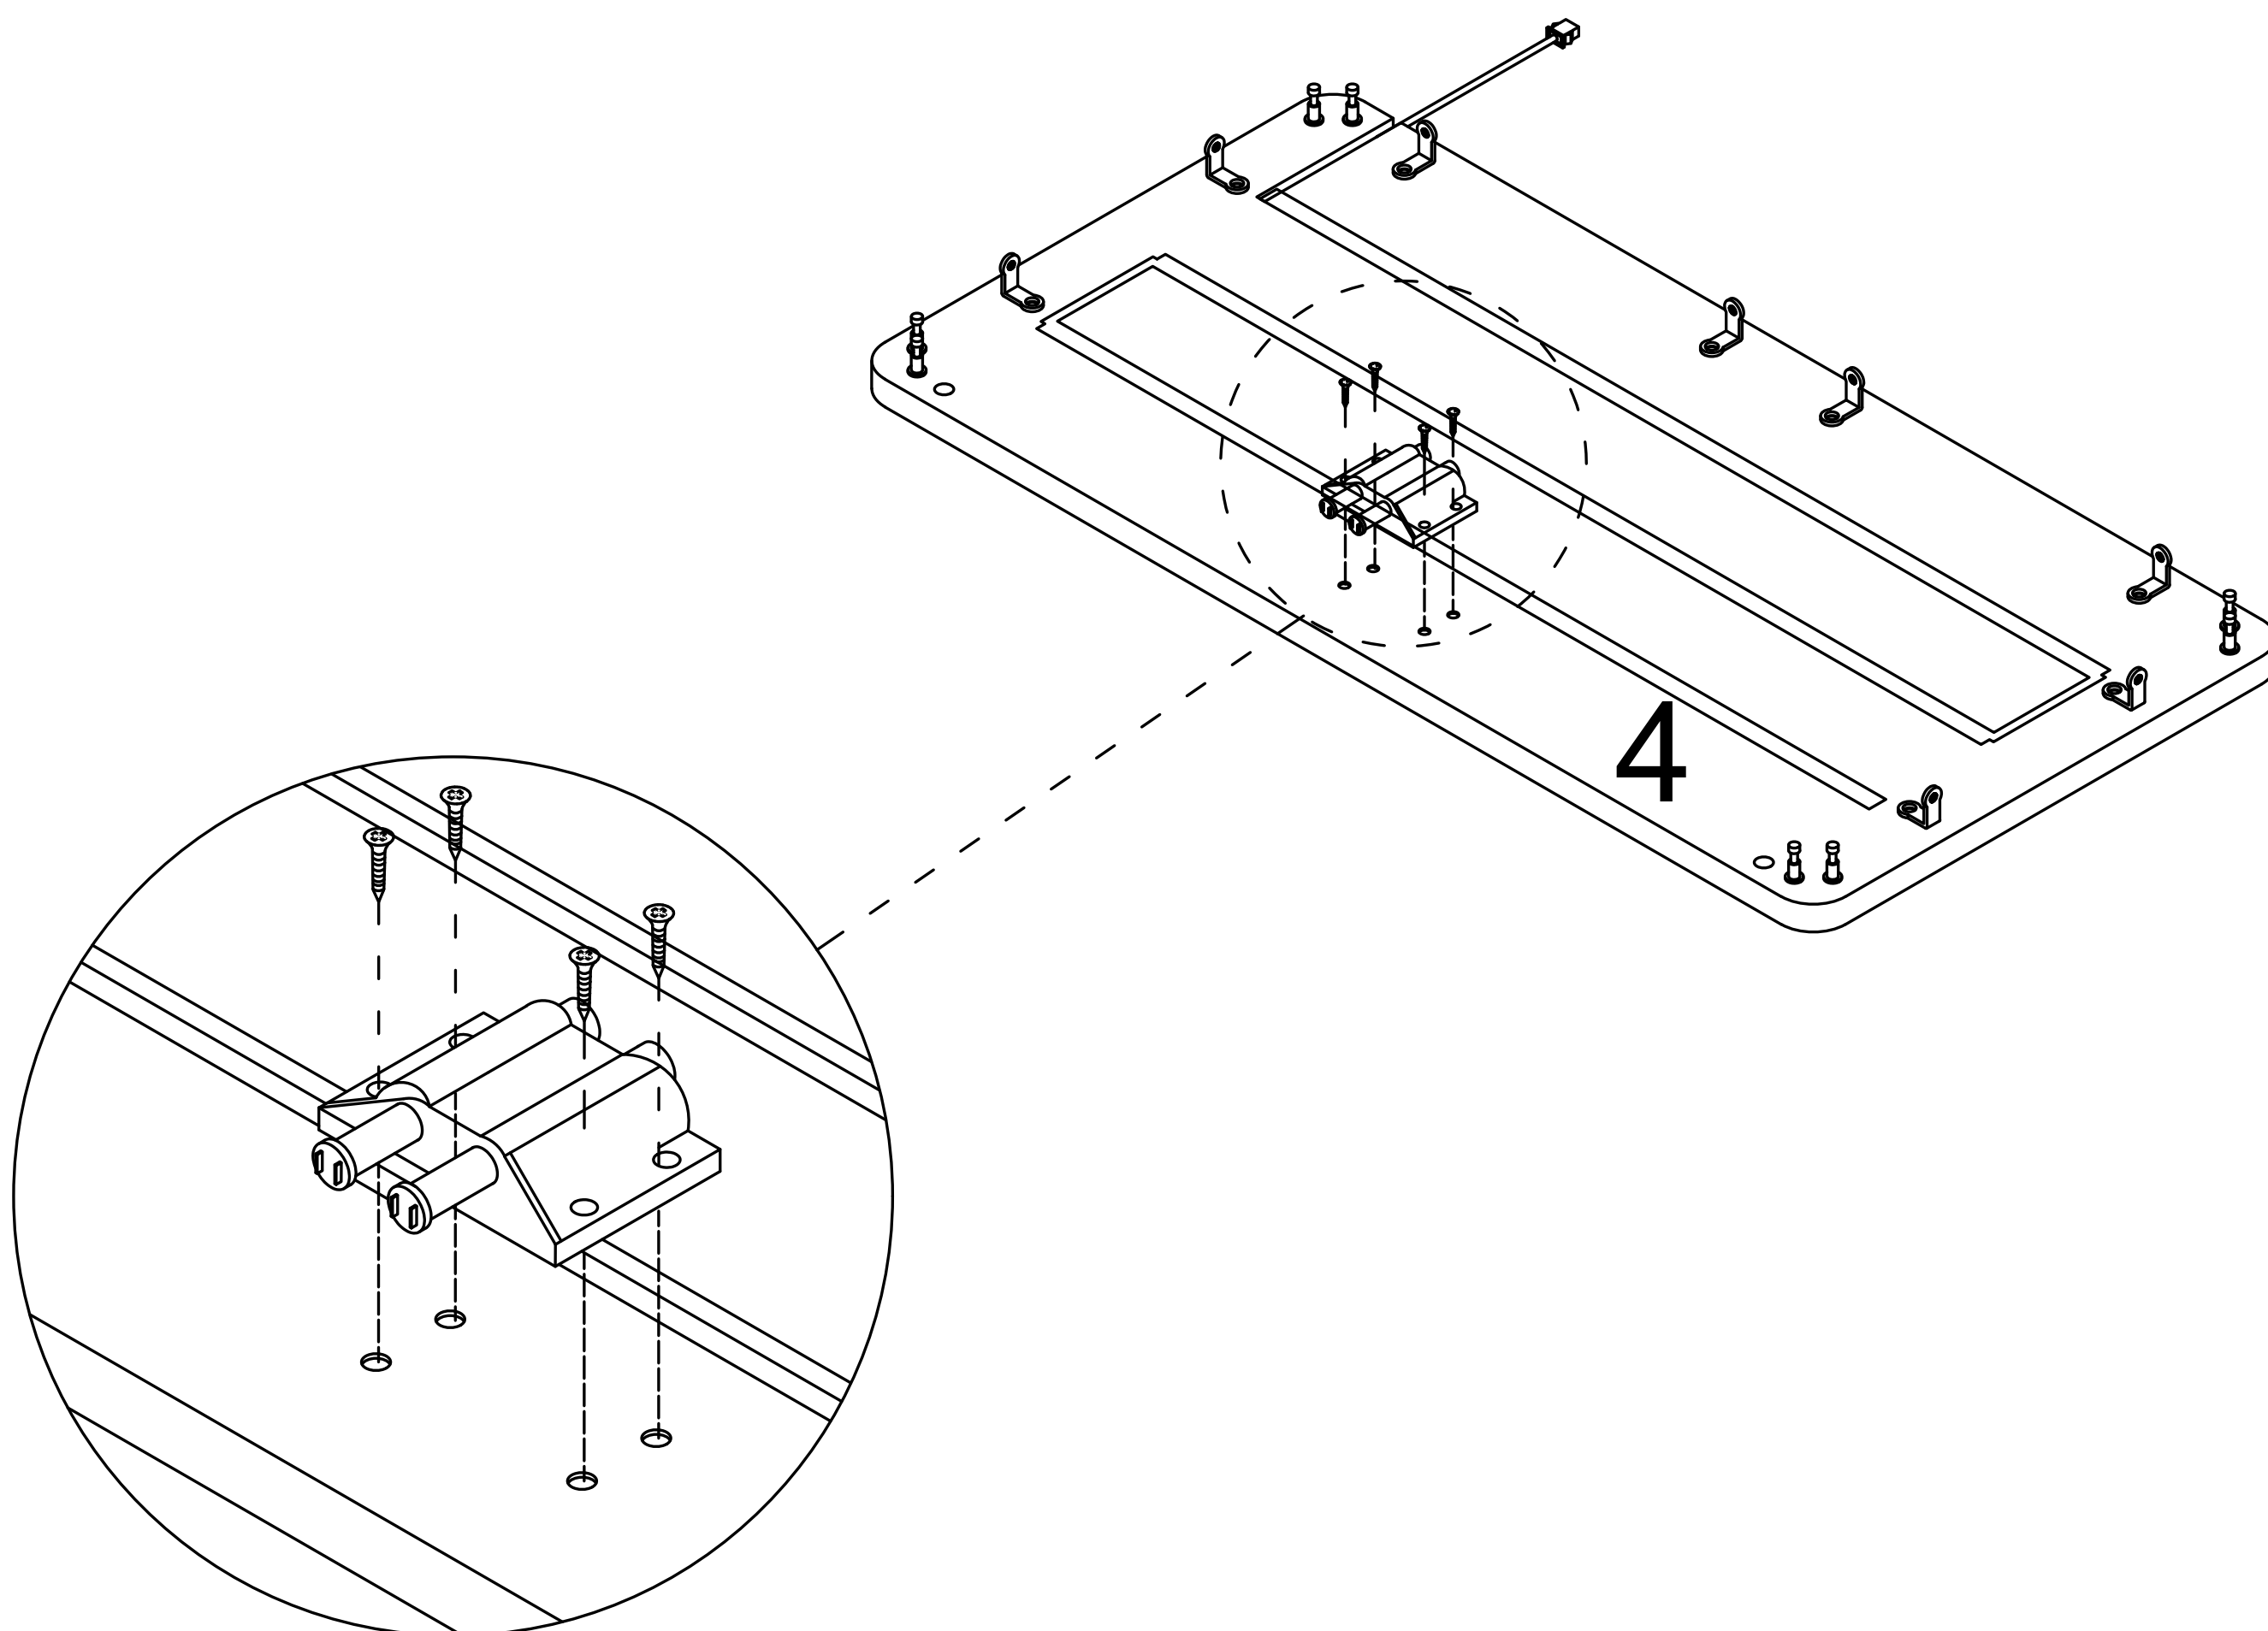

- E:  x1
-  x4


Step 13

C





x 8

D




x 8

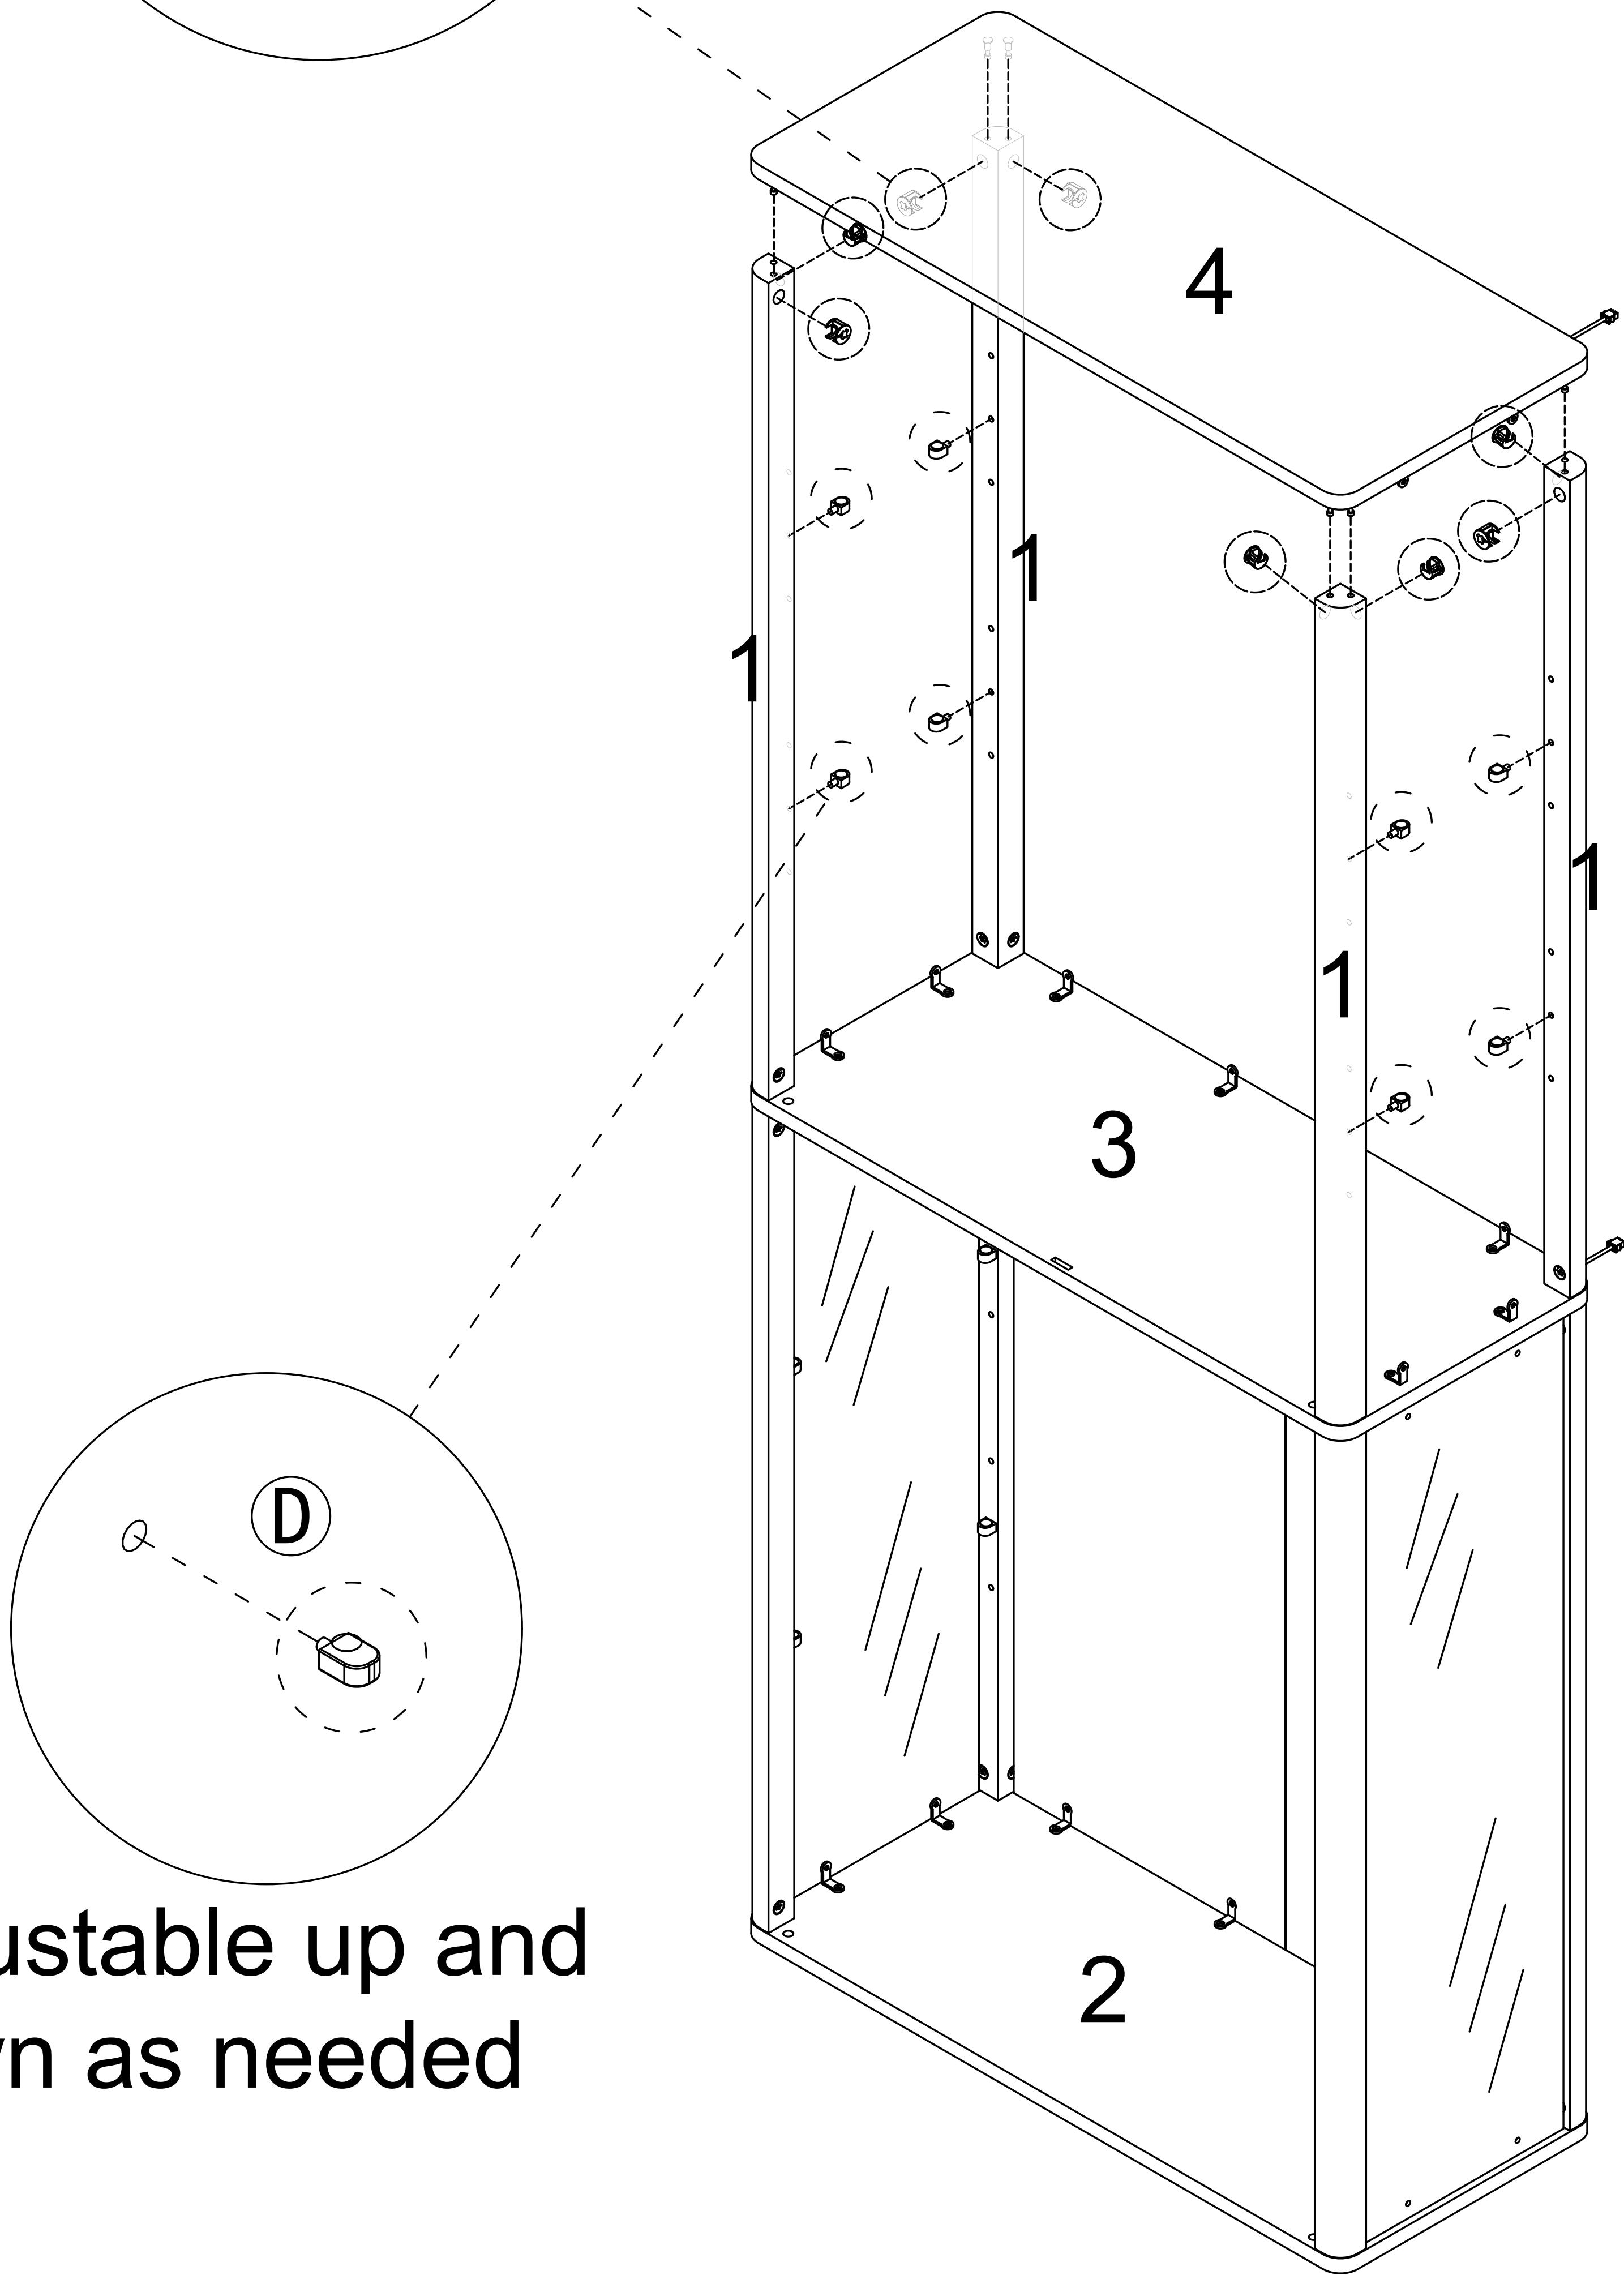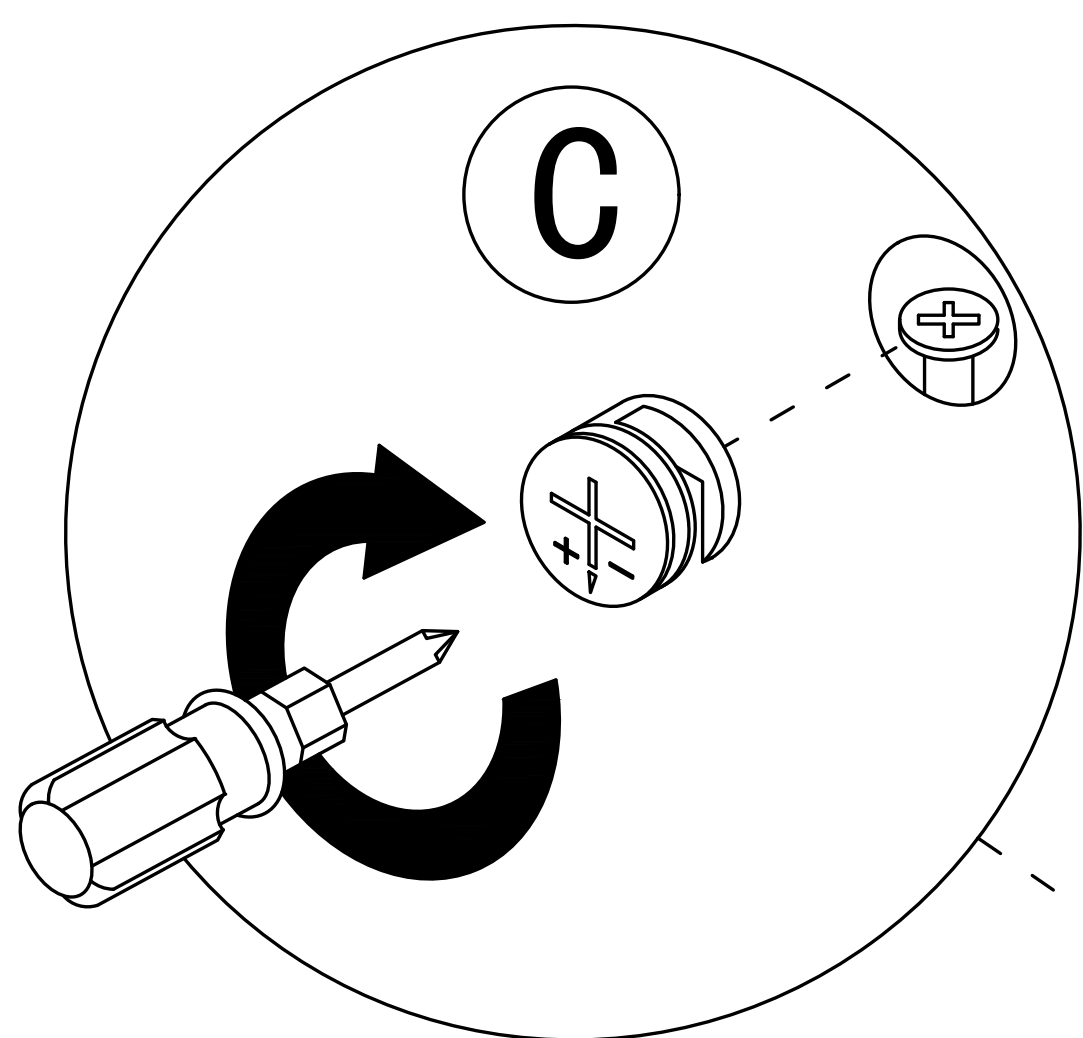


Adjustable up and down as needed


Step 14

B

x8




x8

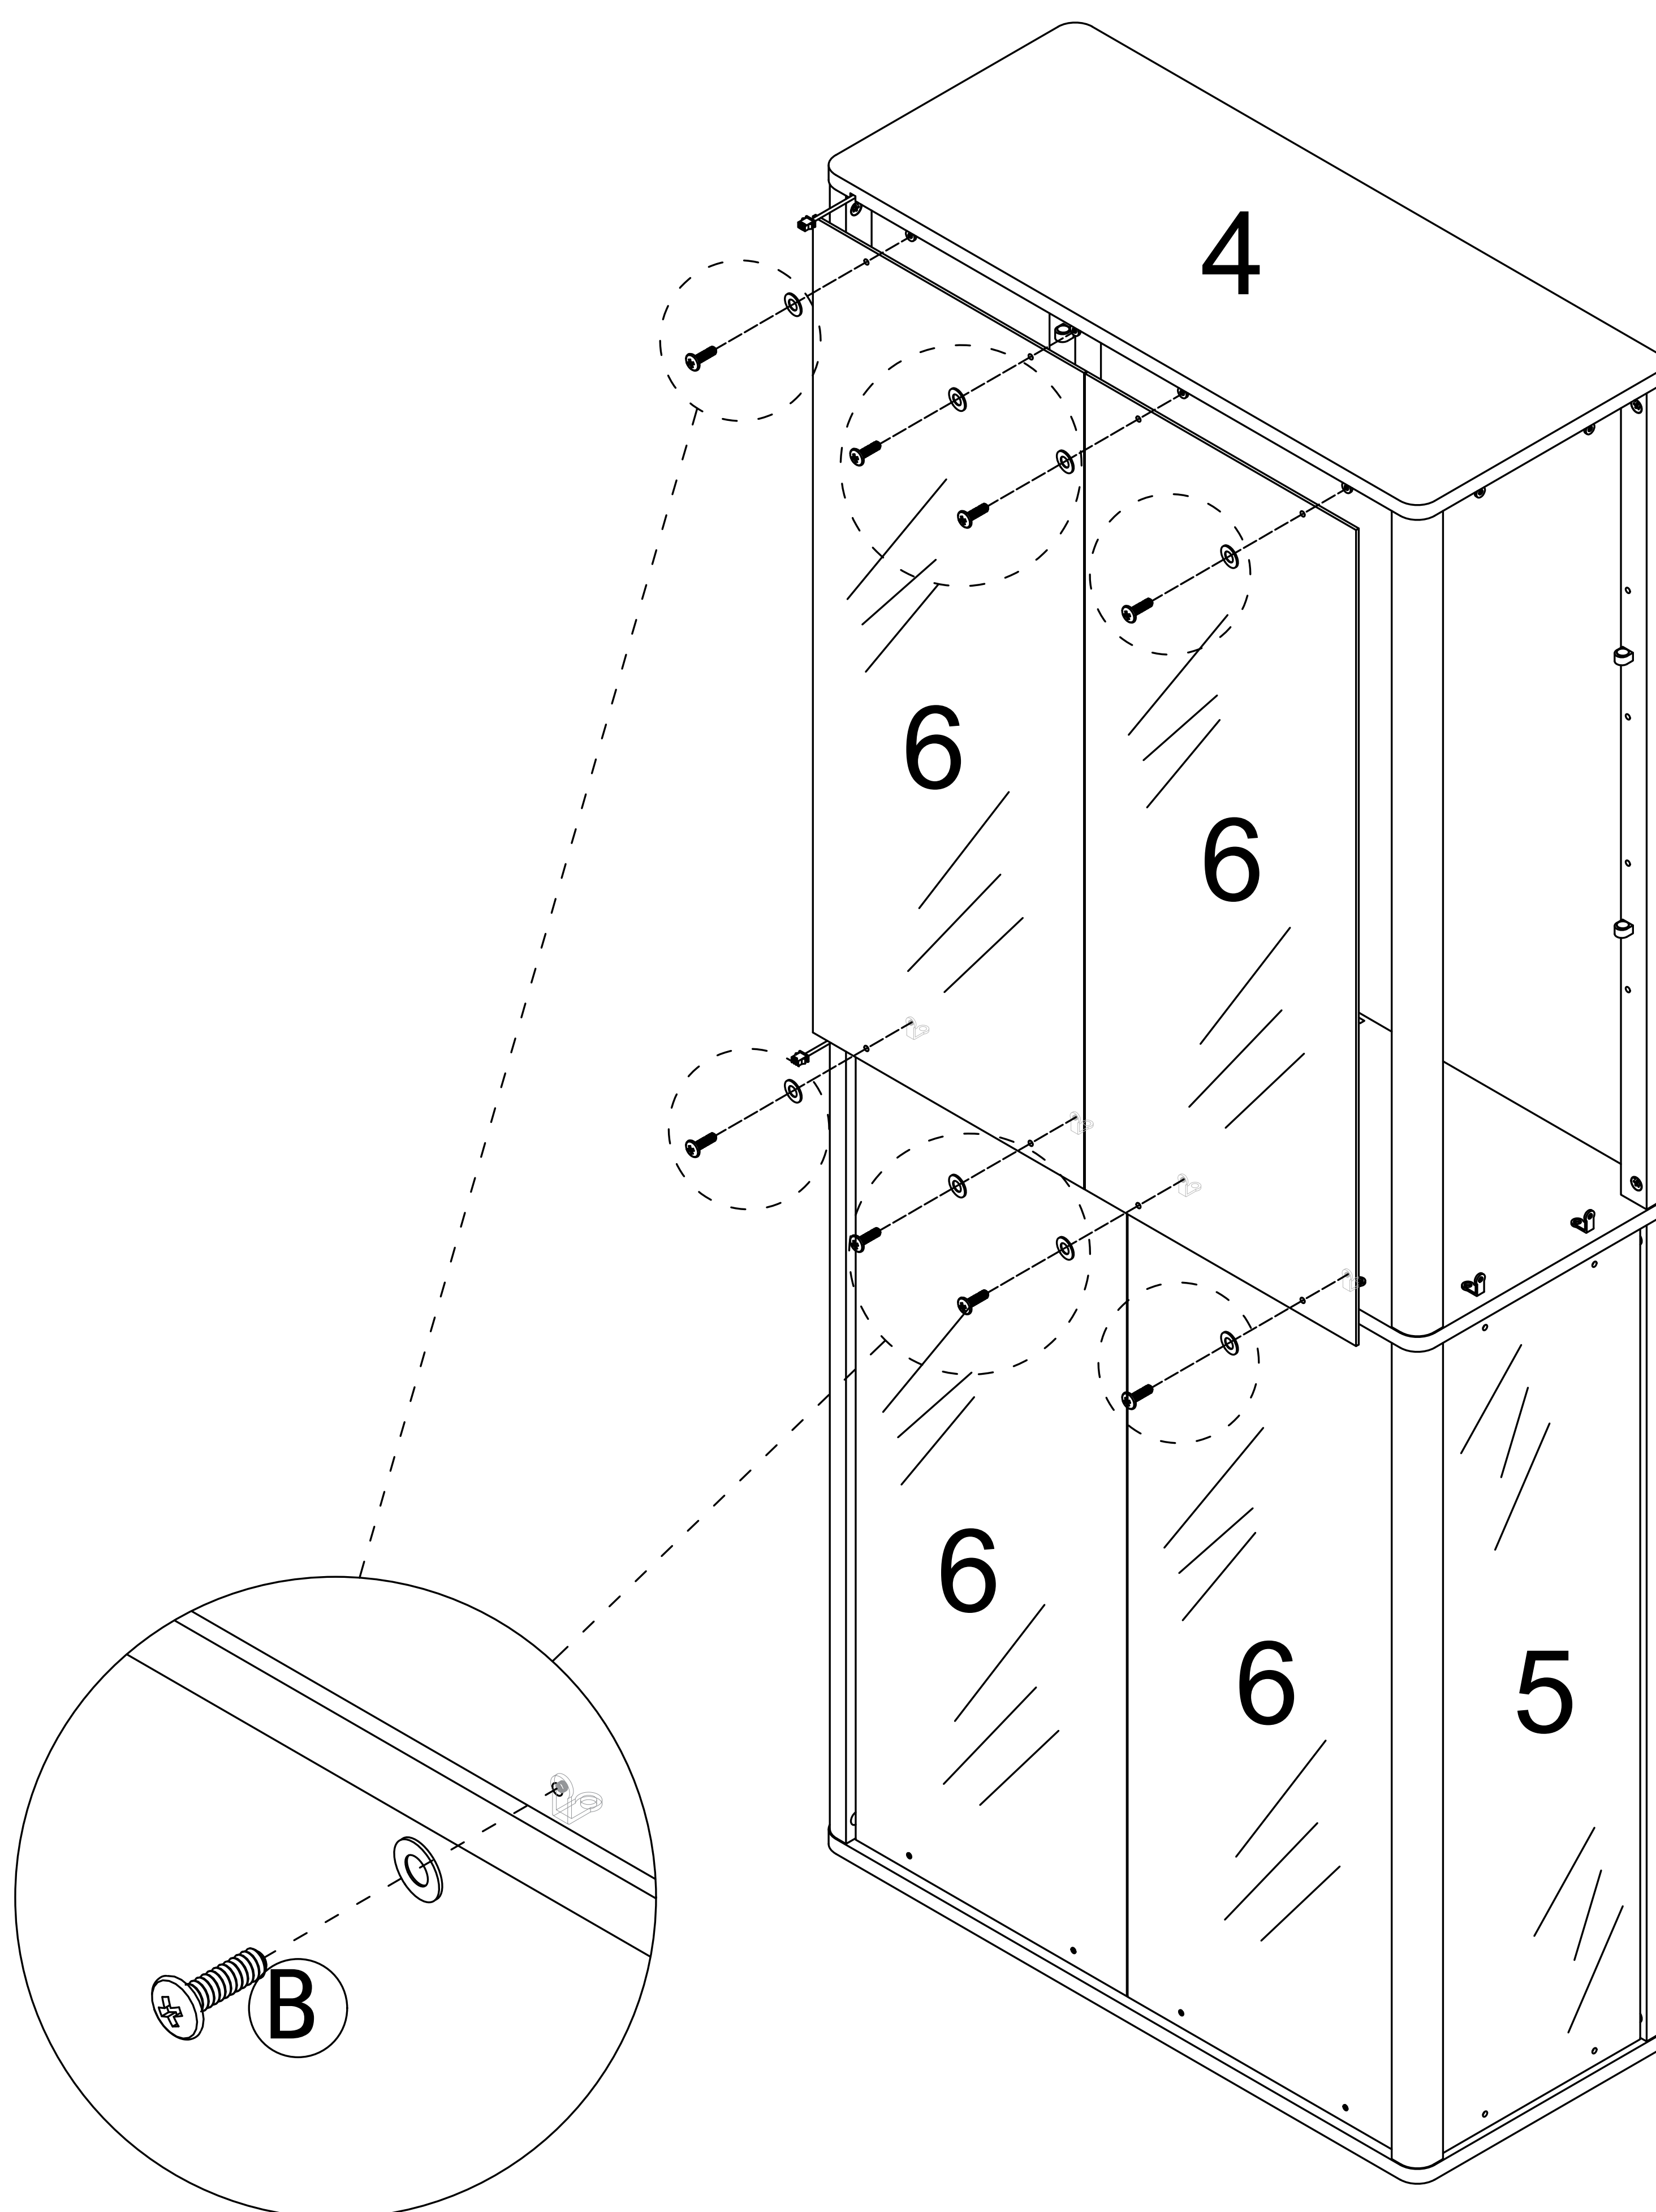


Please note: Do not use an electric drill when installing glass.

It is recommended to have two people assist with the installation.


Step 15

B

x8




x8

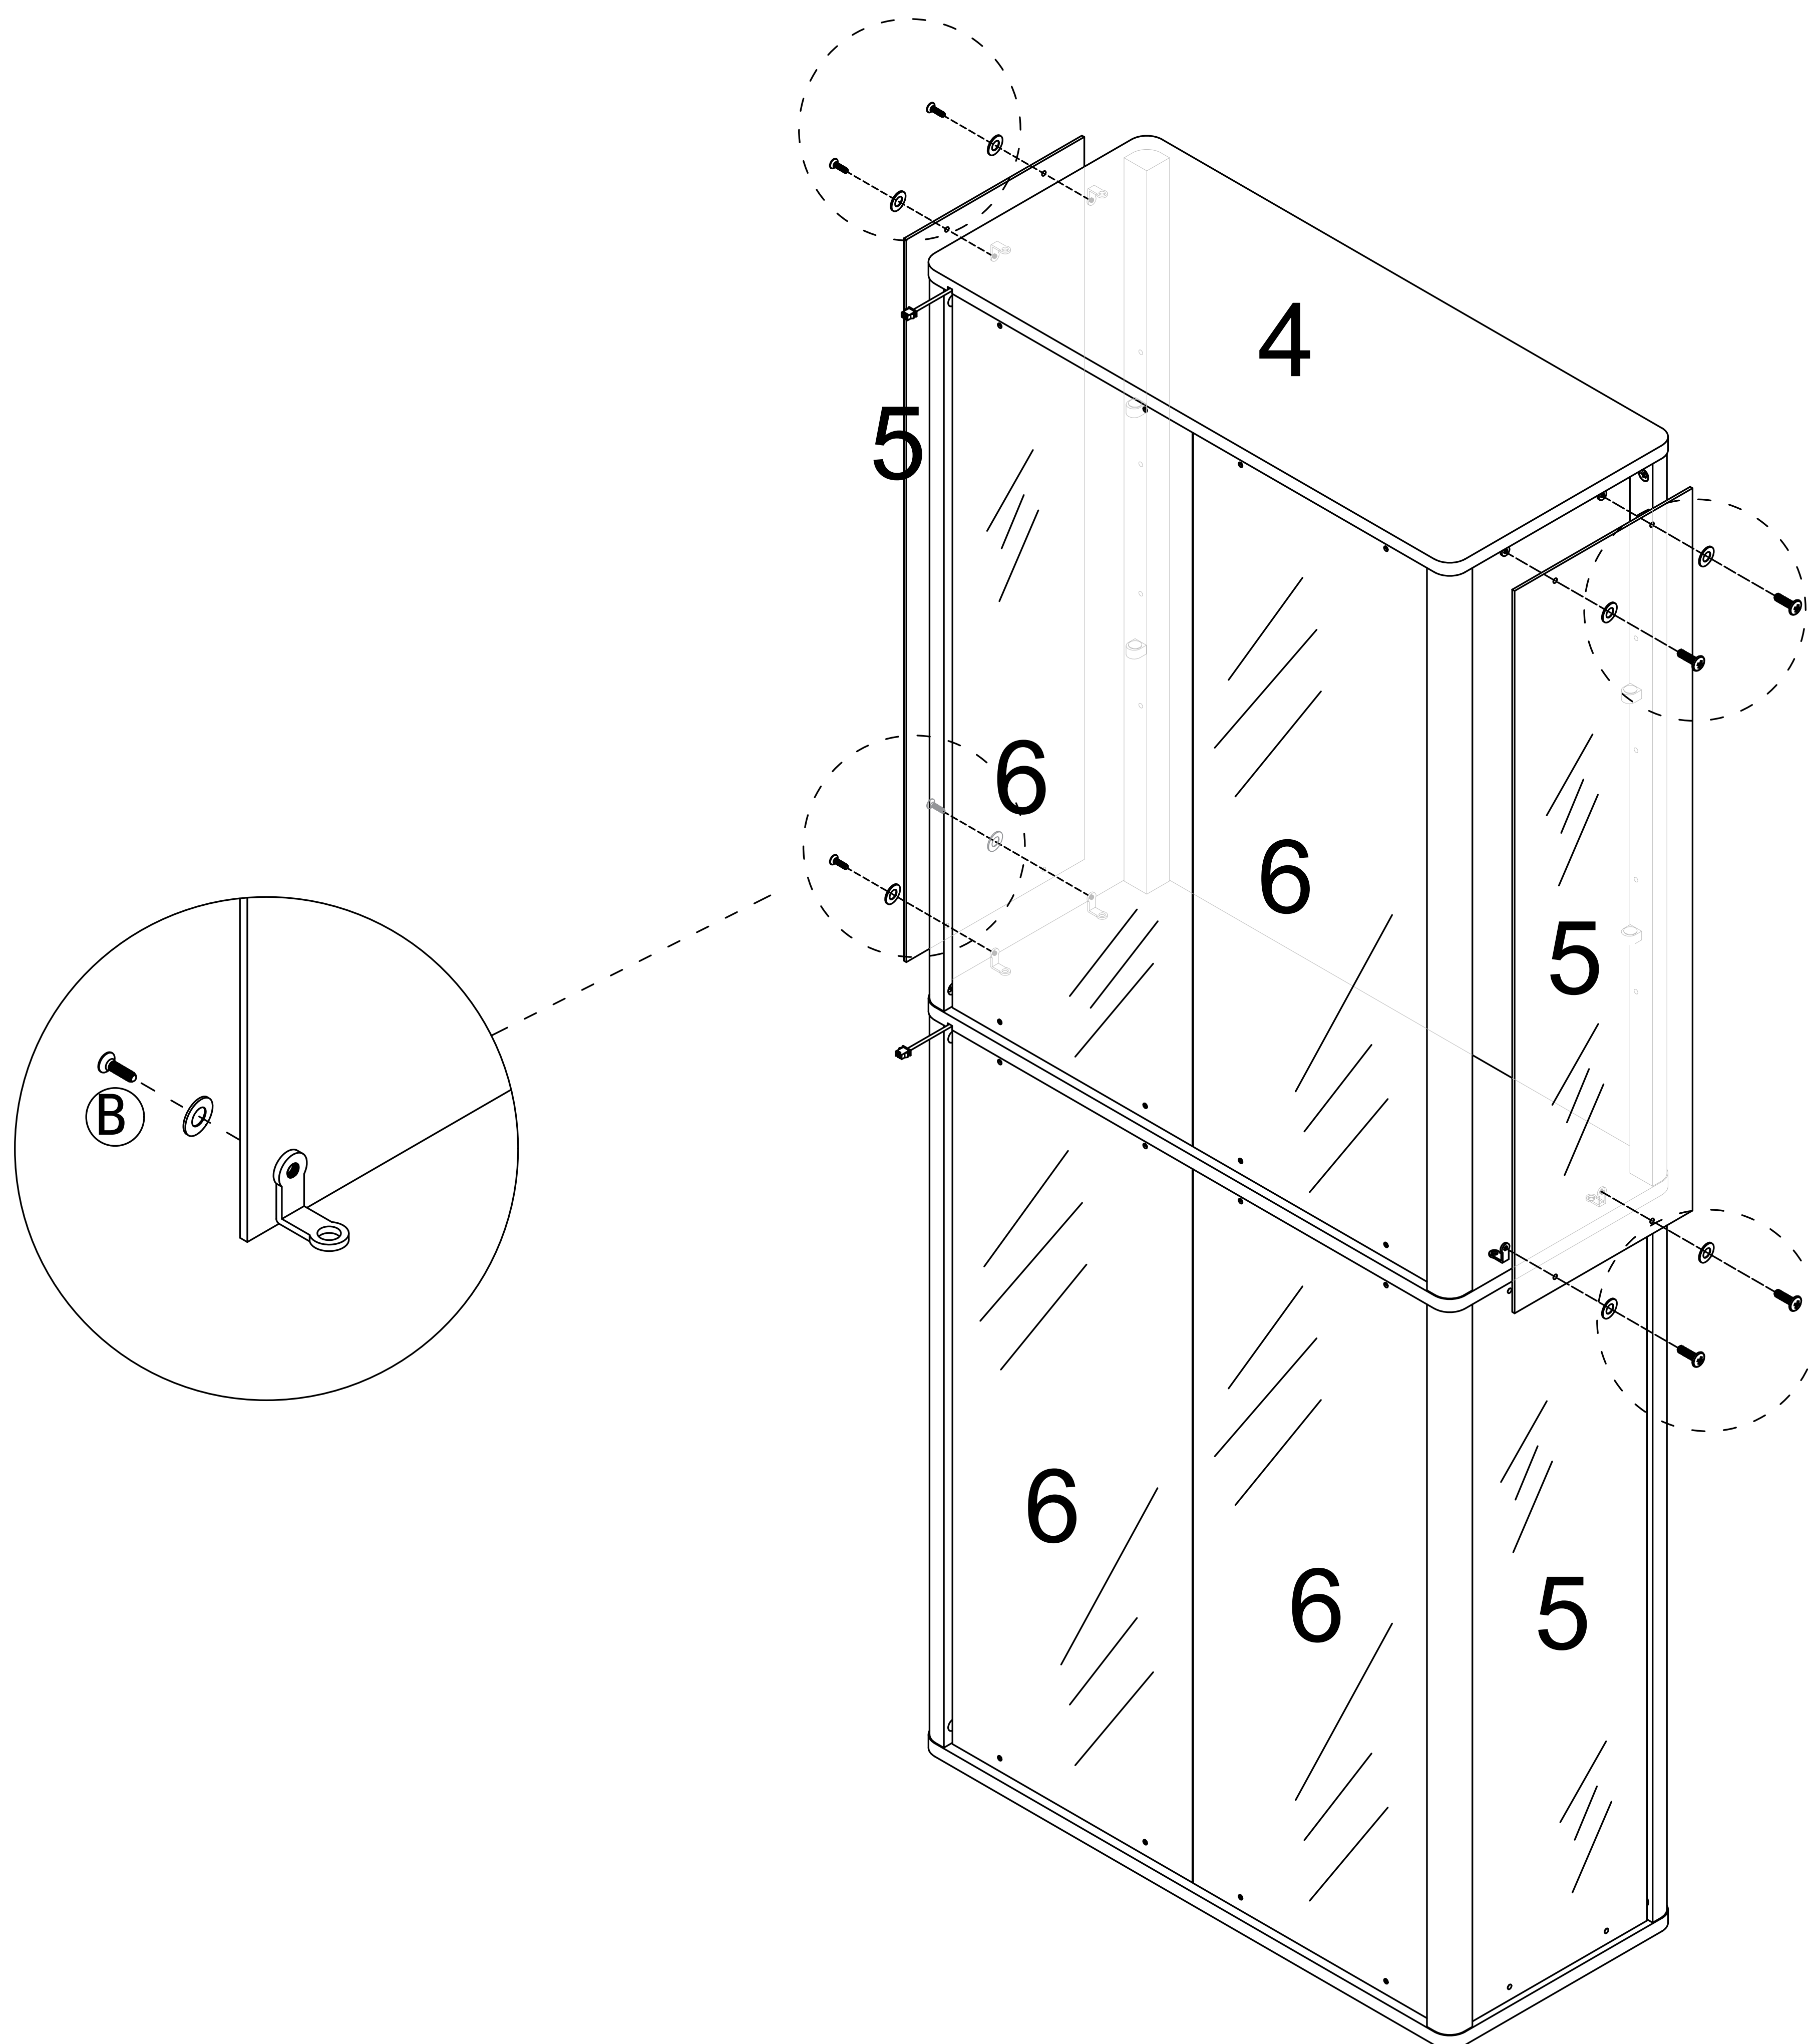


Please note: Do not use an electric drill when installing glass.

It is recommended to have two people assist with the installation.

Step 16

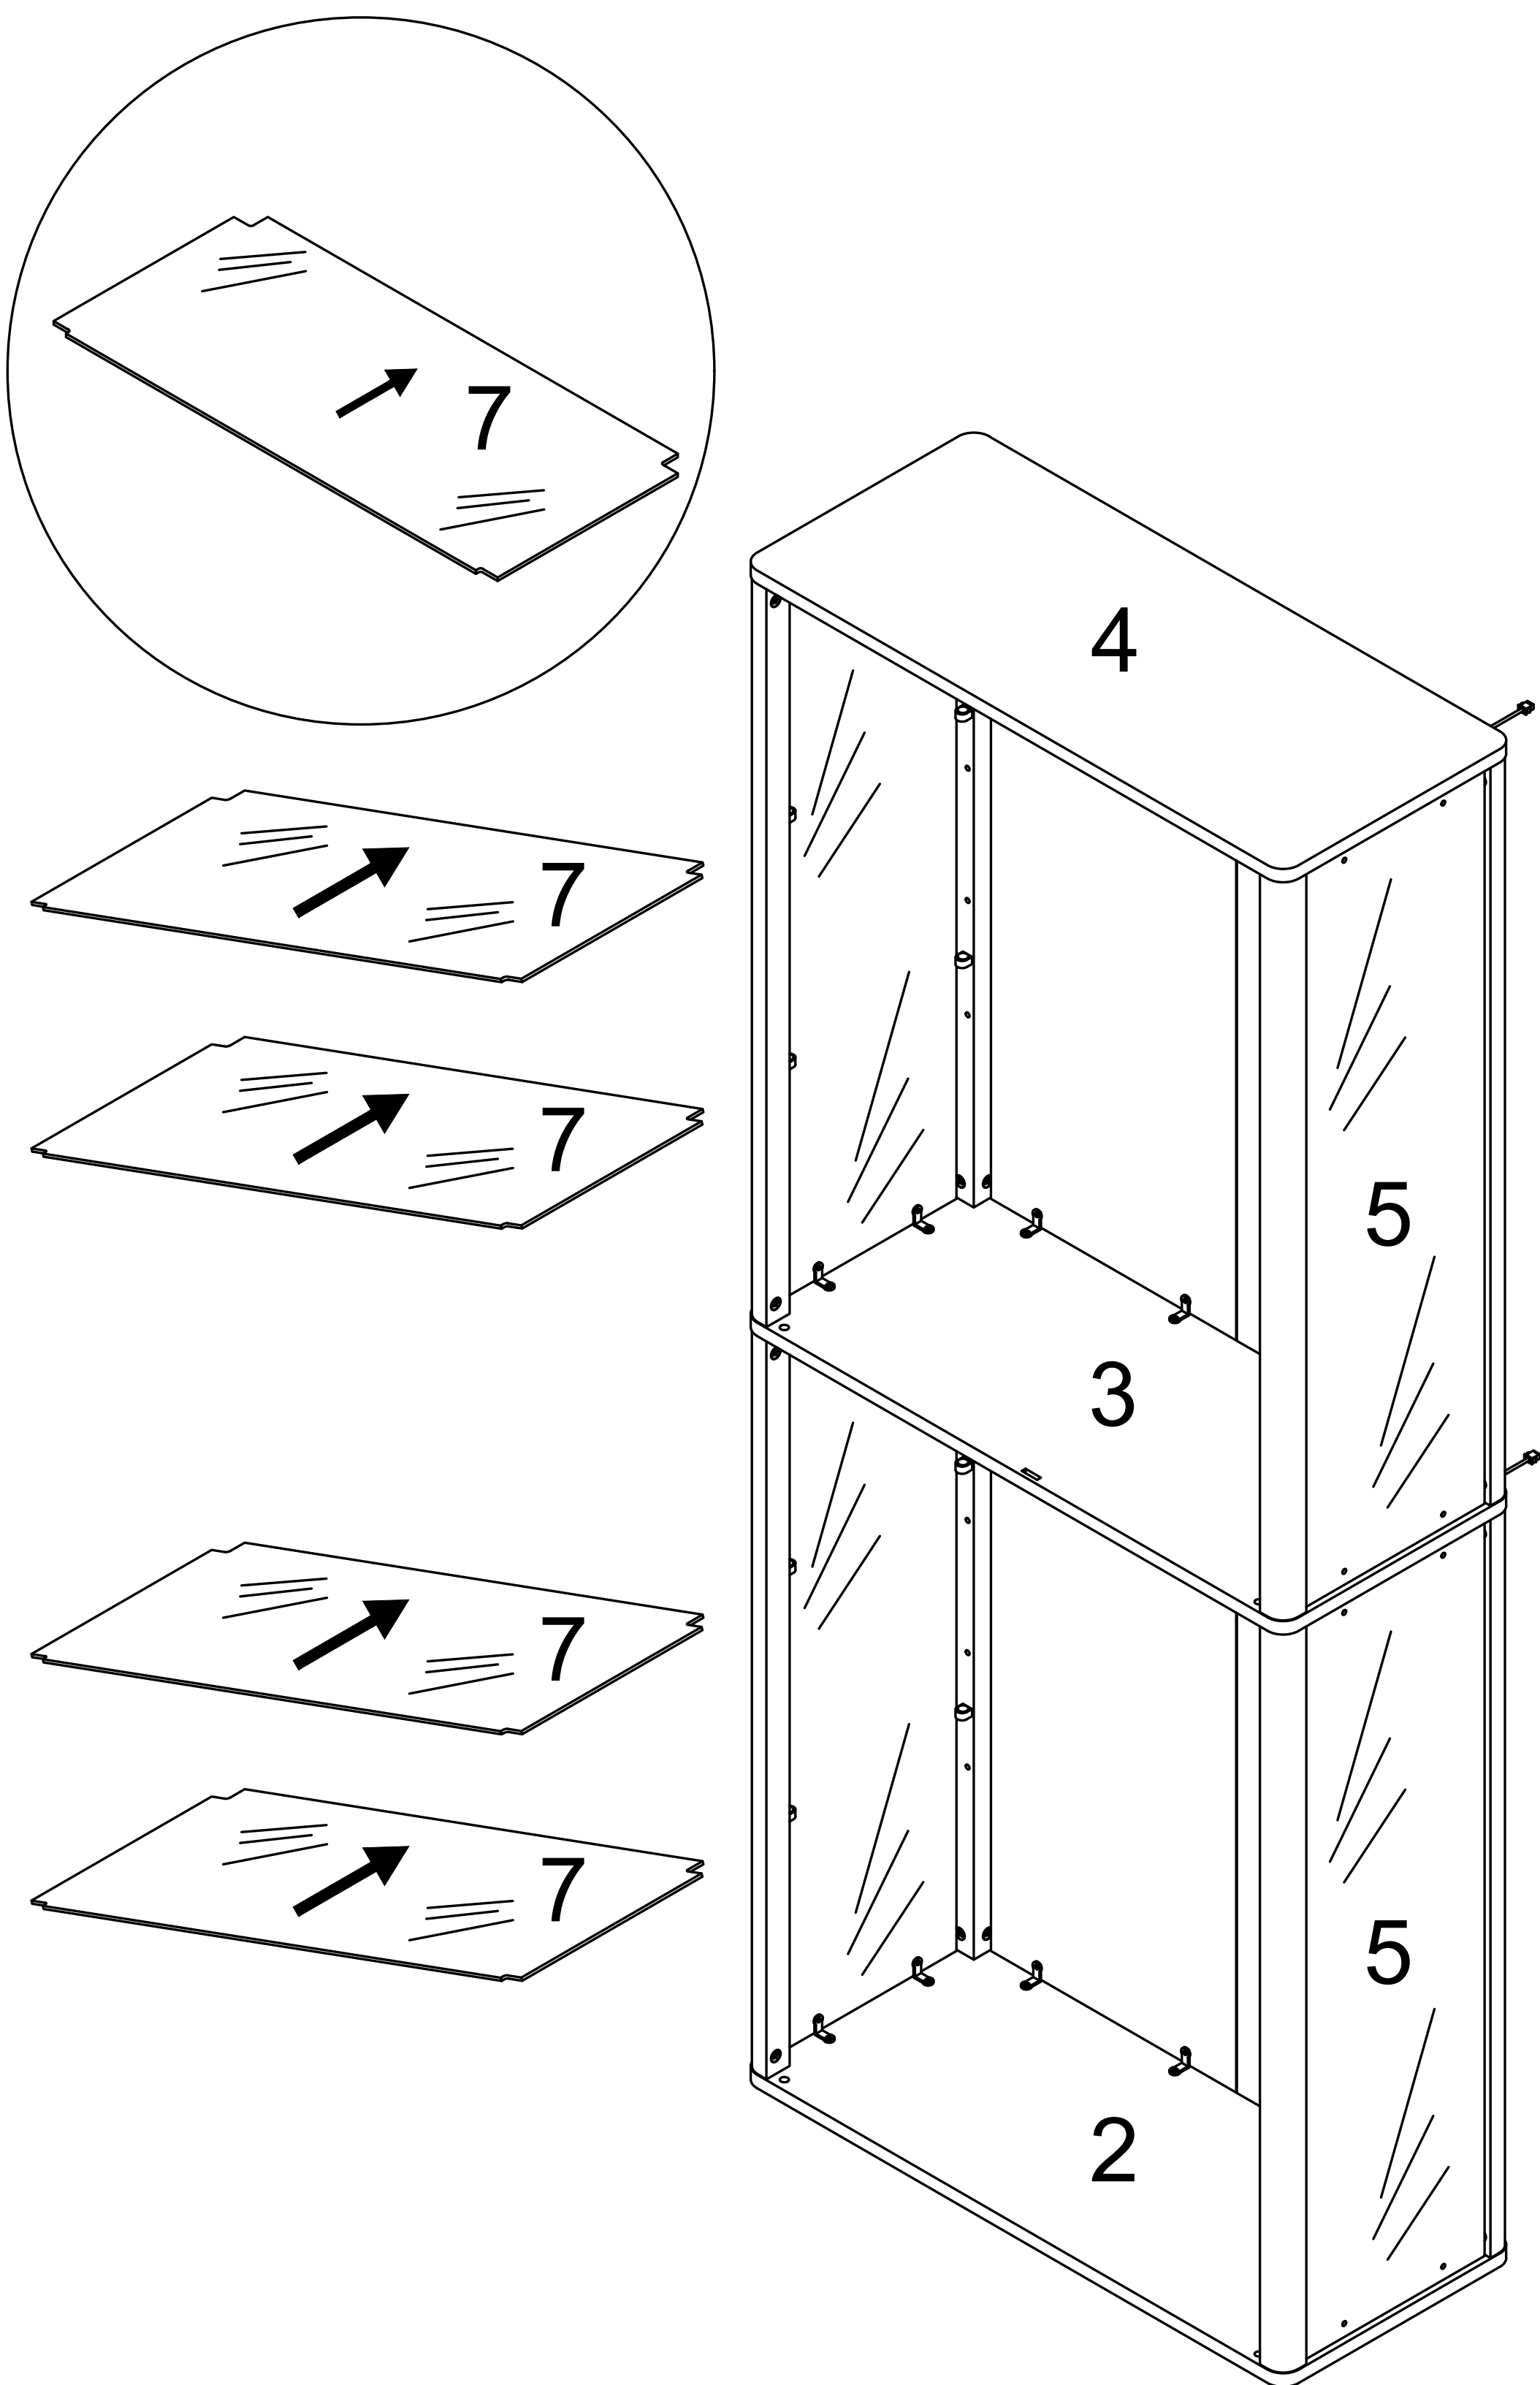


First, place the glass shelf at an angle inside the cabinet, then lay it flat on the shelf support.

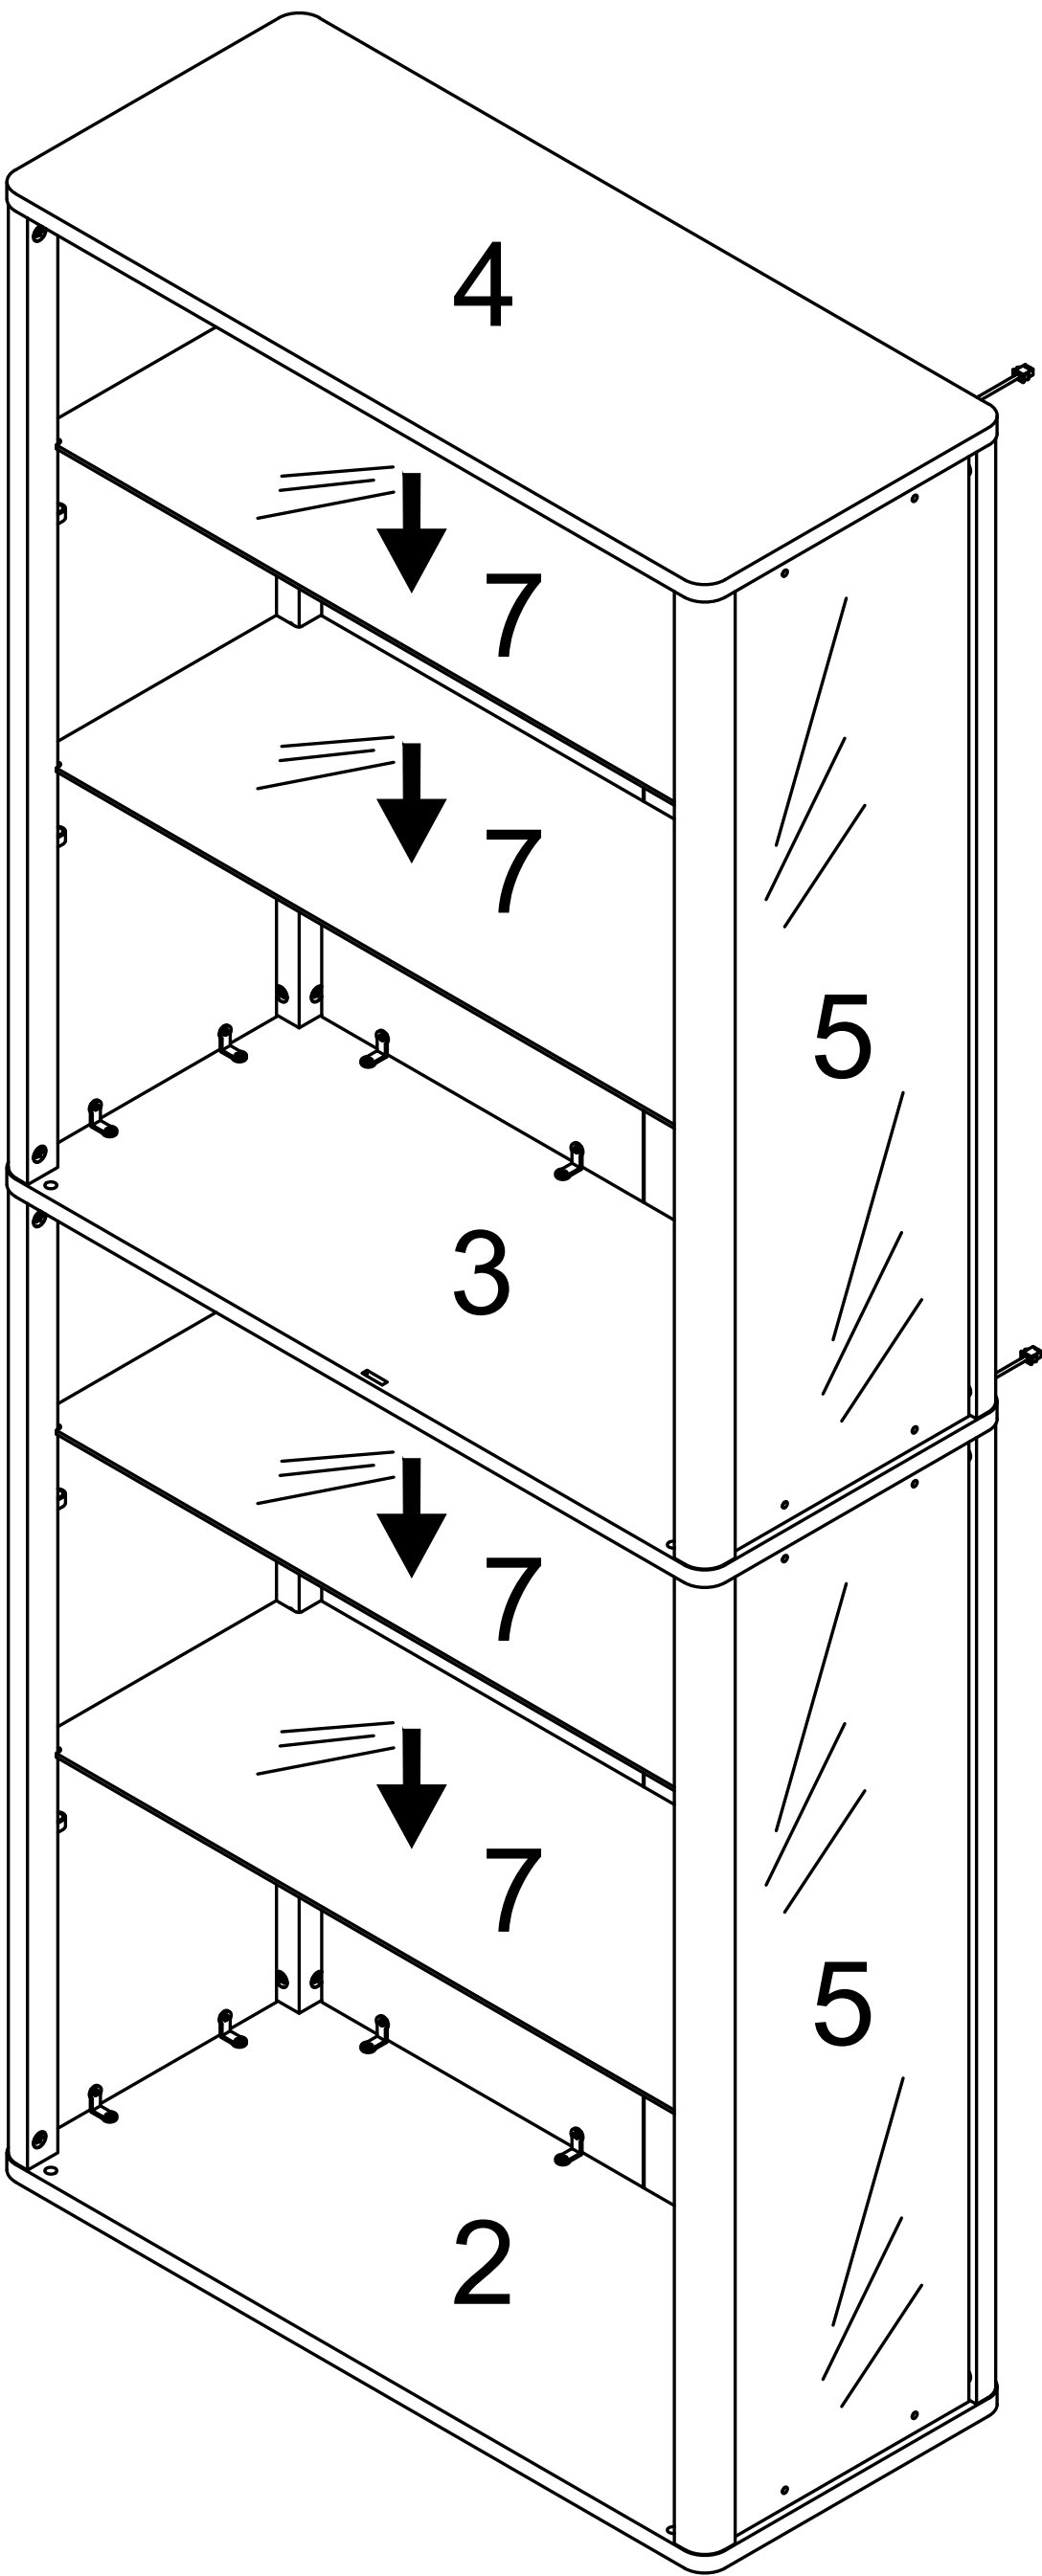


Step 17


First, completely unscrew the screws on the parts

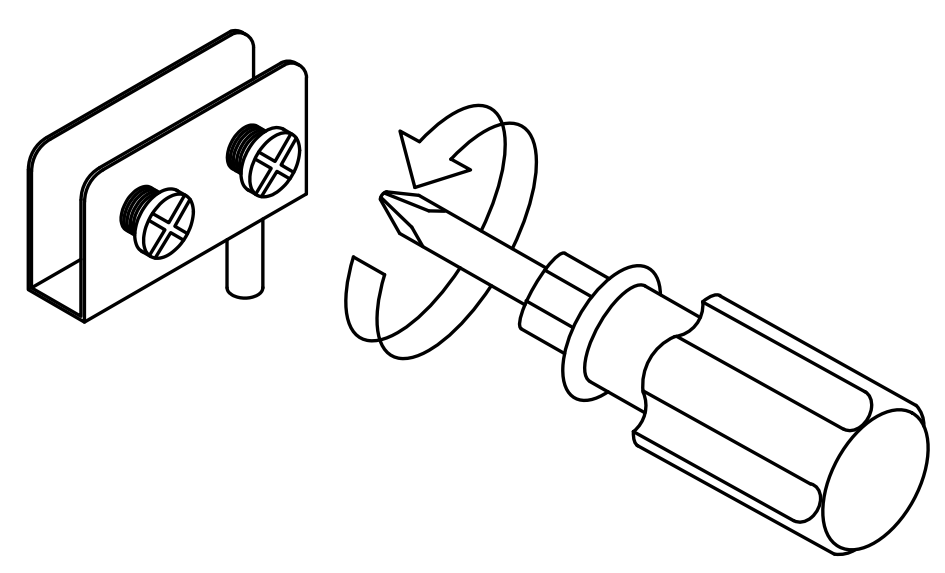


Place the white gasket first, then install the hinge, and finally tighten the screws.

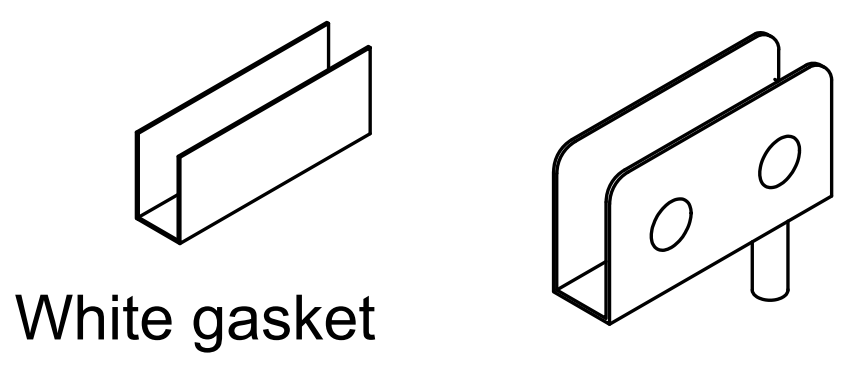

E


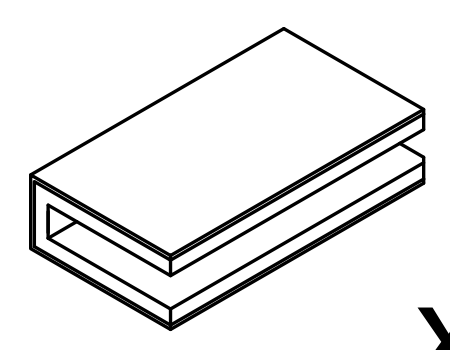


x2


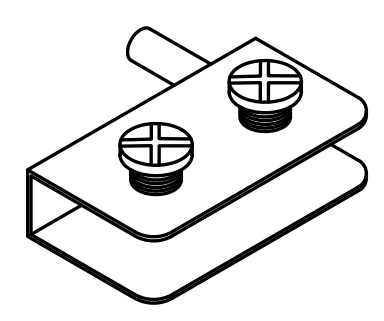


x2

Pay attention to the direction of the door hinge, and rotate the screws to compress the white gasket

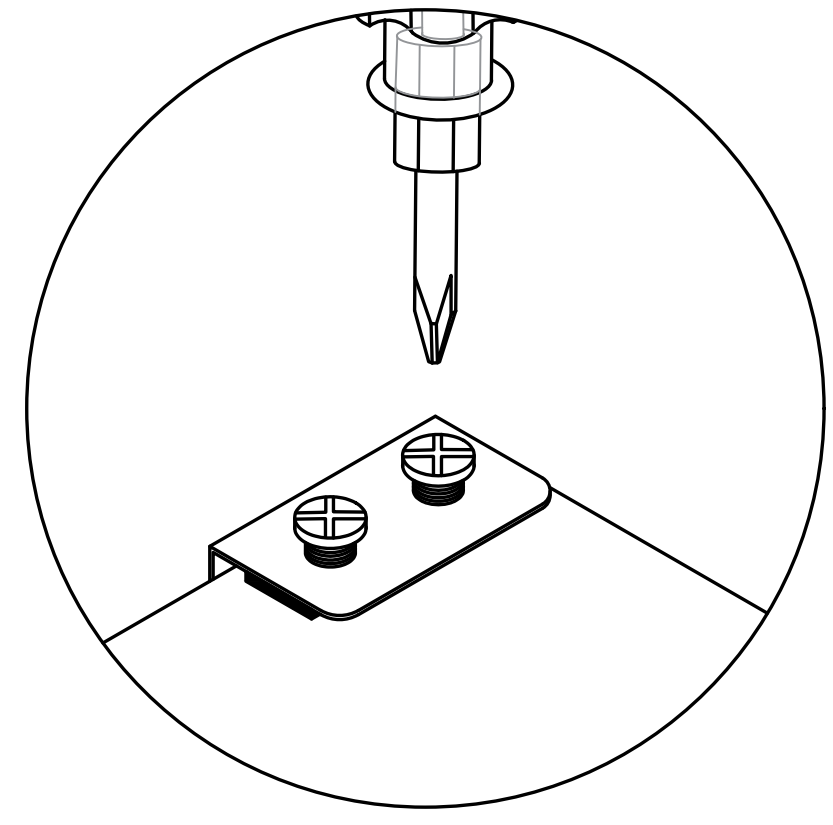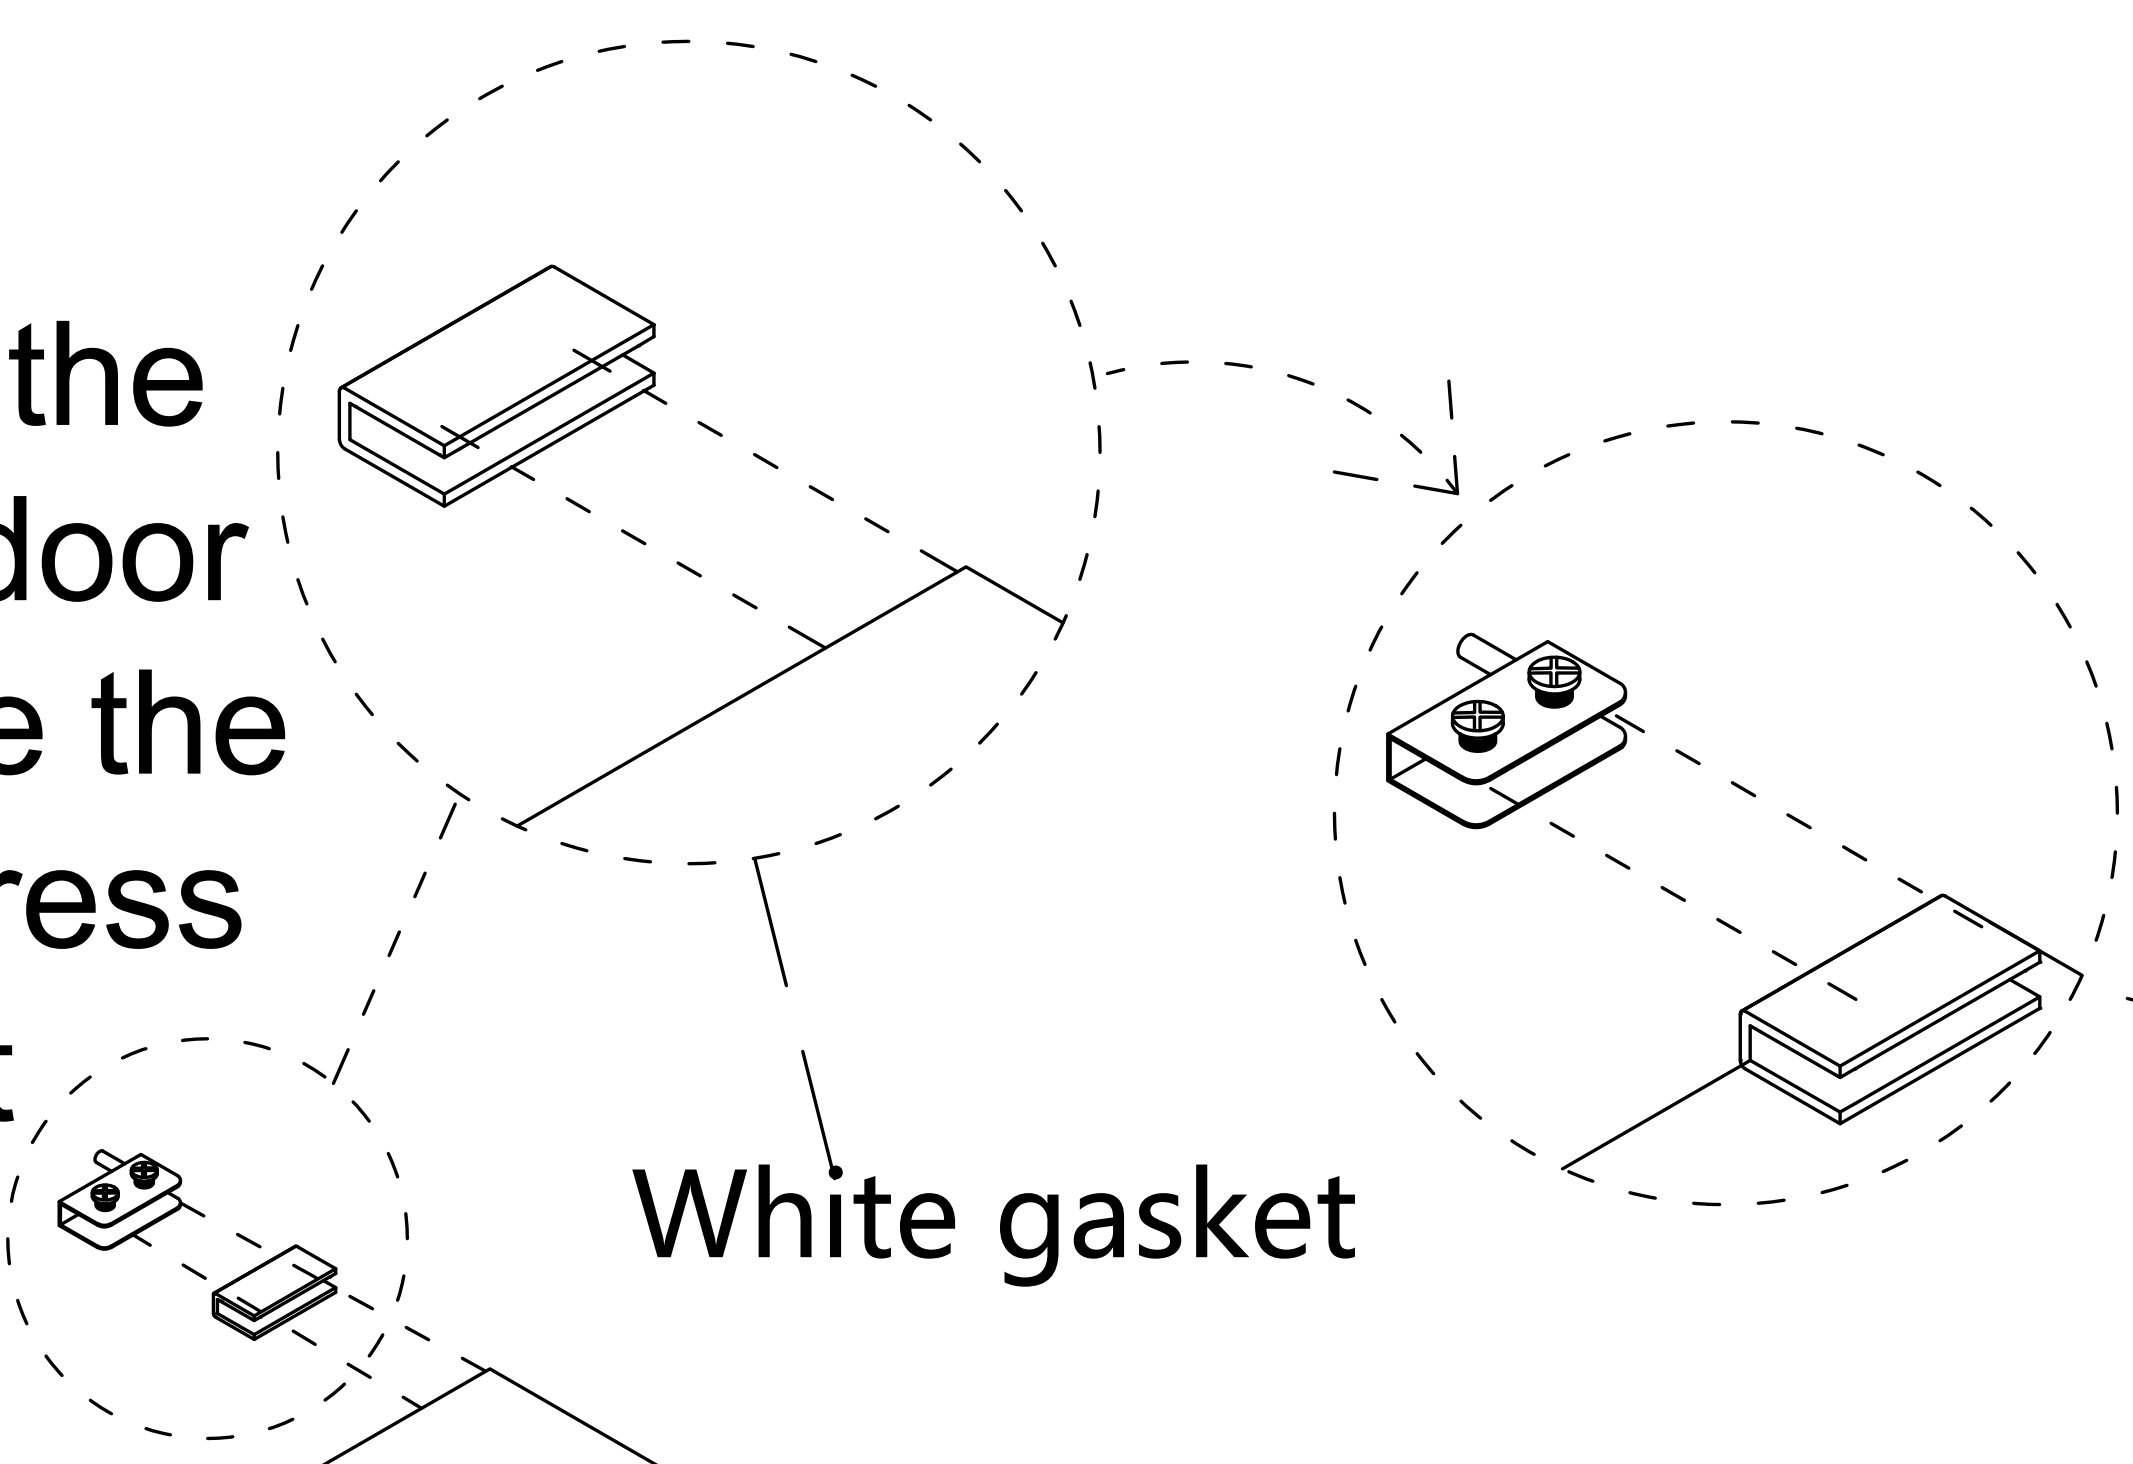

Locking screw

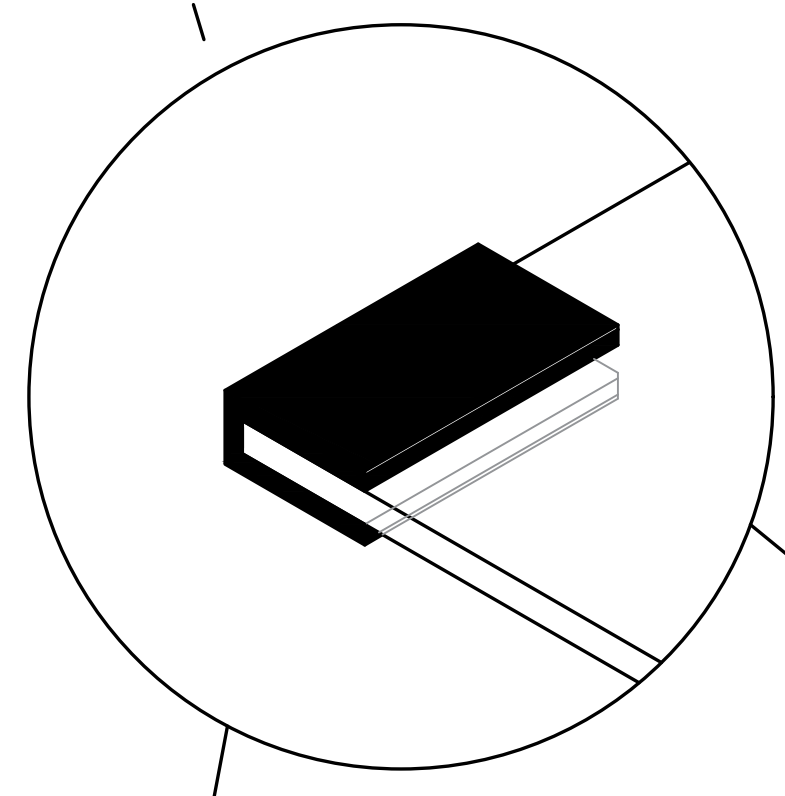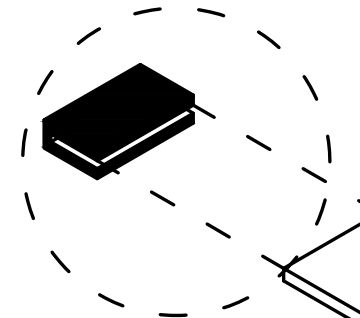

Iron sheet

If you feel loose, please pinch the accessory before installation


8

X2


Please note: Do not use an electric drill.

Step 18


First, completely unscrew the screws on the parts

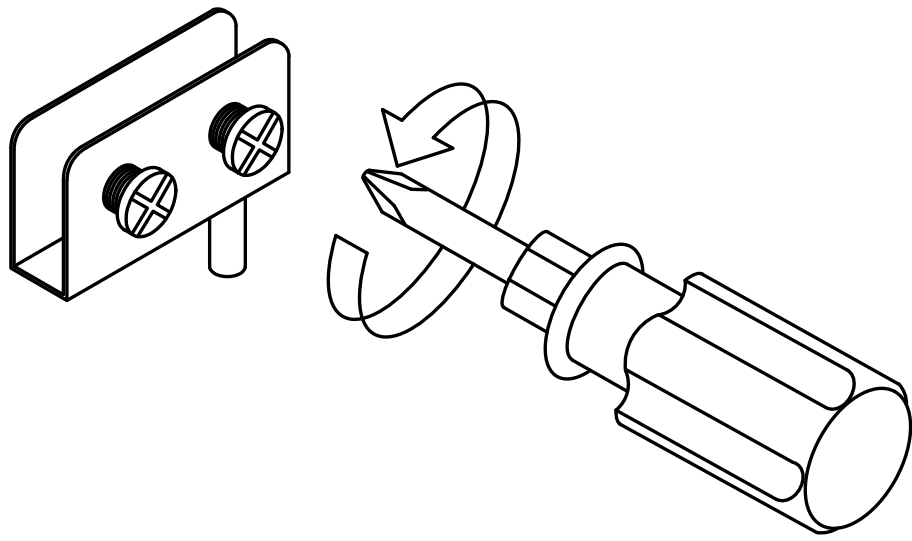

Place the white gasket first, then install the hinge, and finally tighten the screws.

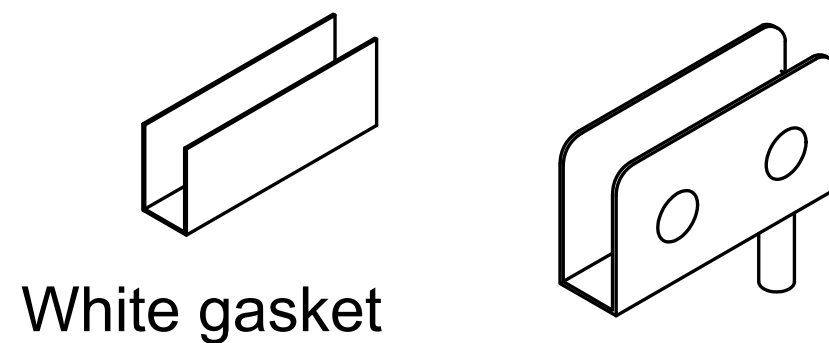


White gasket

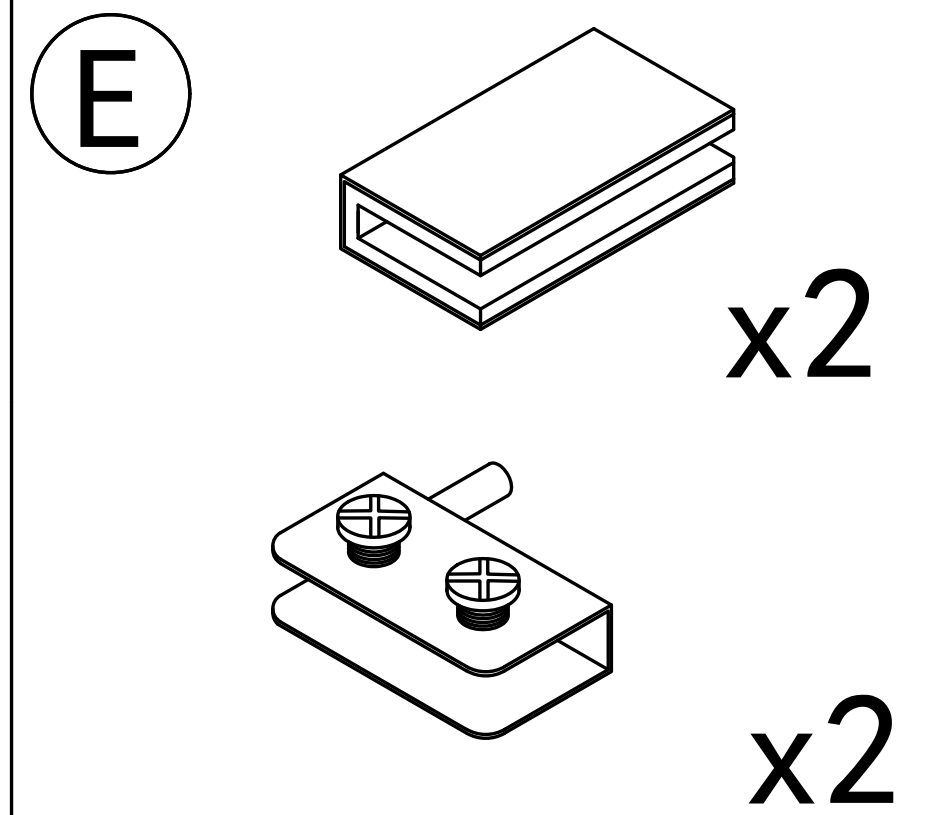

White gasket

Pay attention to the direction of the door hinge, and rotate the screws to compress the white gasket

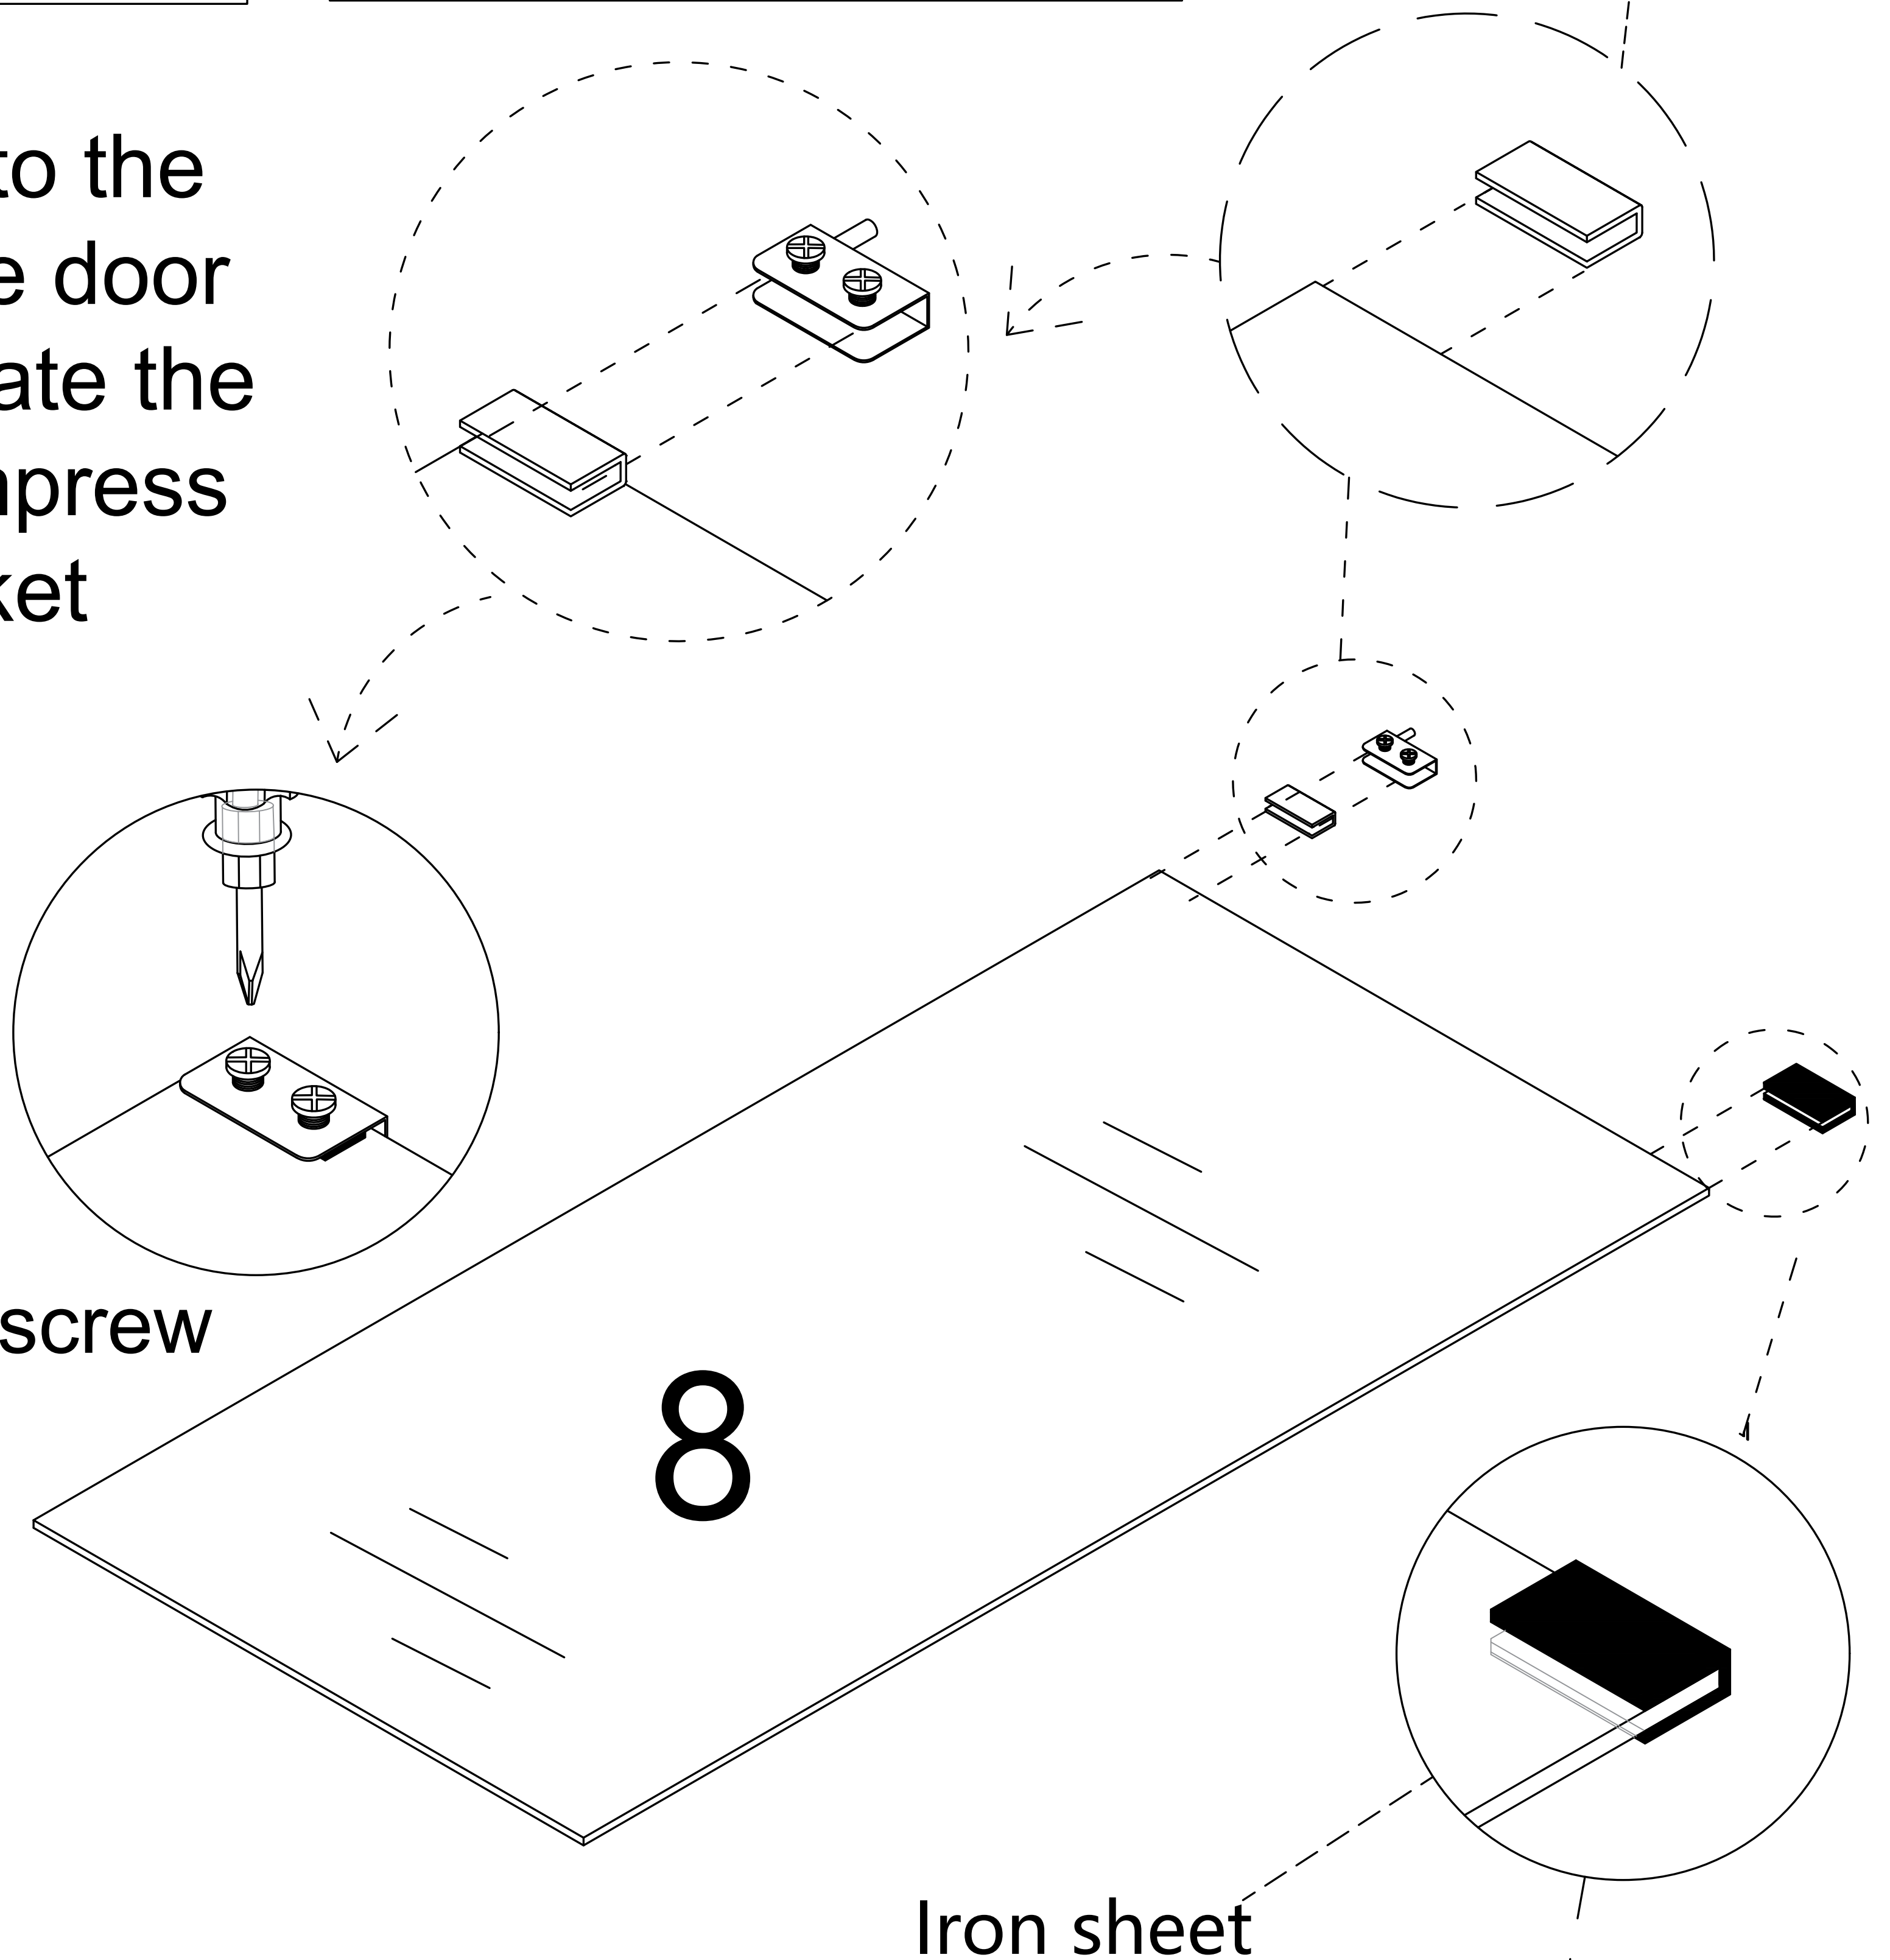

Locking screw

8




Iron sheet



X2

If you feel loose, please pinch the accessory before installation

Please note: Do not use an electric drill.

Step 19


- E**  x4
-  x2
-  x2

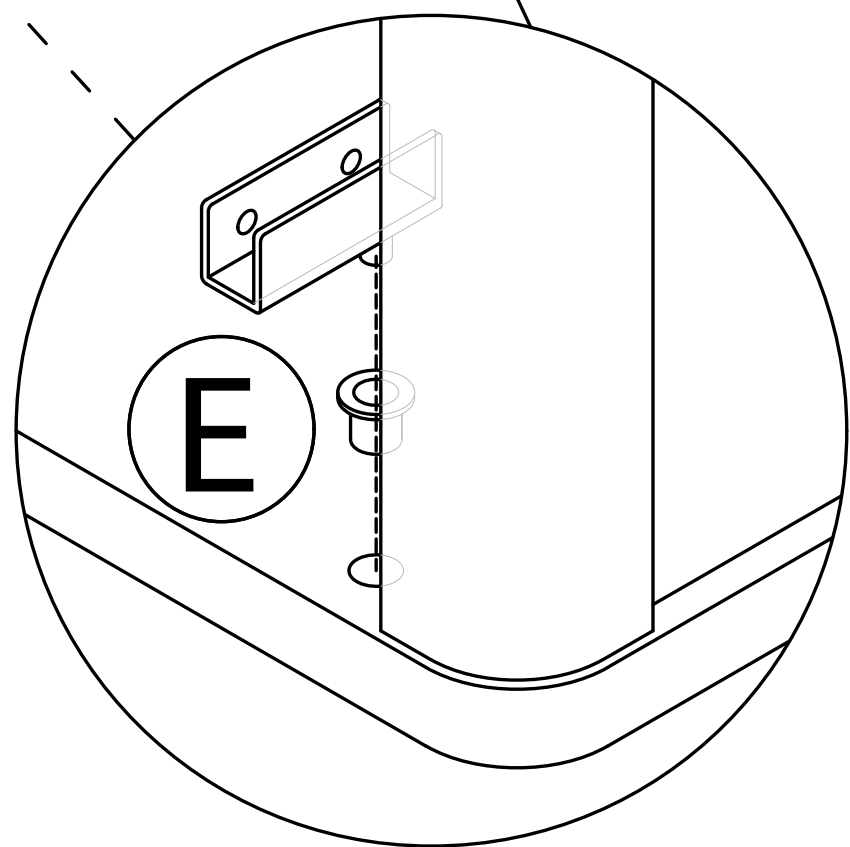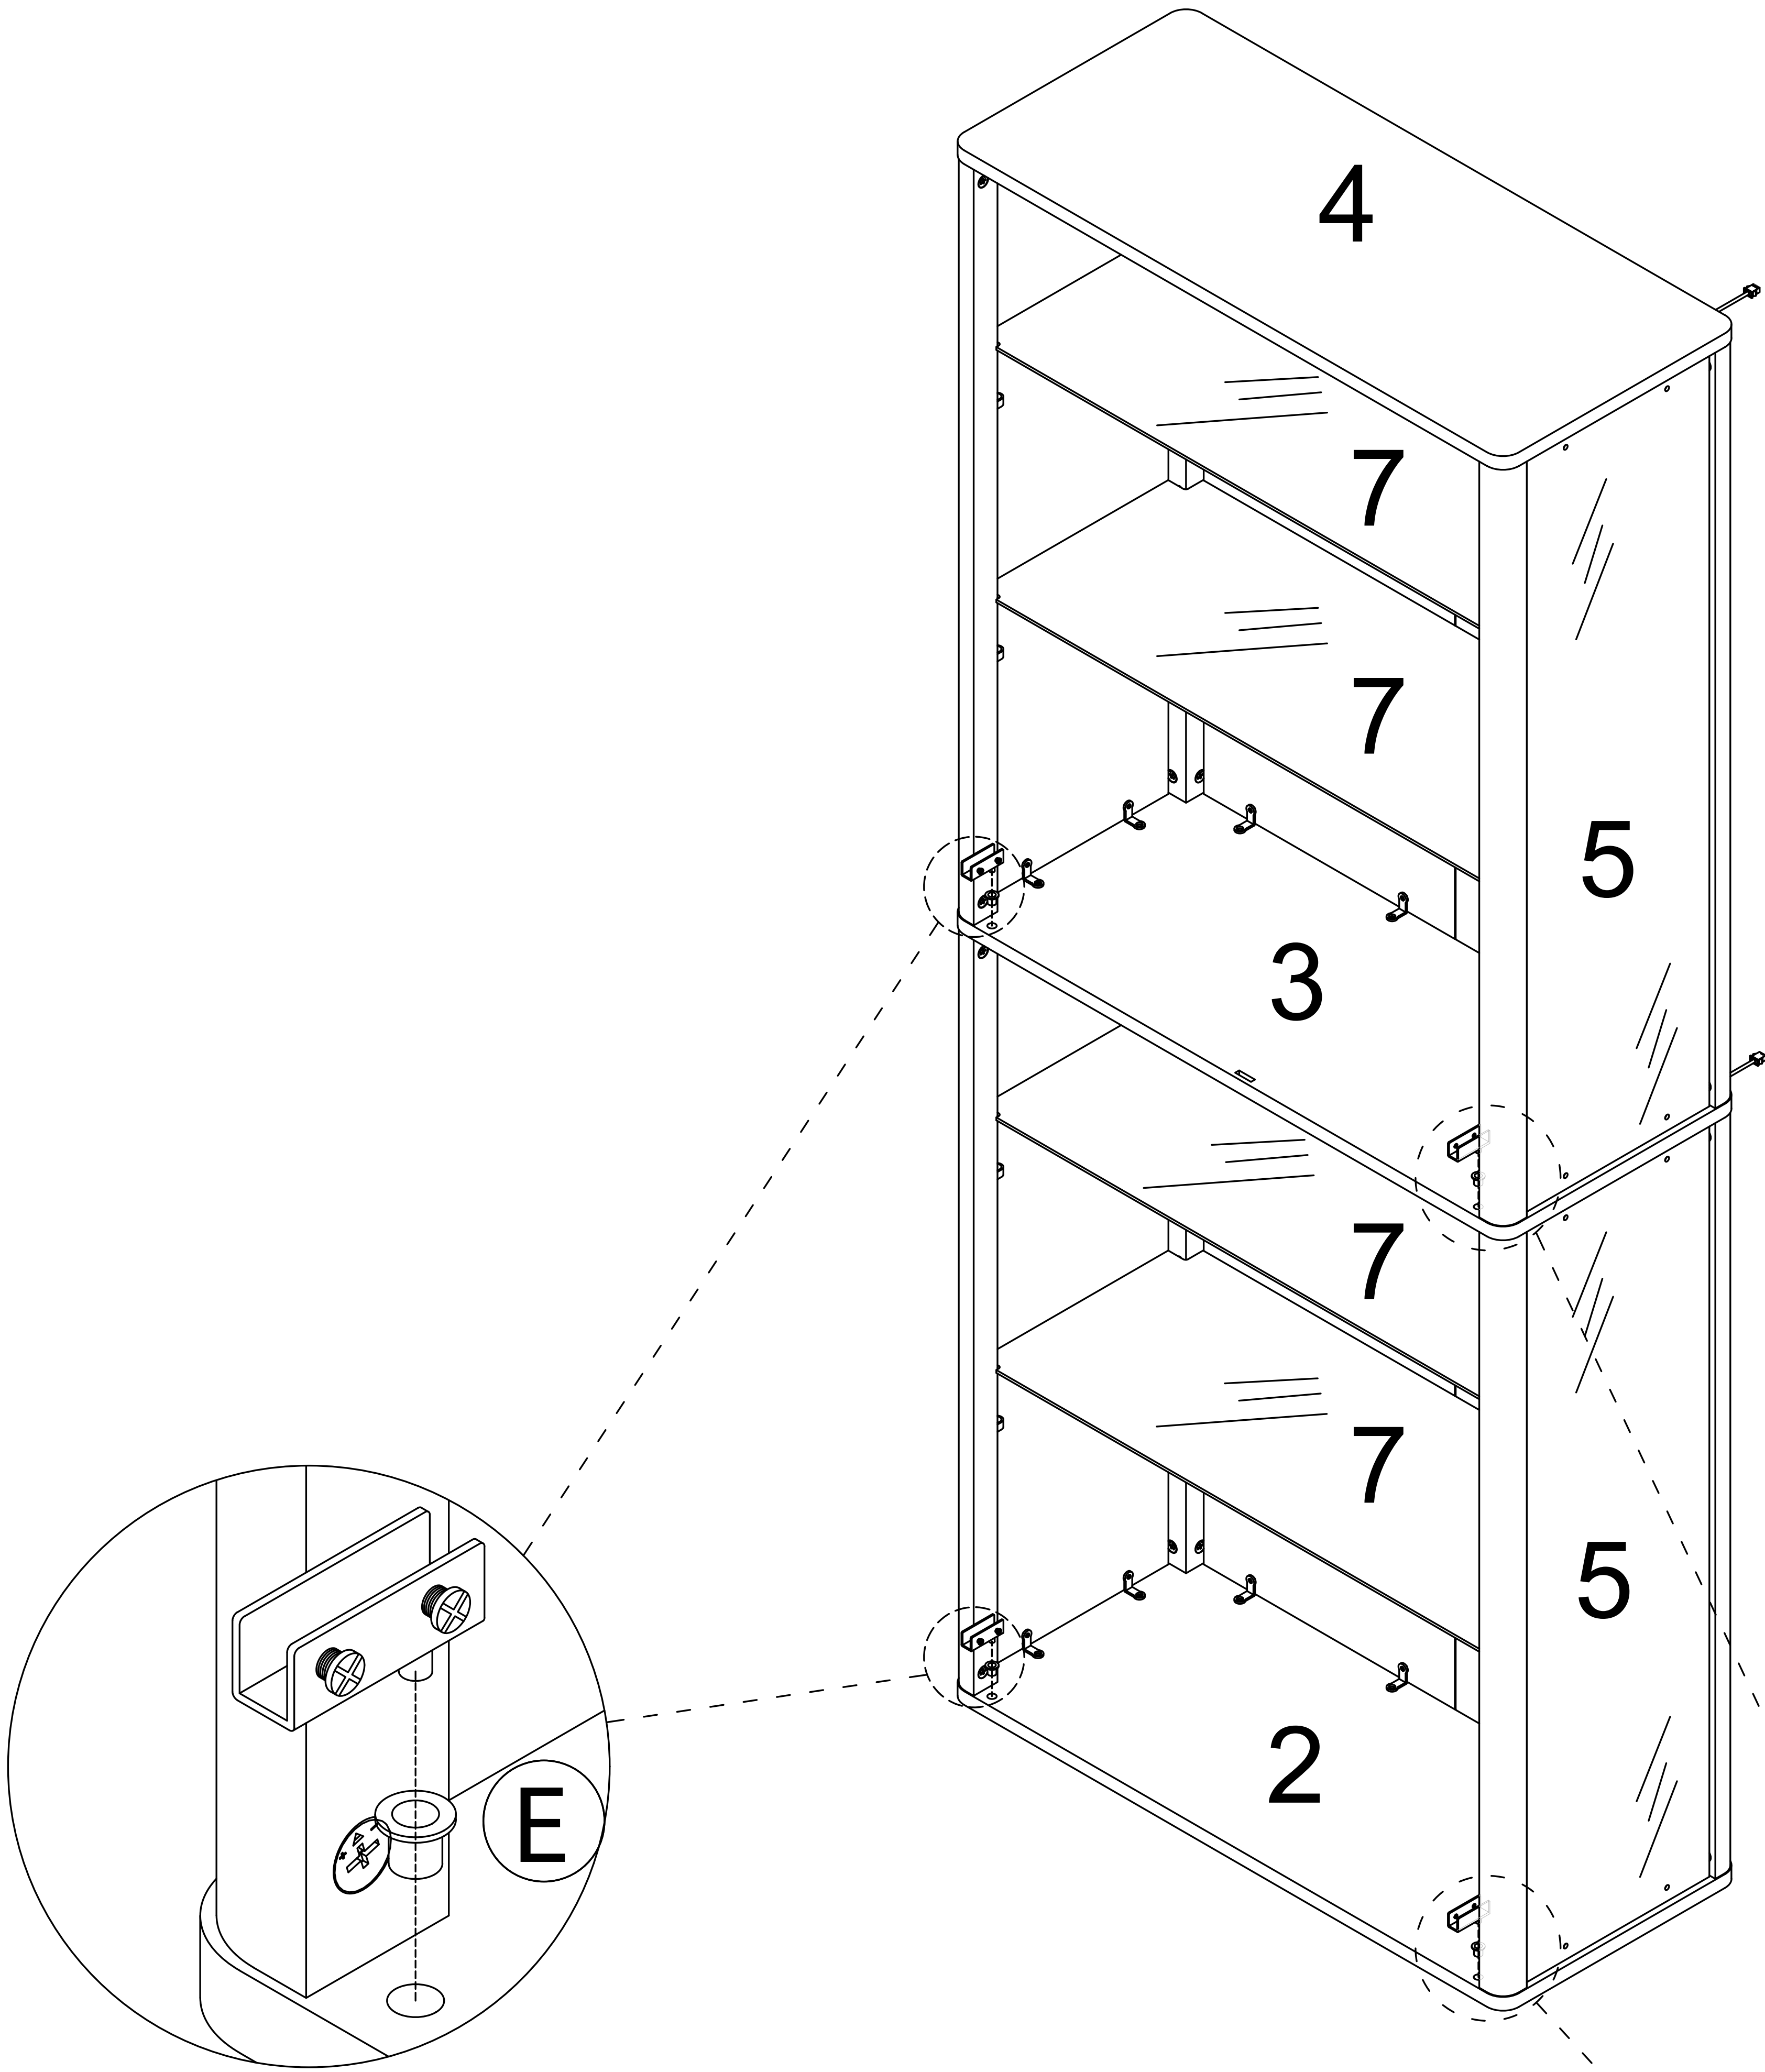

Step 20


Pay attention to the direction of the door hinge during installation

E




x2


When installing a glass door, it is recommended to have two people install it to avoid the glass door colliding or hitting oneself.

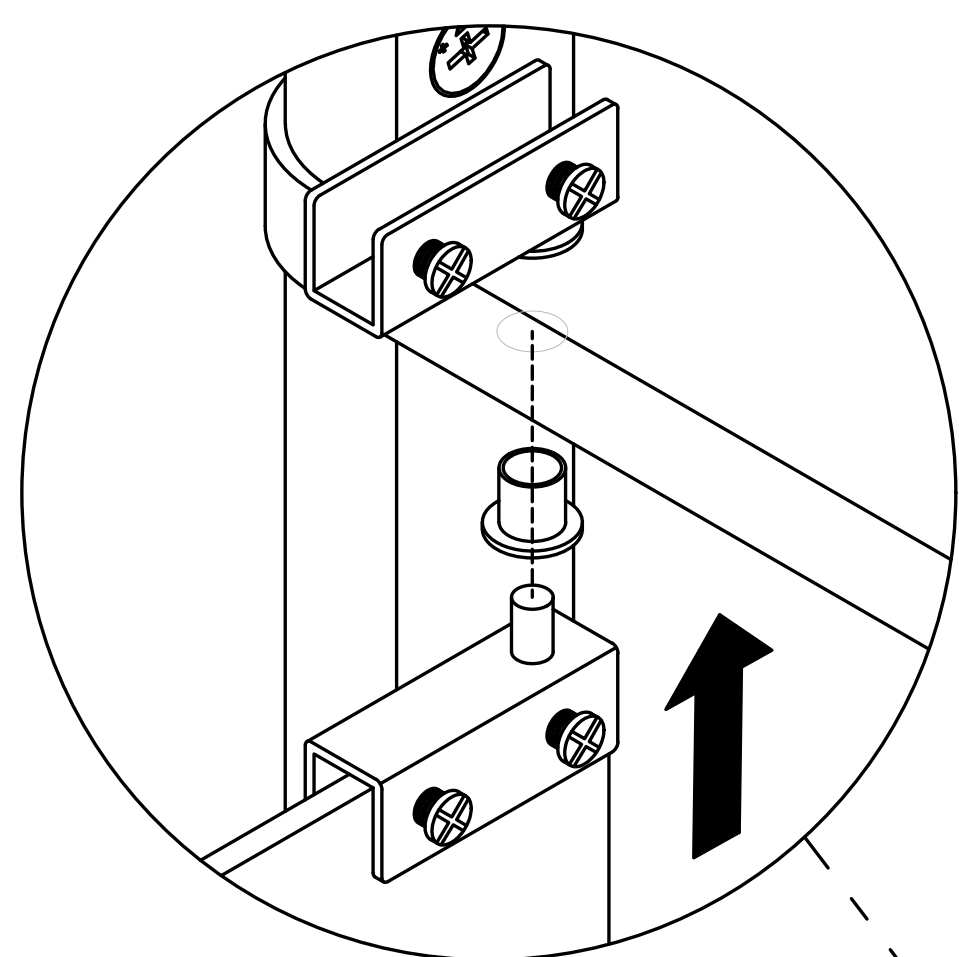

first

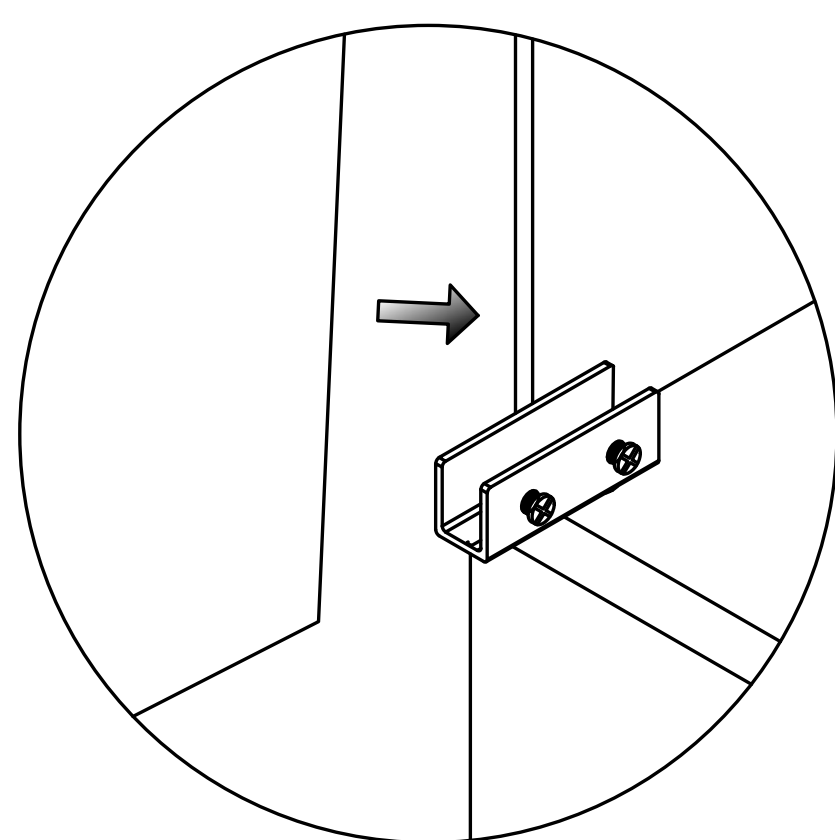


second

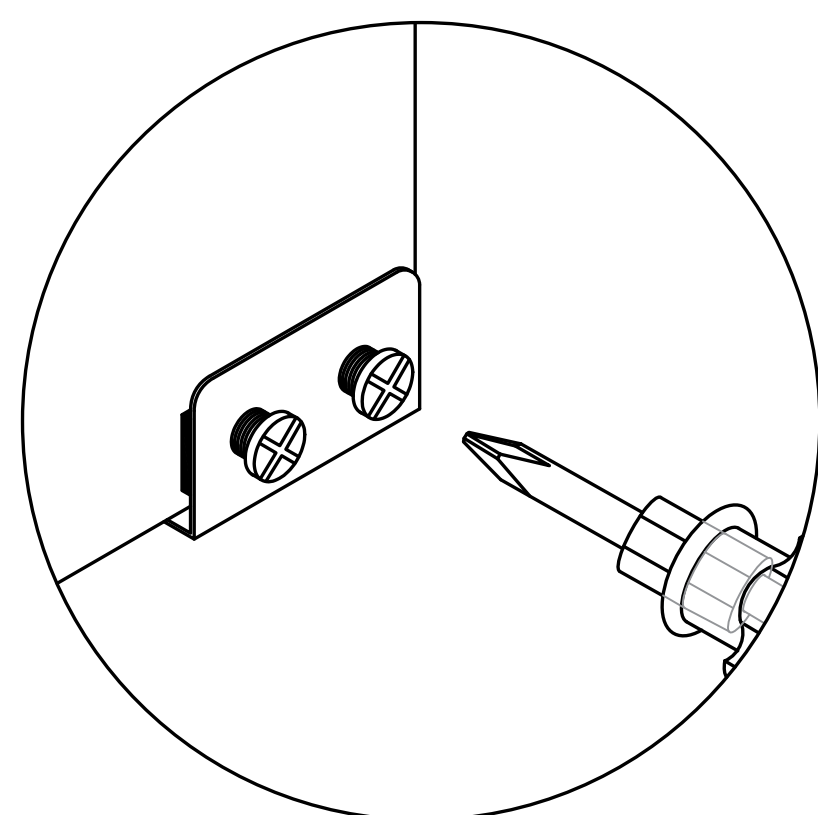

third

Locking screw

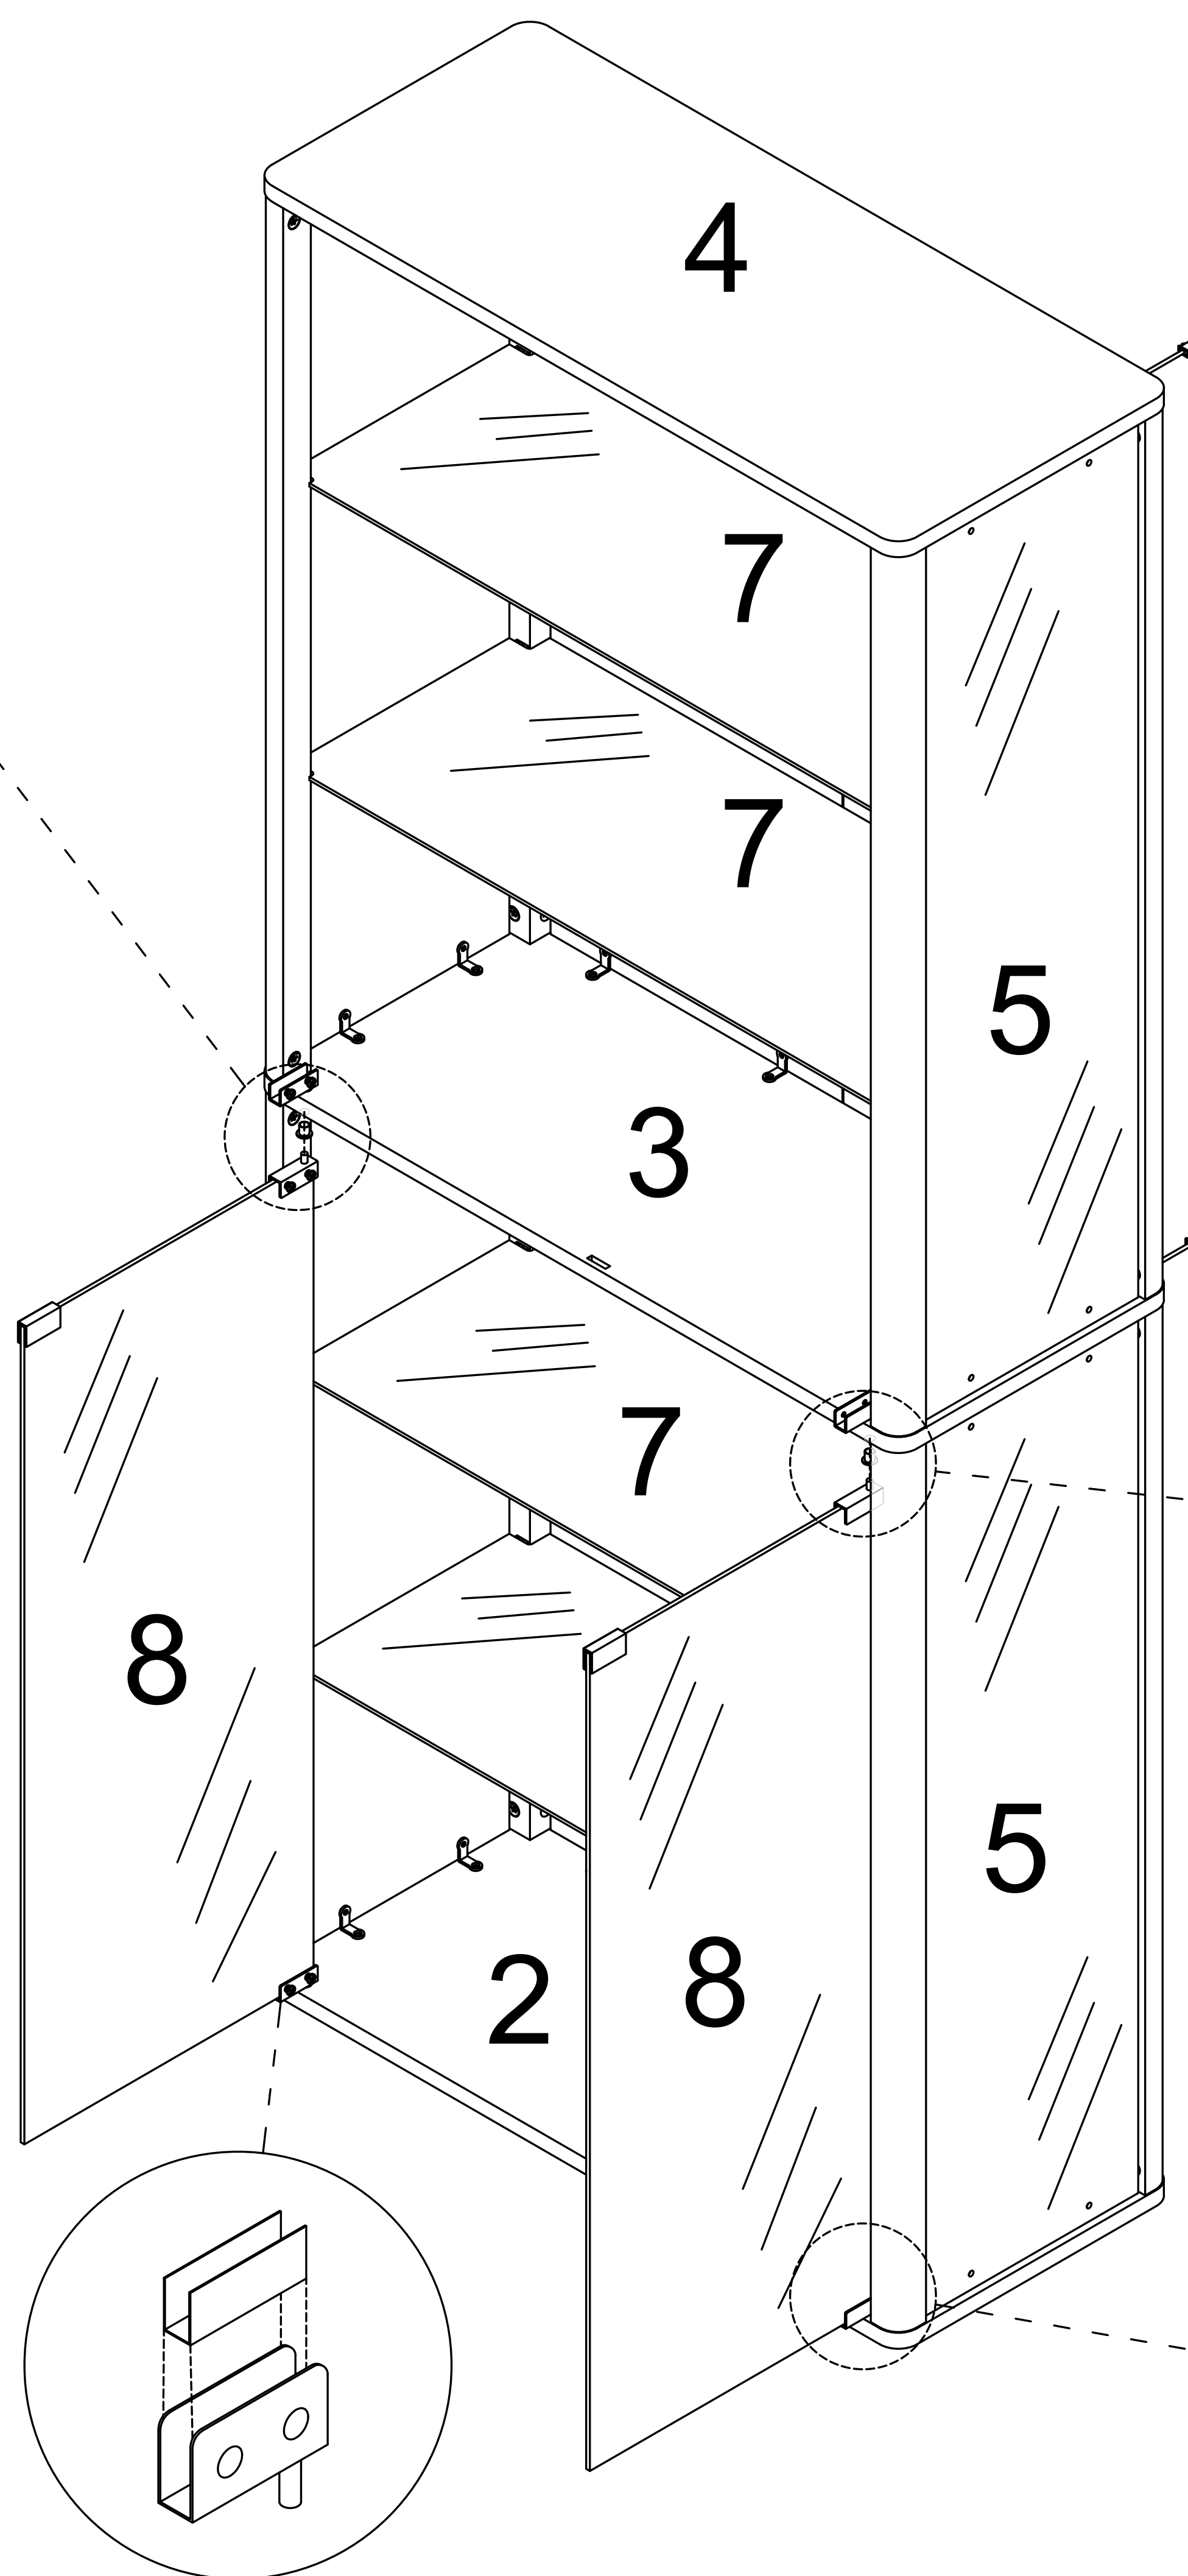


After aligning the glass door, tighten the screws to secure it.

Step 21


Pay attention to the direction of the door hinge during installation

E




x2


When installing a glass door, it is recommended to have two people install it to avoid the glass door colliding or hitting oneself.

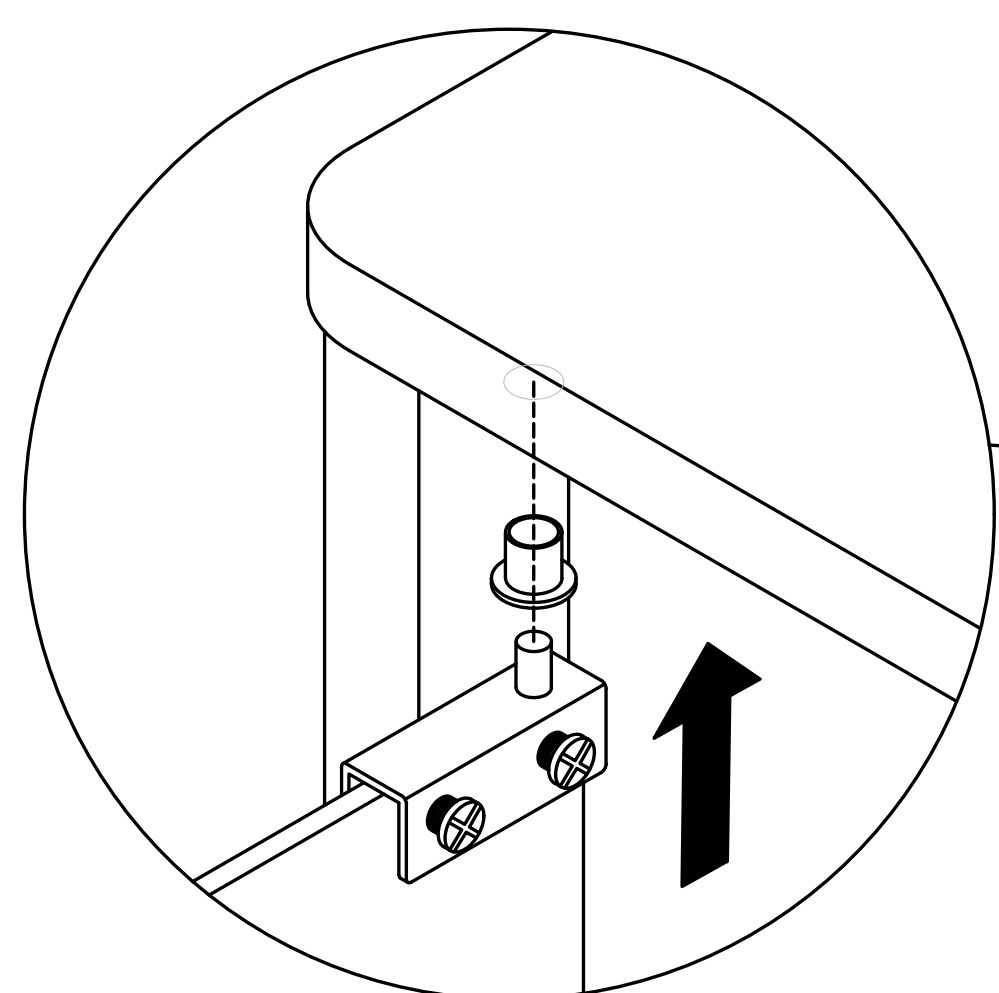

first

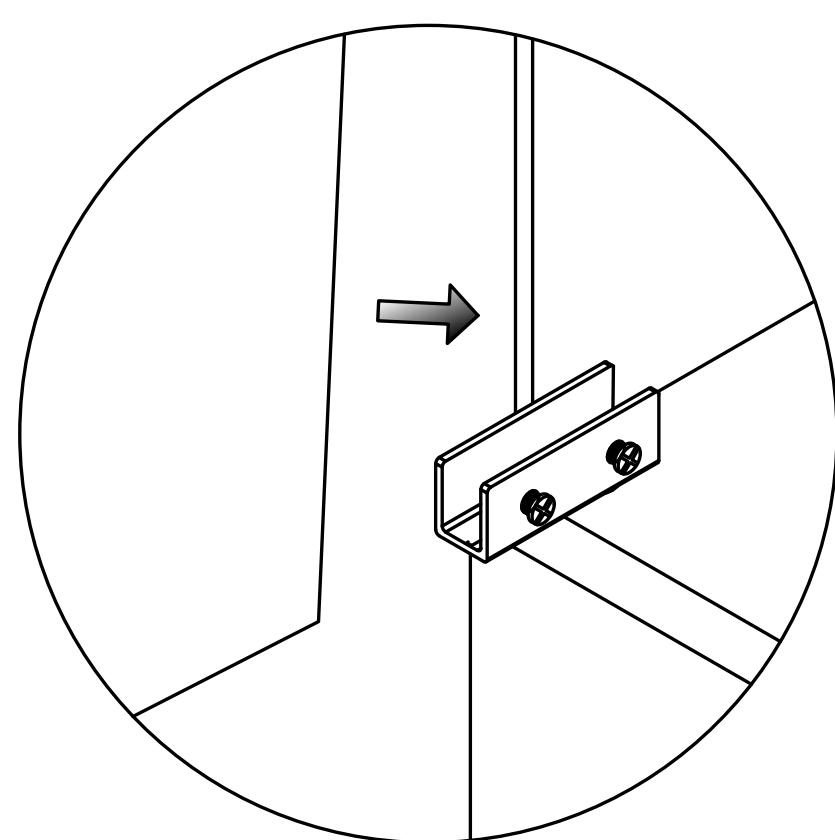


second


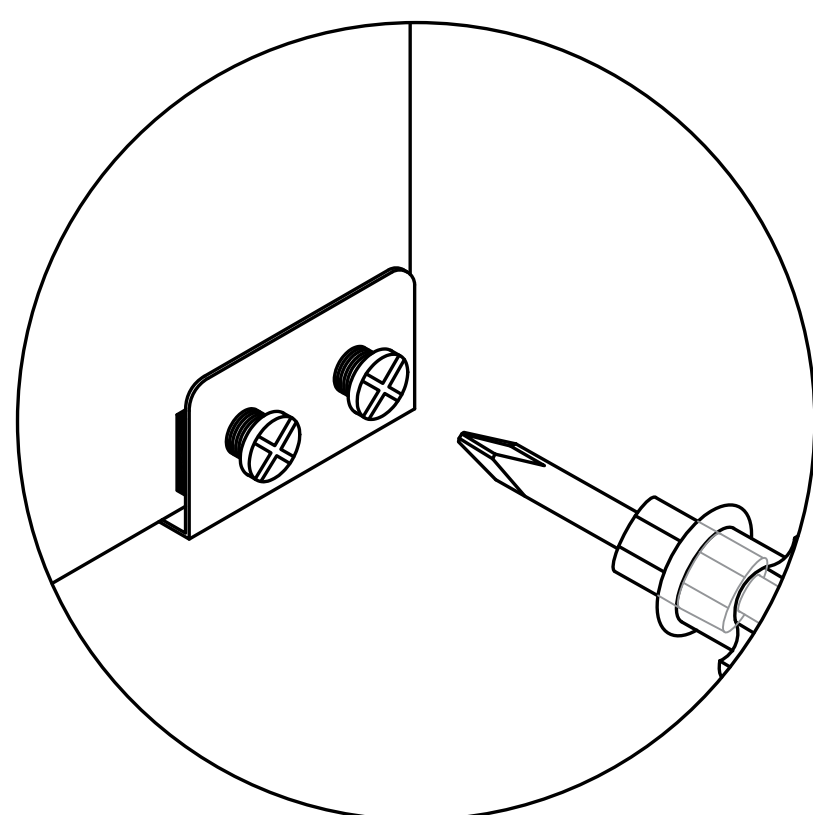


third


Locking screw

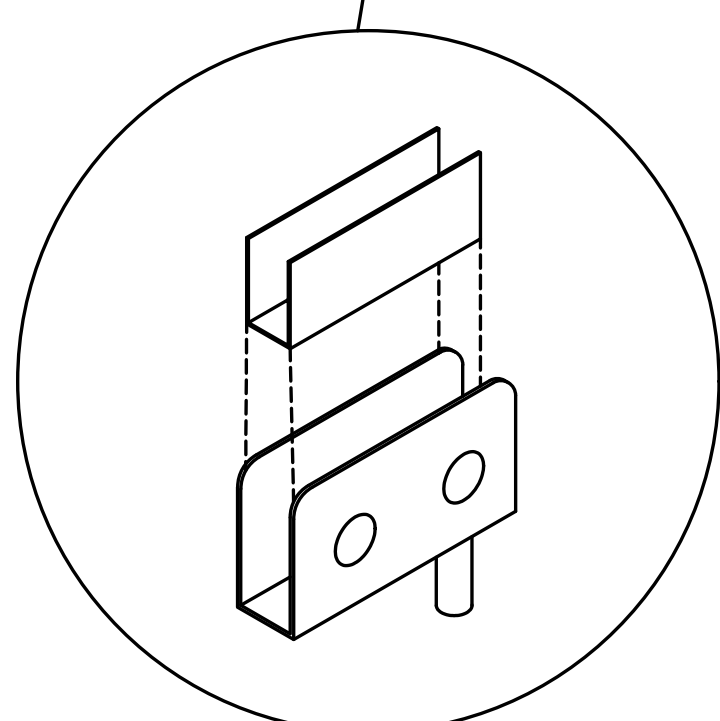


After aligning the glass door,
tighten the screws to secure it.

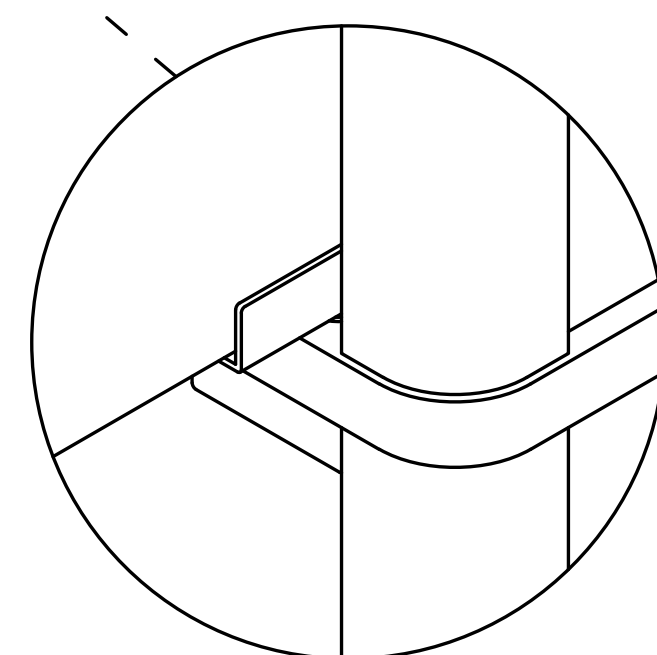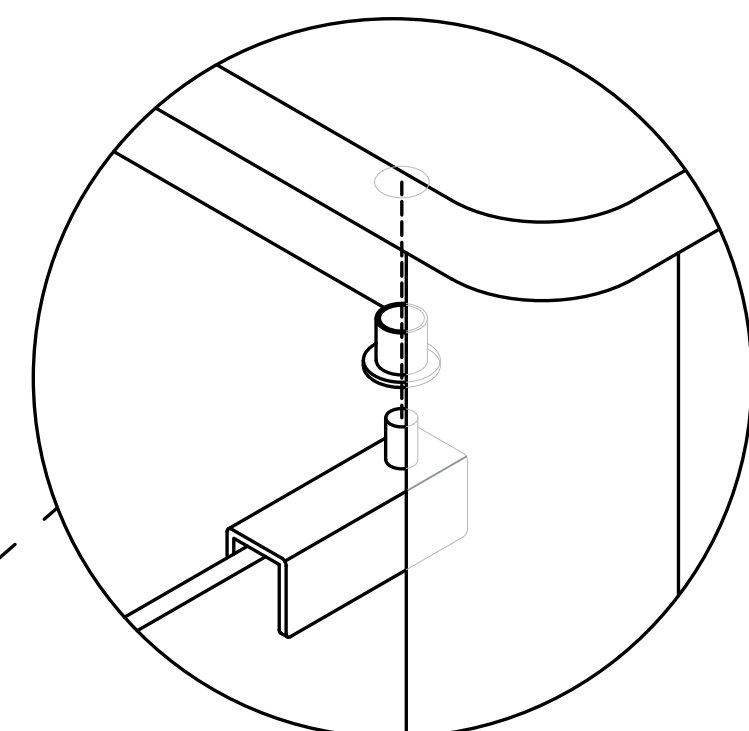



Tip: Turn the door lock all the way to the right to lock it.

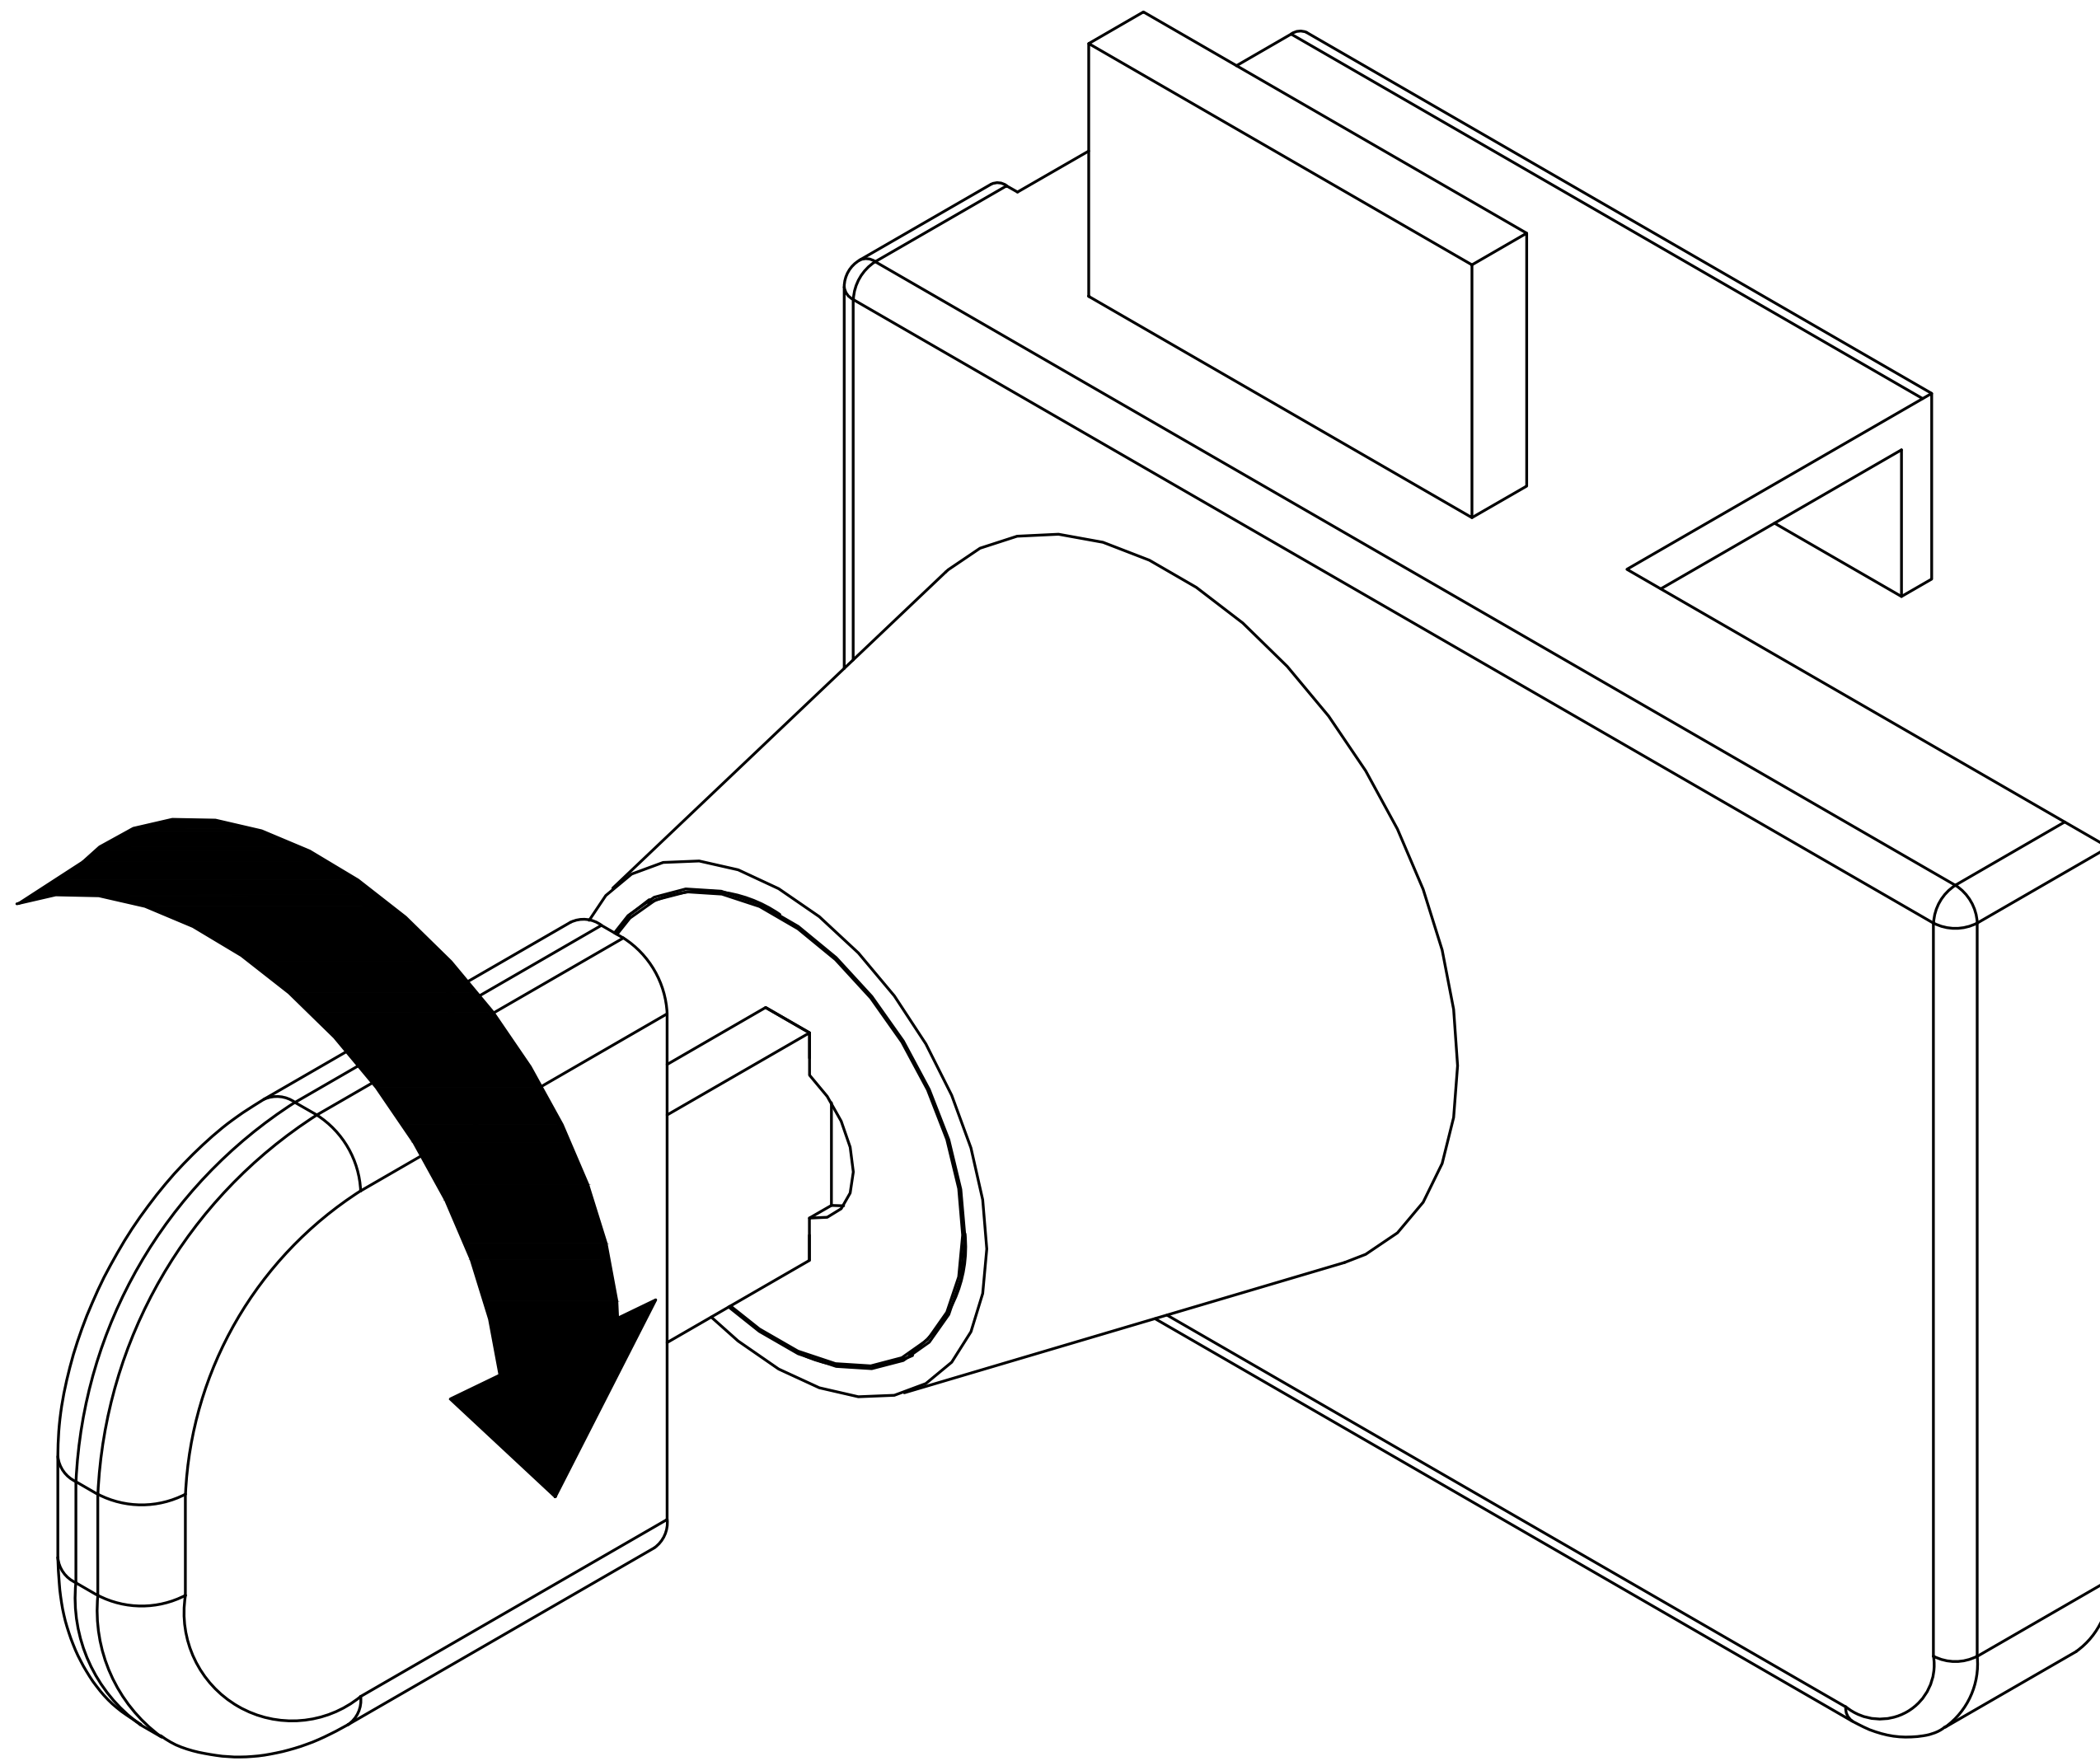

Tip: Turn the door lock all the way to the left to unlock it.




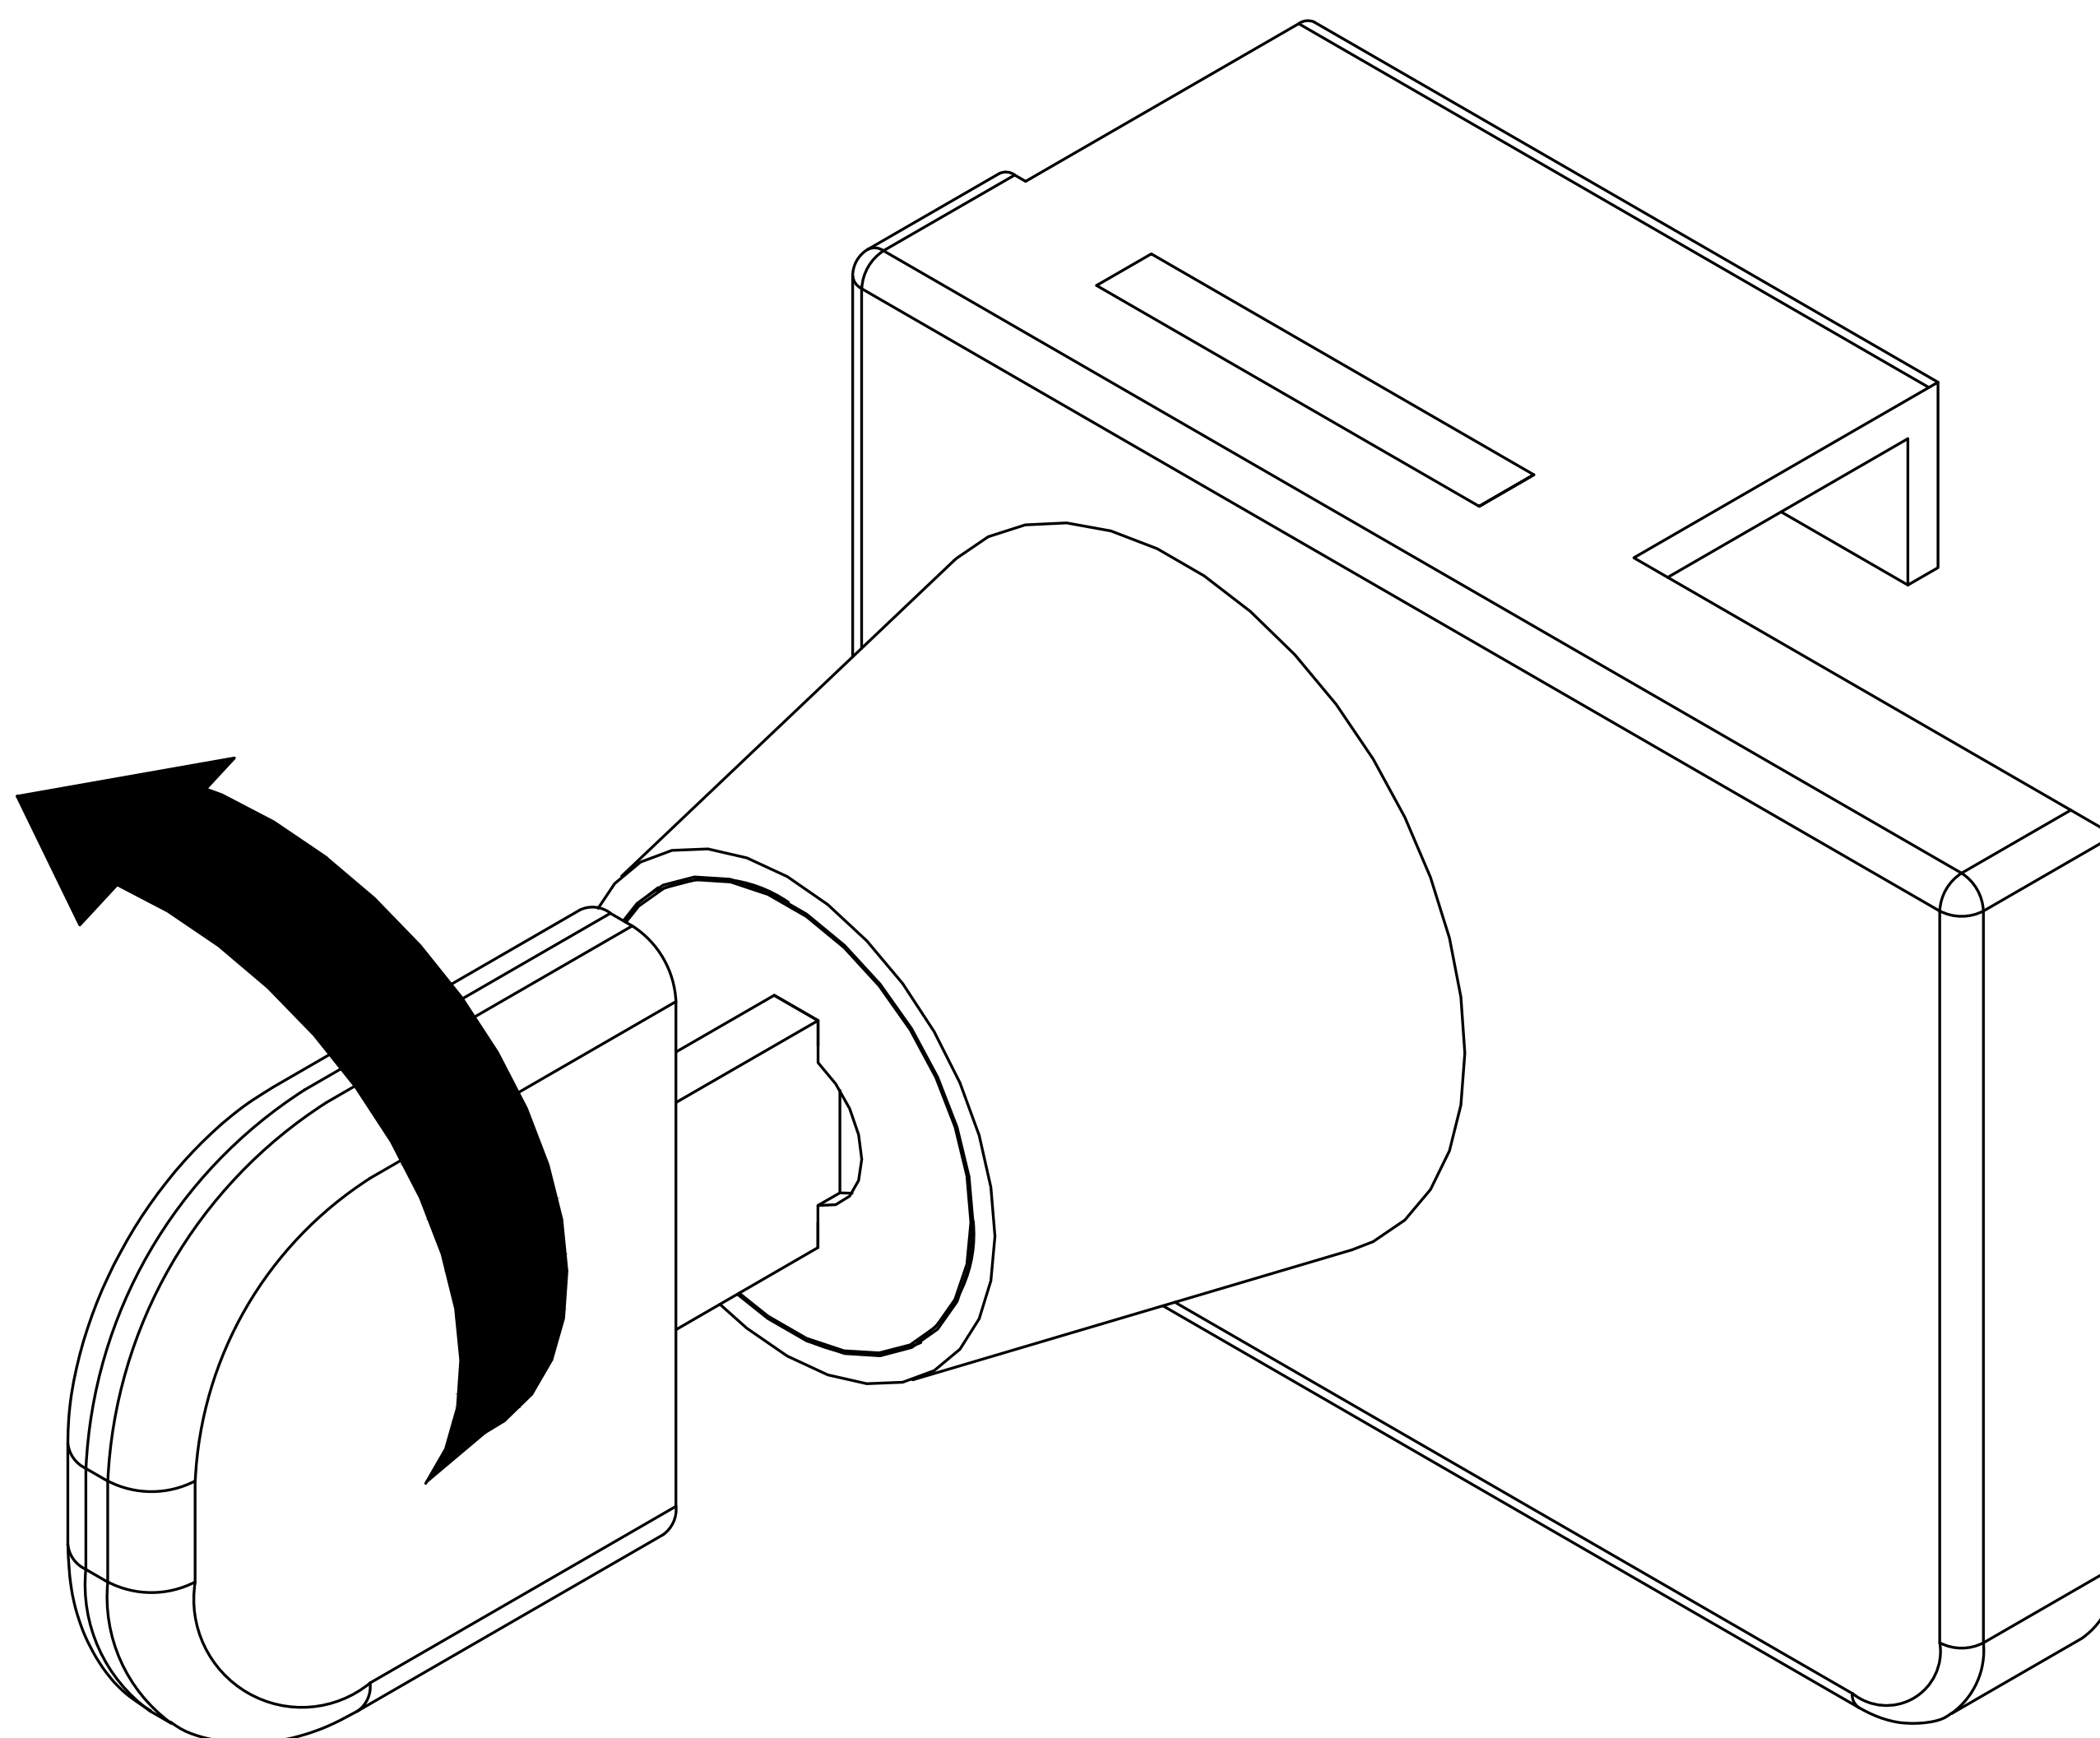



Step 22

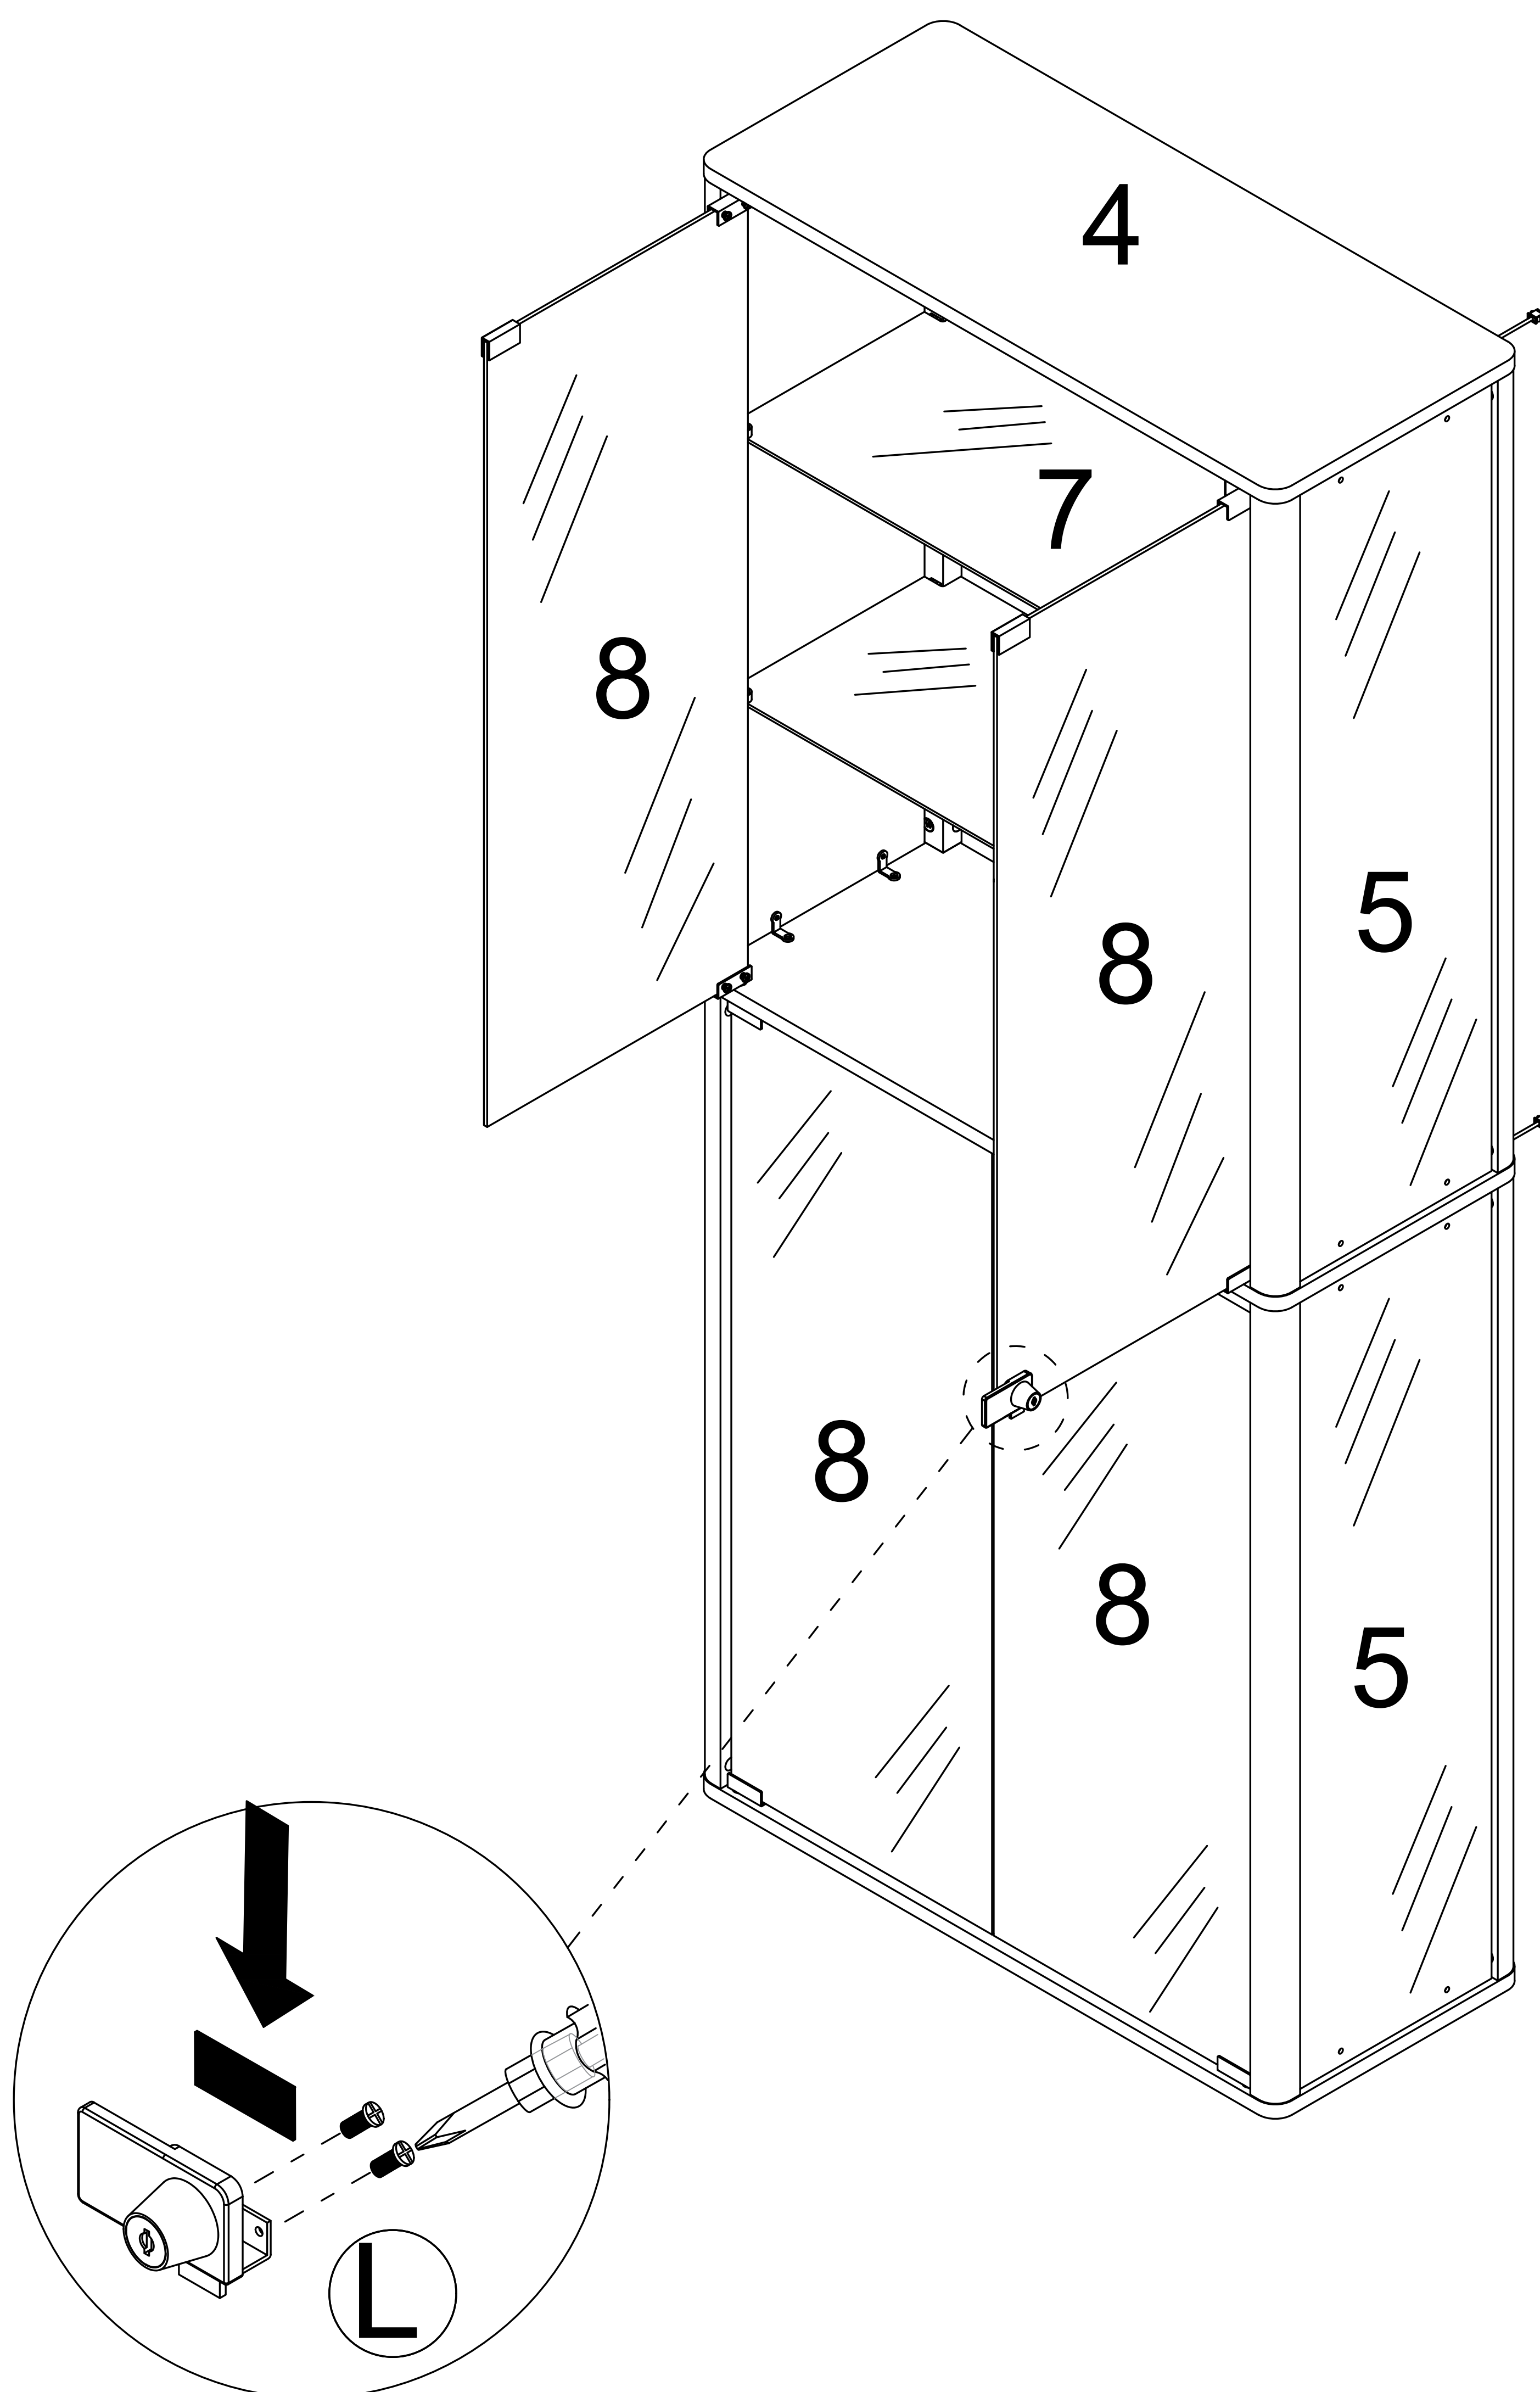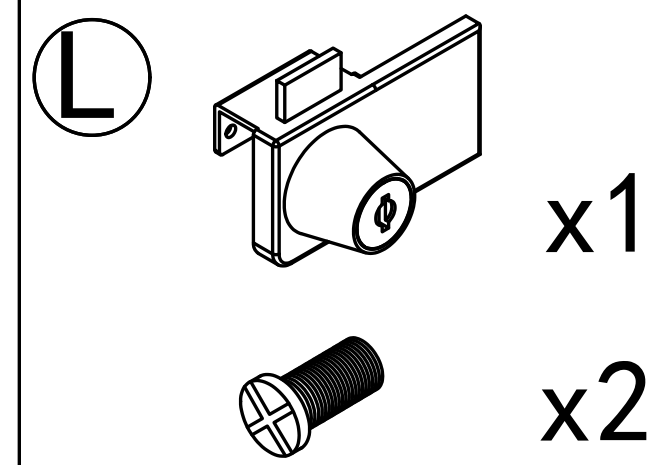

Step 23


Peel off the sticker on the back of the module to secure it in a place where it's easy to reach.

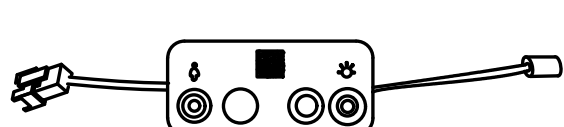- J  x3
- F  x1
- G  x1
- K  x1

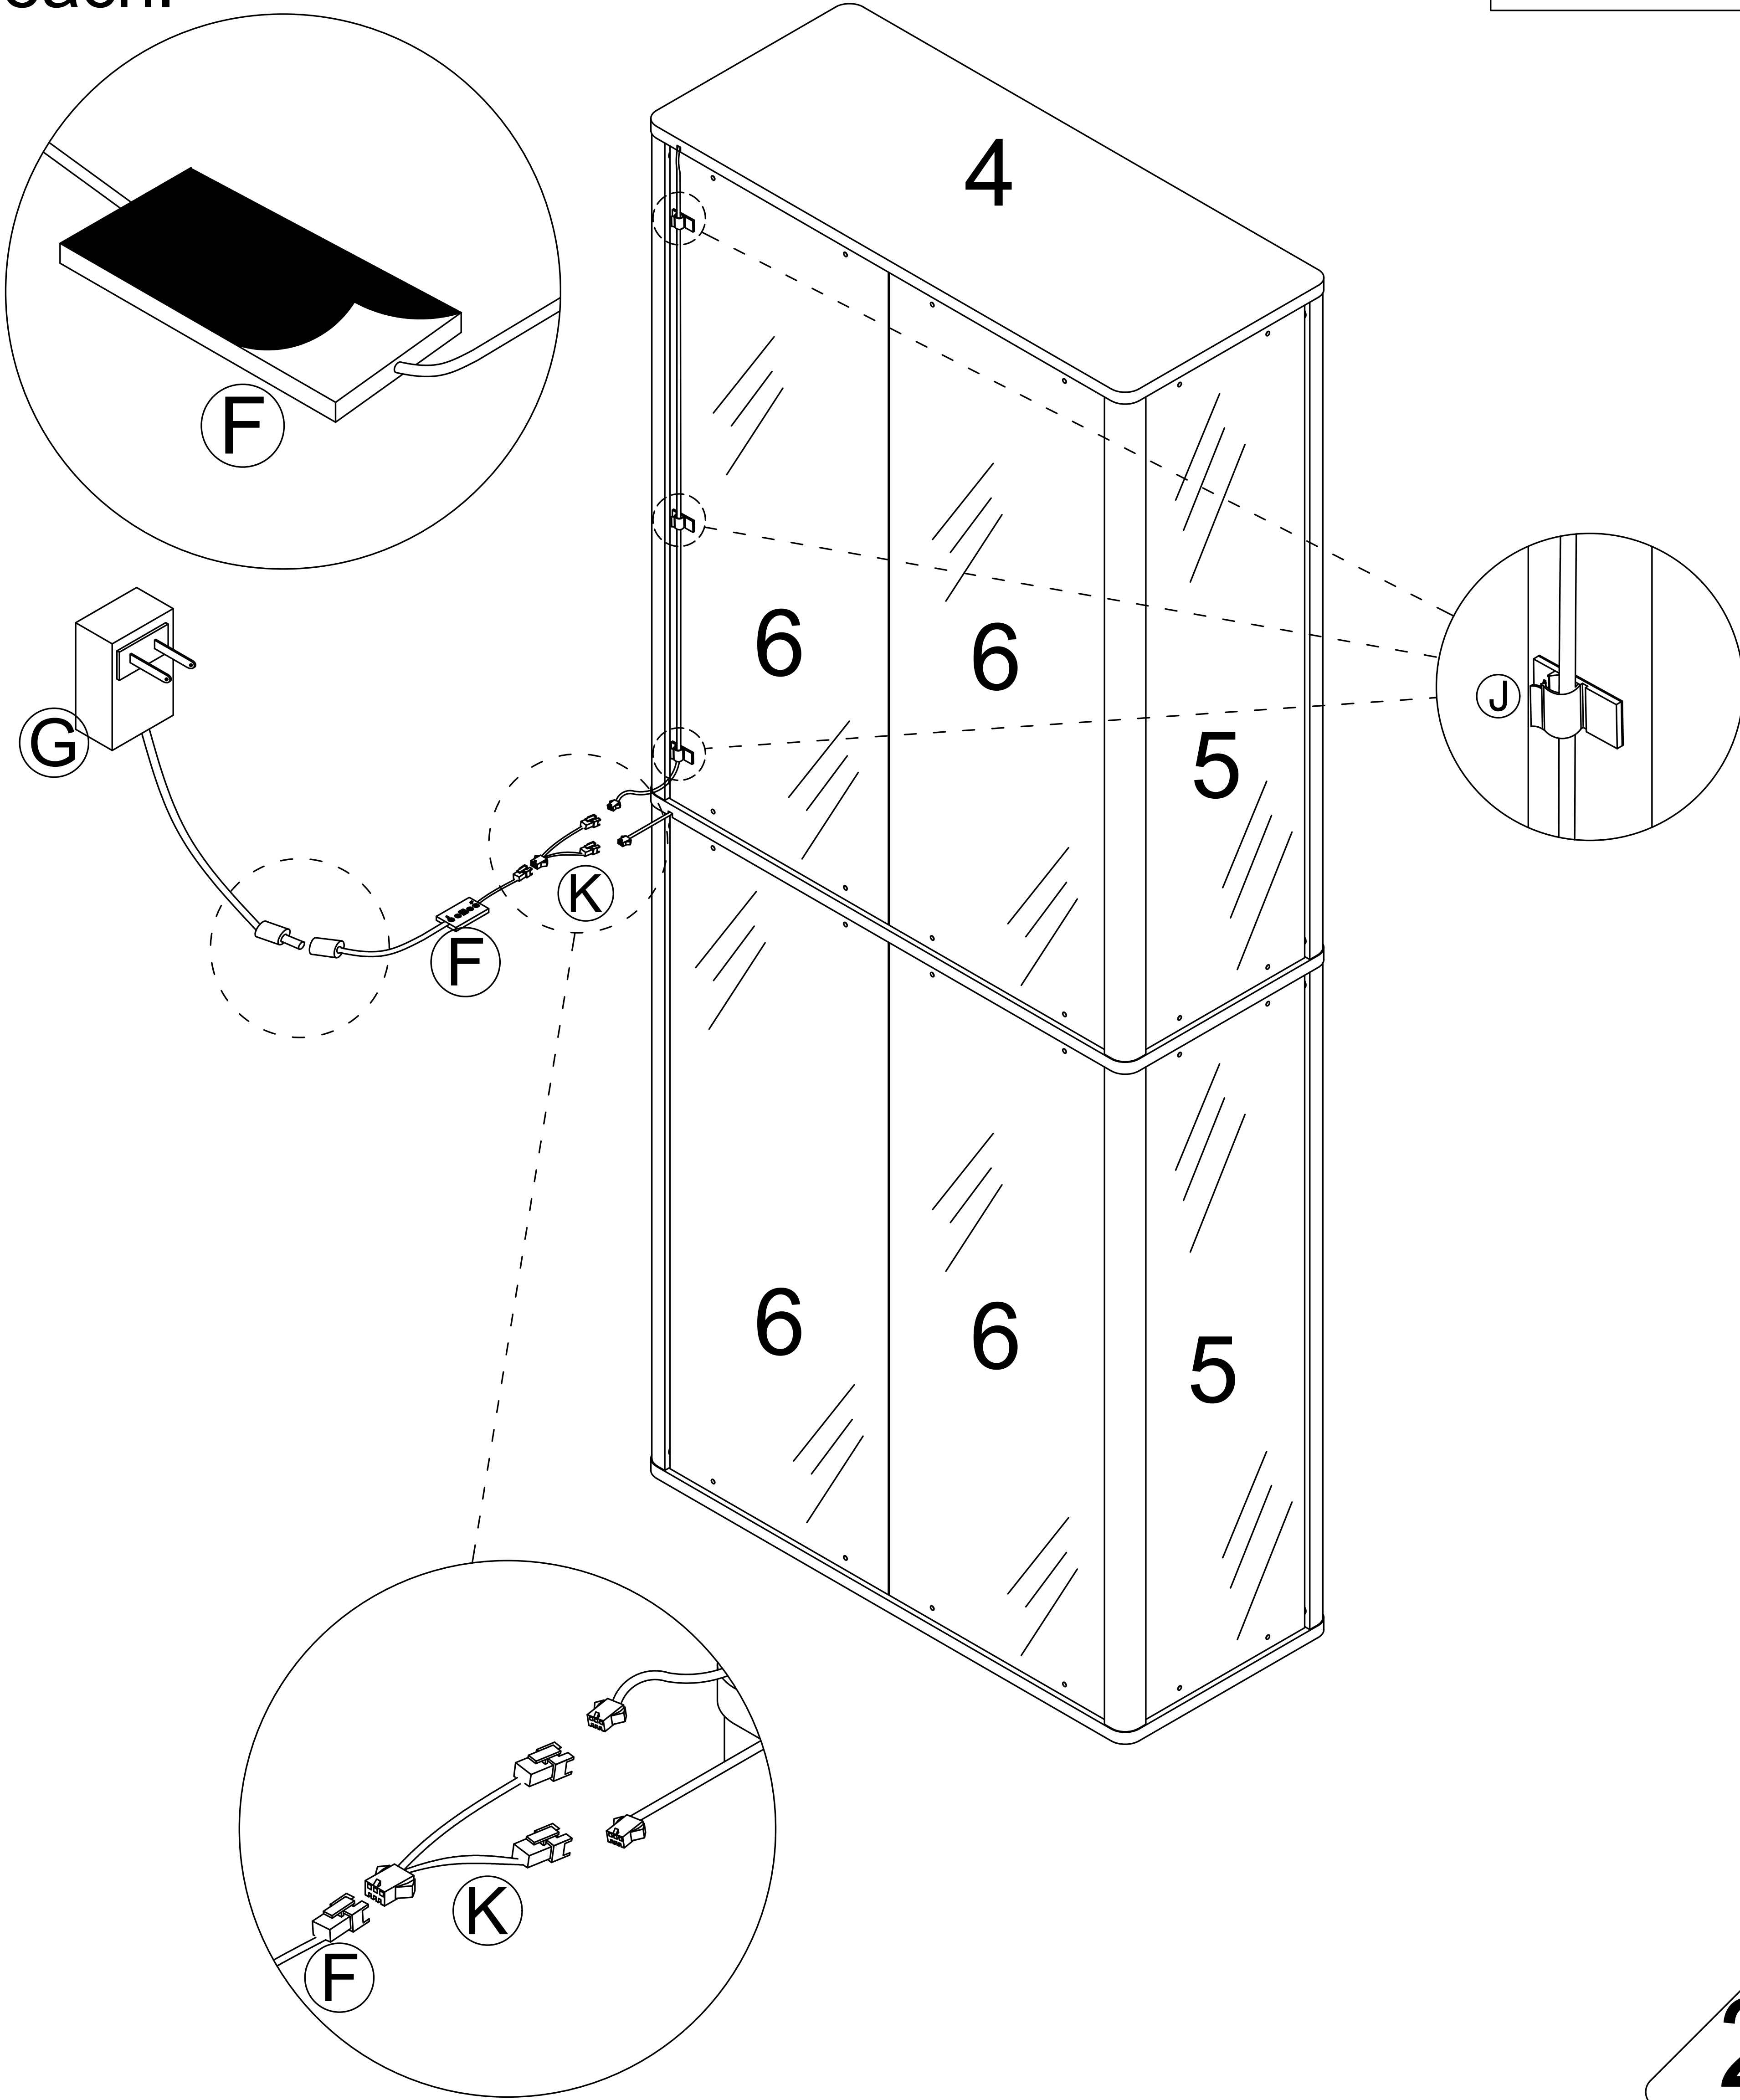


Step 24




Install as required

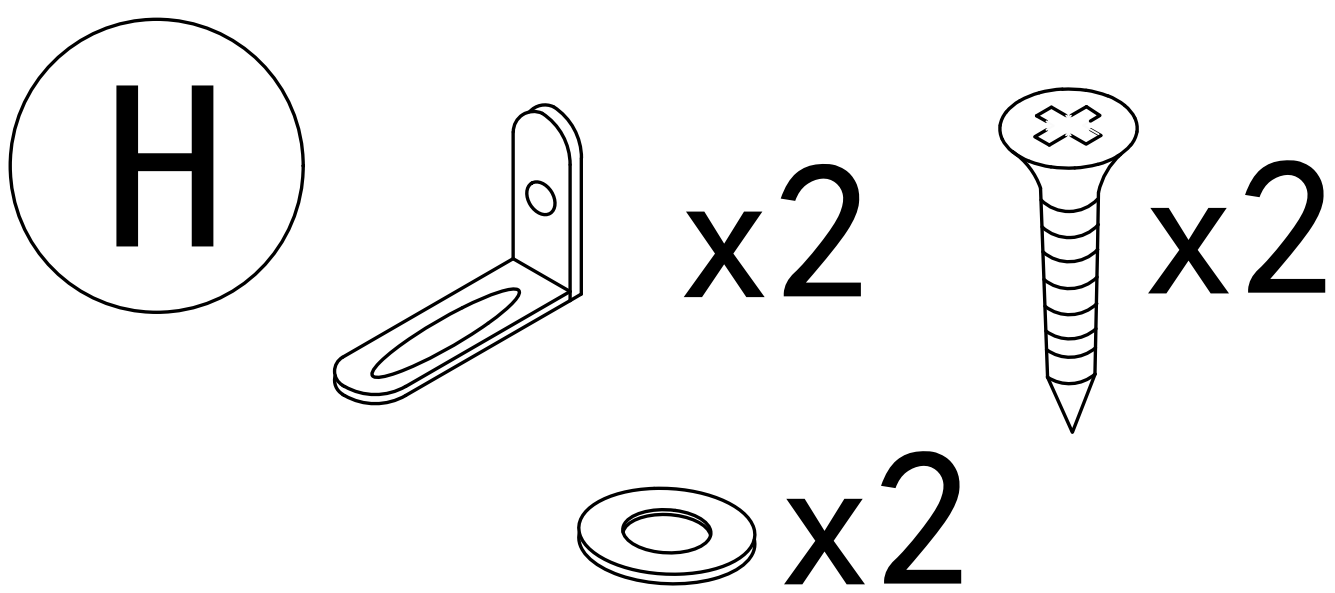

3.5x14mm


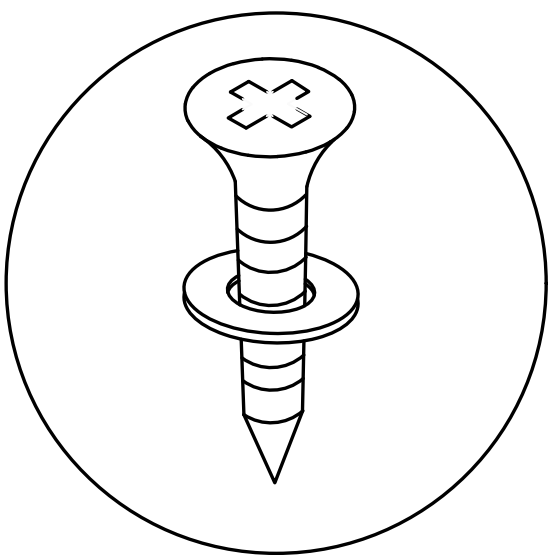


Install the anti fall hardware on the cabinet as shown in the picture first

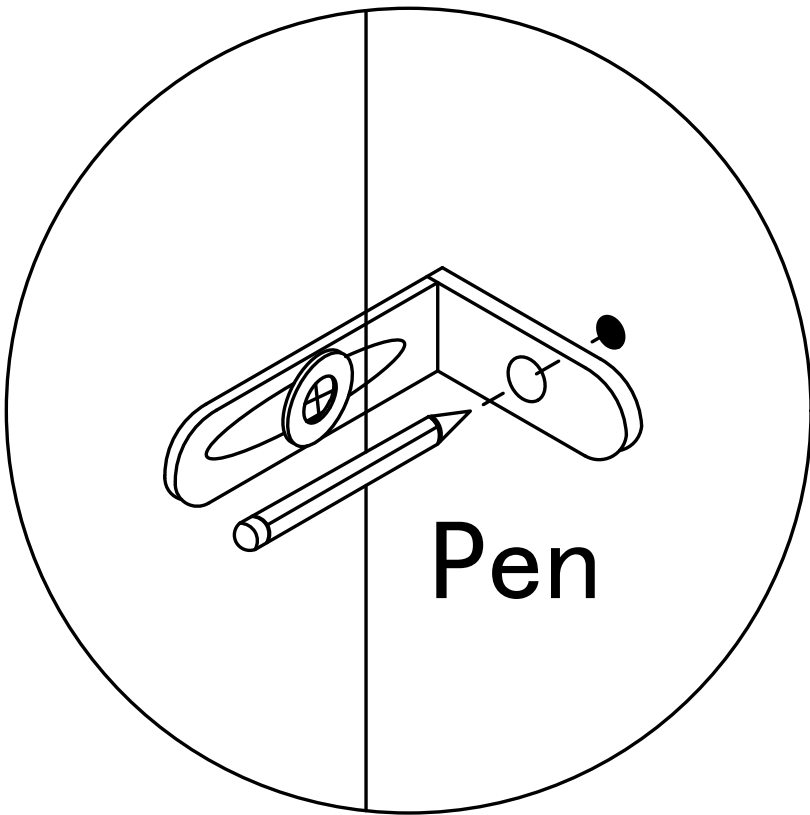
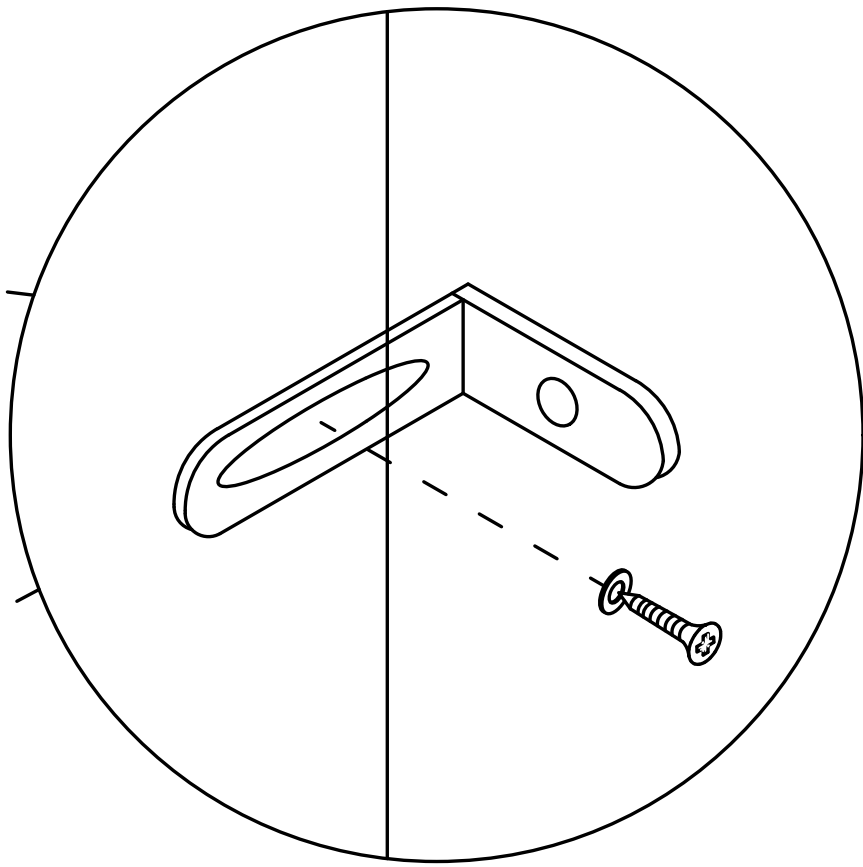
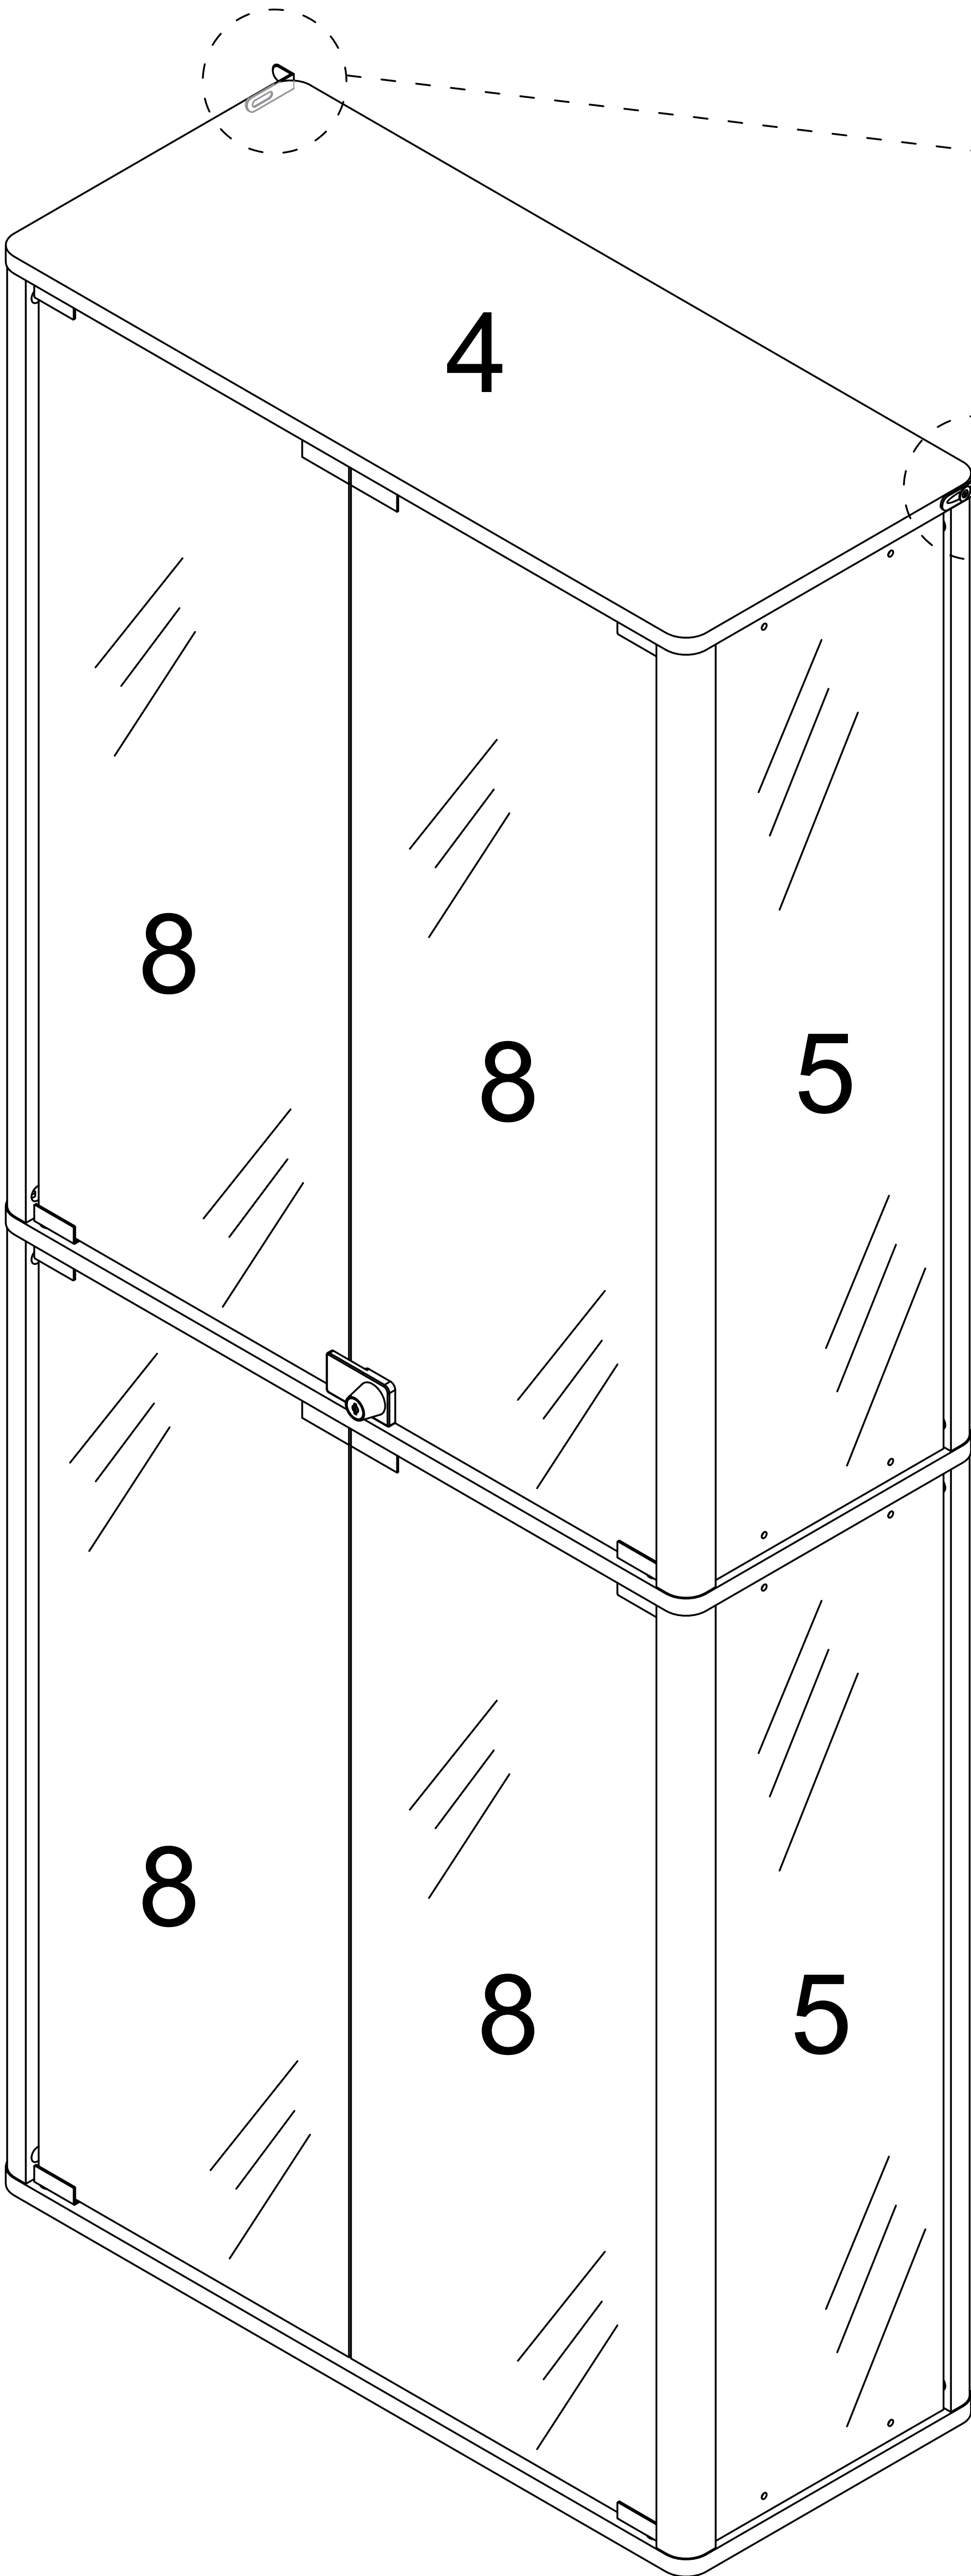


Then mark the wall with a pen through the holes in the anti-fall hardware

Step 25

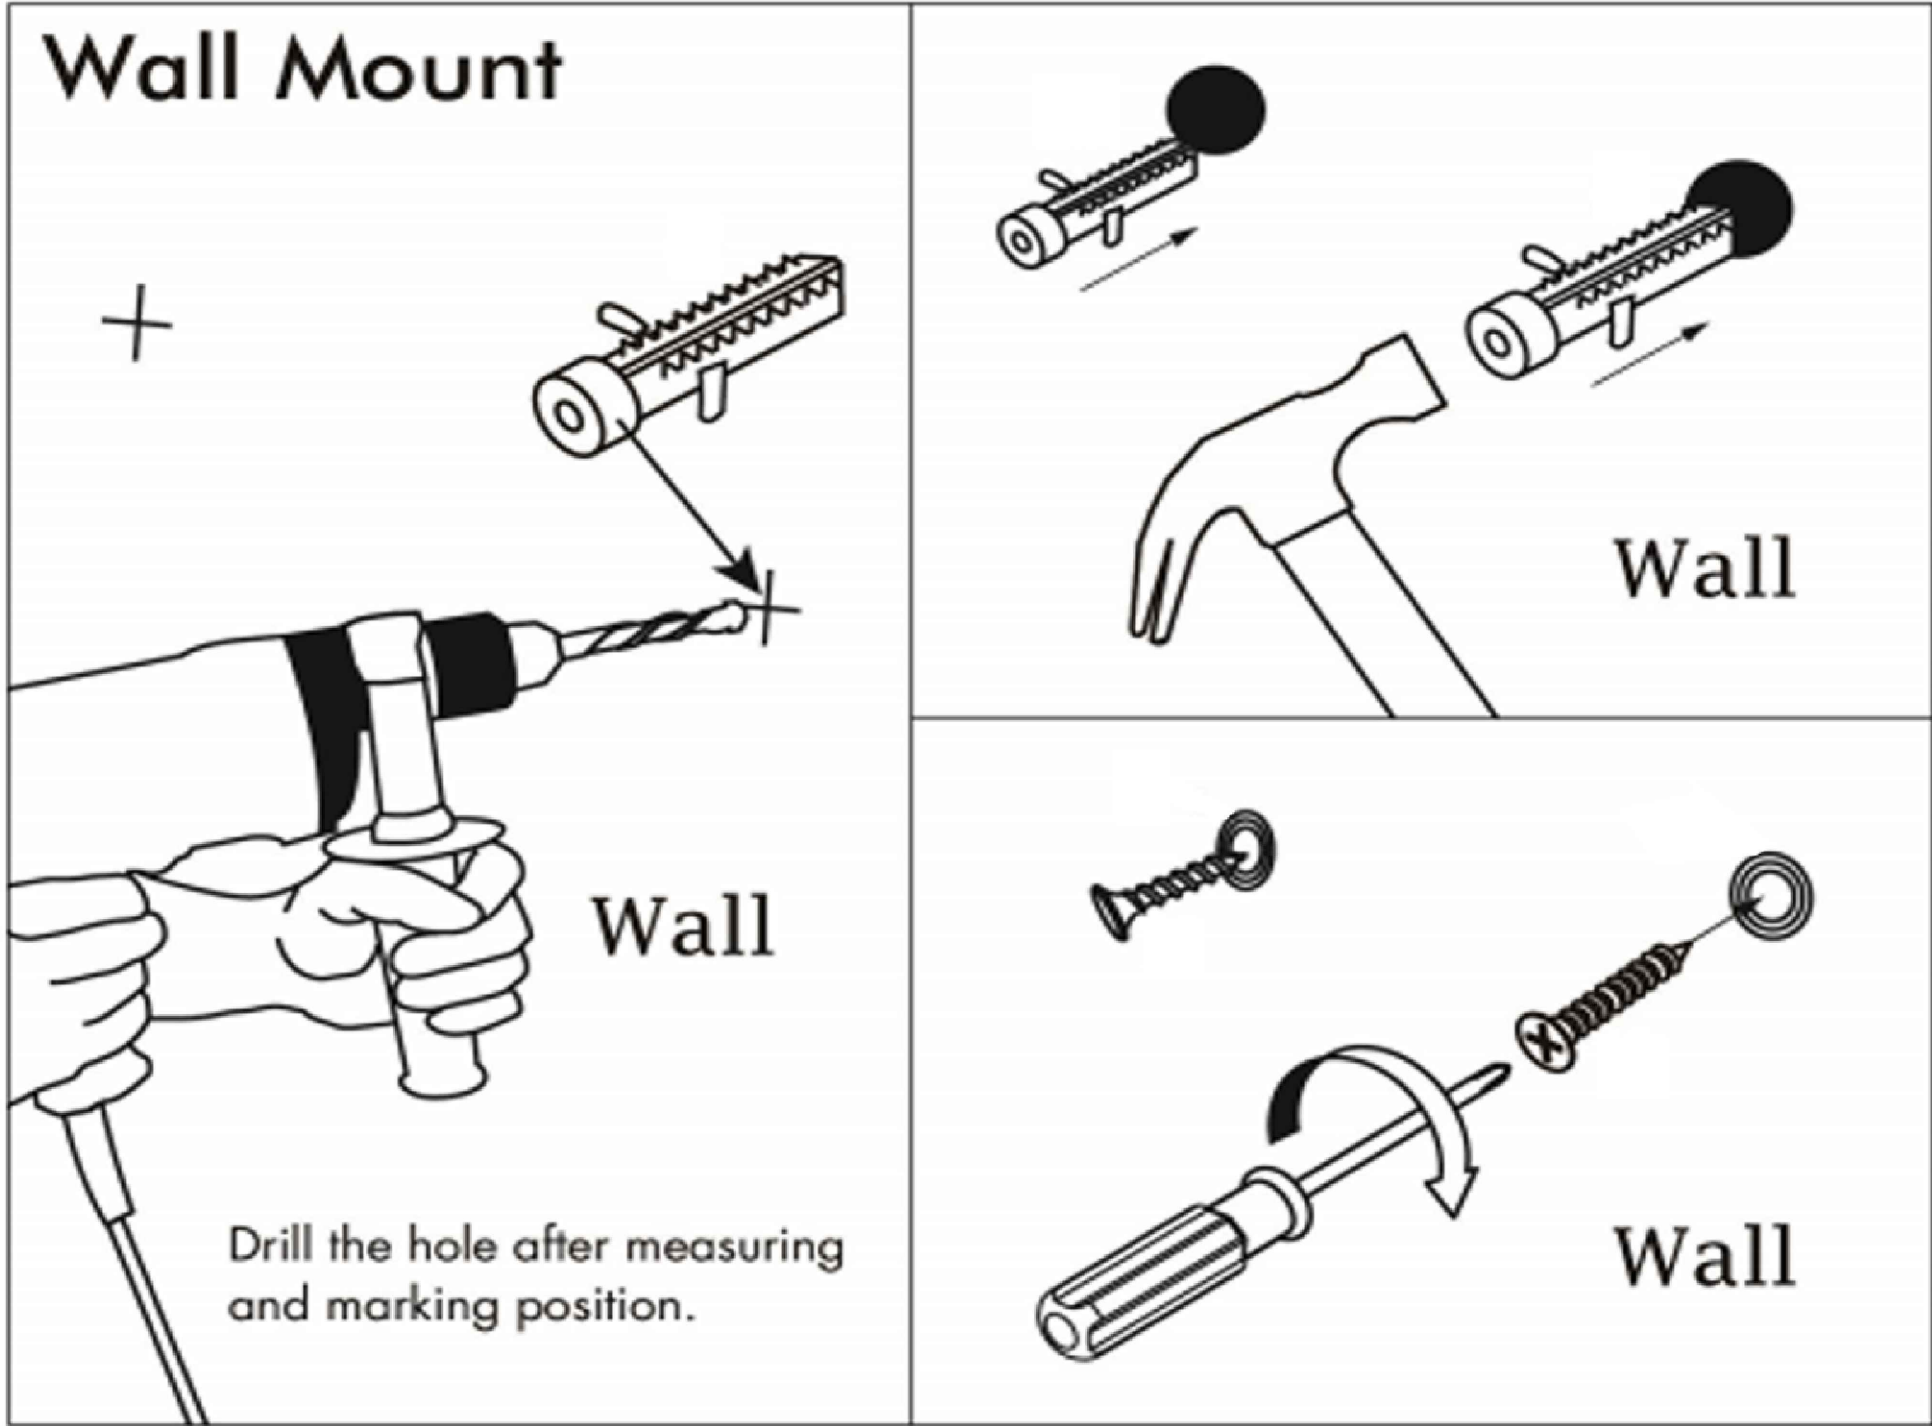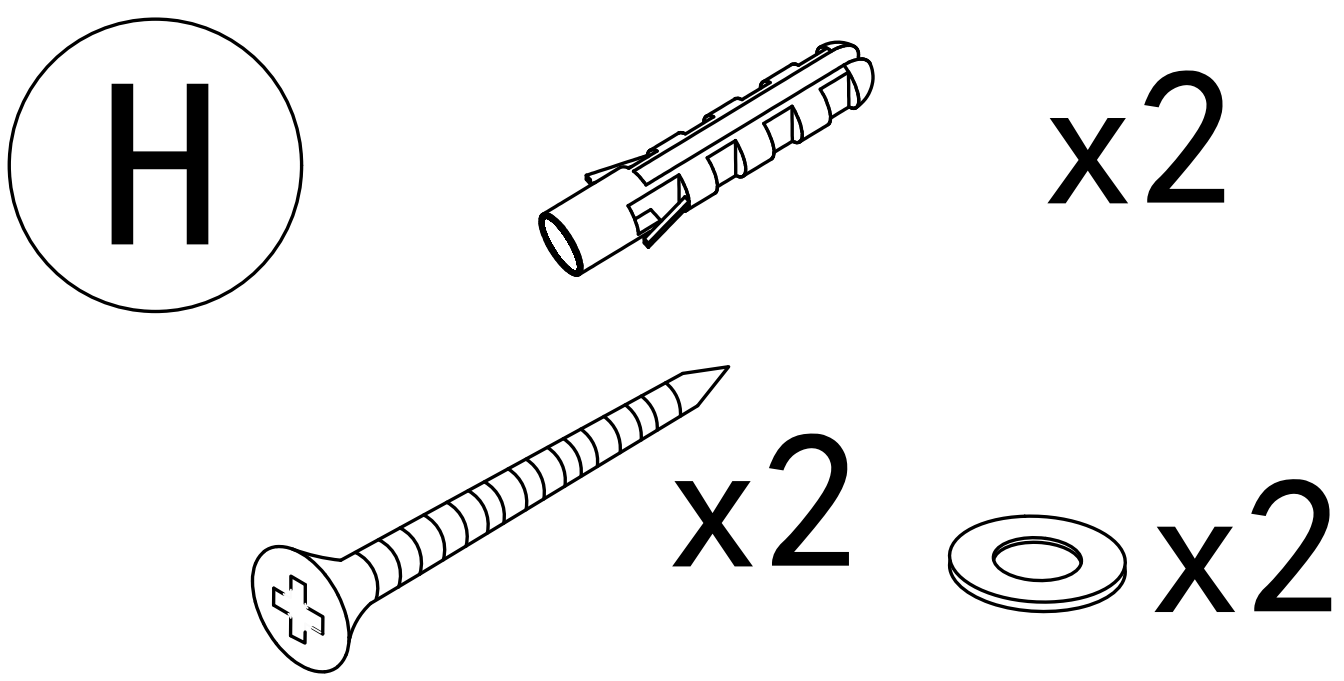


Drill the hole with an electric drill and punch in the colloidal particles

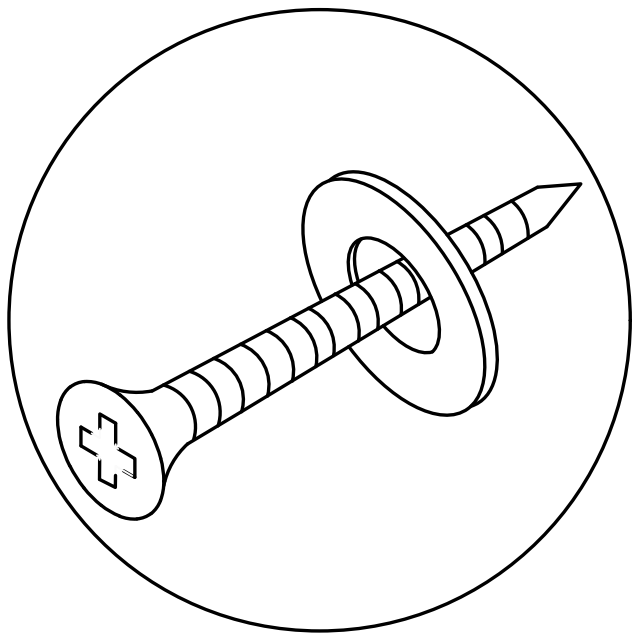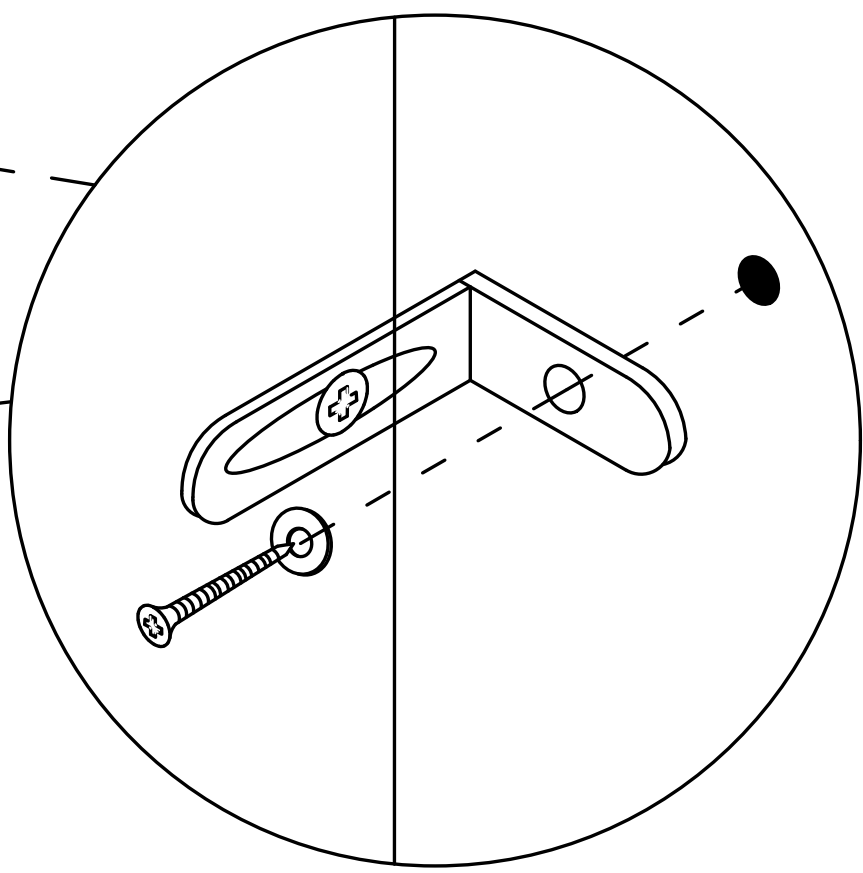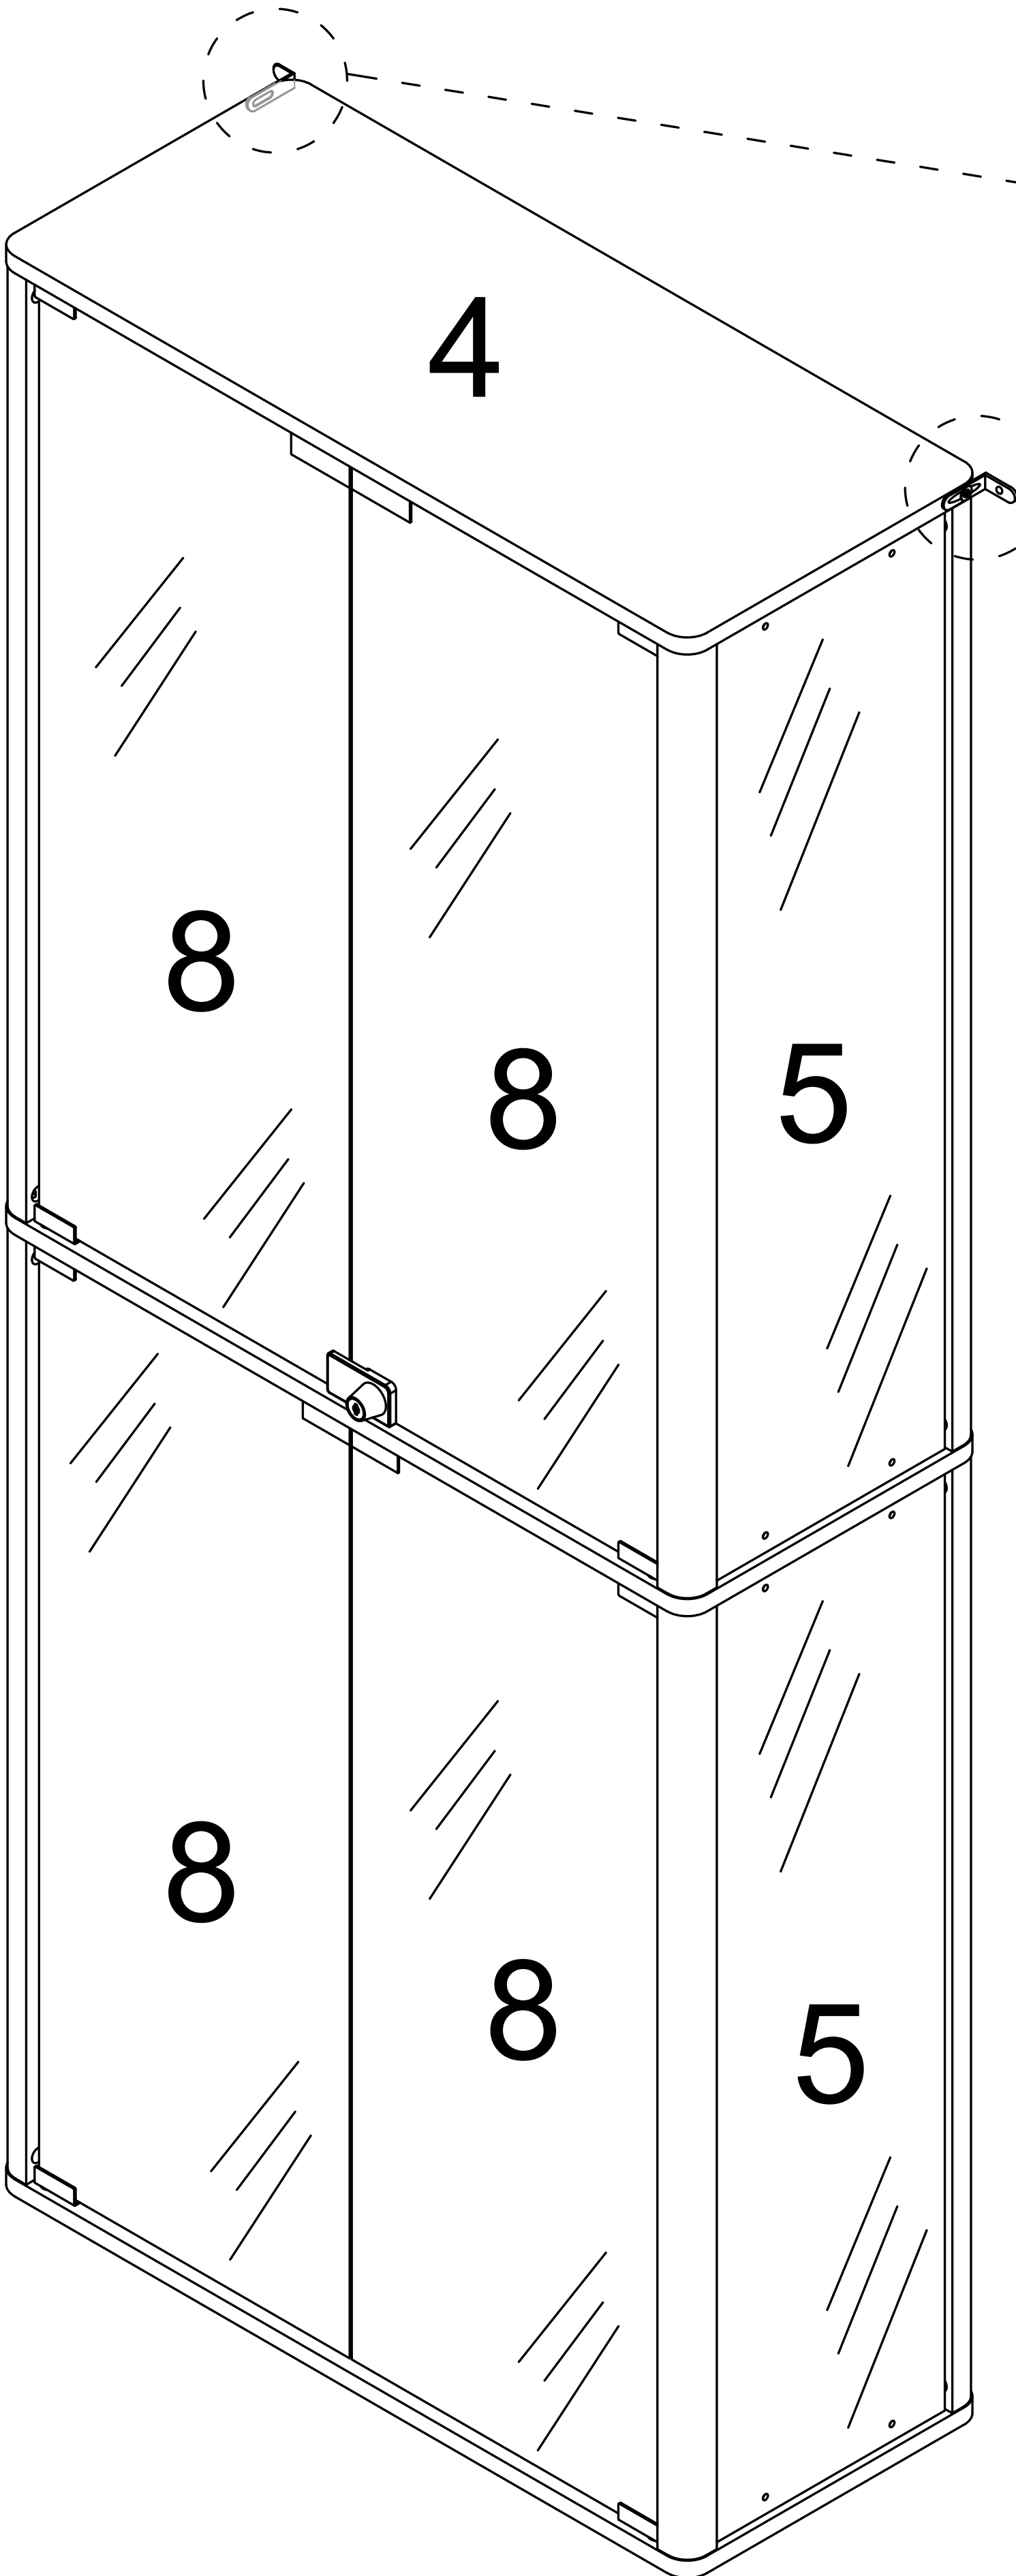

4x45mm


Secure the display case to the wall

Smart Box (Light)

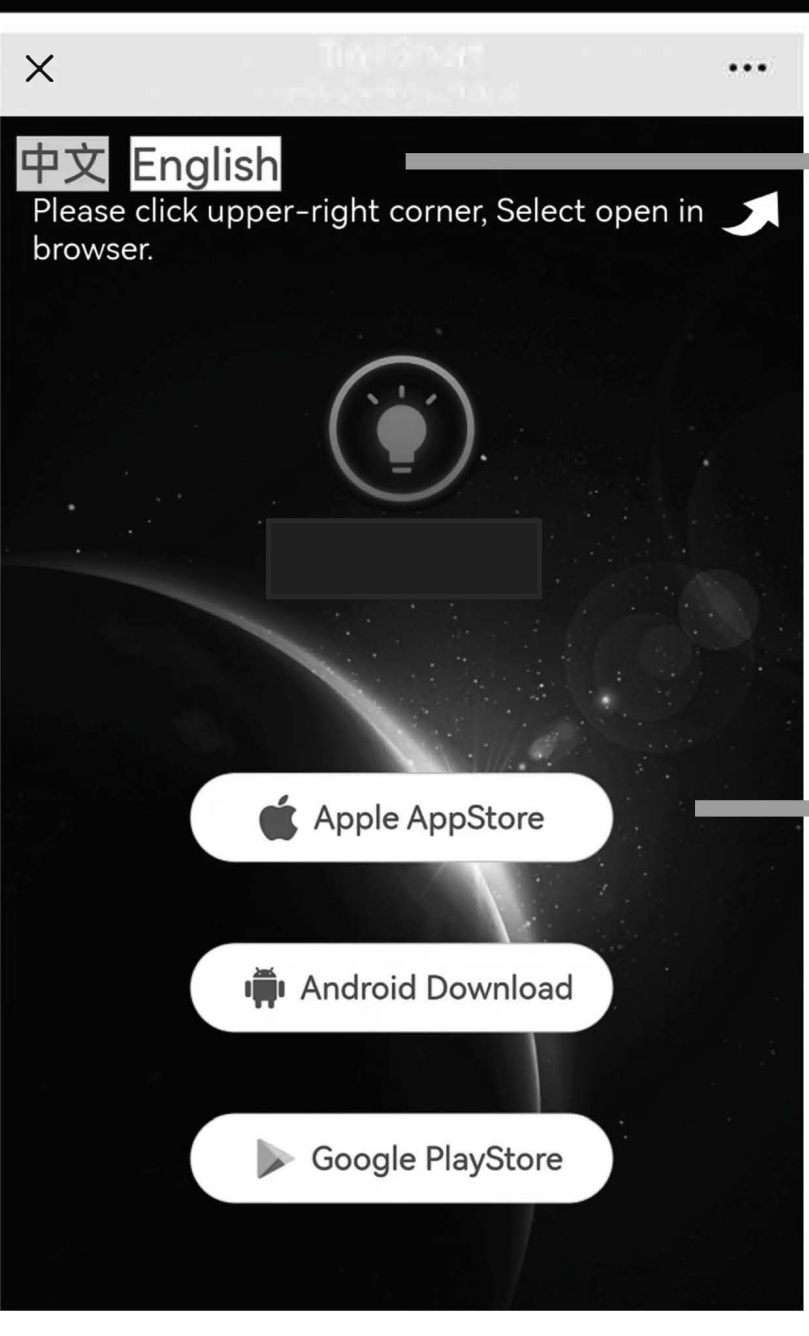

Select English Language


Select the corresponding device to download.
Note: If the download fails, please turn off the “Enhanced Protection” in the Pure Mode settings of the device.

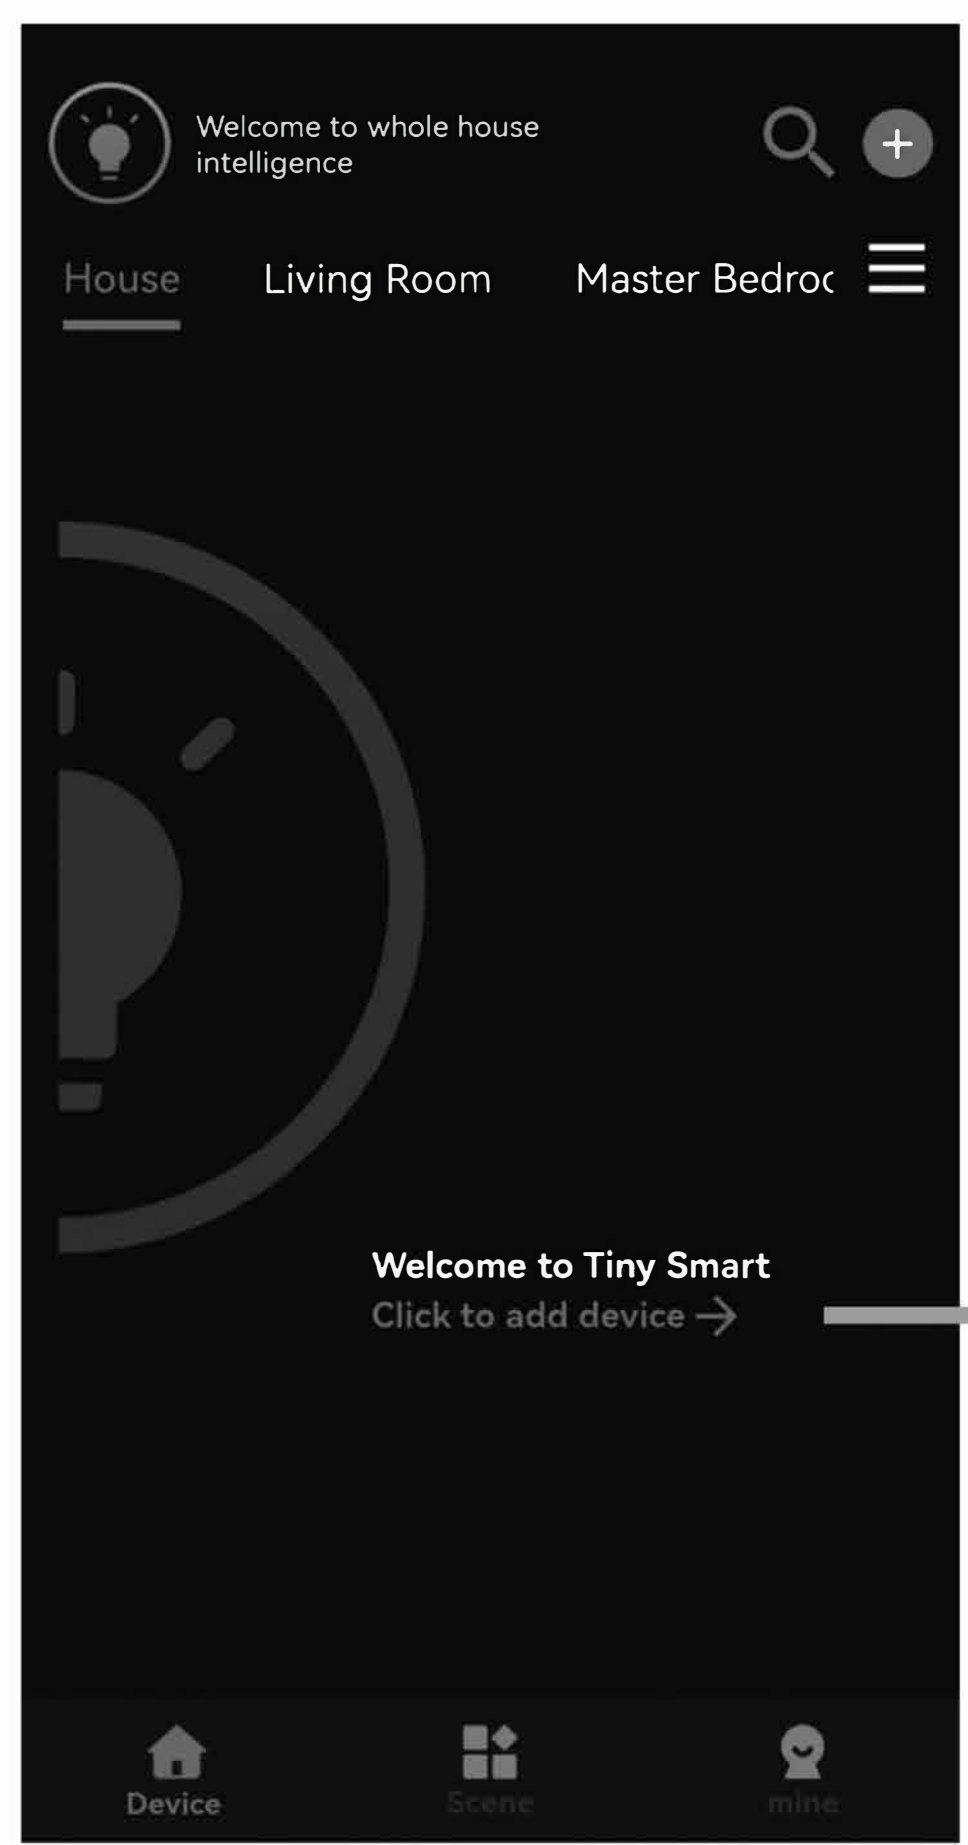


1

2

It turns blue after clicking

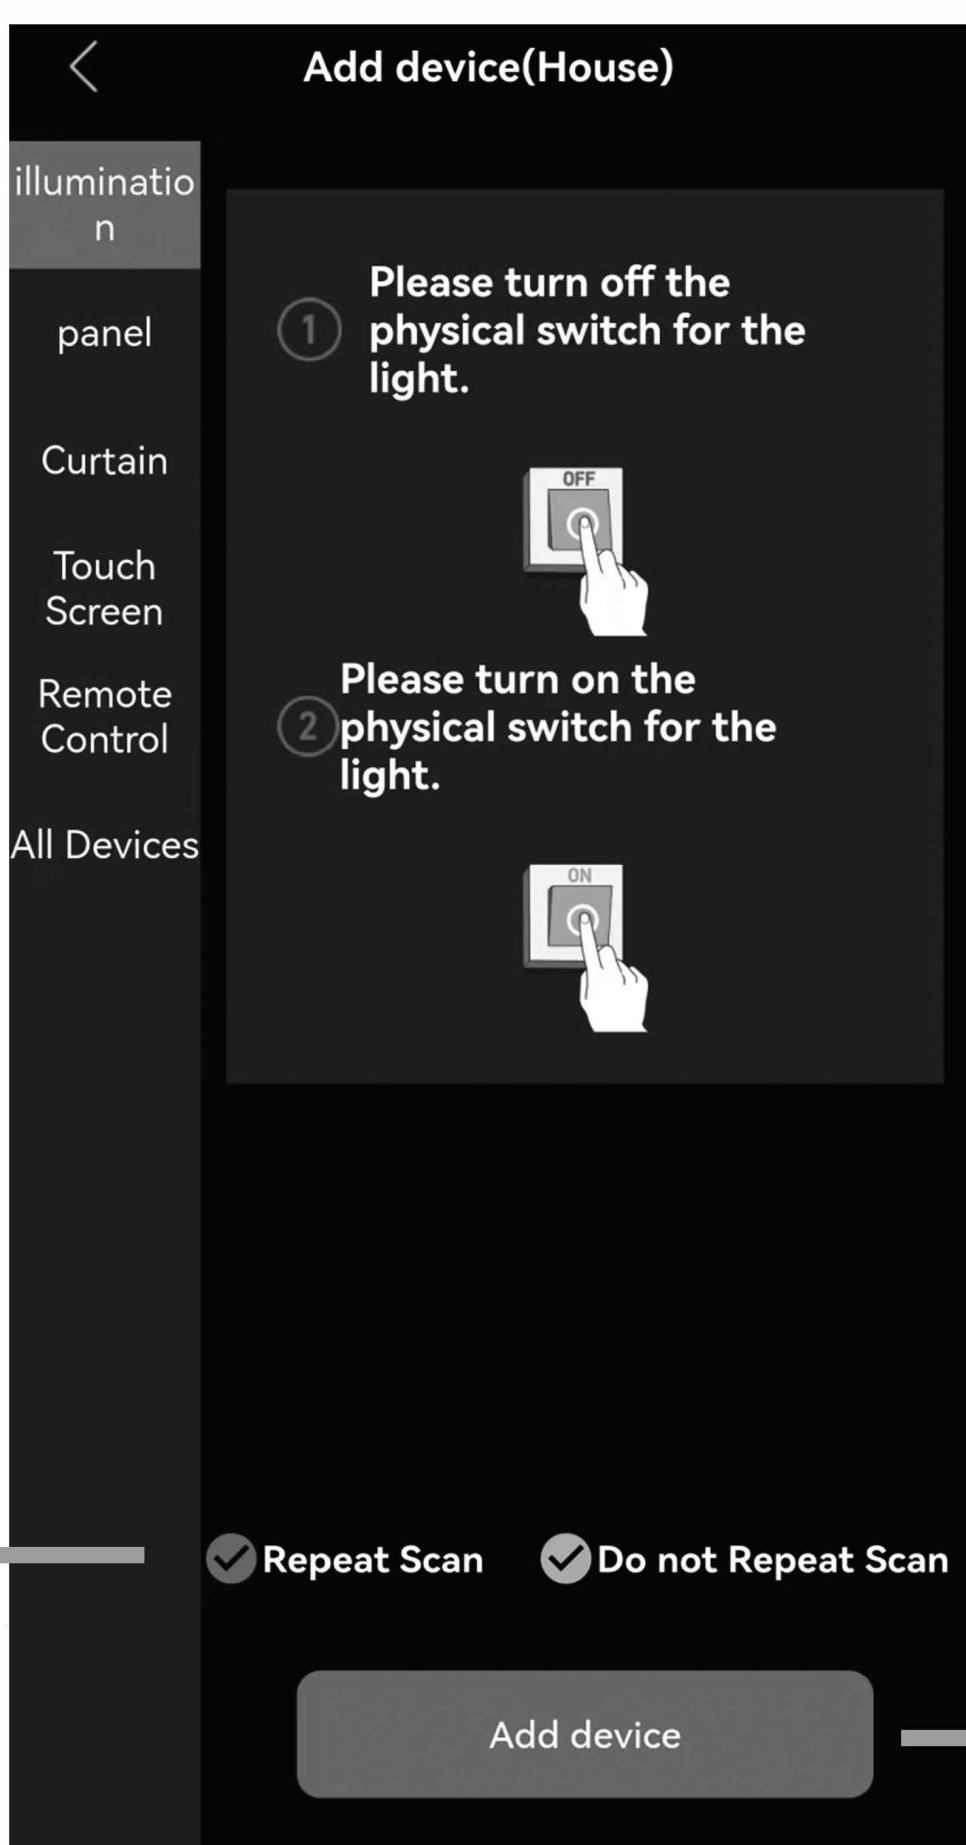


3

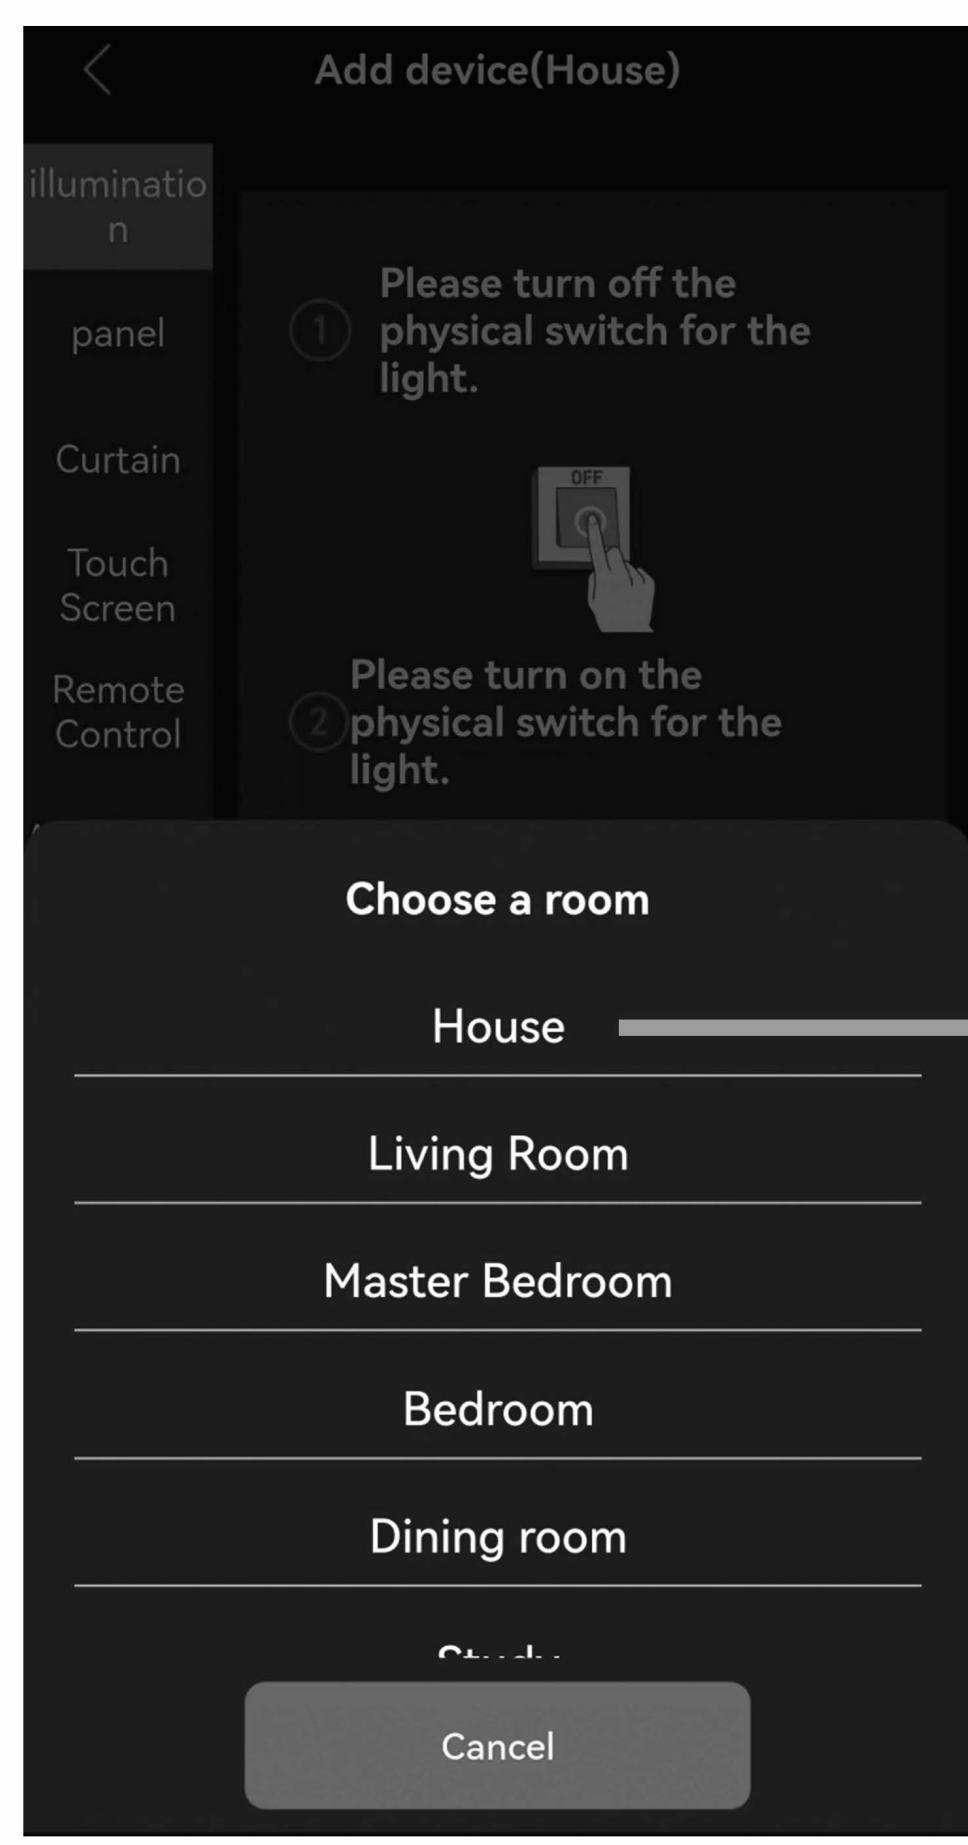

4




5 Unplug the smart box

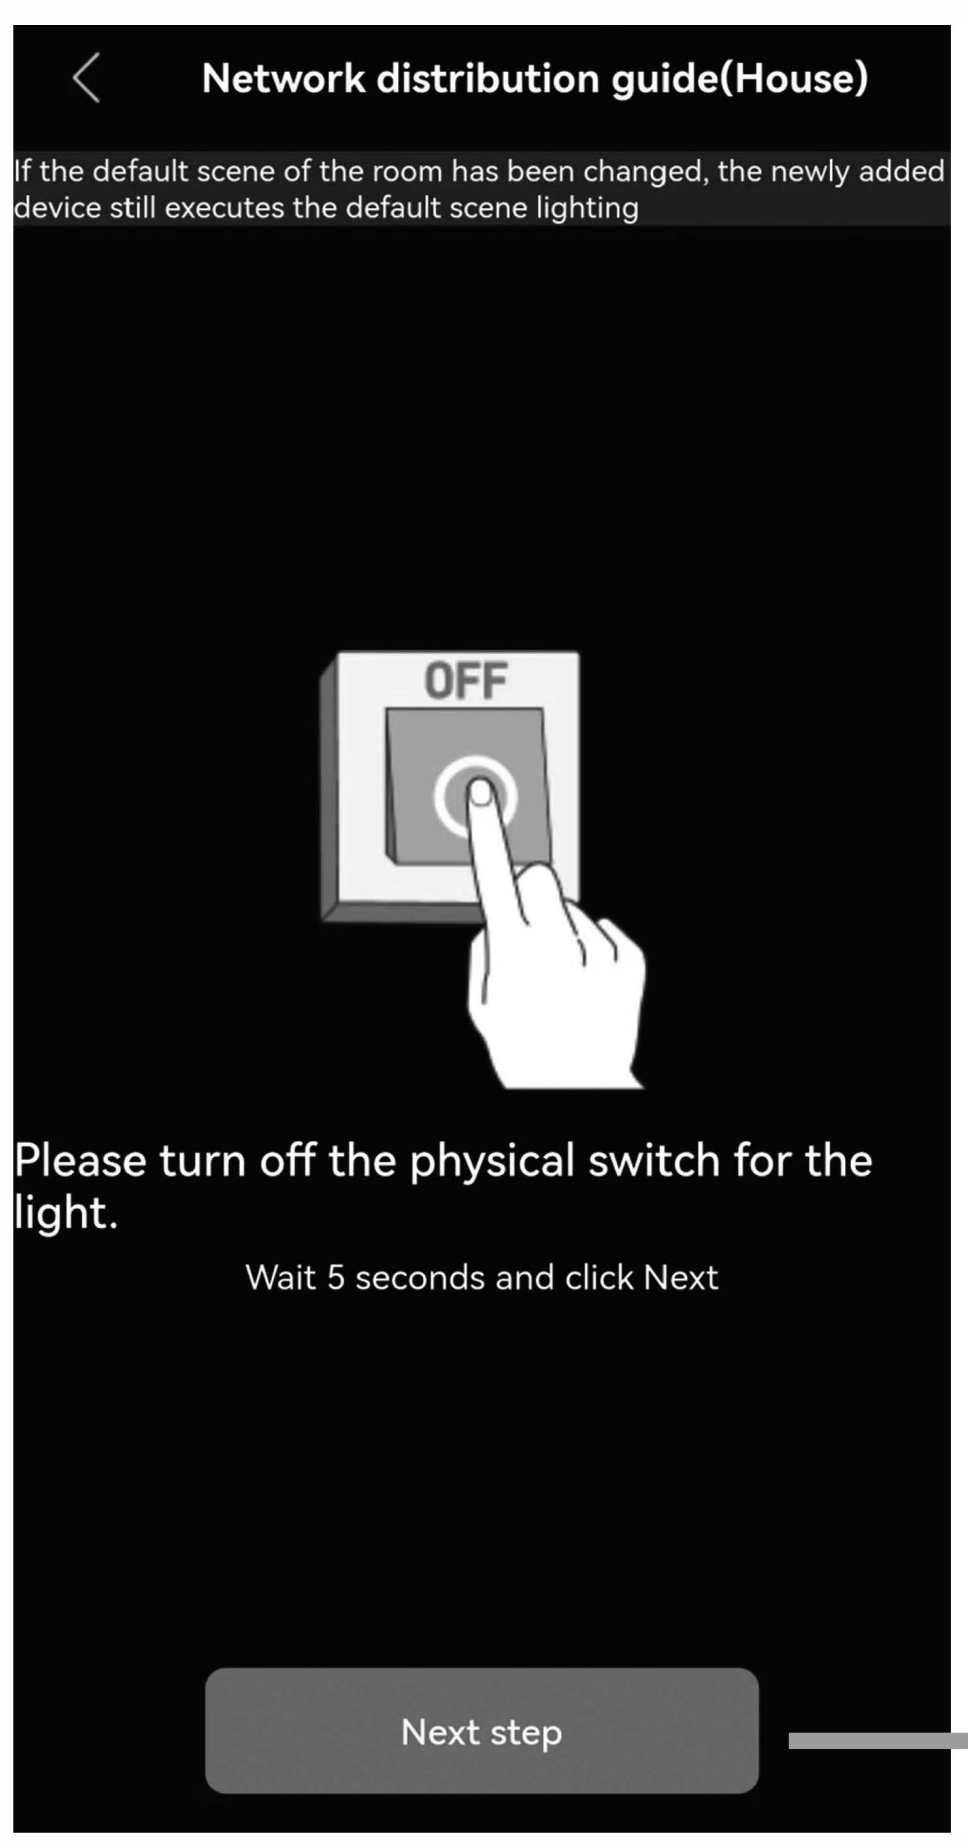


6

7 Plug in the smart box power plug.


The appearance of this program icon indicates that the matching is complete

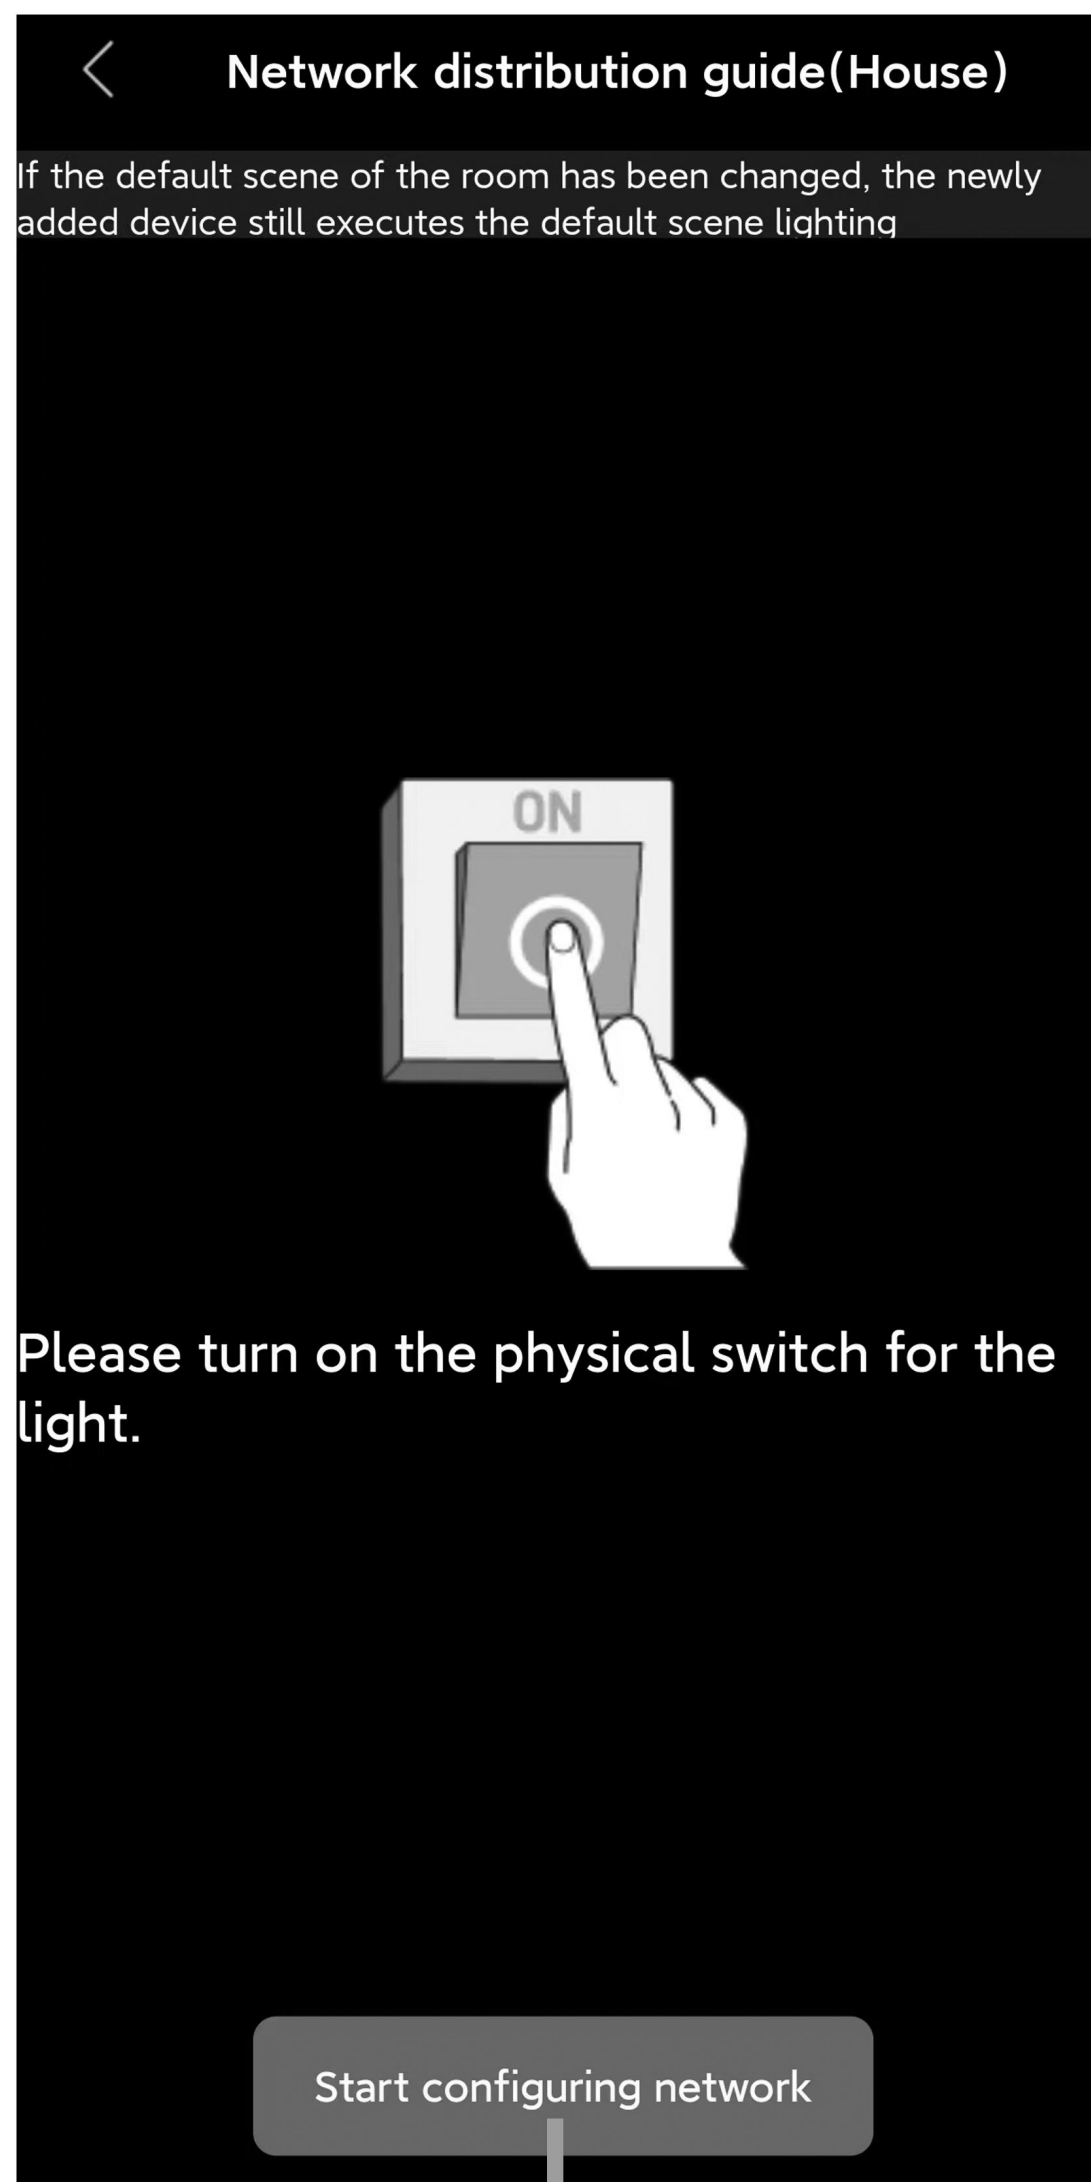


8

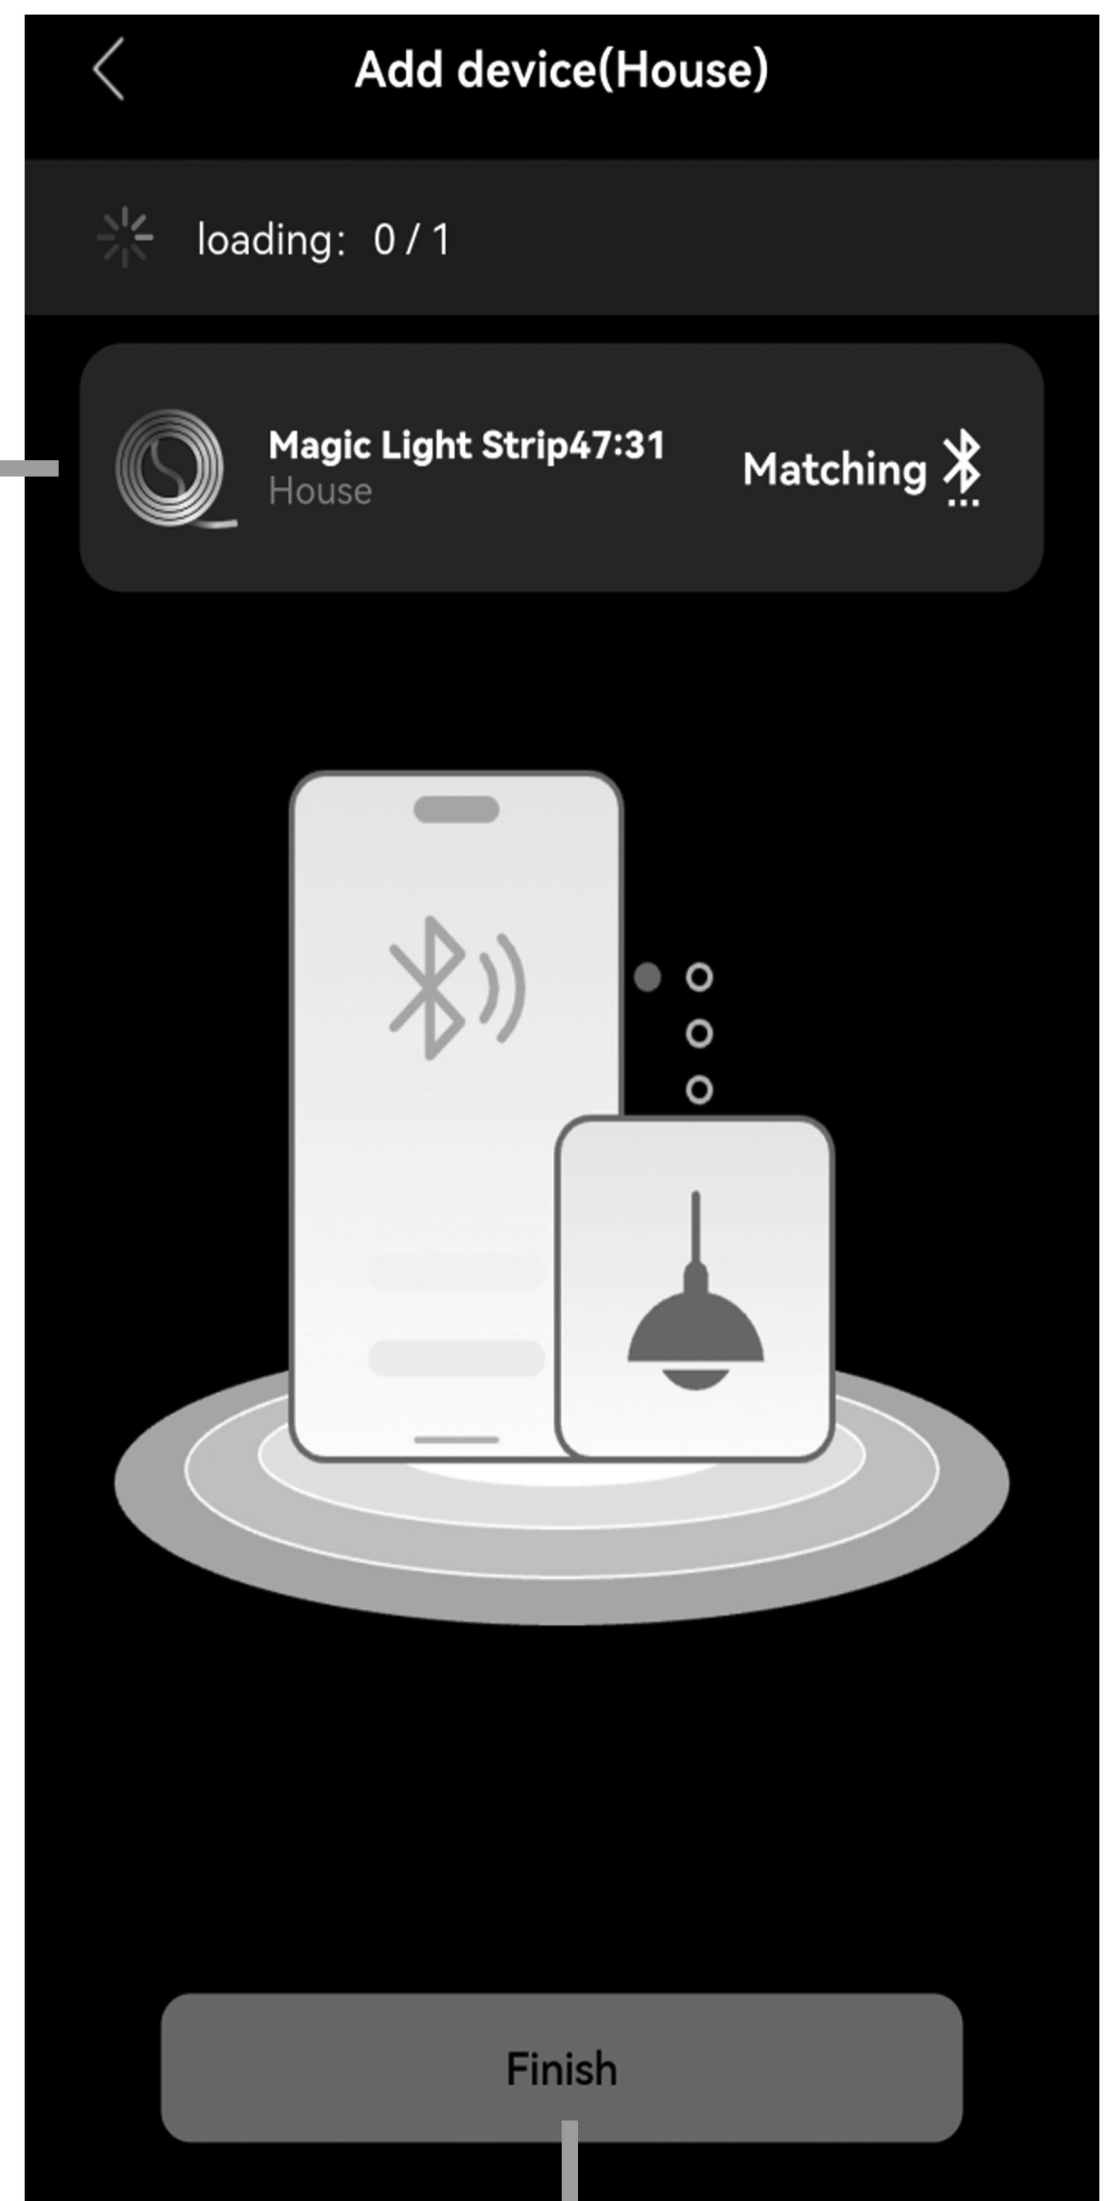

9

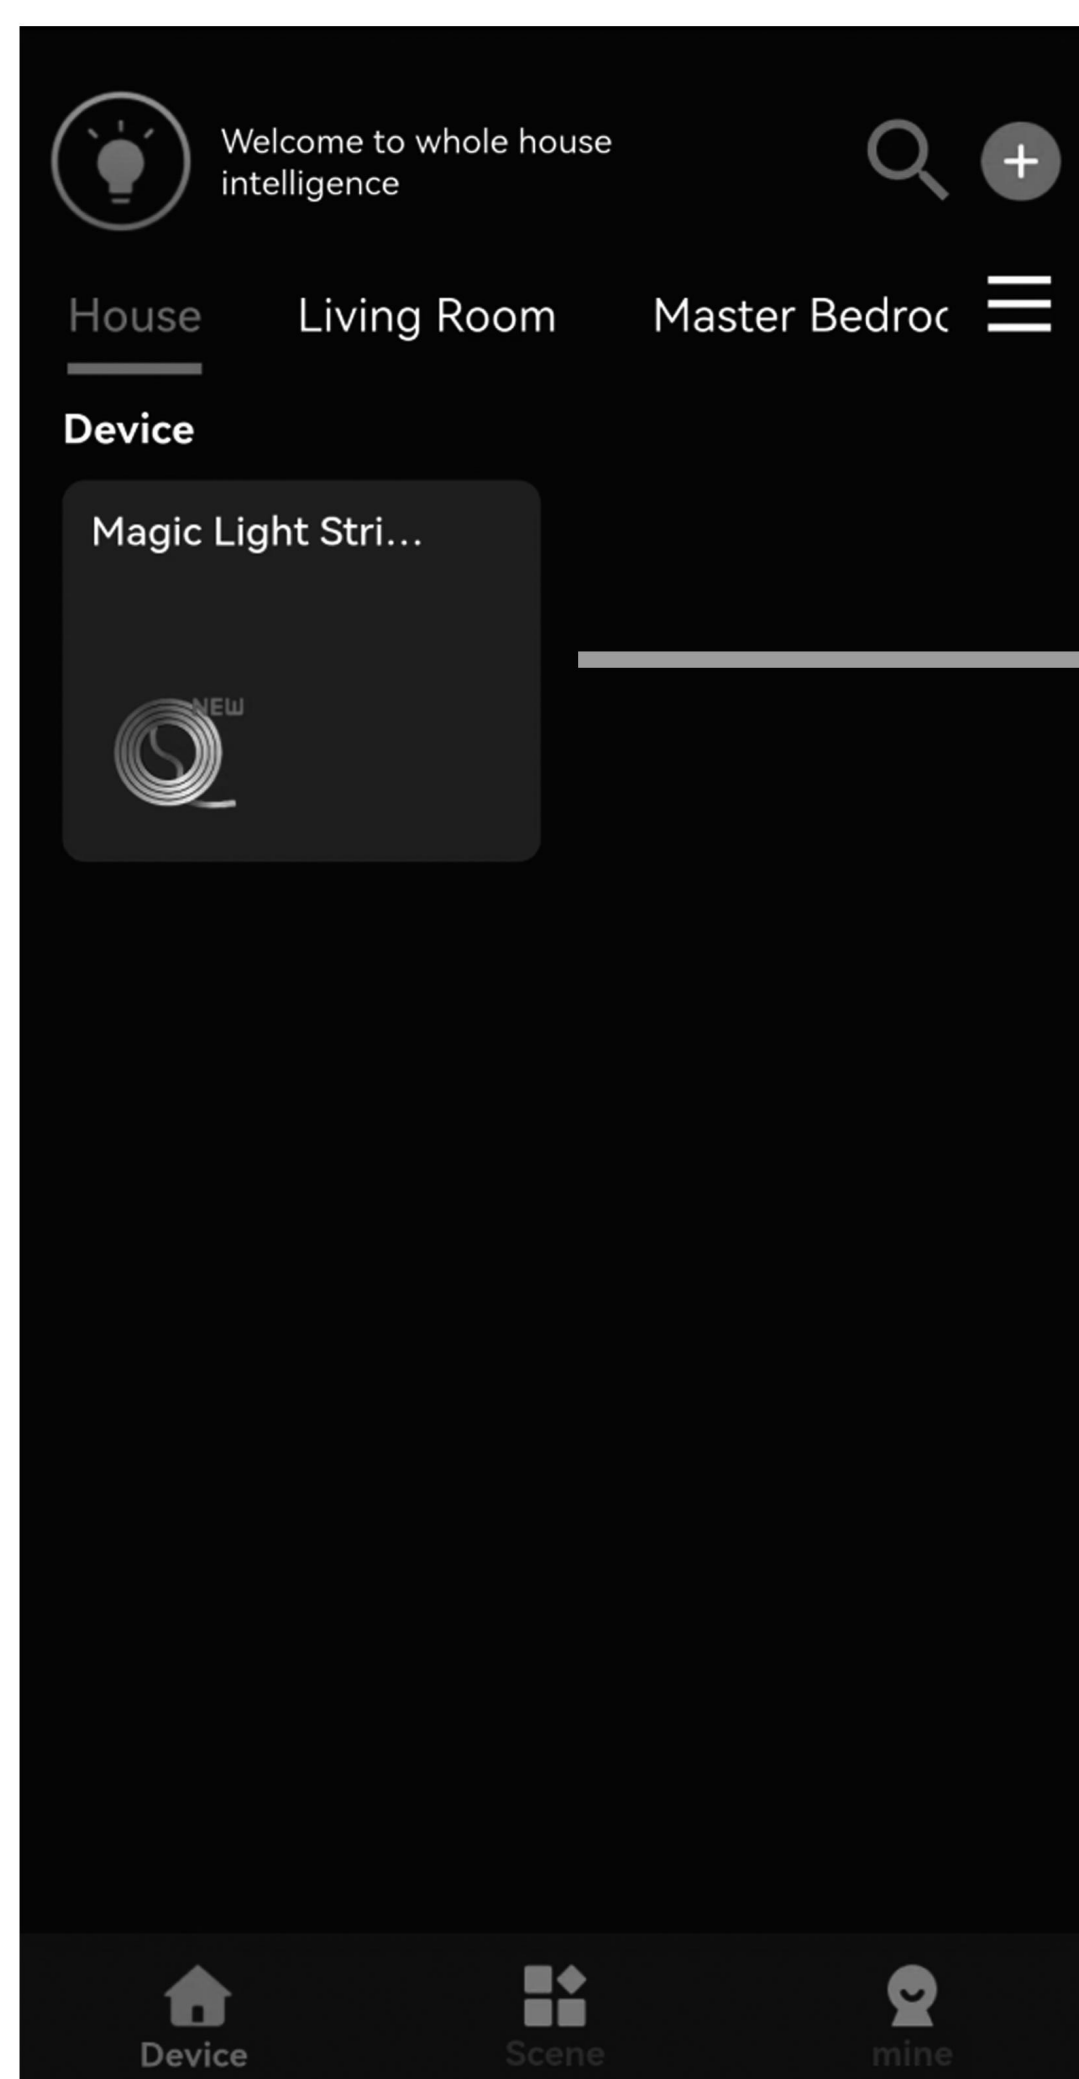

10

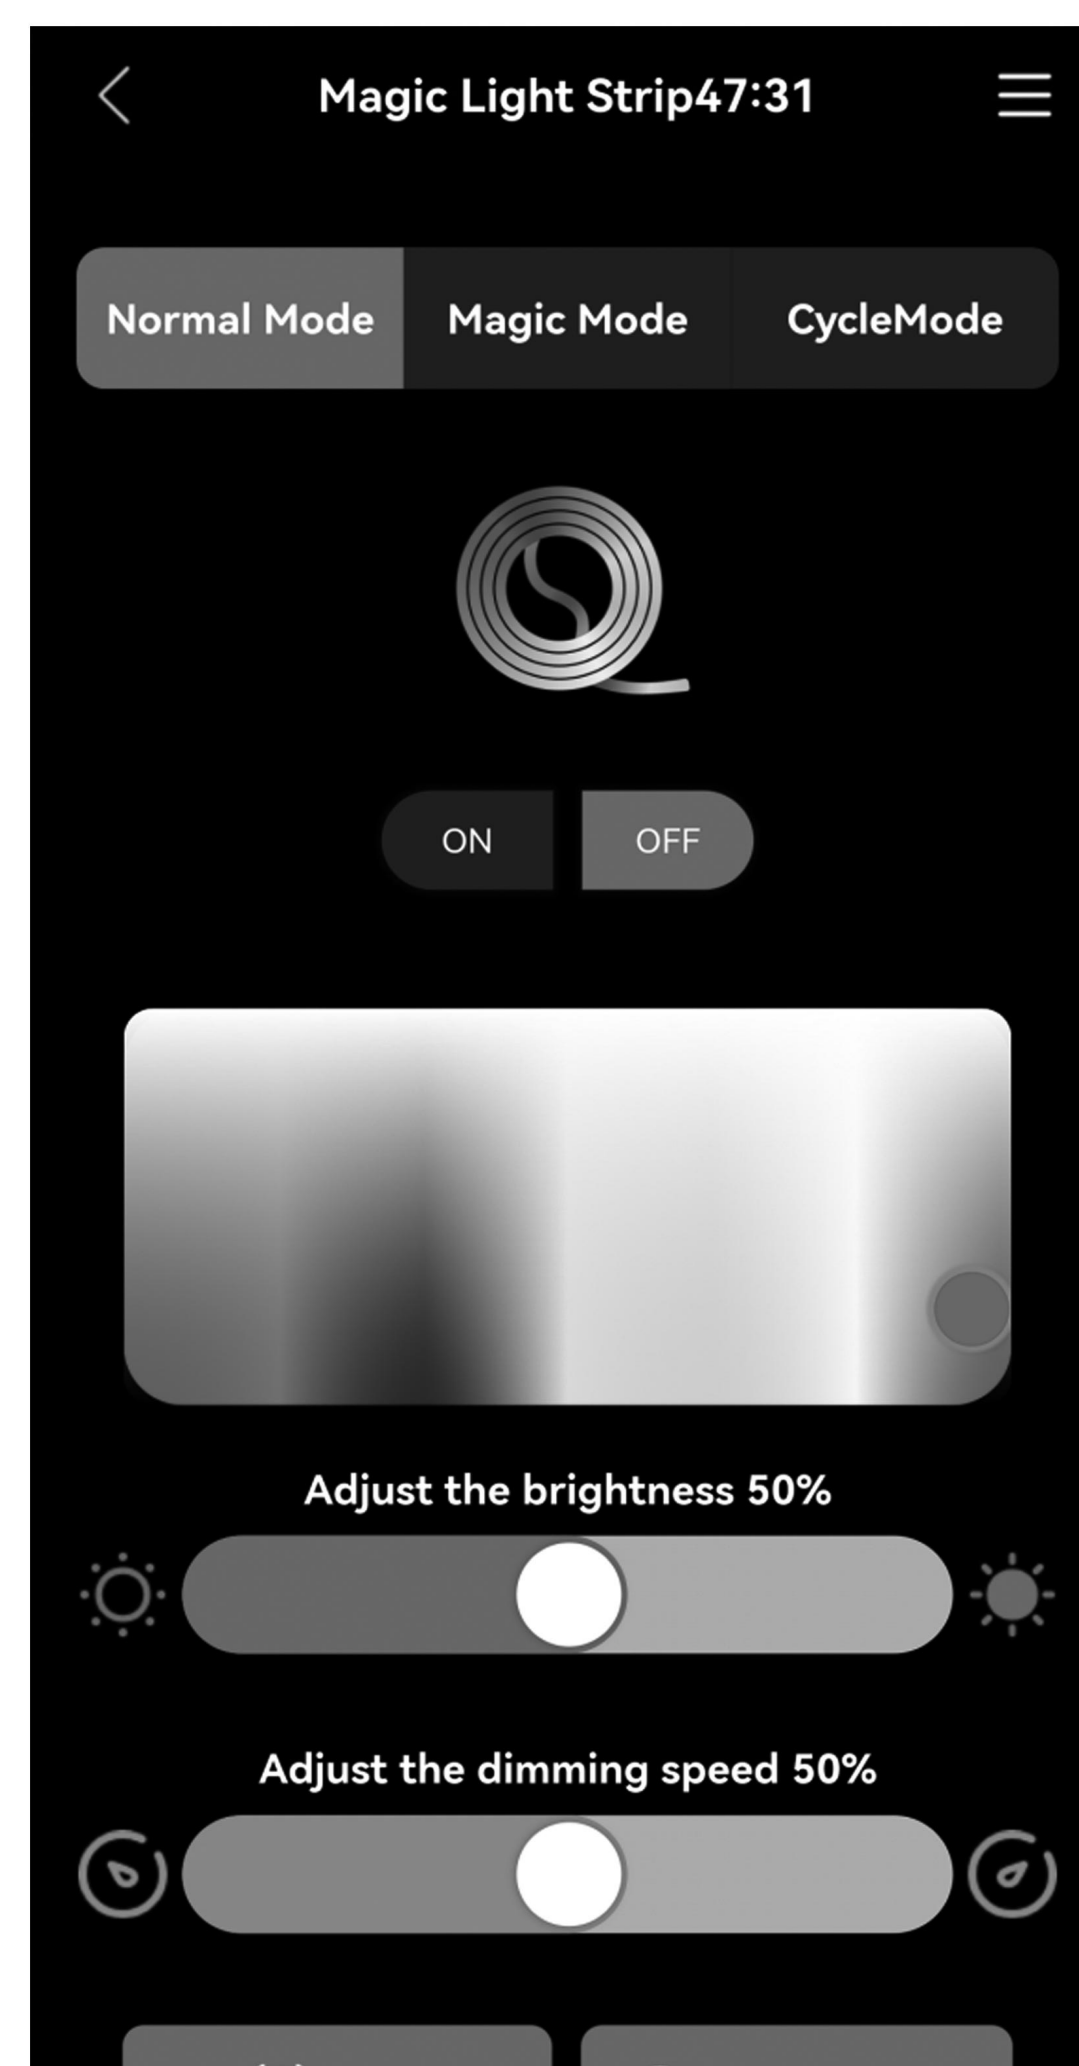

Now you can freely adjust the lighting according to your preferences

User's Guide

Thank you for purchasing this product.

To use this product, please plug it into a 12V DC power supply.

Please use if the product works normally after connecting to power.

Introduction

The box is an intelligent controller. With 4 touch buttons, it can turn ON/OFF the light and turn ON/OFF the induction function, change light colors, and adjust the light luminance.

The lights can be controlled through both the touch buttons and a dedicated app.

Operation



This touch button is the master switch of the smart box, which can turn off all functions of the box and control the light strips on/off operation.

The operation that can be turned on and off with just a light tap. Press and hold to adjust the brightness. Upon first power-up, the default light will be set to white.



This touch button is used to turn on/off the induction function.

A. touch this button once to turn on the induction function (indicator light on).

After the person leaves or remains stationary for more than 30 seconds, the light strip goes out; people and objects within a range of 1 meters move will light up the light strip.

B. Long press this button for 0.5 seconds to turn off the human body induction function (the indicator light goes out).

At this point, Keep the light strip as it was before turning off and no longer be affected by human and object activities.

By default, induction function is enabled when powered on.



This touch button is the Dynamic Phantom Color Mode, which includes 5 magical lighting effects.


Simply tap to cycle through the options. (Attention: This mode cannot adjust the brightness)



This touch button controls the single-color switching function of the light strips, offering 7 different colors to choose from.

Phantom Color Mode Button

7-Color Mode Button

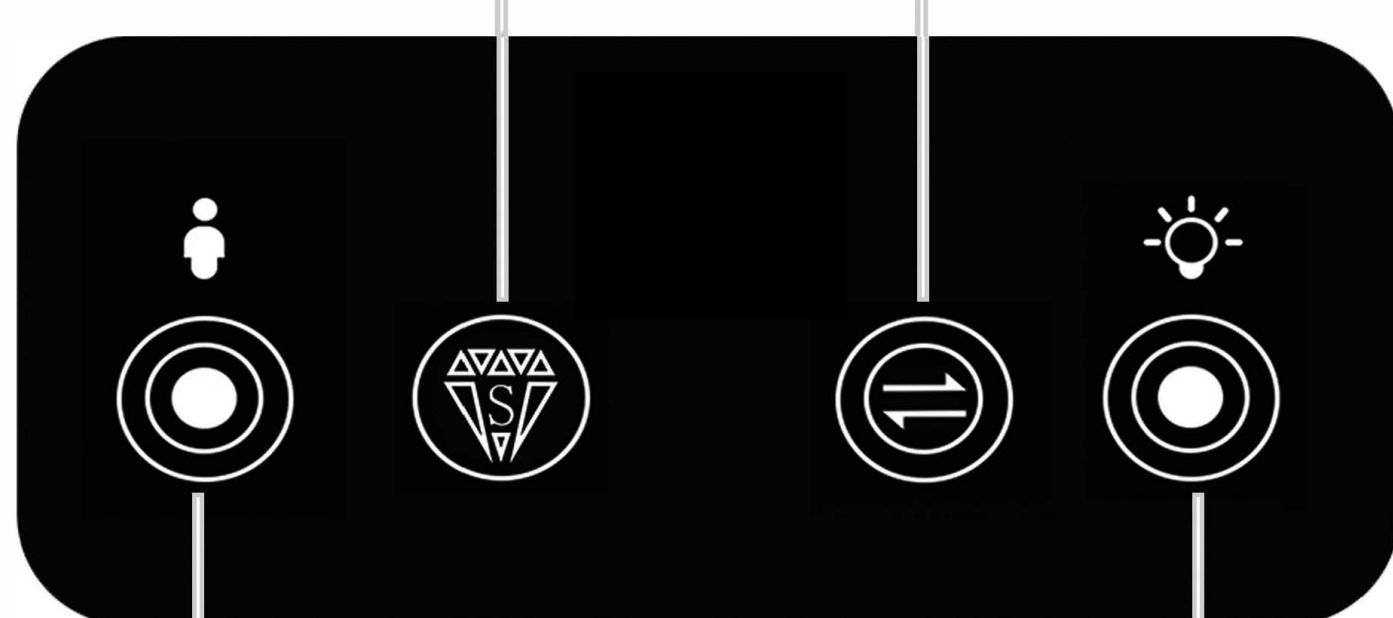

Induction Button

Master Switch Button



ATTENTION PLEASE

1. If there is no touch response suddenly, Re-plug the power to reset the touch static electricity.
2. If you have any questions when installing, please feel free to contact us. Thank you.