


Product Installation Instructions

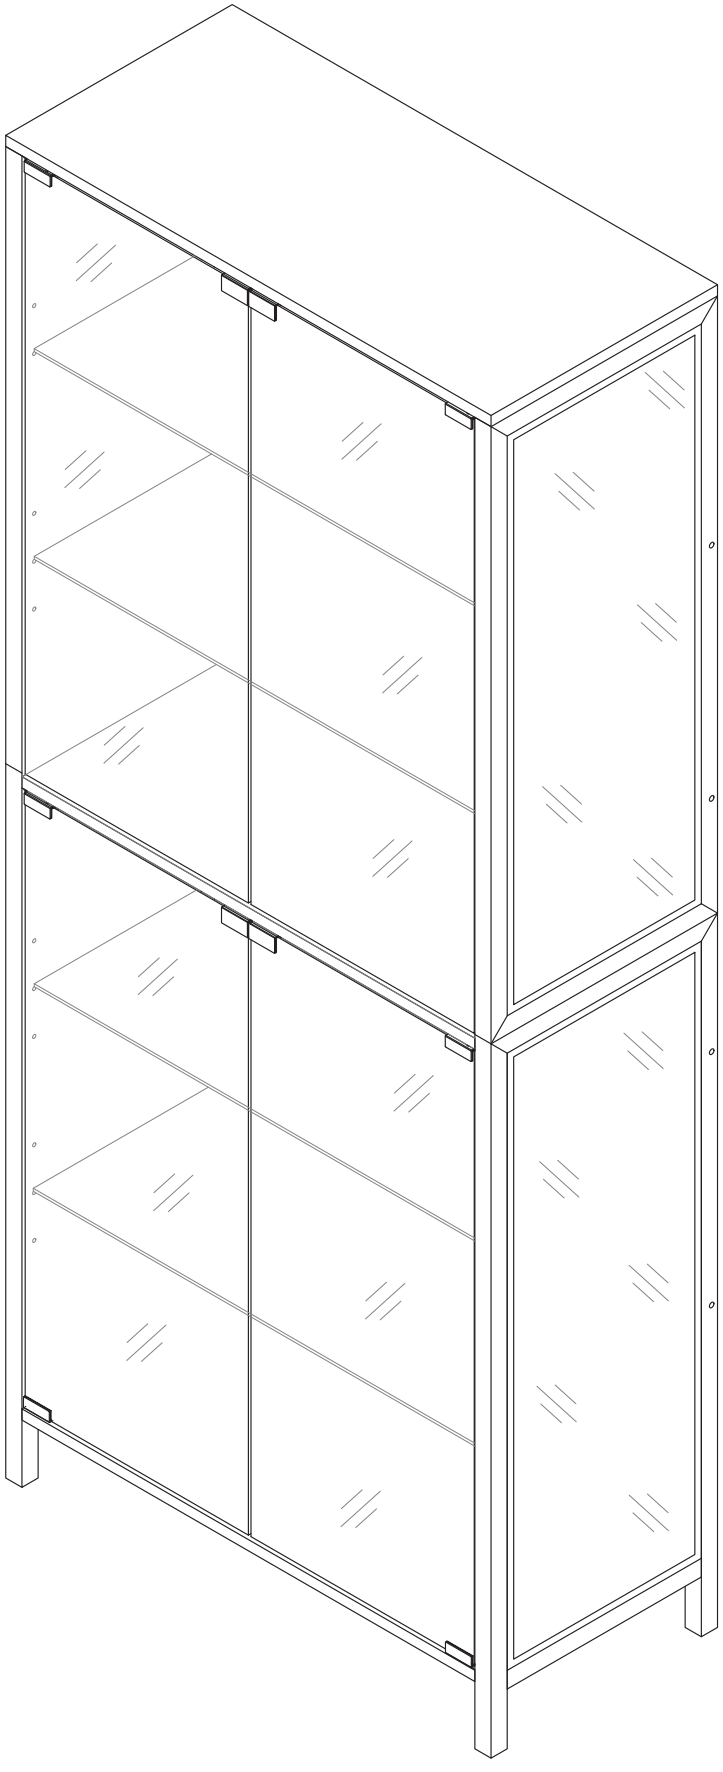





A x1




B x1

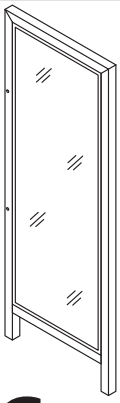


C x1

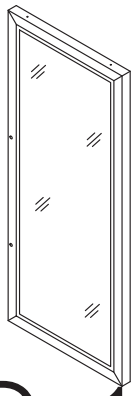


D x1




E x4




F x1

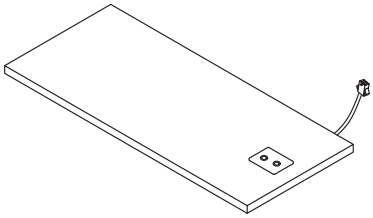


G x1

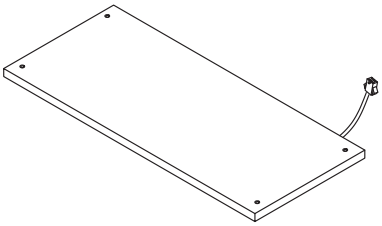


H x1

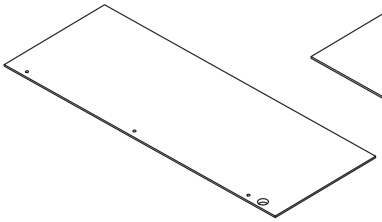


I x1

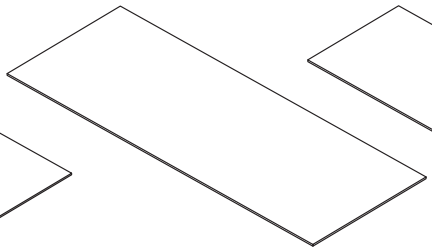


J x1

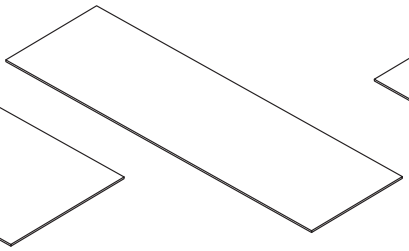


K x1

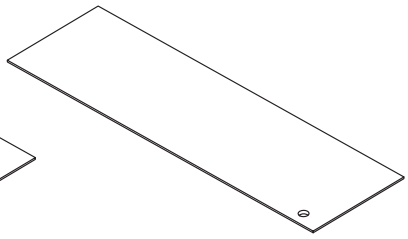


L x1

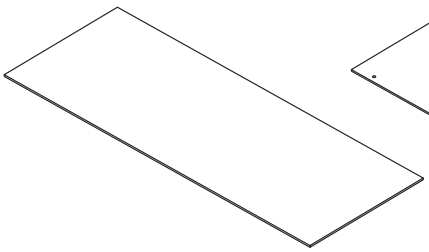


M x1

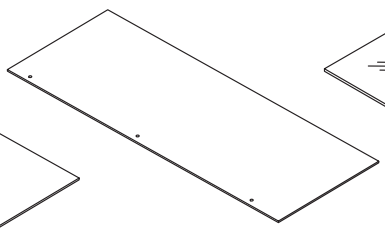

N x1







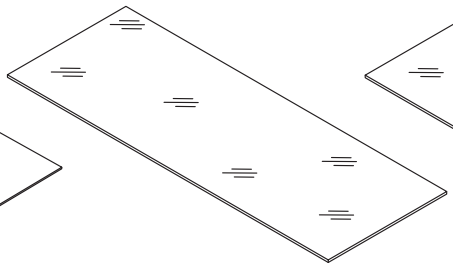


O x4

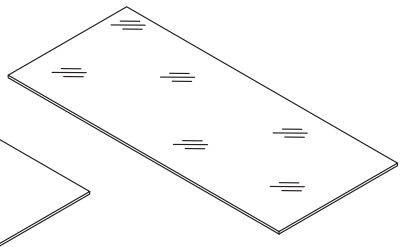


P x4


Accessories list

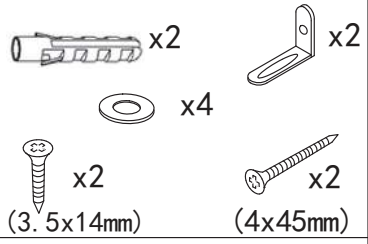1		Two In One Screw (6x28mm) Two In One Nut (10x12mm)	8pcs +1pcs
2		screw (6x33mm)	8pcs
3		Rebound device Screw (3x16mm) Iron sheet Hinge	2pcs 8pcs 4pcs 8pcs 4pcs 4pcs
4		screw (4x30mm)	4pcs +1pcs
5		screw (3x12mm) washer (ϕ10mm)	21pcs +4pcs
6		Laminate Support Nail	16pcs +2pcs
7		Adjustable Foot	4pcs
8		Anti Fall Hardware	1pcs
9		Wire clamp	1pcs
10		screw (6x10mm)	8pcs
		AC/DC Adapter (12V⎓3.0A)	1pcs


Double-head screwdriver, use as required



1pcs




Product structure decomposition

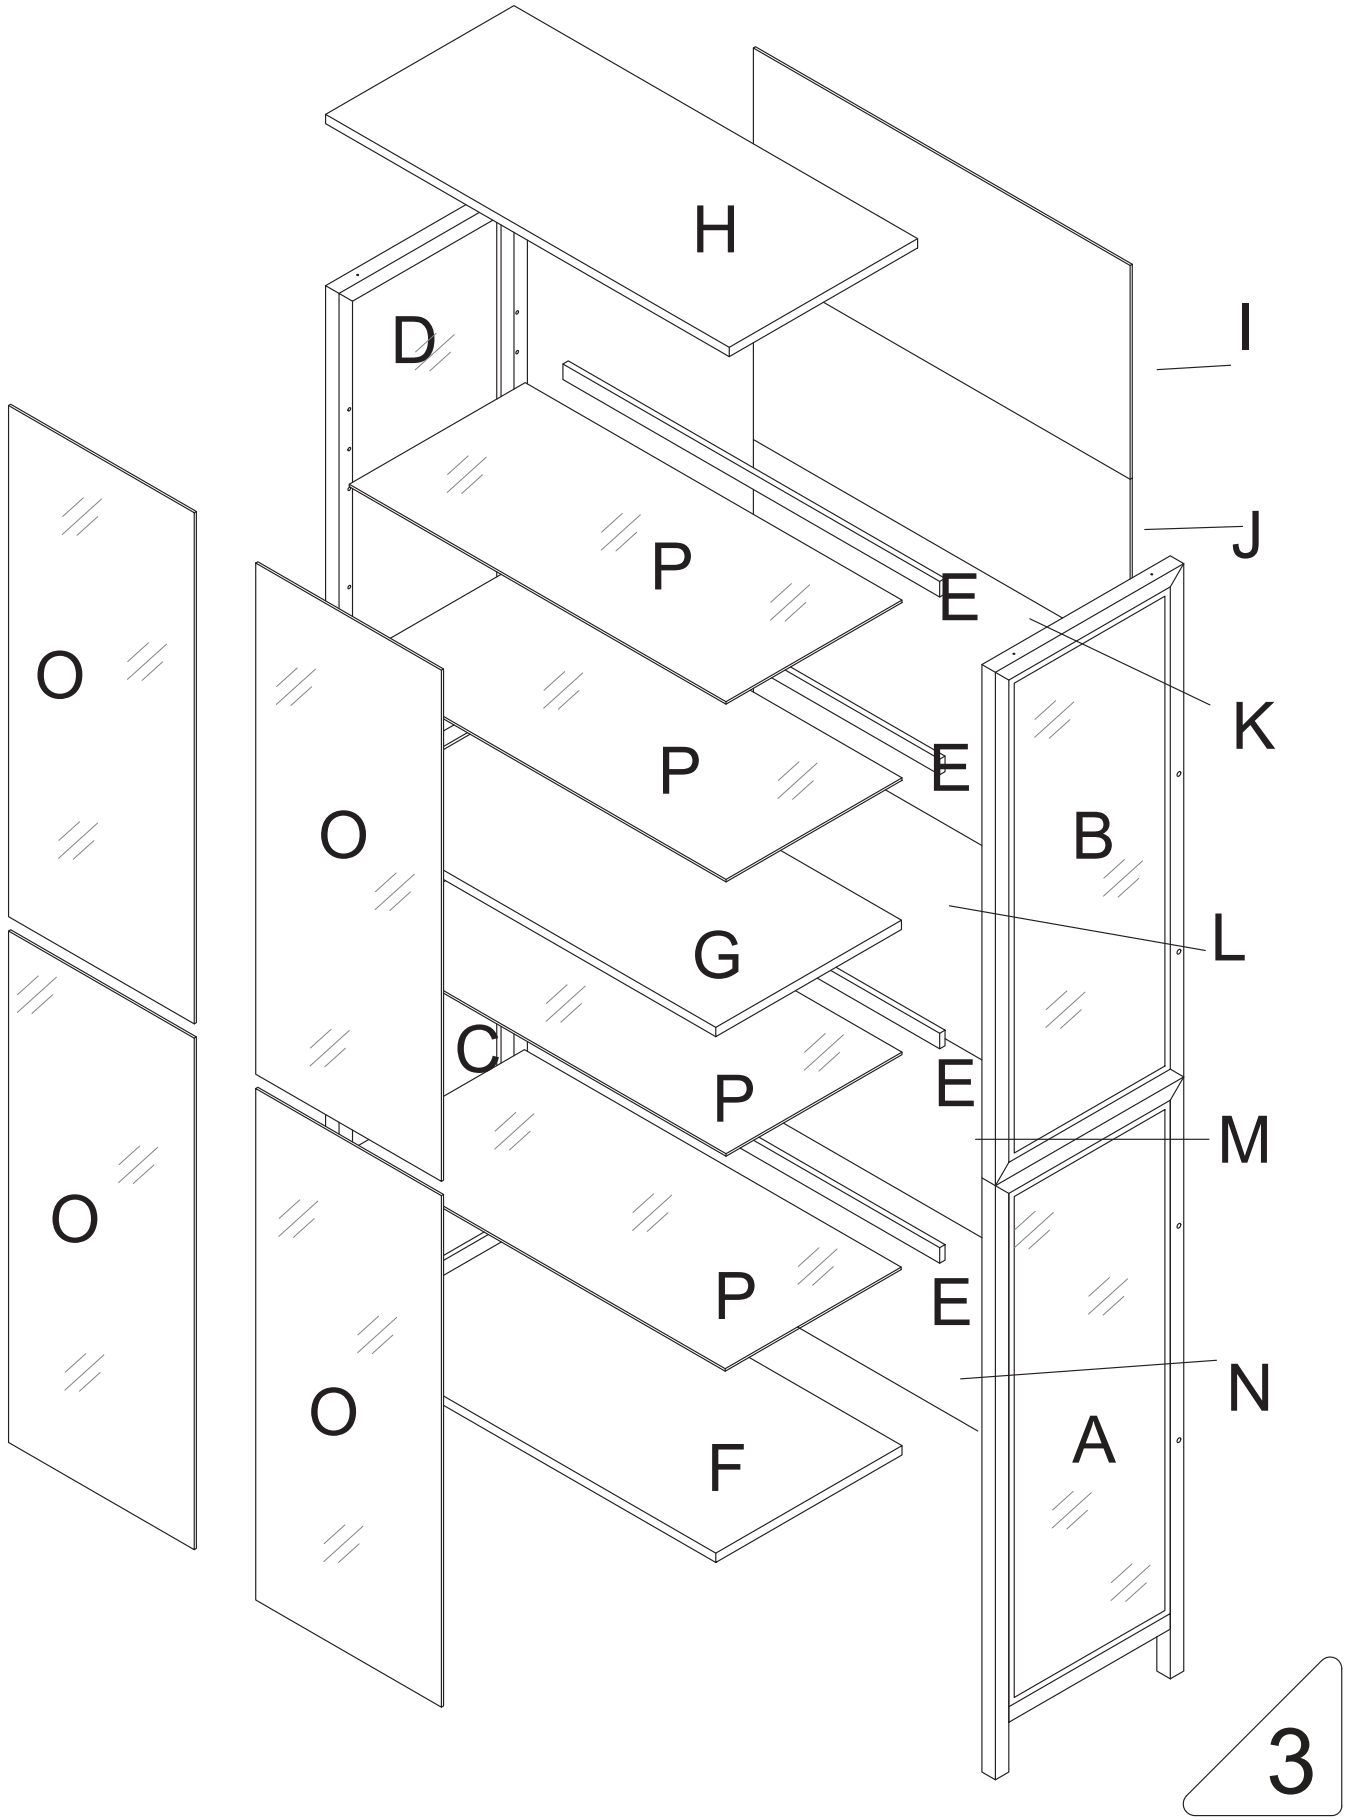


Use parts ① and ①


Step1

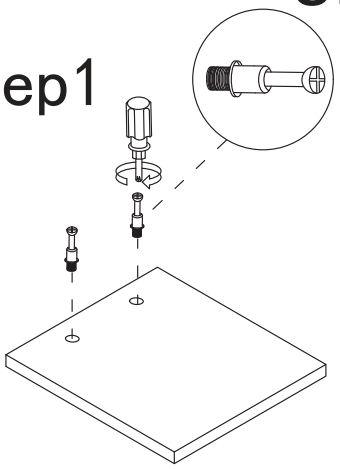


Step2

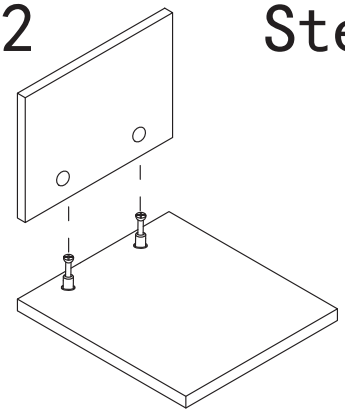


Step3

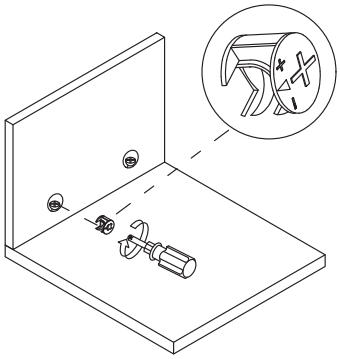

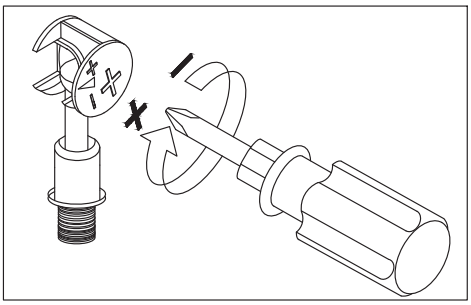


Use a screwdriver to lock in the direction of the "+" sign

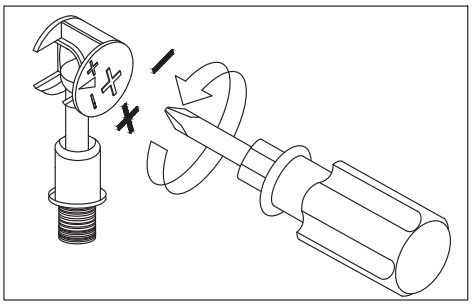

Disassemble along the direction of "-" sign


Step 1

①		x4

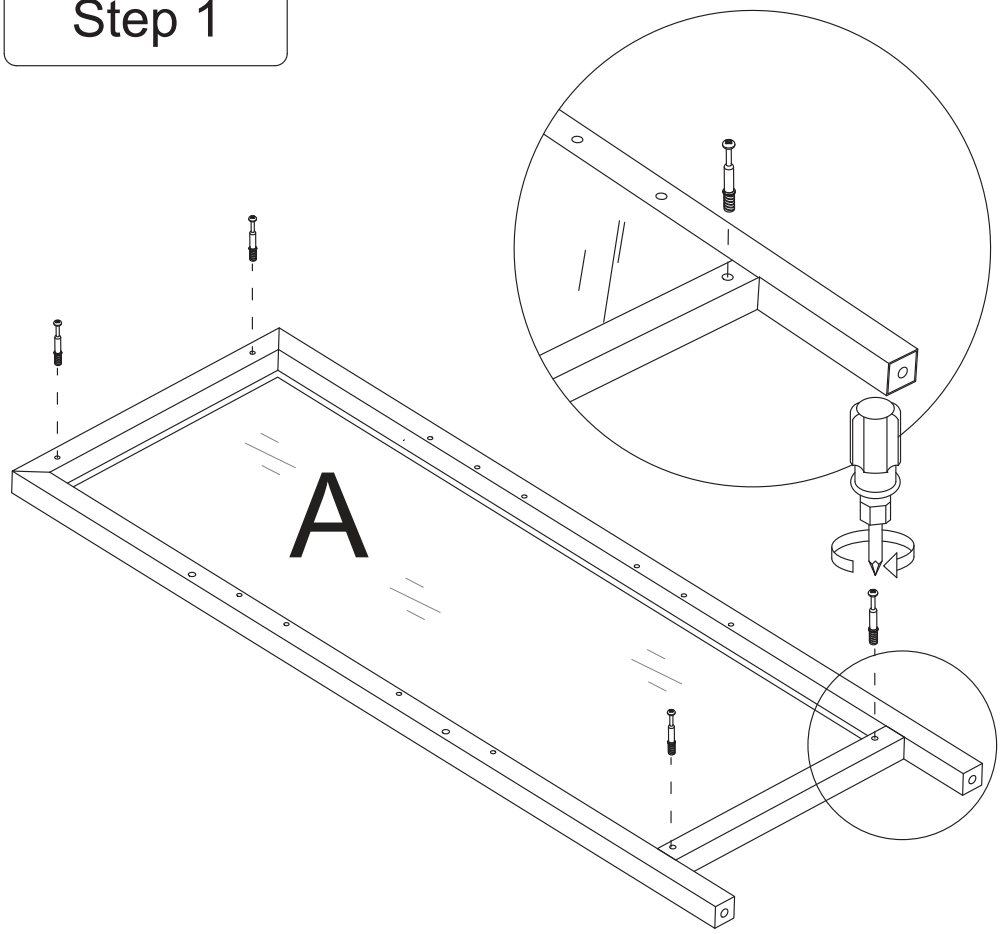


Step 2

All connection holes
are on the same side.

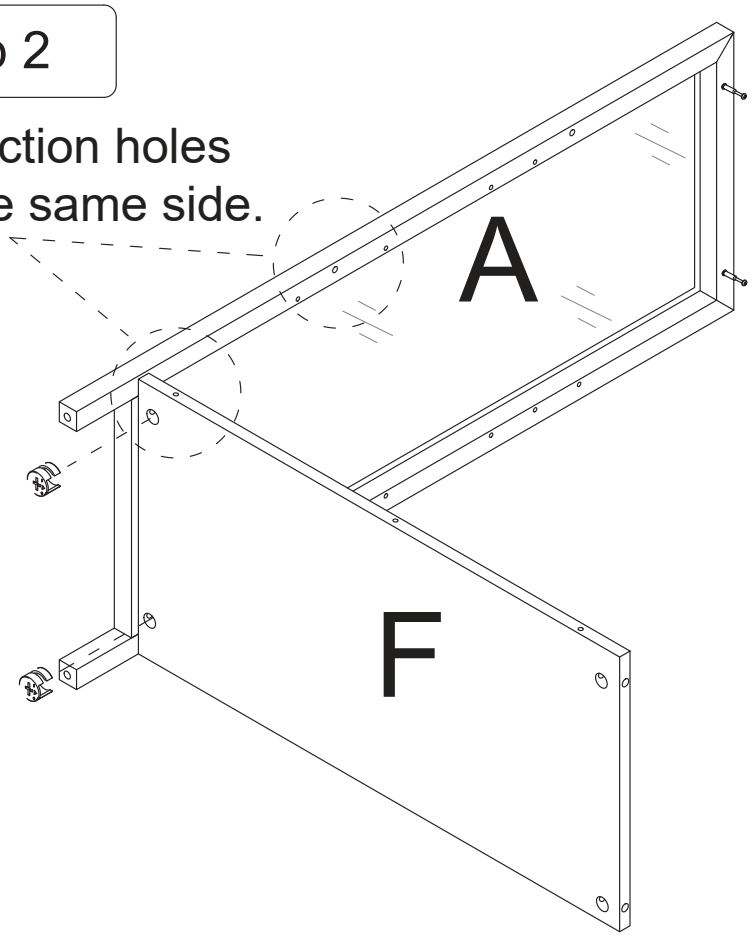

1 x2

Step 3

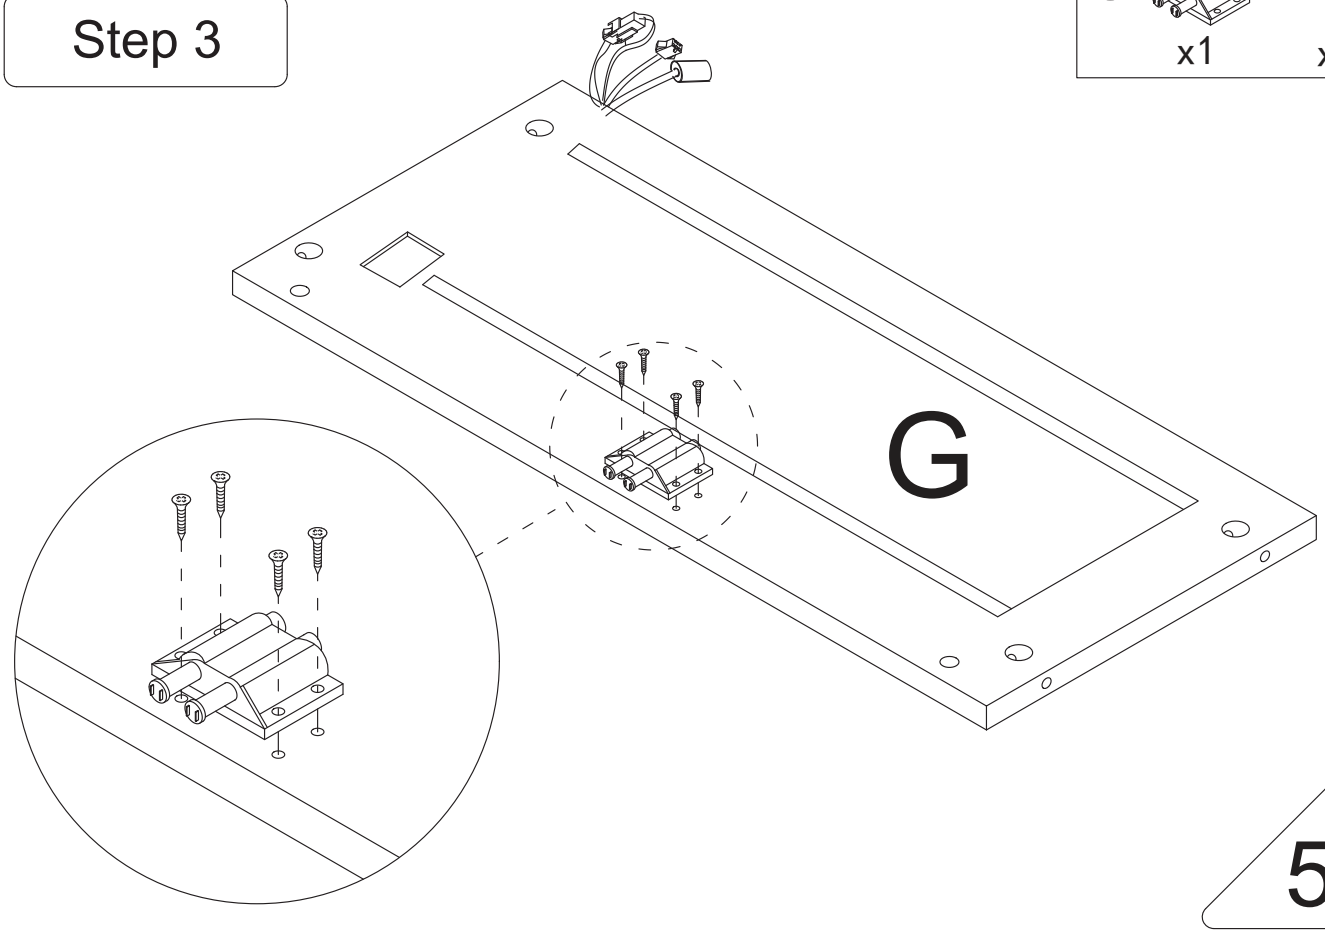


3 x1 x4

Step 4


All connection holes are on the same side.

1 x2

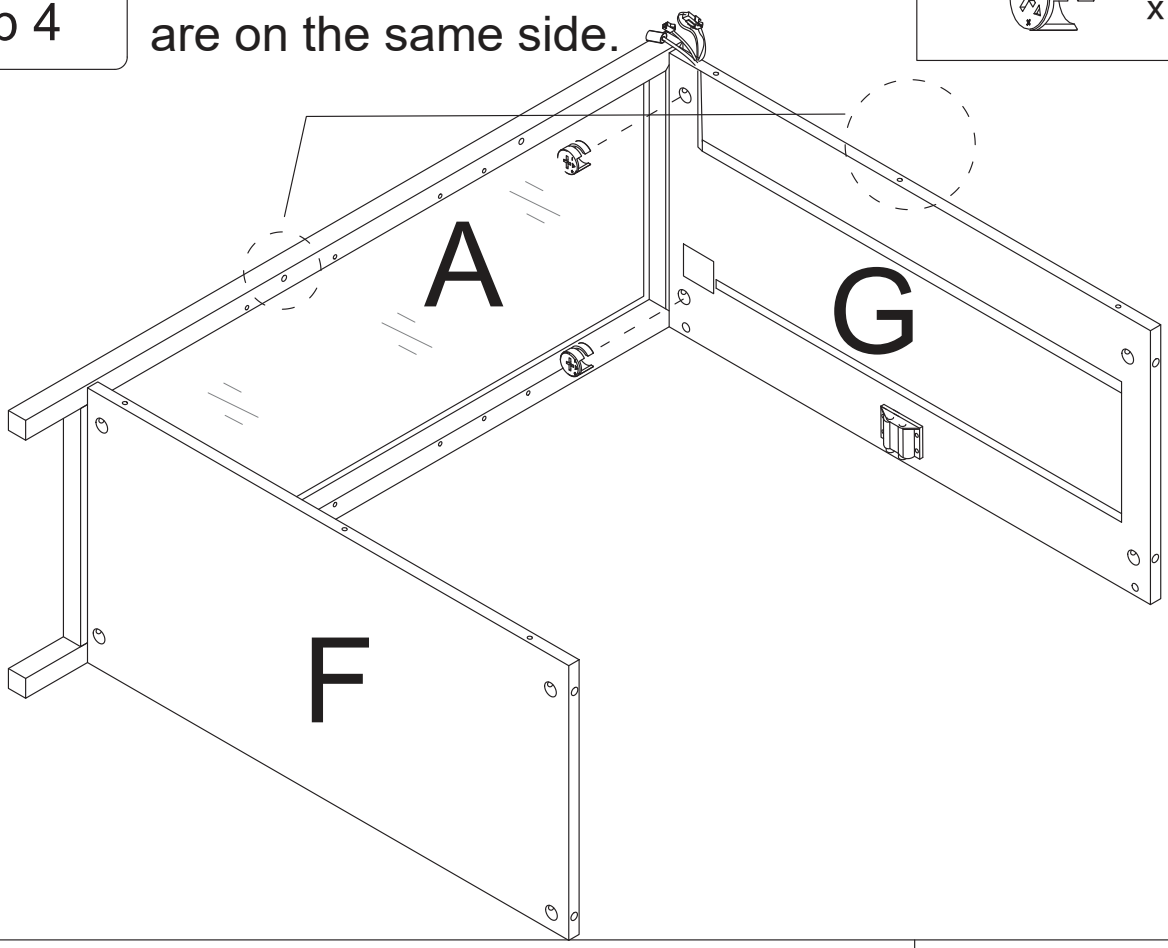

Step 5


1 x4

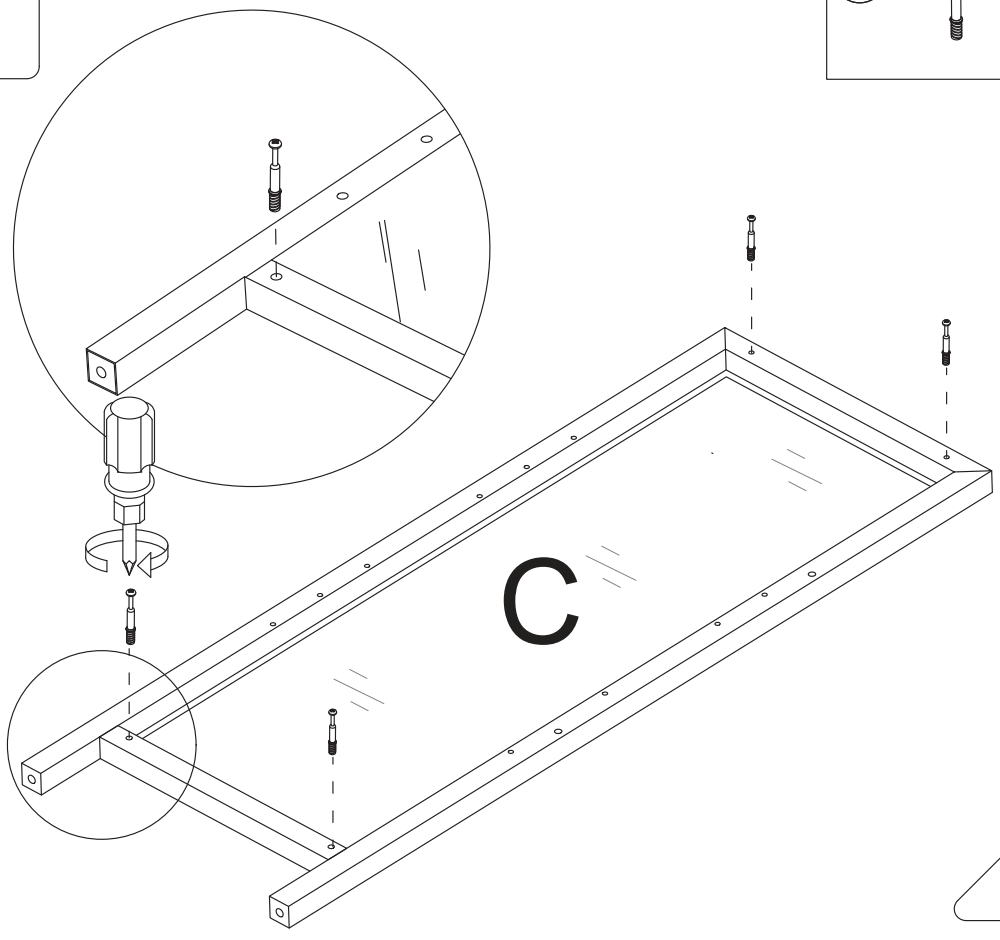

Step 4


① x4

All connection holes are on the same side.

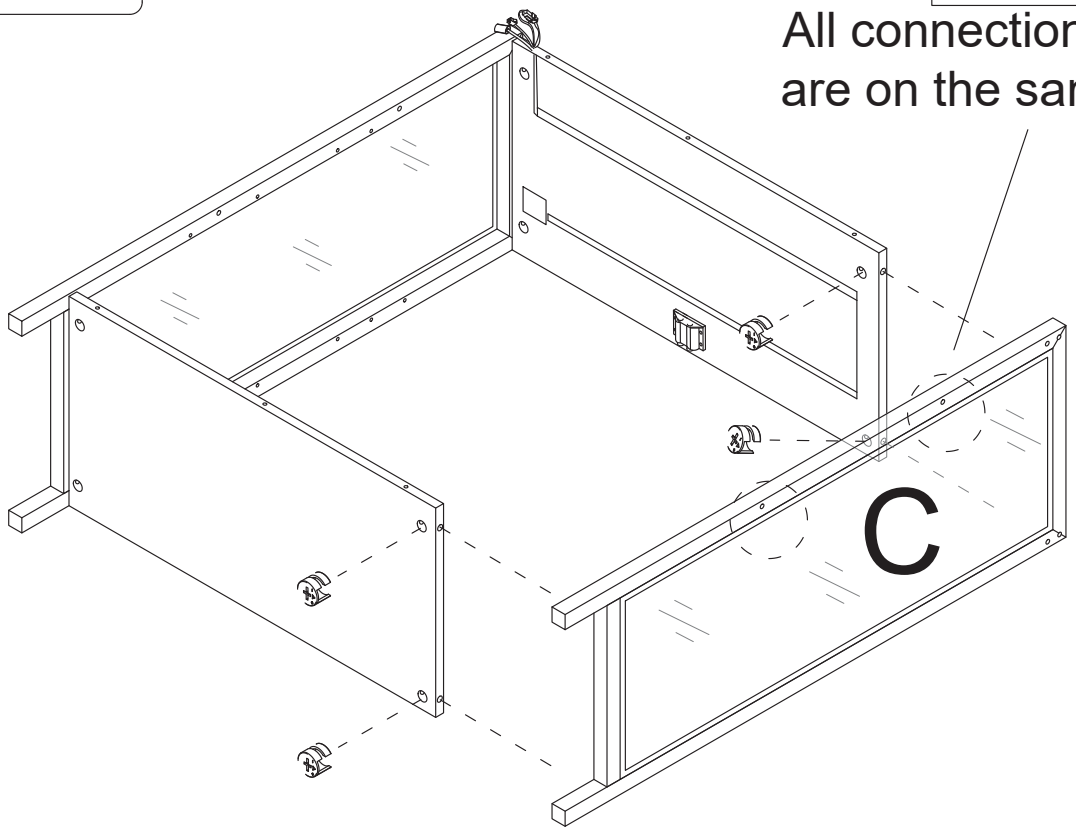

Step 5

② x4

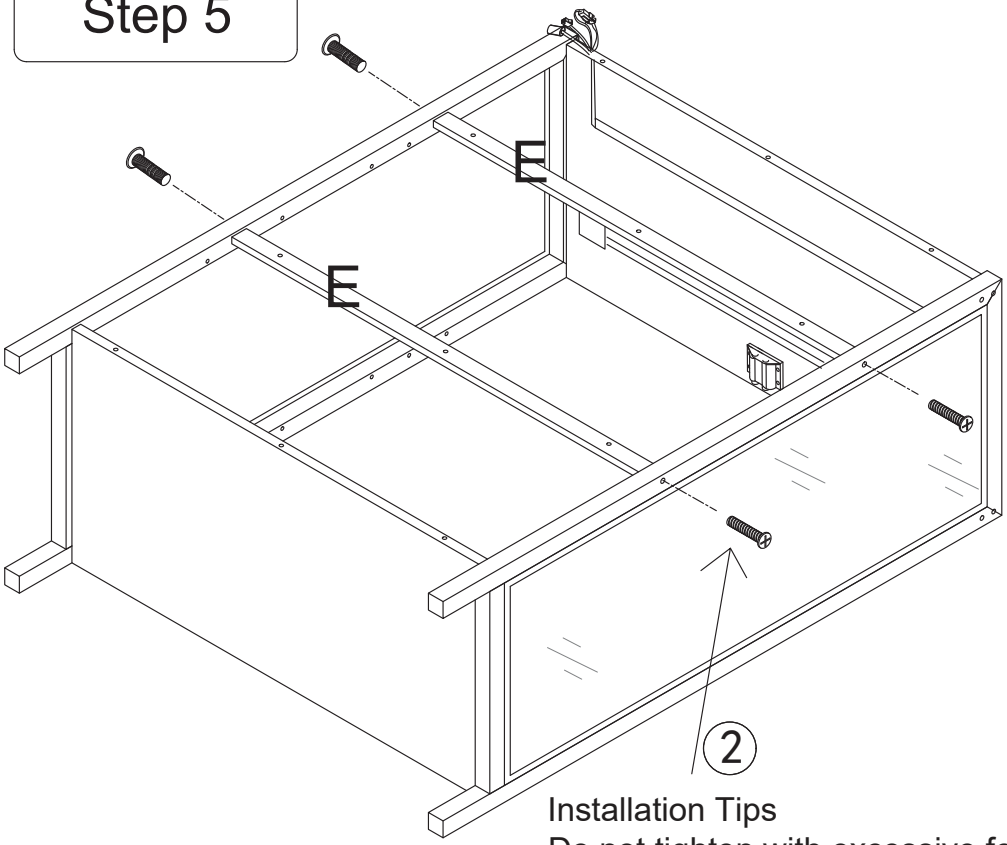

Installation Tips
Do not tighten with excessive force,
as the back panel needs to be installed later.


Step 6



All connection holes are on the same side.

Step 7



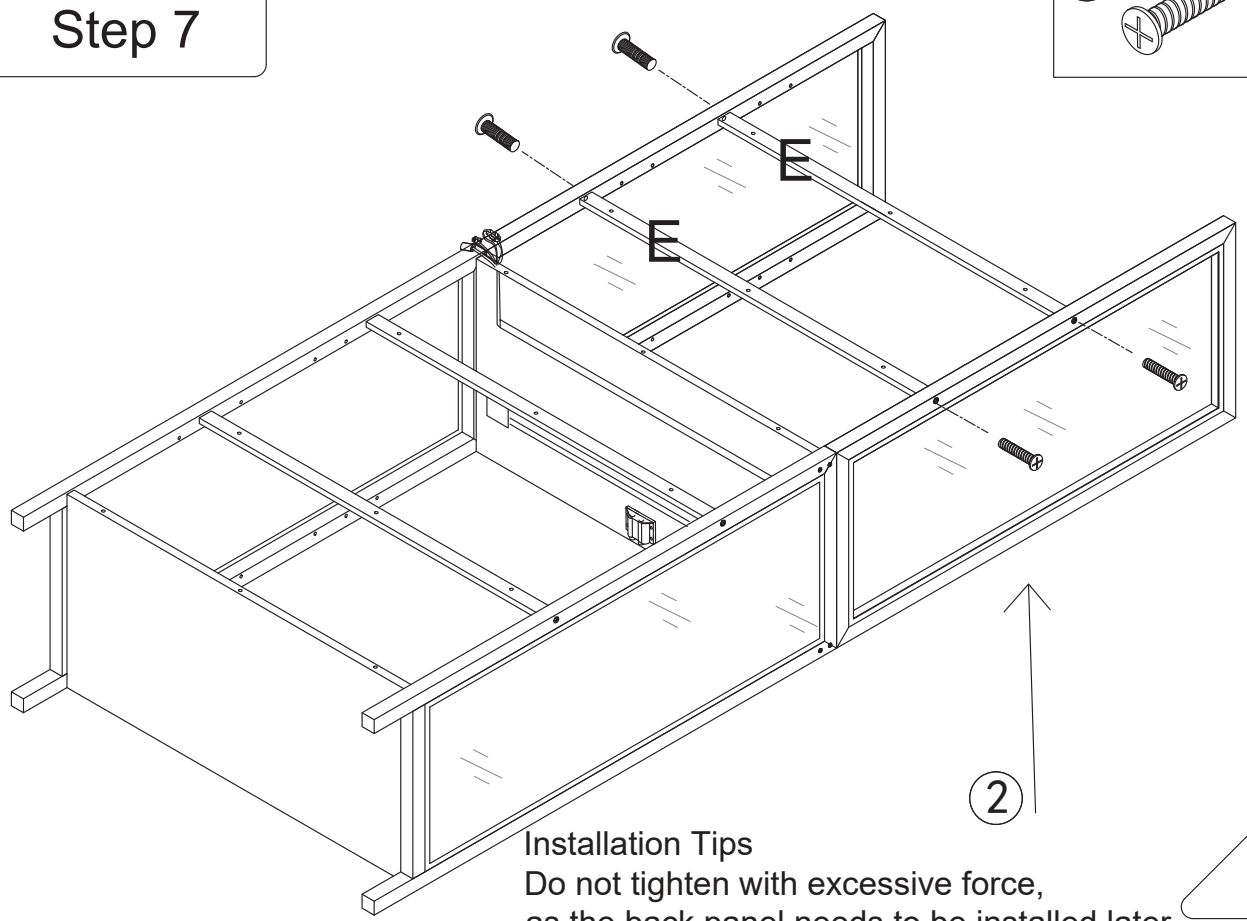


Installation Tips
Do not tighten with excessive force,
as the back panel needs to be installed later.

Step 8

3

x1


x4

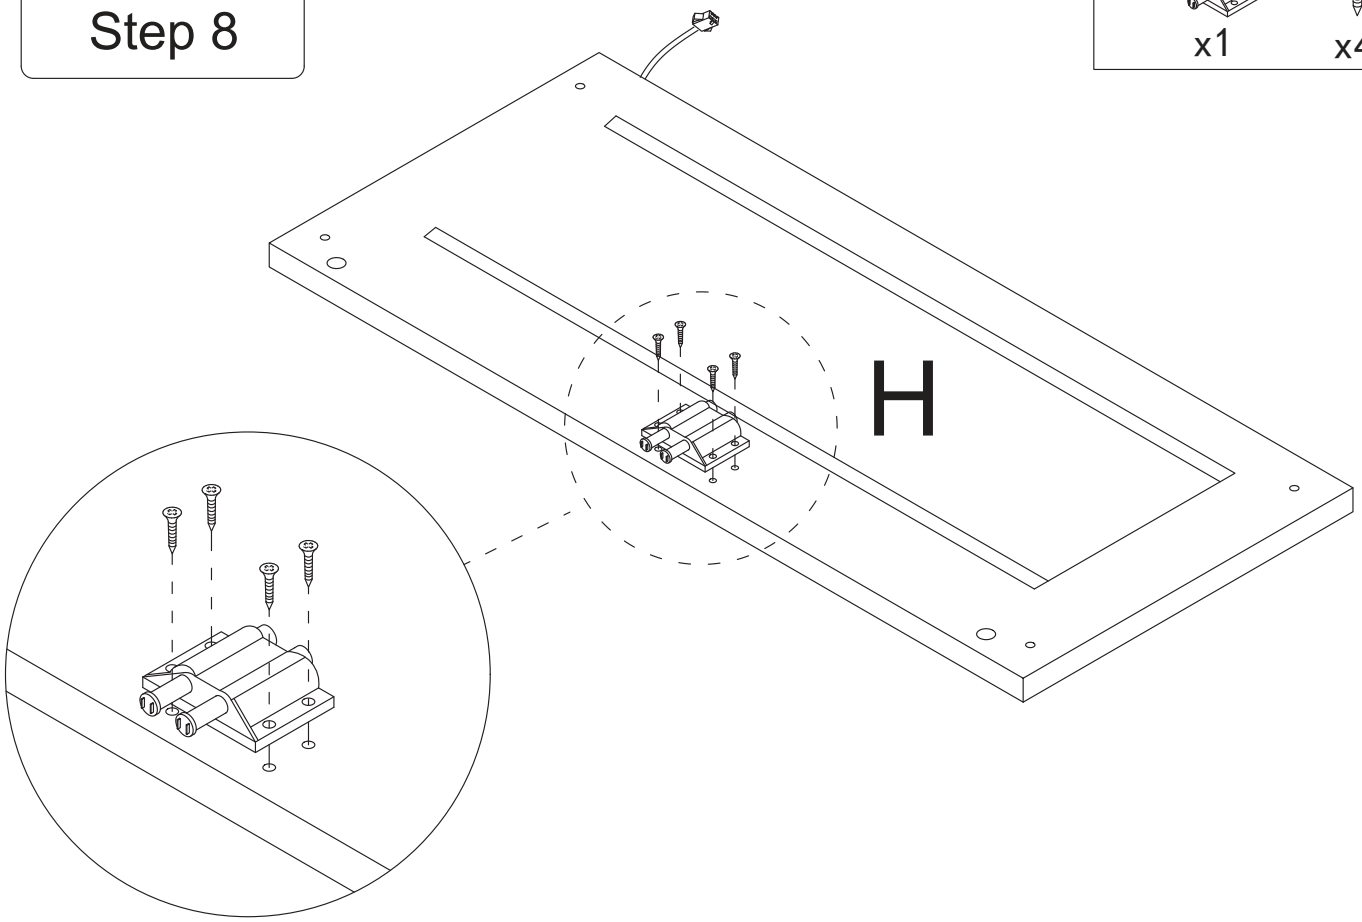

Step 9


4

x4

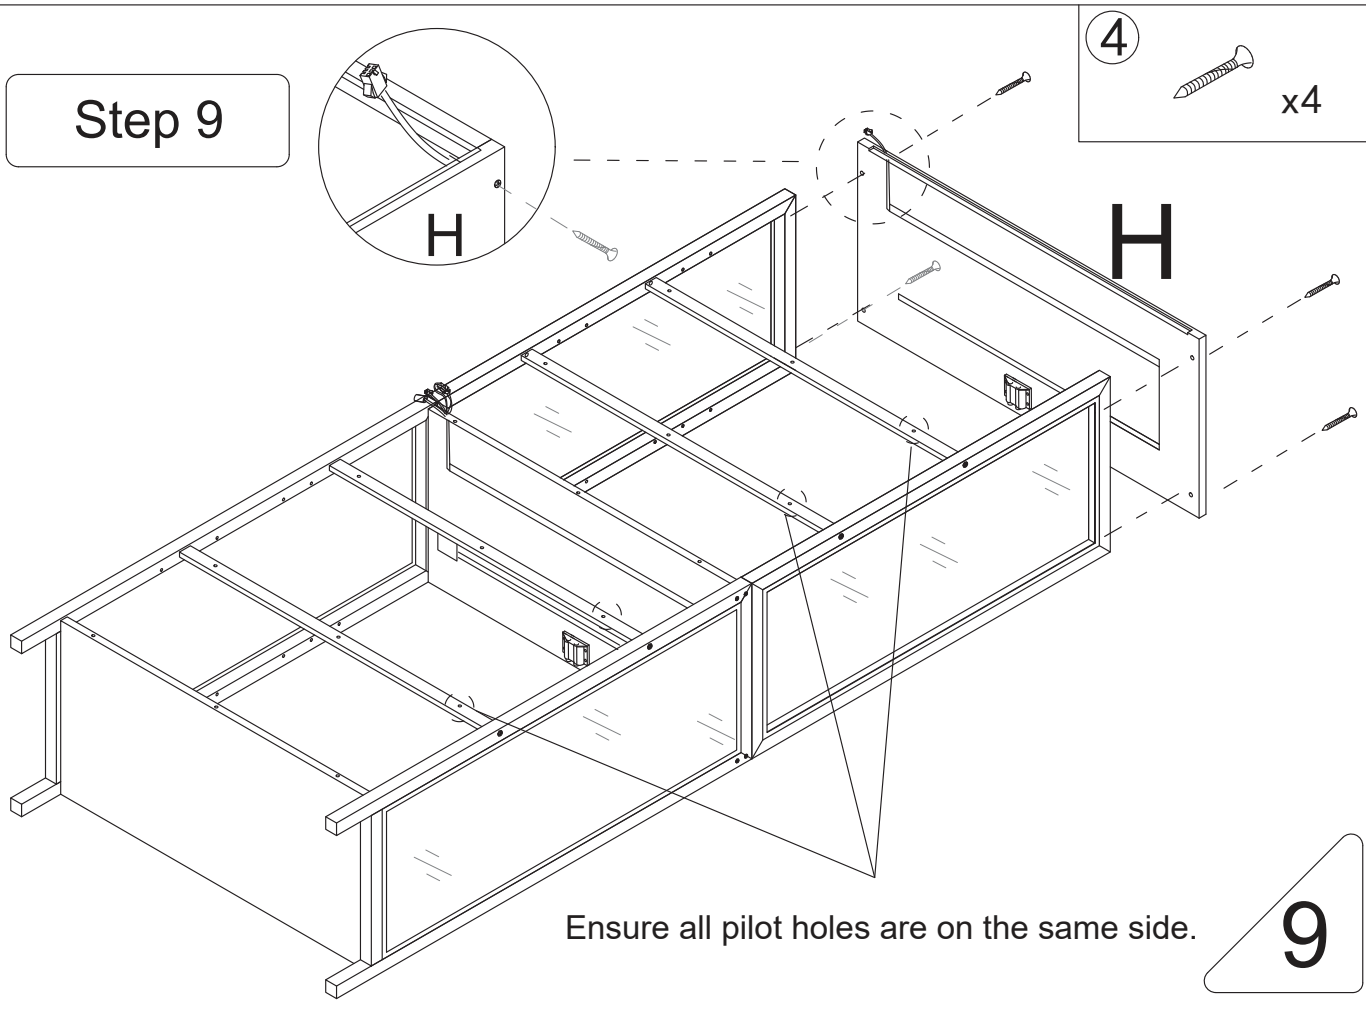


Ensure all pilot holes are on the same side.

Step 10



The light wire passes out through the hole in the back panel.

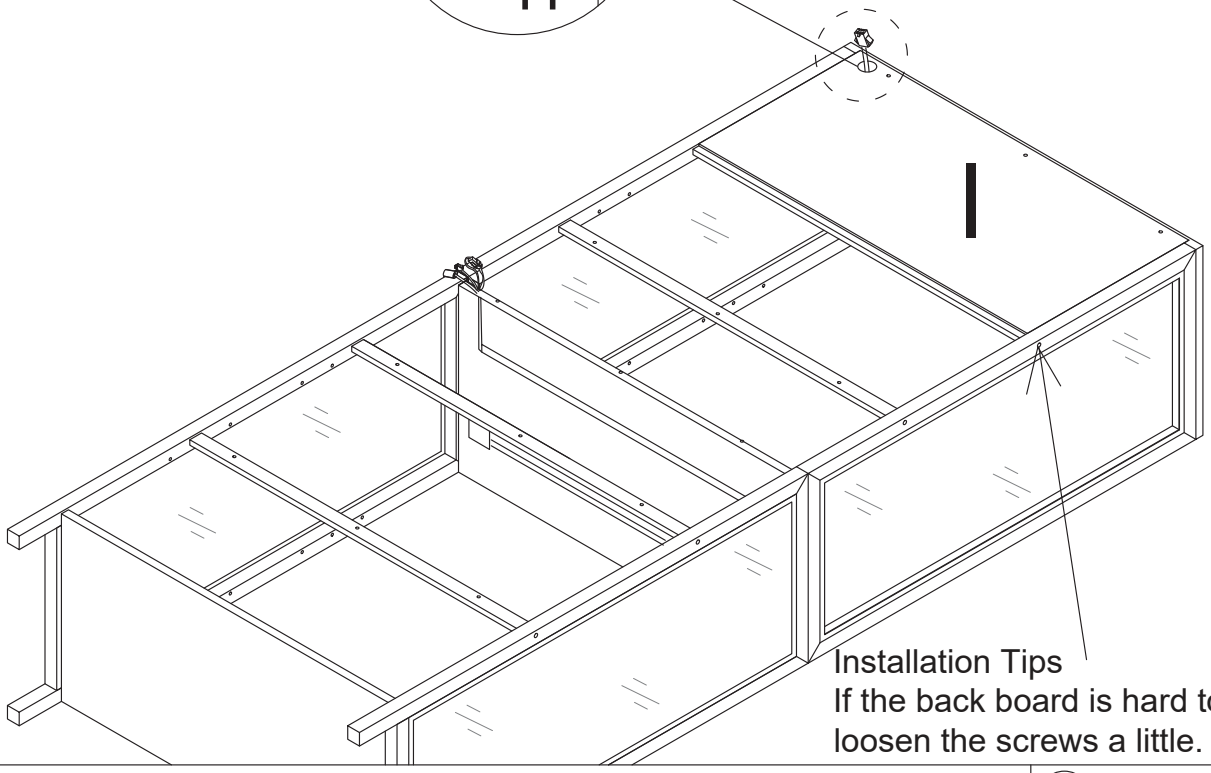


Installation Tips
If the back board is hard to insert, loosen the screws a little.

Reserve a gap for the pilot holes when installing the back panel.

5 x3


Step 11

There are pilot holes on the iron pipe. Align the holes for assembly.

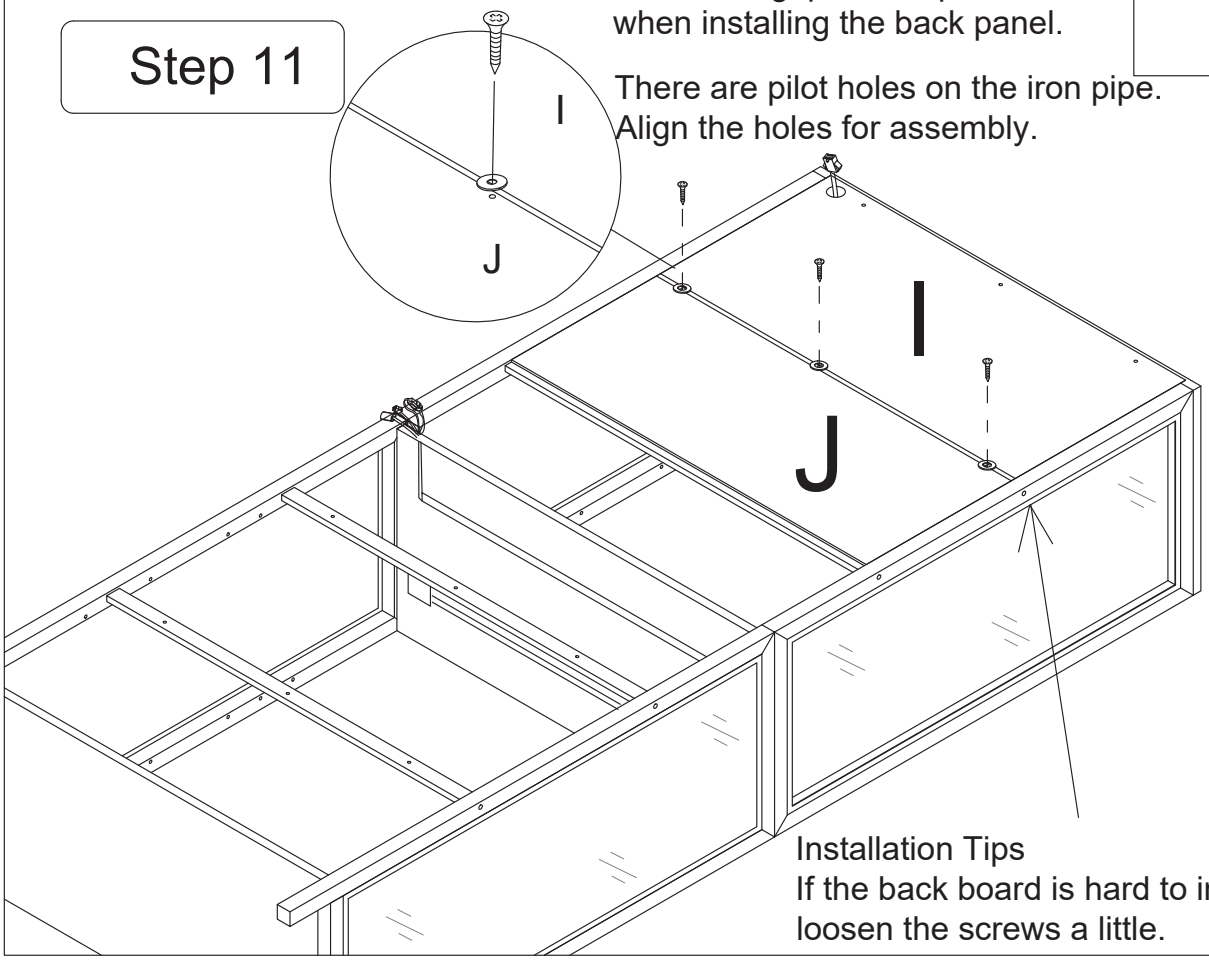


Installation Tips
If the back board is hard to insert, loosen the screws a little.

Step 12

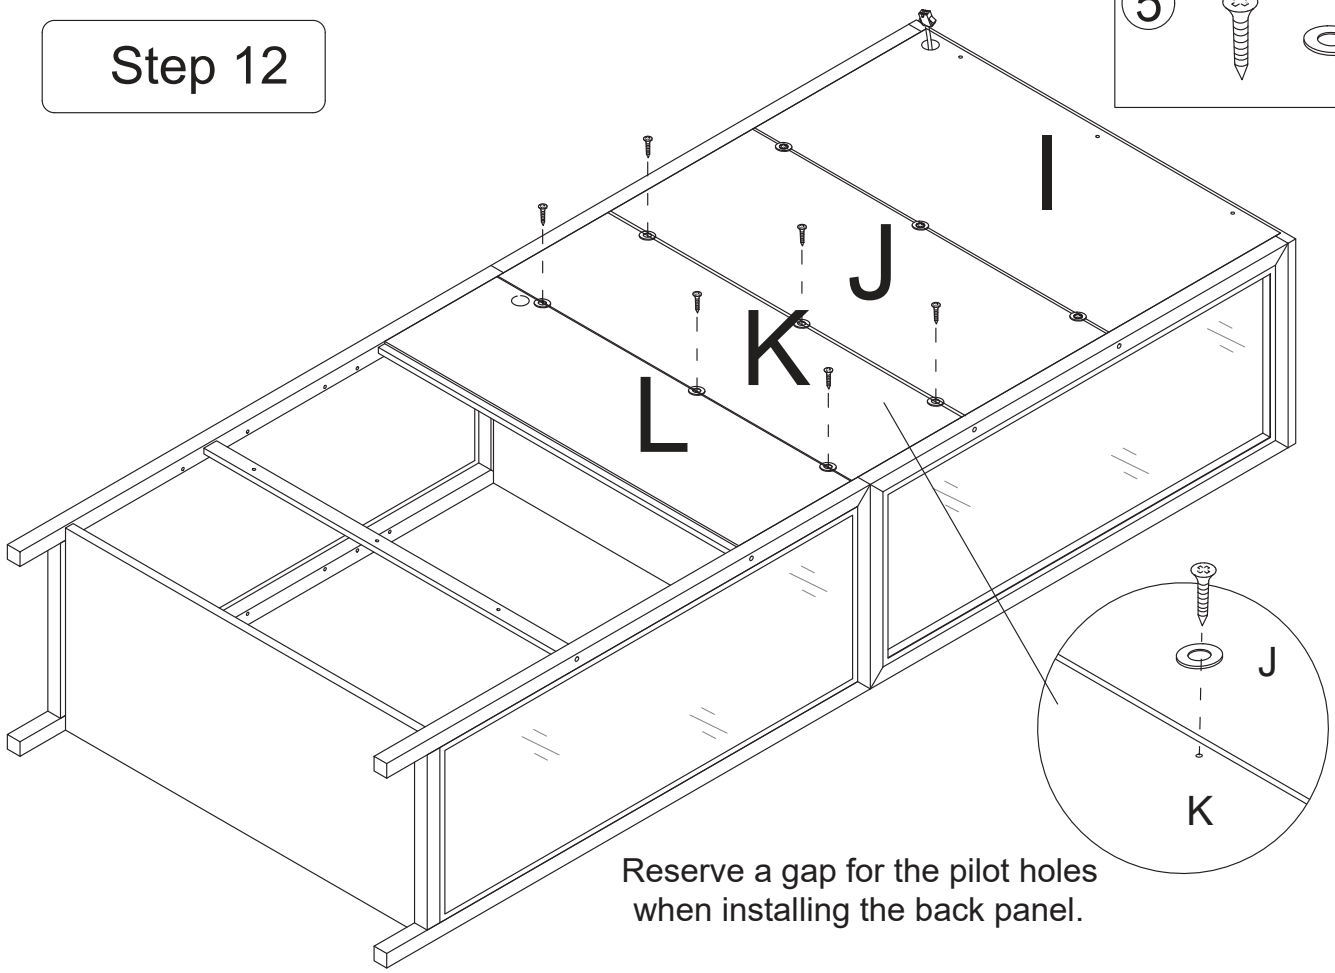


Reserve a gap for the pilot holes when installing the back panel.

Step 13

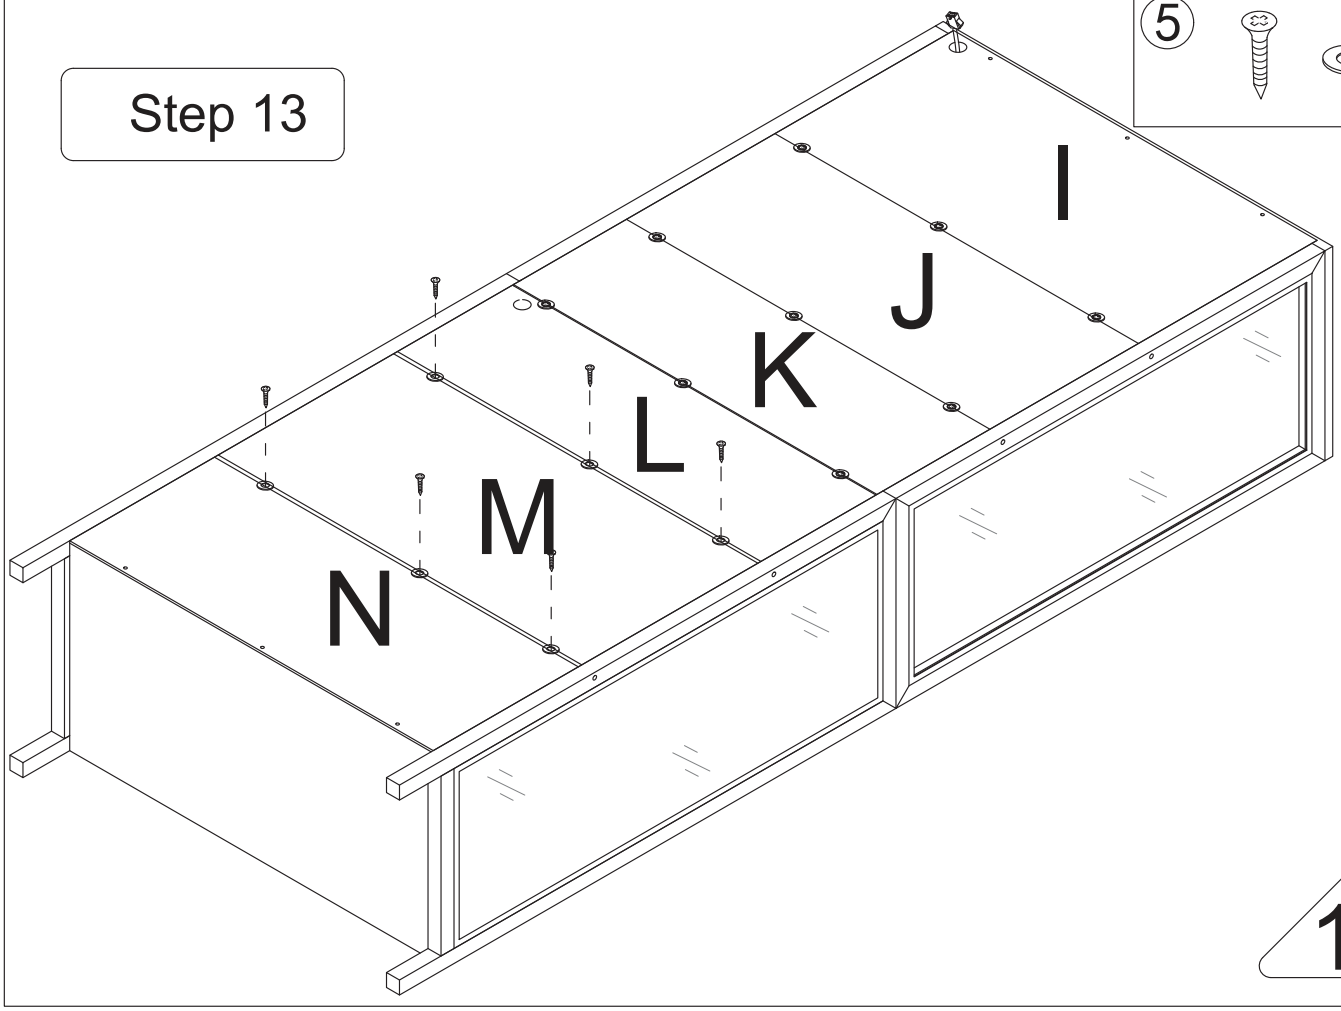


Step 14

5 x6

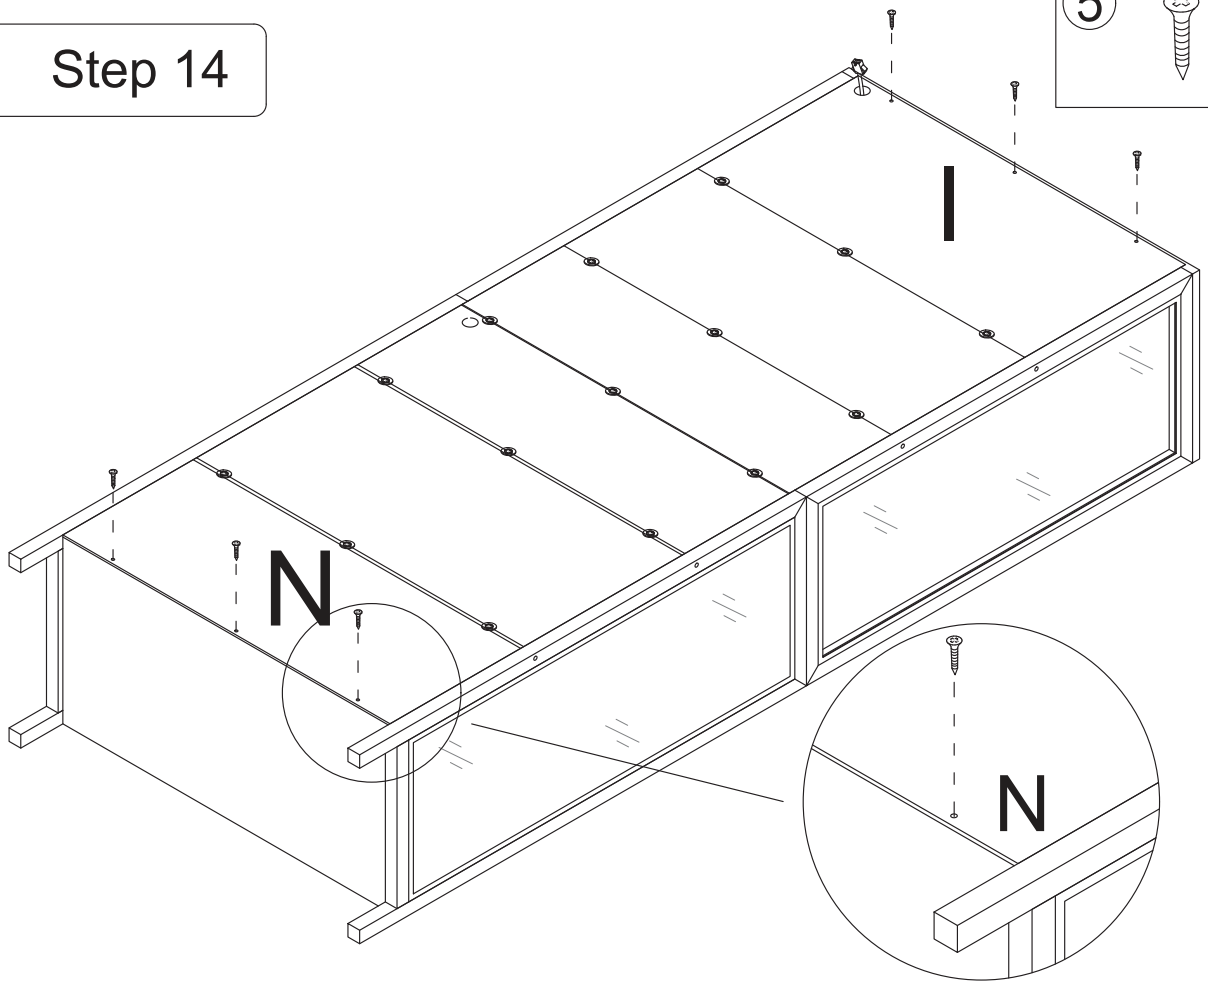

Step 15

7 x4

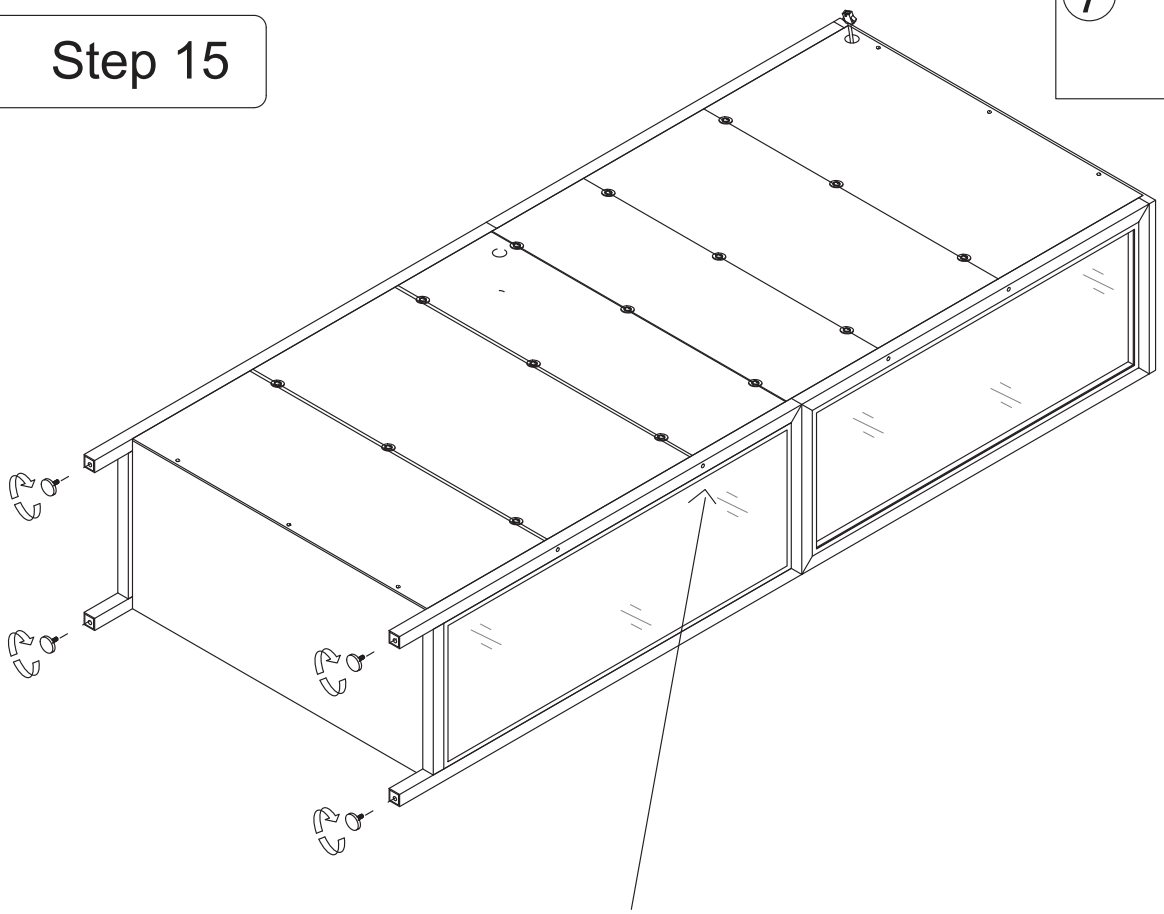


Fit the back panel in place, then tighten the side screws.


Step 16

6

x8

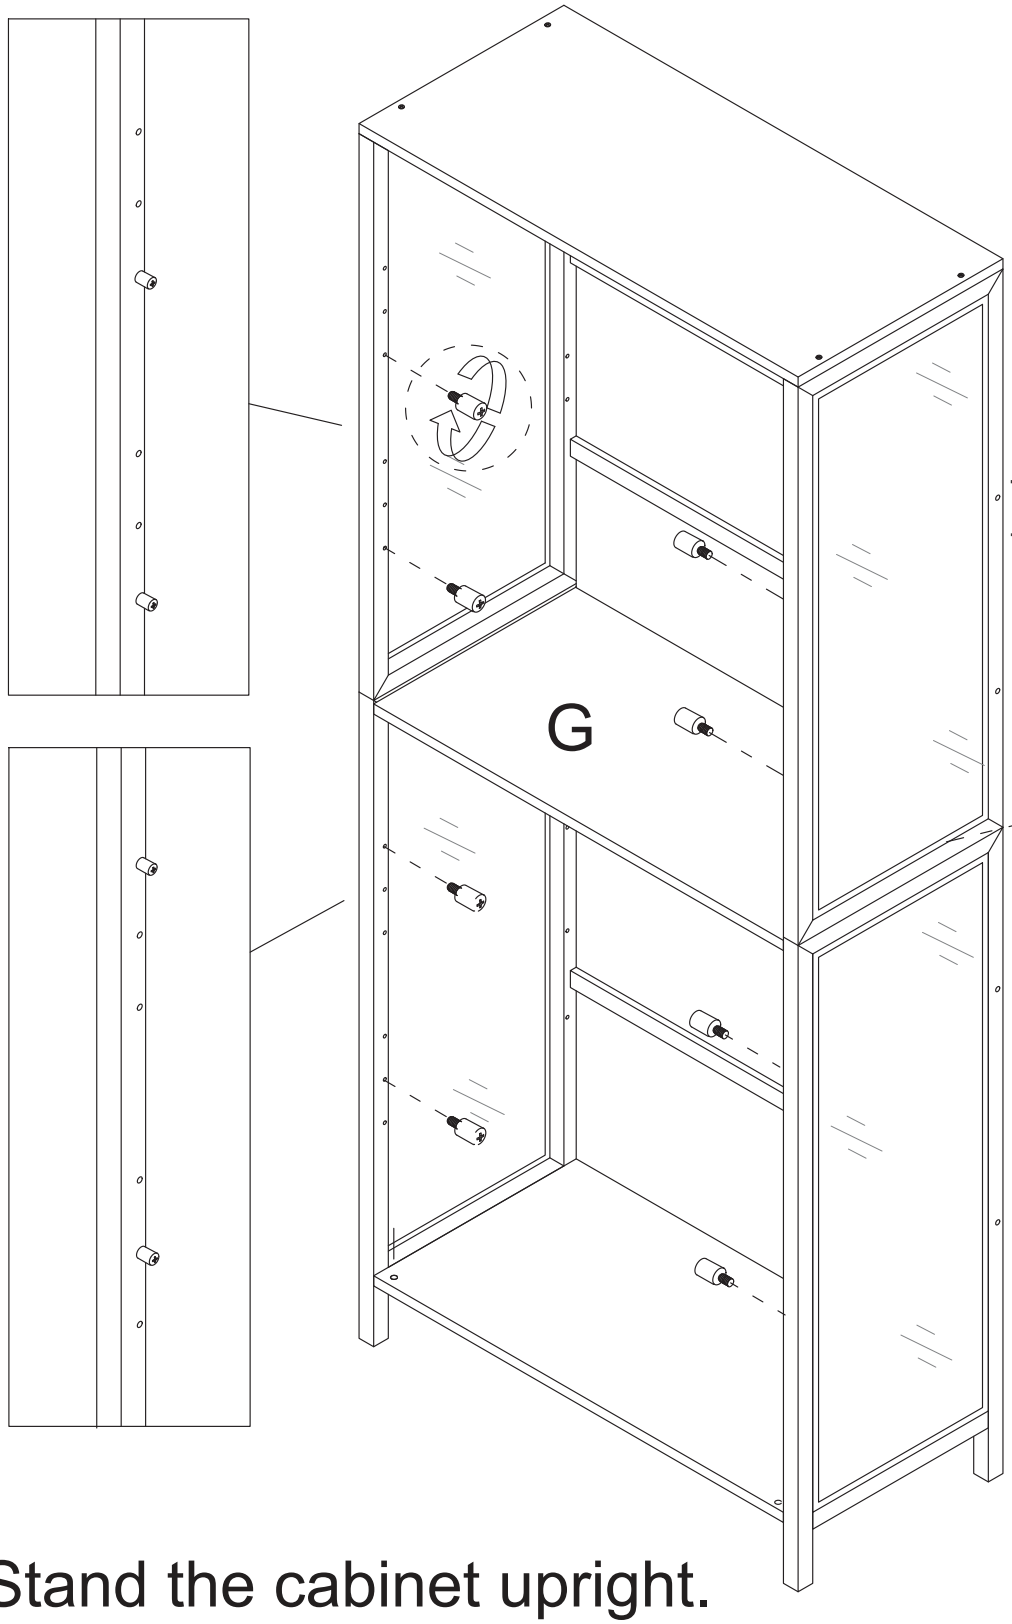



Thread the lamp wire through the wire outlet.



Stand the cabinet upright.


Step 17



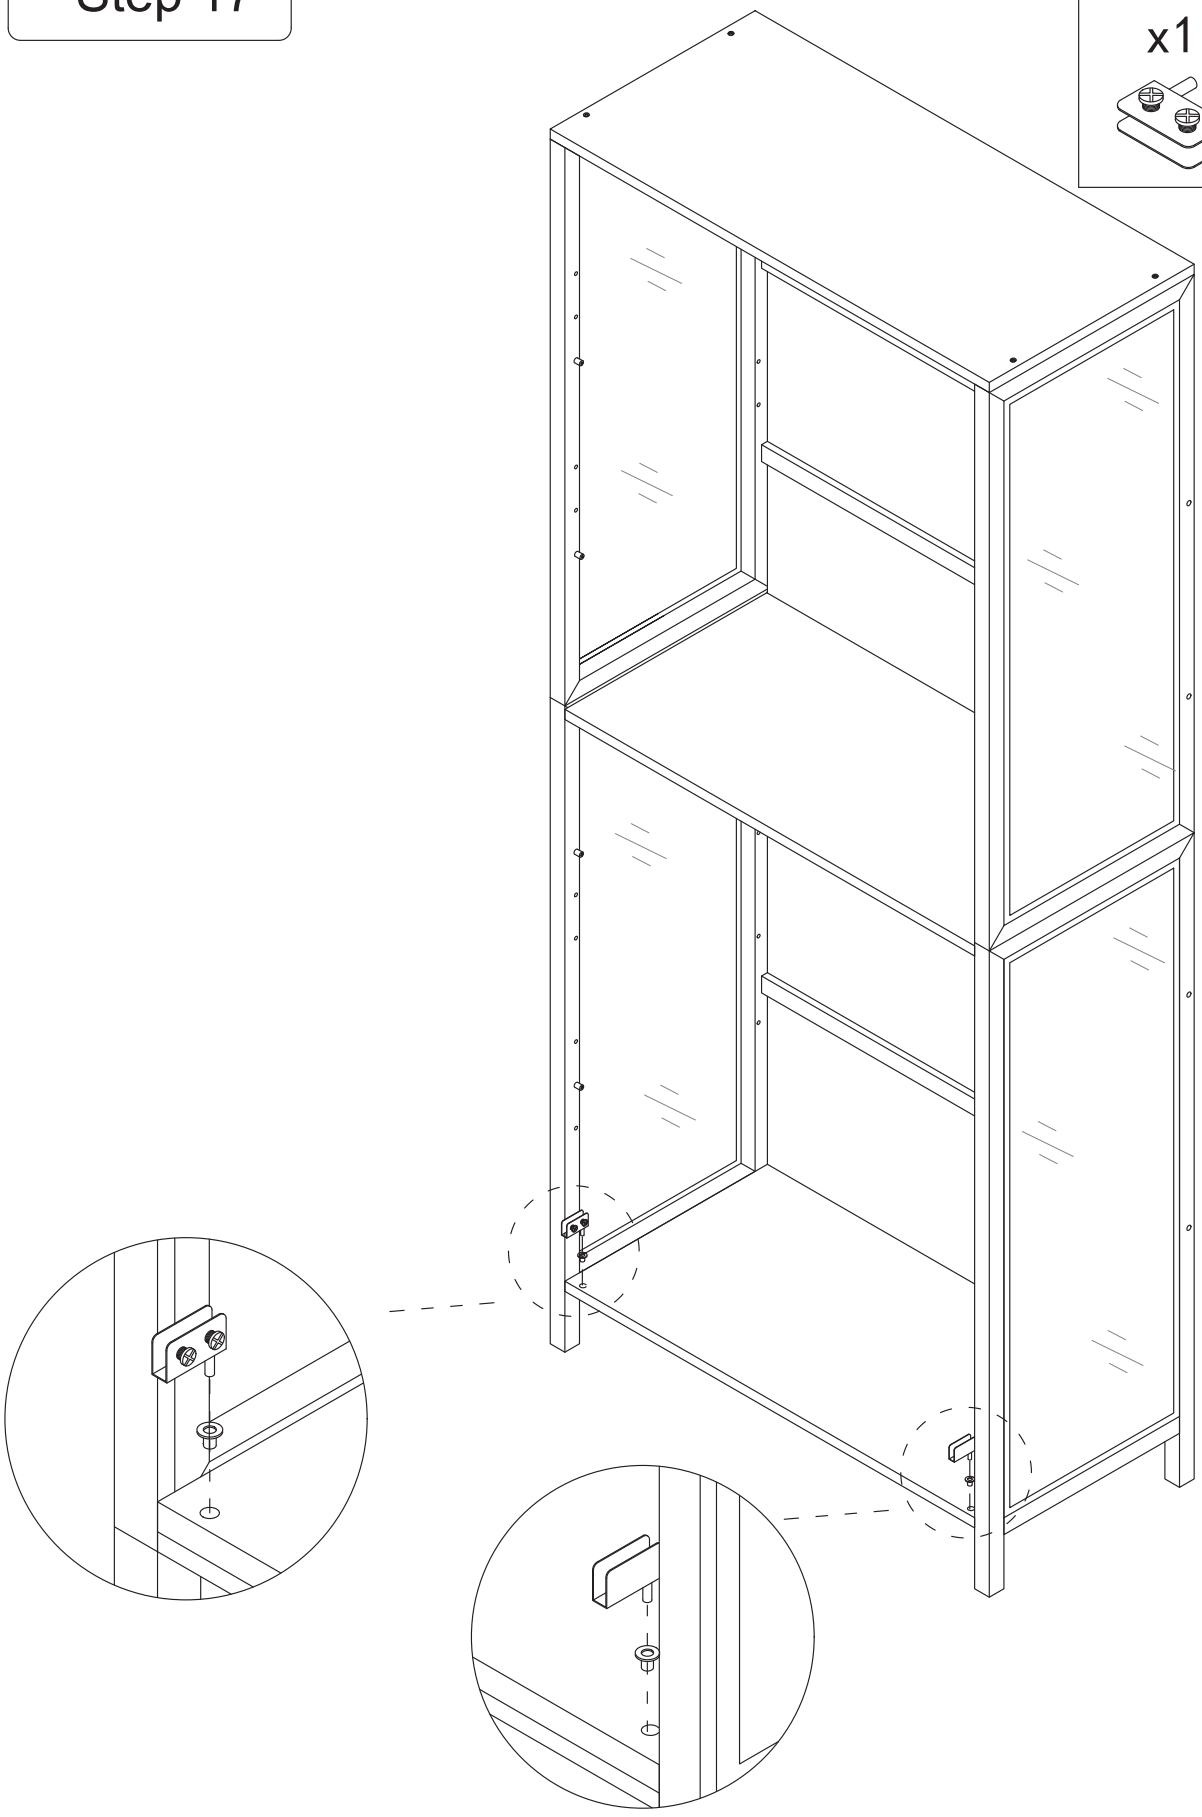



Step 18

First, completely unscrew the screws on the parts




Then take out the black rubber pad from the inside of the part, and the white sponge remains unchanged inside the part.

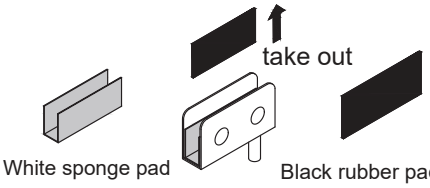



Left

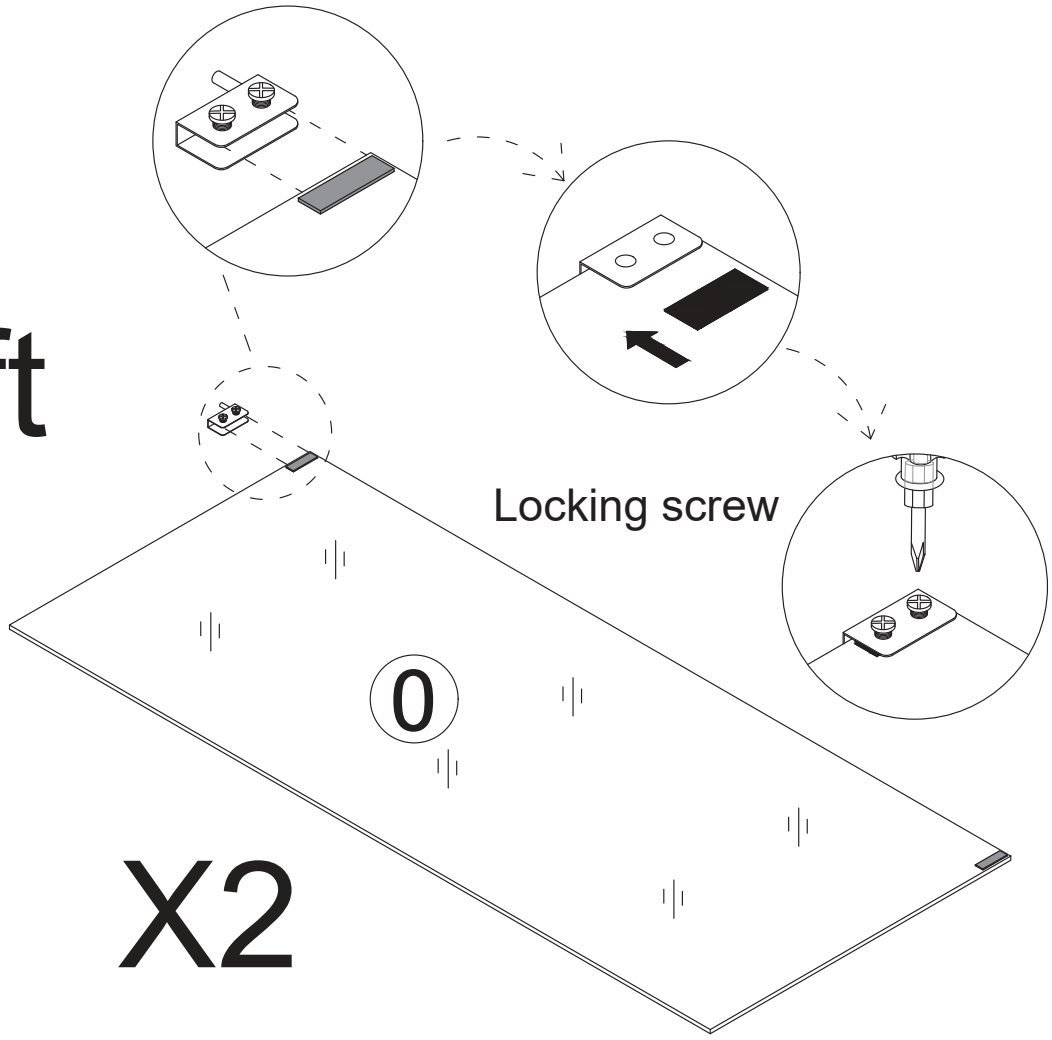



X2

Pay attention to the direction of the door hinge, rotate the screws to compress the black gasket, and do not place it in the opposite direction

Place the black gasket on the side where the screws are installed

Step 19



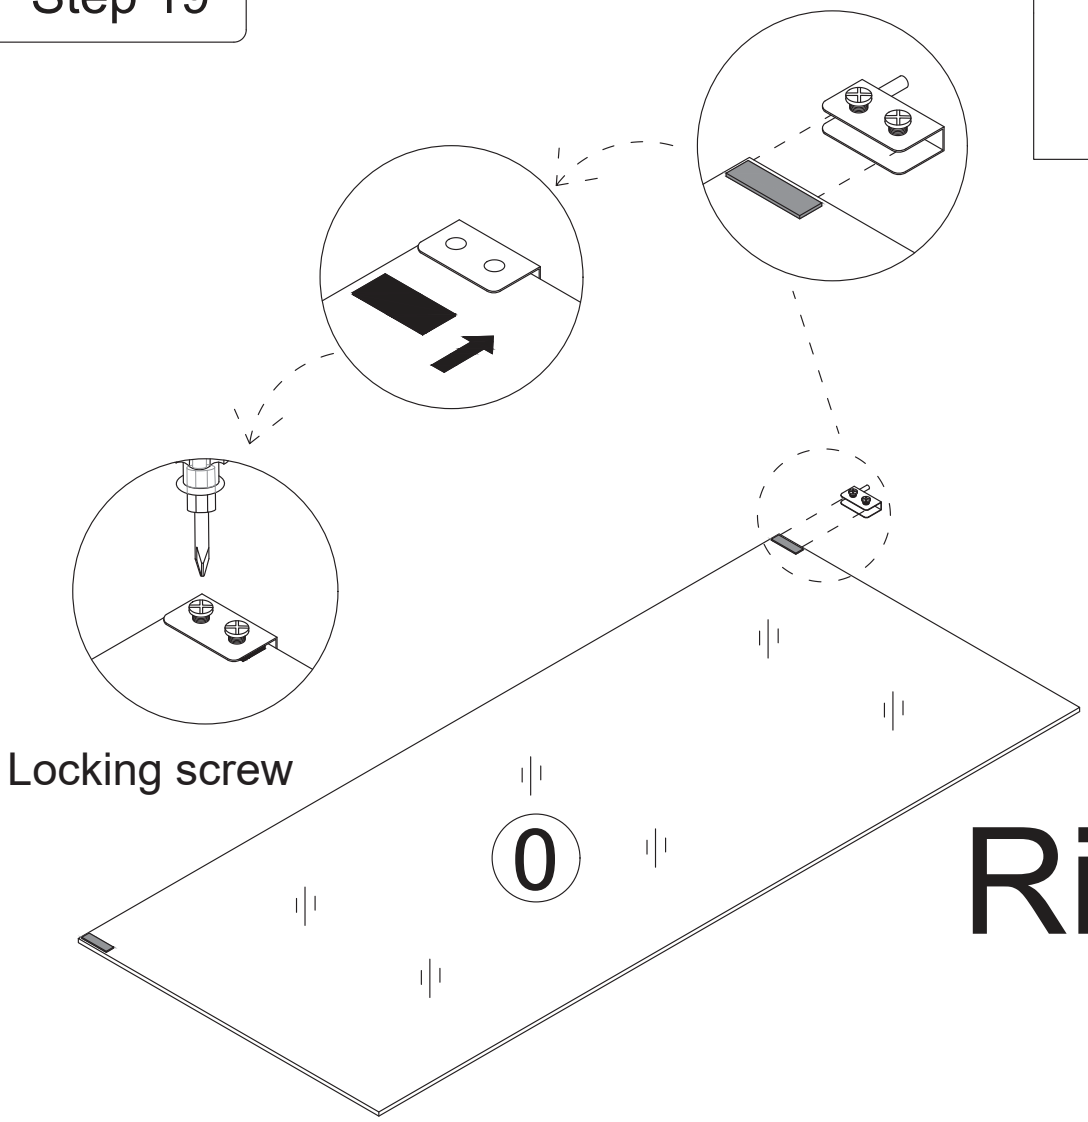

Right


X2

Pay attention to the direction of the door hinge, rotate the screws to compress the black gasket, and do not place it in the opposite direction

Place the black gasket on the side where the screws are installed


Step 20

Pay attention to the direction of the door hinge during installation




x2

When installing a glass door, it is recommended to have two people install it to avoid the glass door colliding or hitting oneself.




first




second

After installing the glass door, place the black gasket on the side where the screws are installed




third

Locking screw

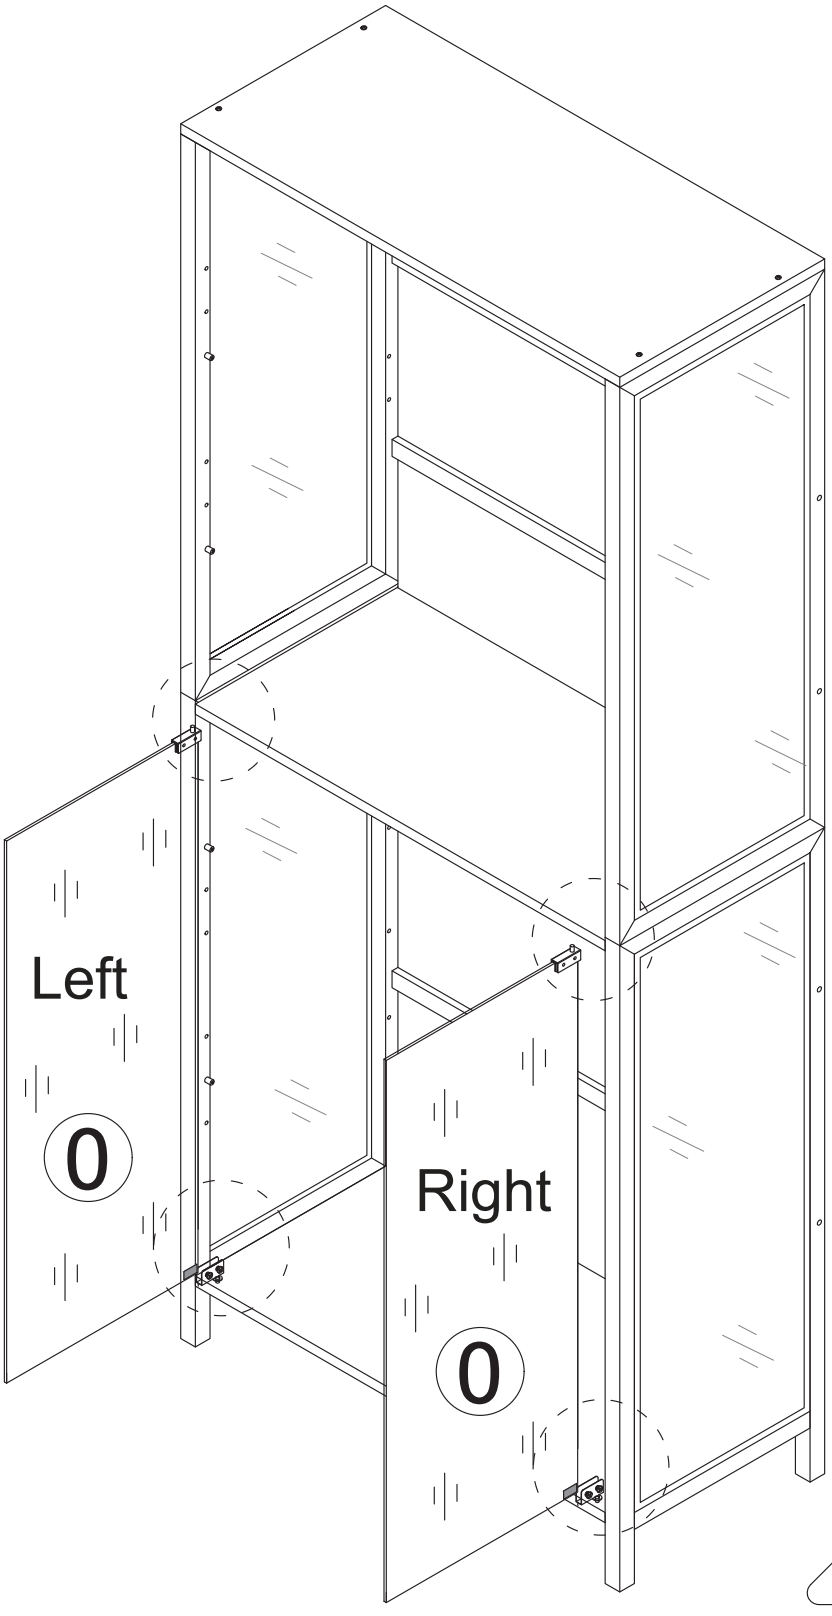



Step 21

3 x2

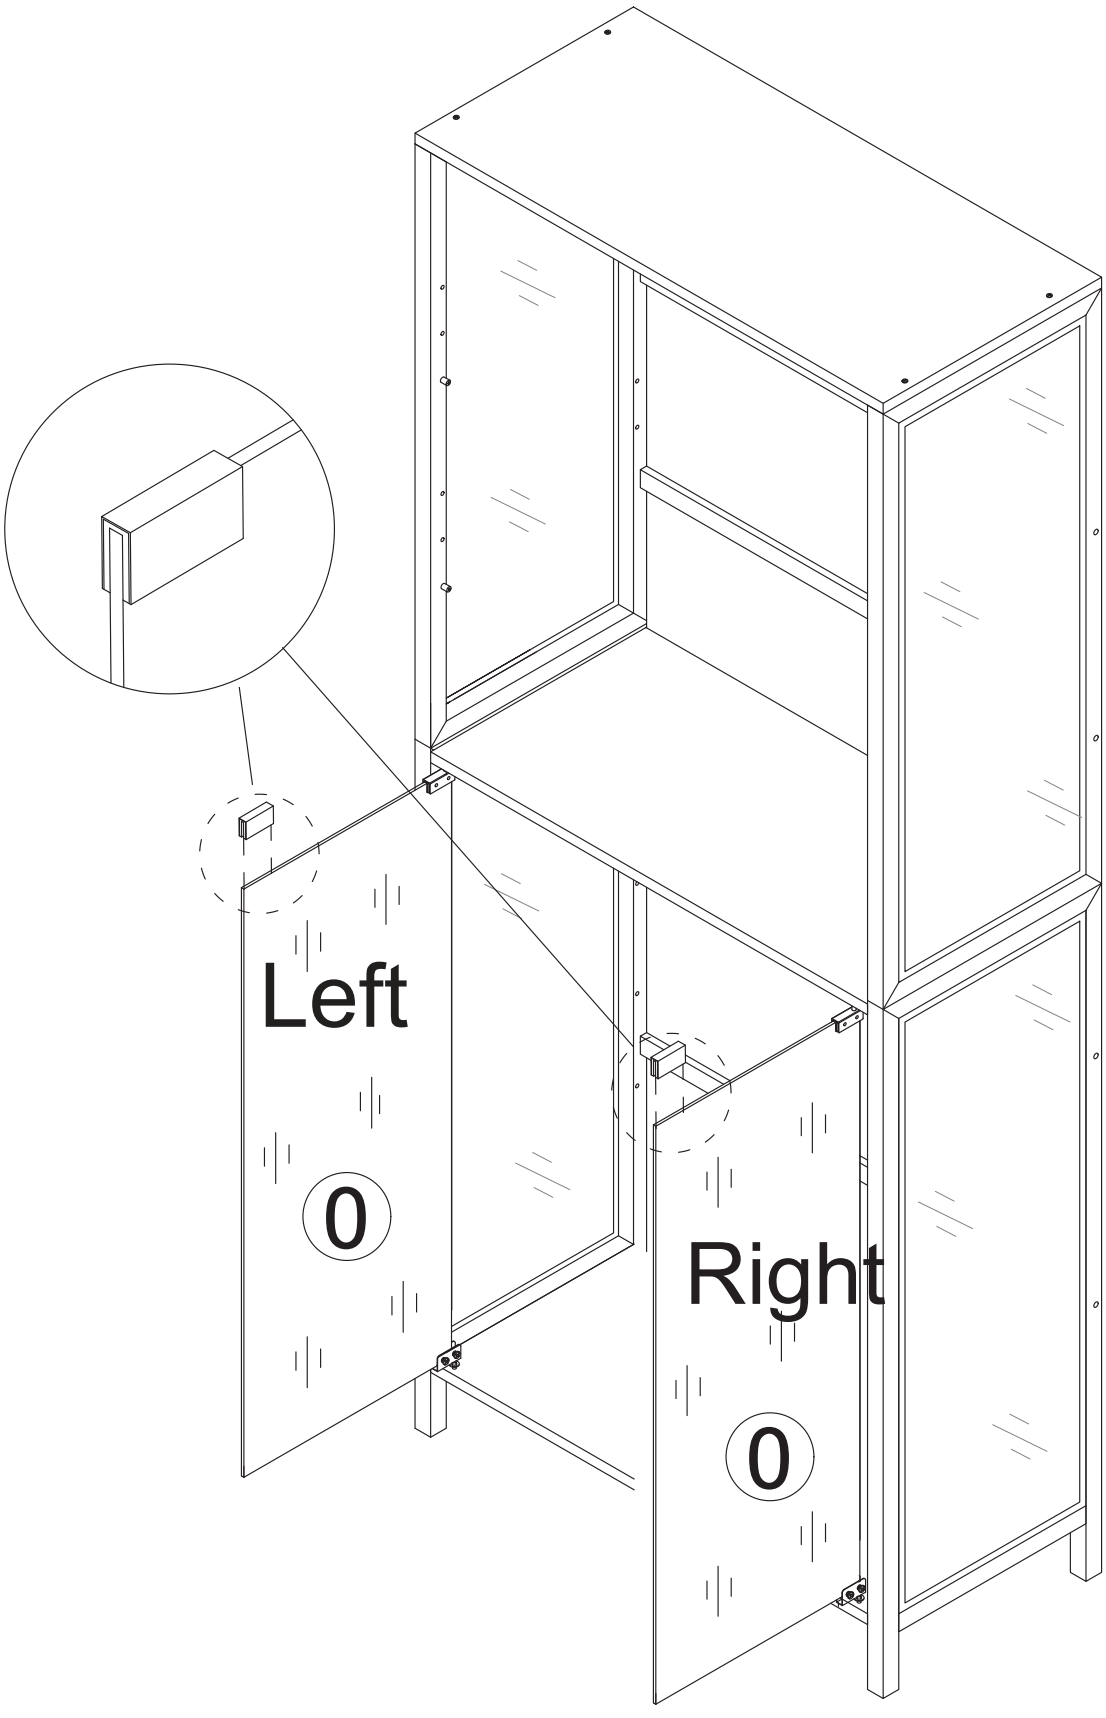


Step 22



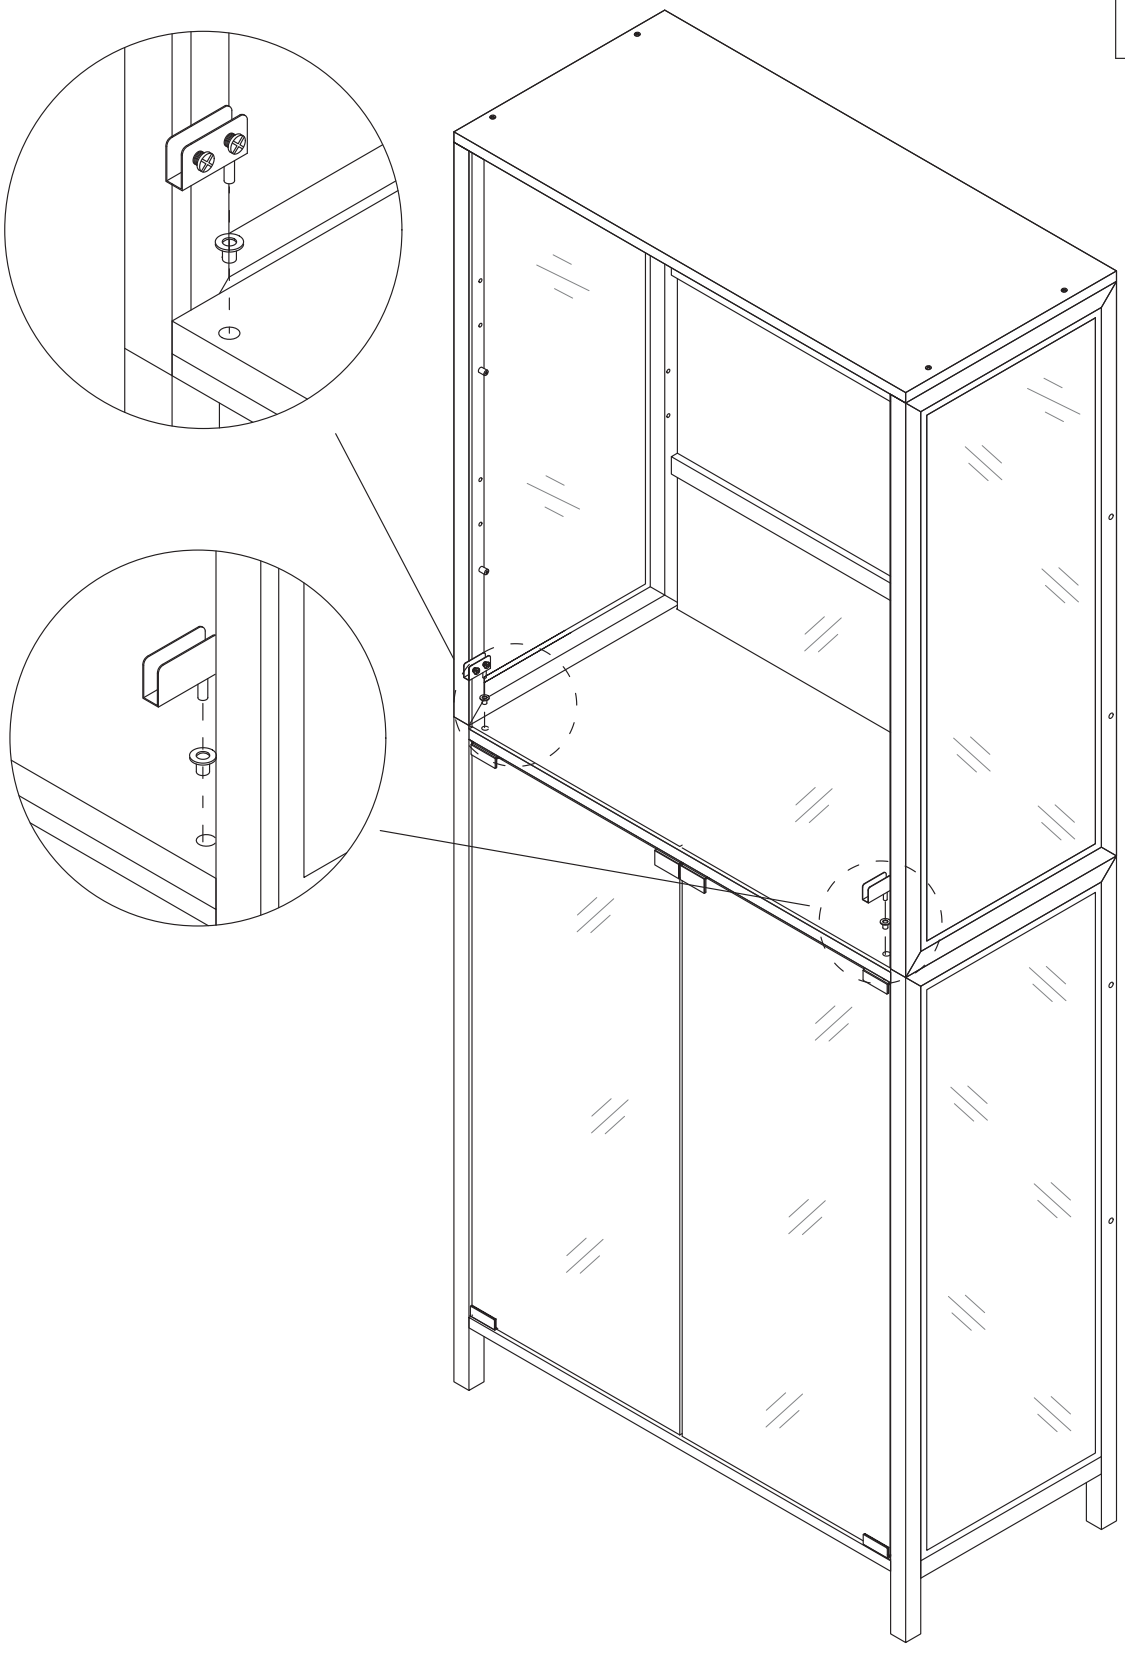


Step 23

Pay attention to the direction of the door hinge during installation




x2


When installing a glass door, it is recommended to have two people install it to avoid the glass door colliding or hitting oneself.




first



second

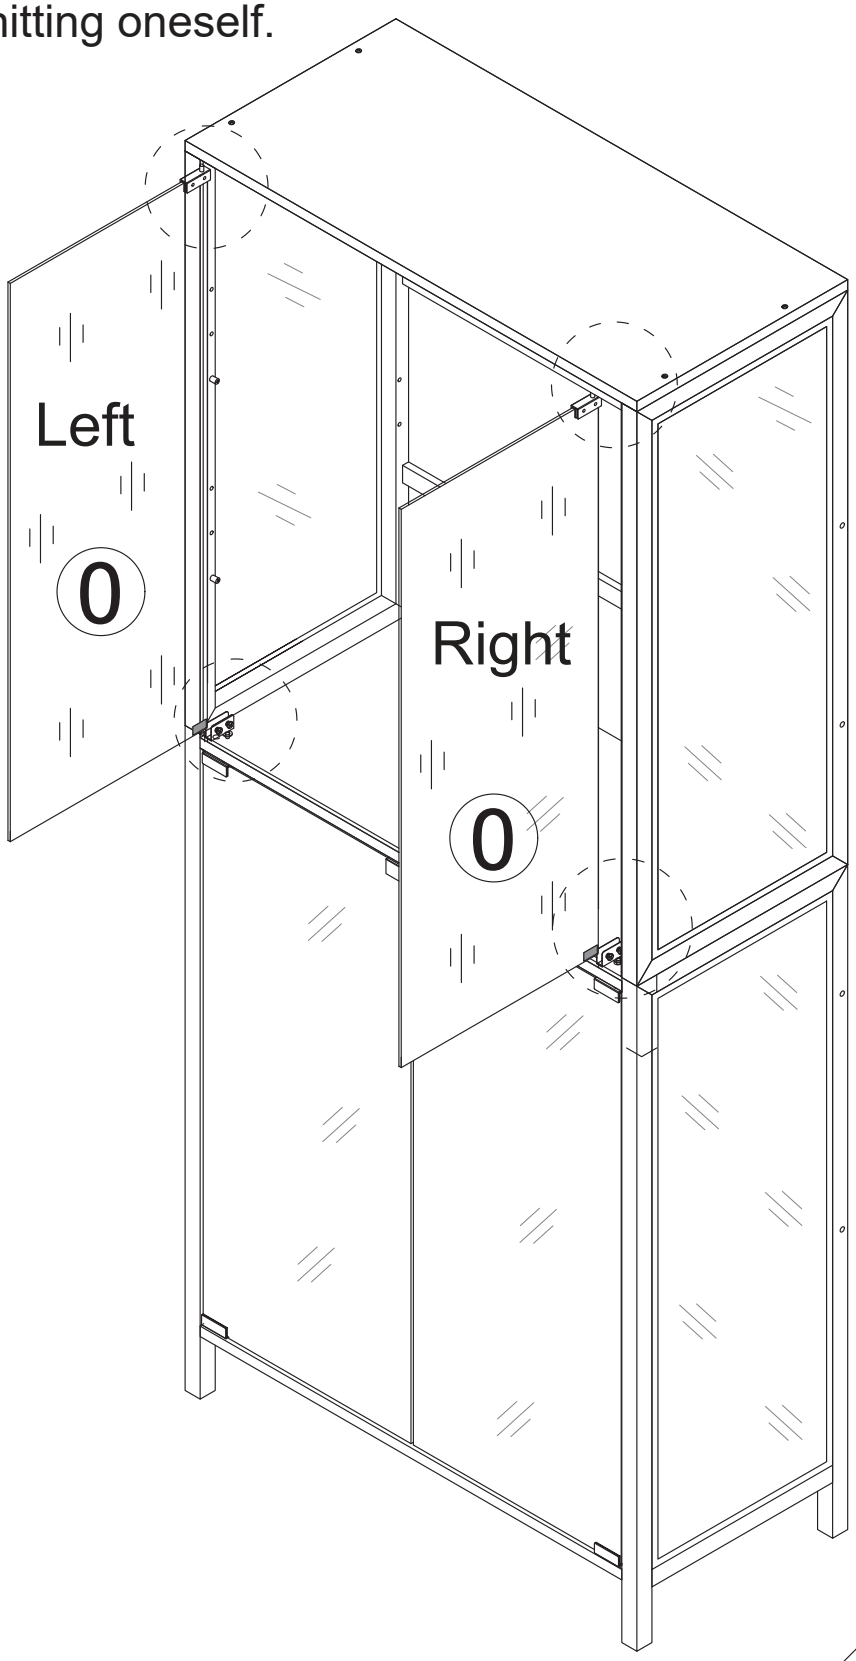

After installing the glass door, place the black gasket on the side where the screws are installed




third

Locking screw

Step 24


3

x2

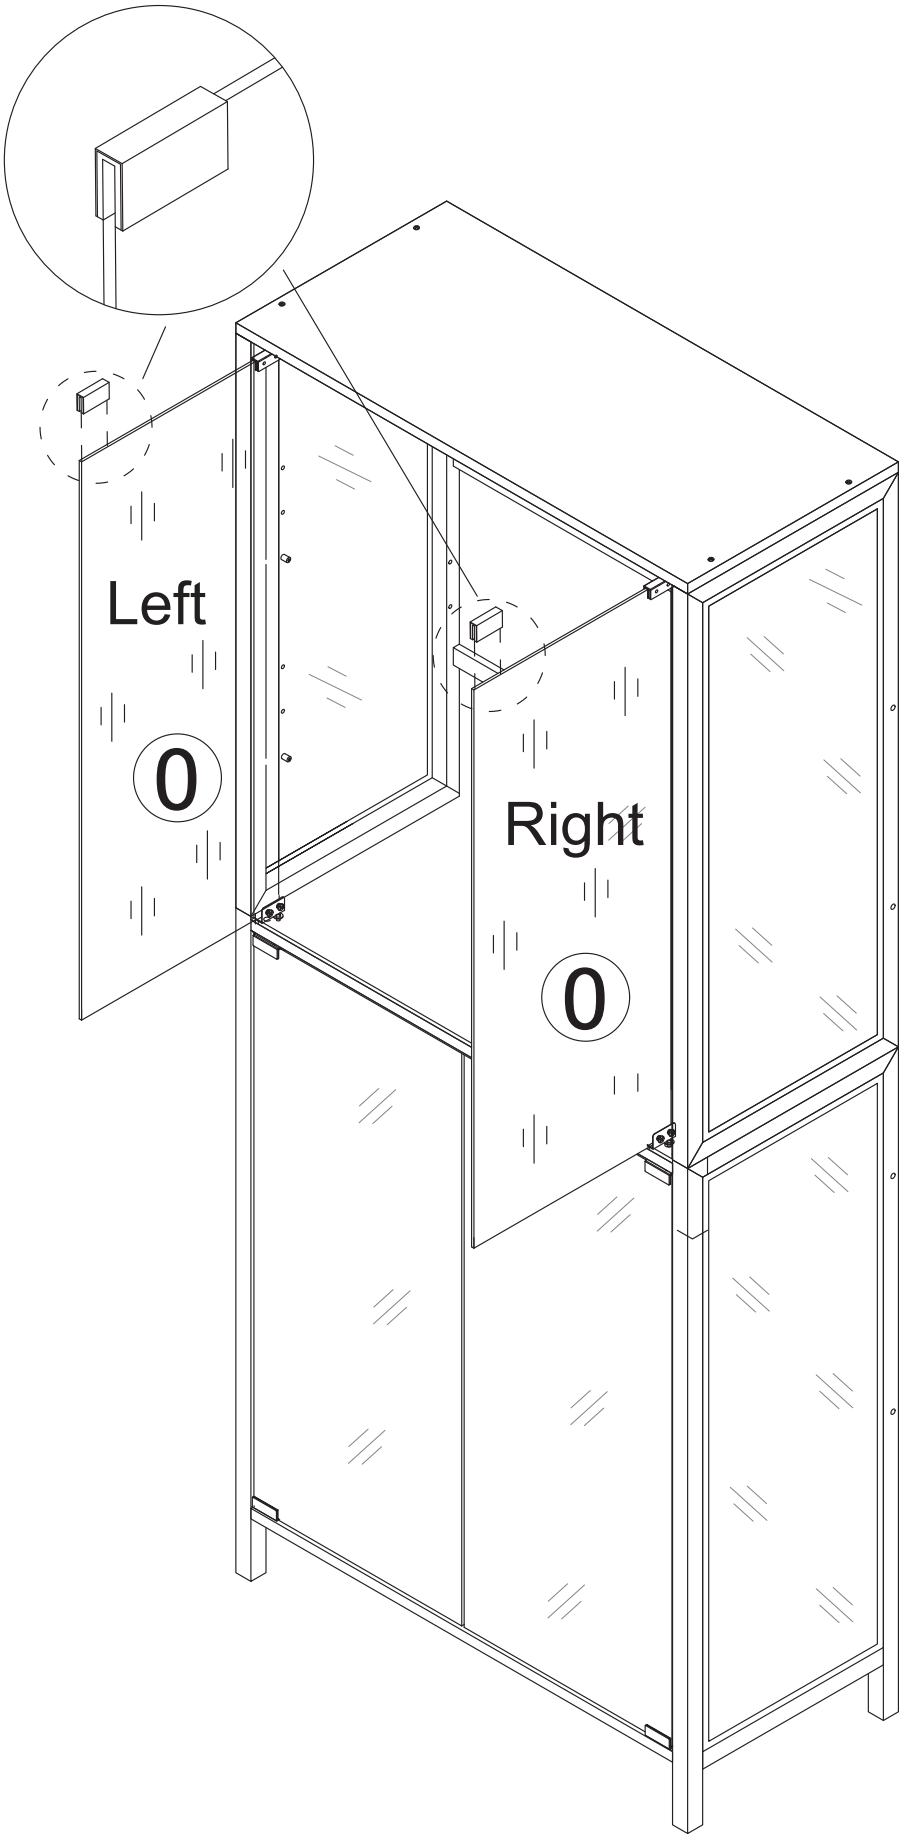

Step 25

9 x1

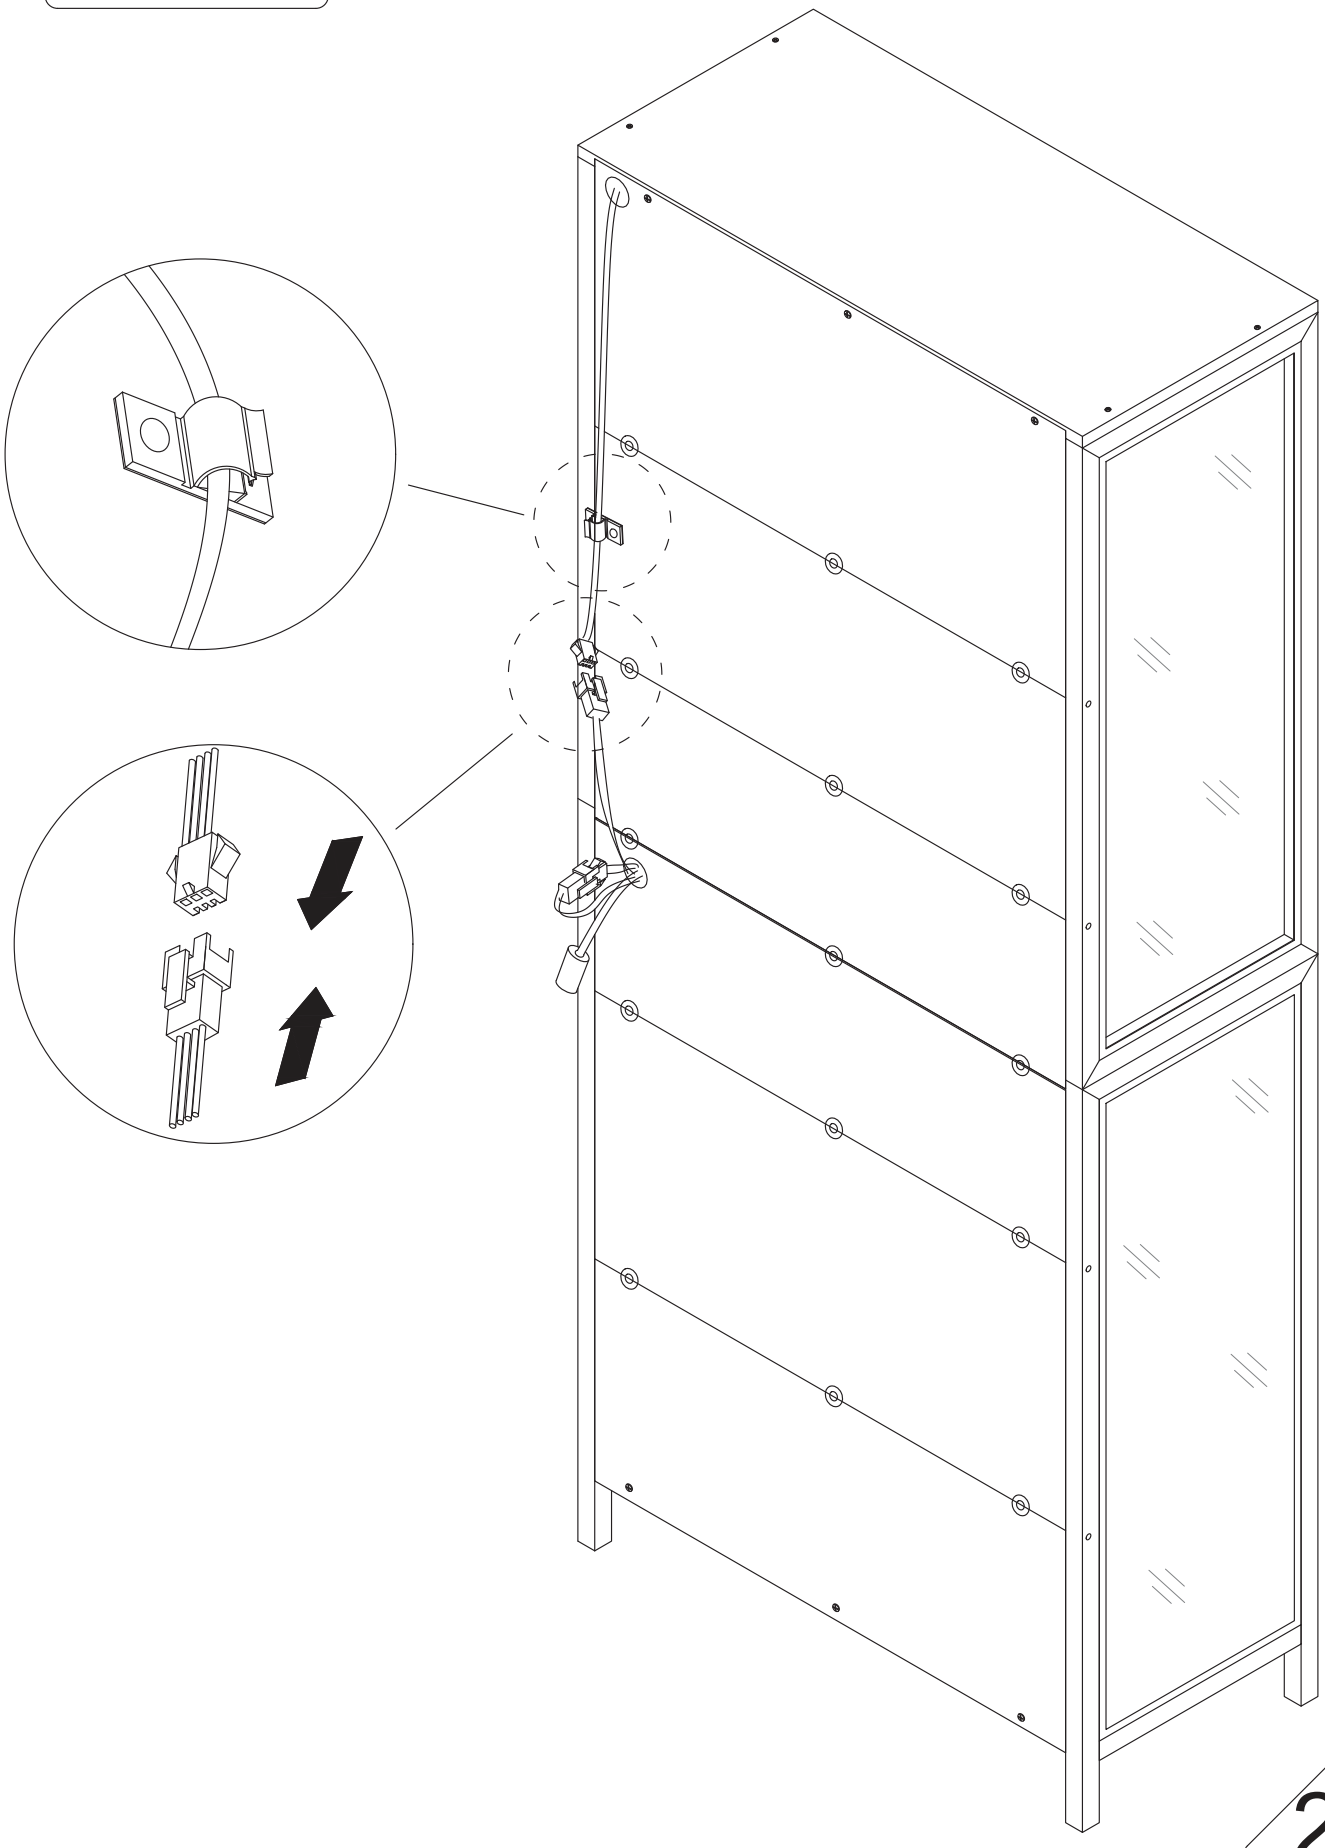

Step 26


Install as required


Install the anti fall hardware on the cabinet as shown in the picture first

8 x2 x2 x2

x1

3.5x14mm



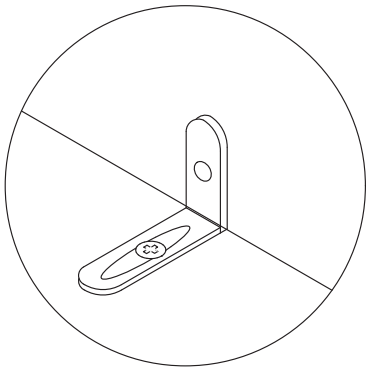


Balance can be adjusted by regulating the bottom adjustment feet.

Step 27

8 x2

x2 x2

Drill the hole with an electric drill
and punch in the colloidal particles

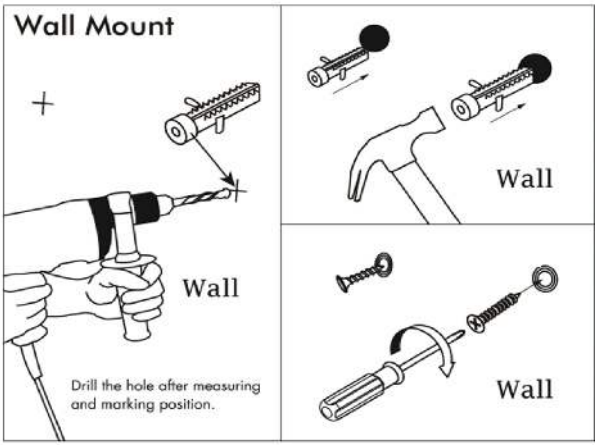


4x45mm

Fix the dressing
table to the wall

Balance can be adjusted by regulating the bottom adjustment feet.


Step 28

Insert the glass shelf at an angle.

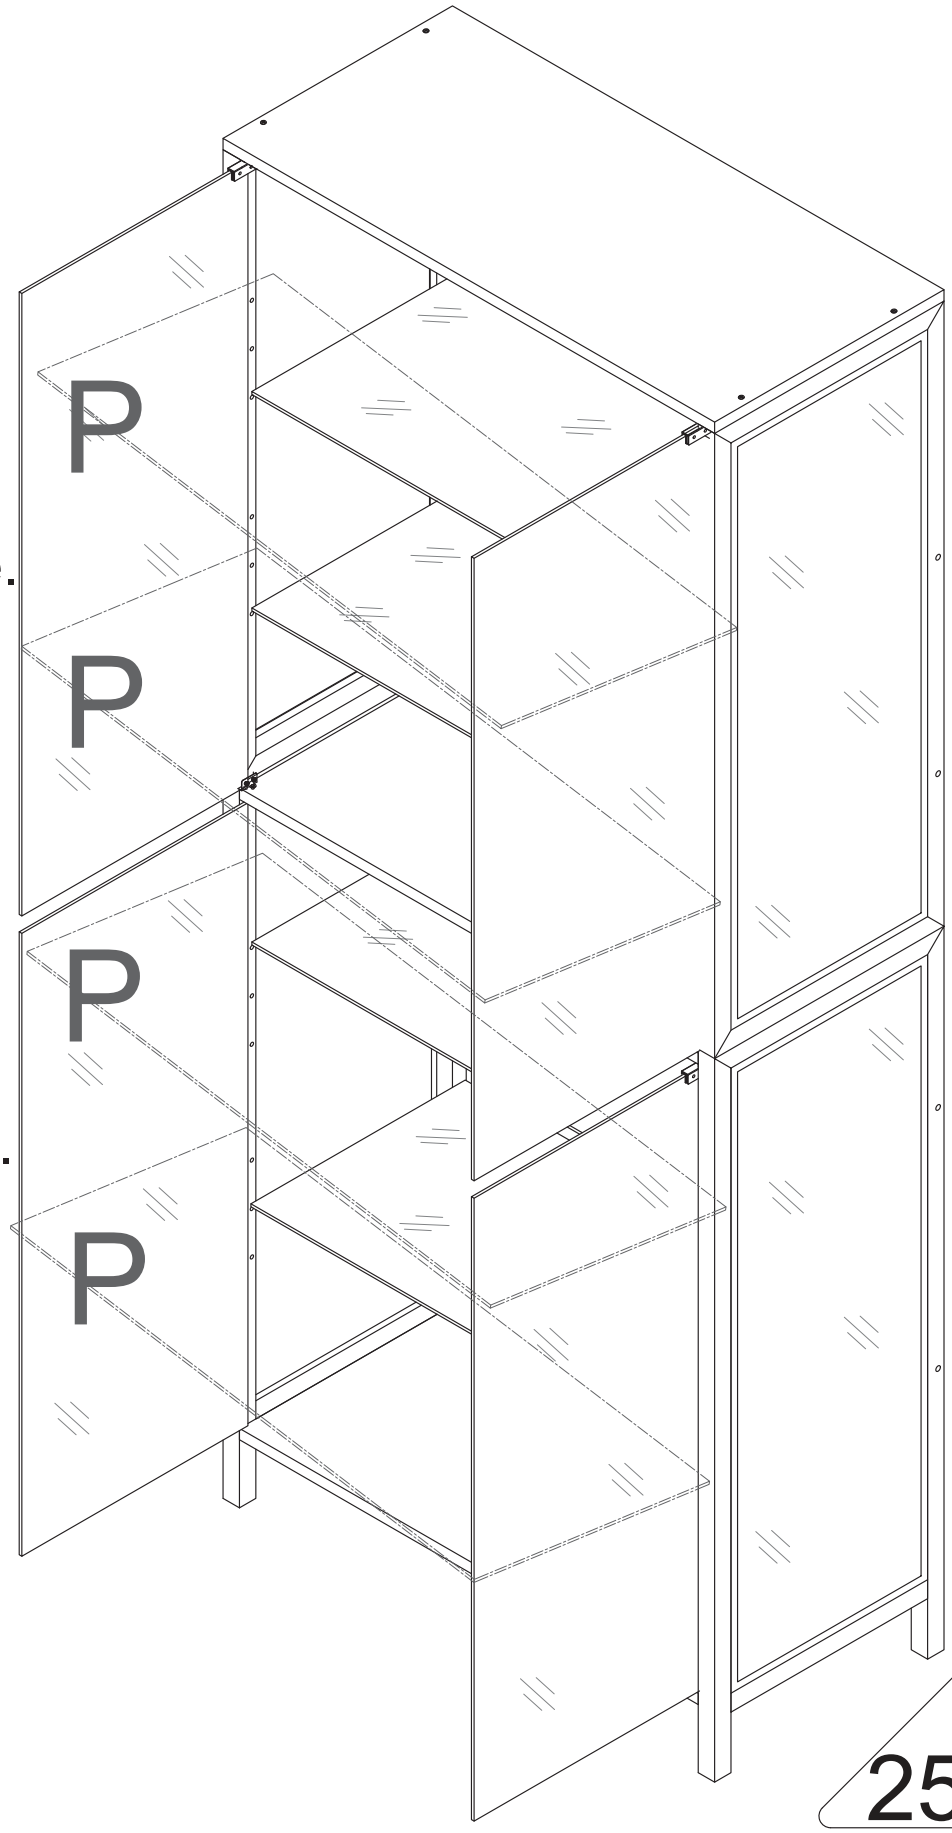


Insert the glass shelf at an angle.

Step 29





If you need to adjust the height of the glass shelf, install accessory 6 (shelf support) into the holes of the iron tube.

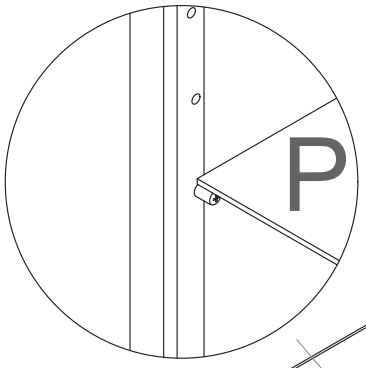

"The height of the shelf bracket mounting holes can be changed."

Place the glass on the iron pipe.



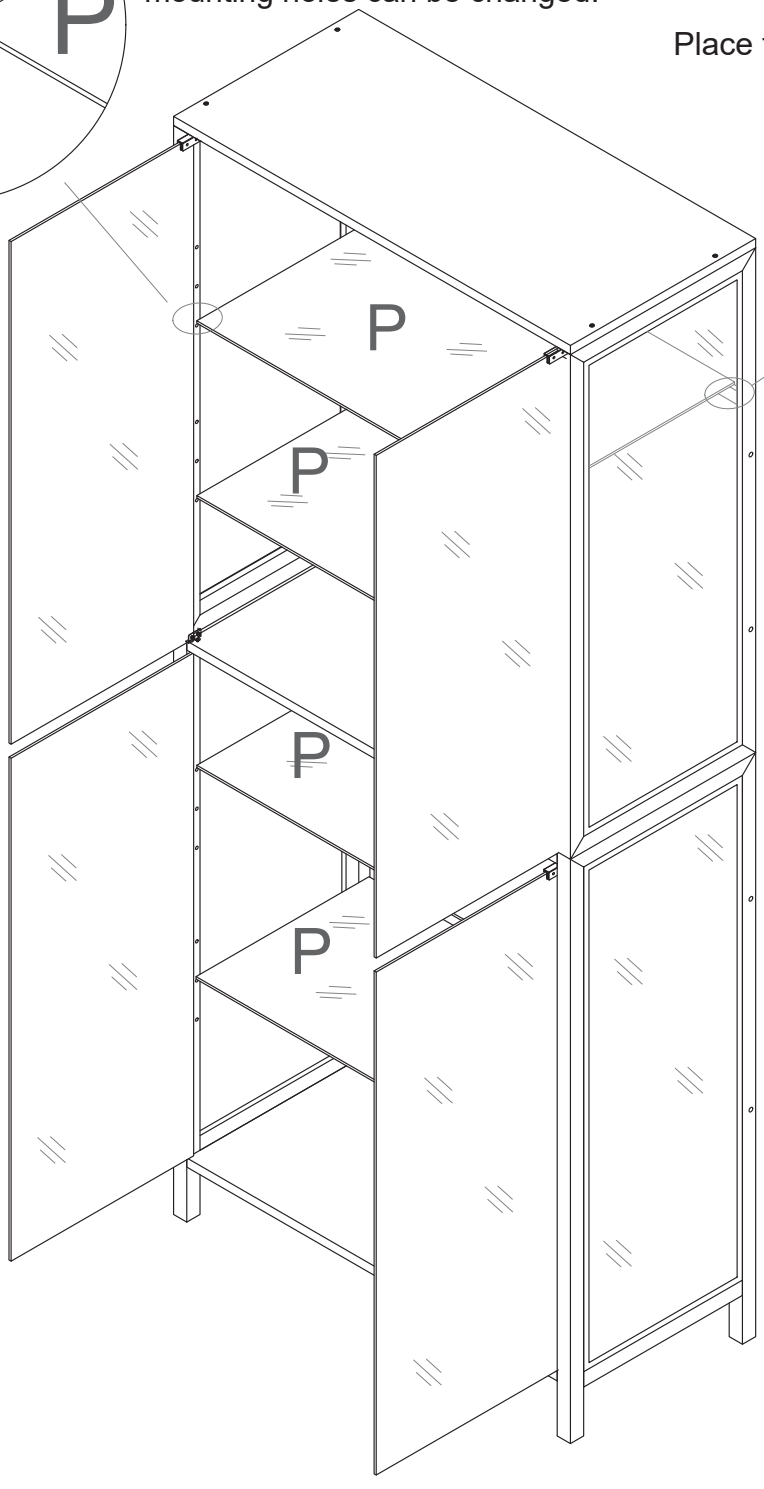


User's Guide

Thank you for purchasing this product. To use this product, please plug it into a 12V DC power supply. Please use if the product works normally after connecting to power.

Introduction

The box is an intelligent controller with 2 touch buttons. It can turn ON/OFF the light, change light colors, and adjust the light luminance.

Product Show

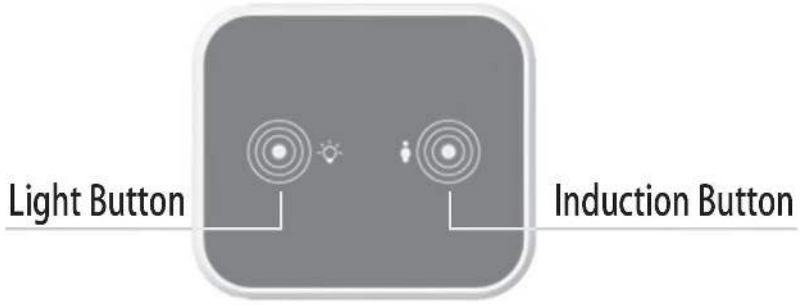

ATTENTION PLEASE

1. If there is no touch response suddenly, Re-plug the power to reset the touch static electricity.
2. If bubbles appear on the panel, remove the protective film.

Operation



This touch button is used to turn on/off, change colors, and adjust brightness.

A. Short touch -> lighting on -> short touch -> change light color -> short touch -> change light color -> short touch -> lighting off. B. Long touch -> adjust the luminance



This touch button is used to turn on/off the induction function.

A. Short touch to turn on the induction function. It can auto-turn on the light when people are close to the controller in 1 meters. It can auto power off the light when the body is far away from the controller after 30 seconds.

B. Long touch to turn off the induction function.

C. Note: When you touch the light button to change the light modes, the induction function will automatically turn off. It is best to turn on this function after selecting the light color and adjusting the brightness you want.