JAMIE YOUNG Co

Poised Table Lamp, Clear Glass
9POISEDTHCL
Assembly Instructions

IMPORTANT SAFETY INSTRUCTIONS:


- For safety purposes, this lamp is equipped with a polarized plug (one blade is wider than the other). If the plug does not fit securely into your outlet, do not force it – contact a professional electrician. Use the plug with an extension cord only if it can be fully inserted into the cord's socket. Never alter the plug in any way.
- These instructions are provided for your safety. It is important that they are read carefully and completely before assembling fixture.
- This fixture has been rated for up to (1) TYPE A standard bulb maximum **150-watt OR 42-watt compact fluorescent bulb OR 20W LED** To avoid the risk of fire, do not exceed the recommended wattage.
- For your safety, use only shades with an open top with a measurement of at least 4.5" in diameter.
- Save these instructions.

Warning:

- To reduce the risk of fire, electrical shock, or personal injury, always turn off and unplug lamp and allow it to cool prior to replacing light bulb.
- Do not touch bulb when fixture is turned on. Do not look directly at lit bulb.
- Keep flammable materials away from lit bulb.

Pre-assembly:

- Remove all parts and hardware from box along with any plastic protective packaging.
- Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.

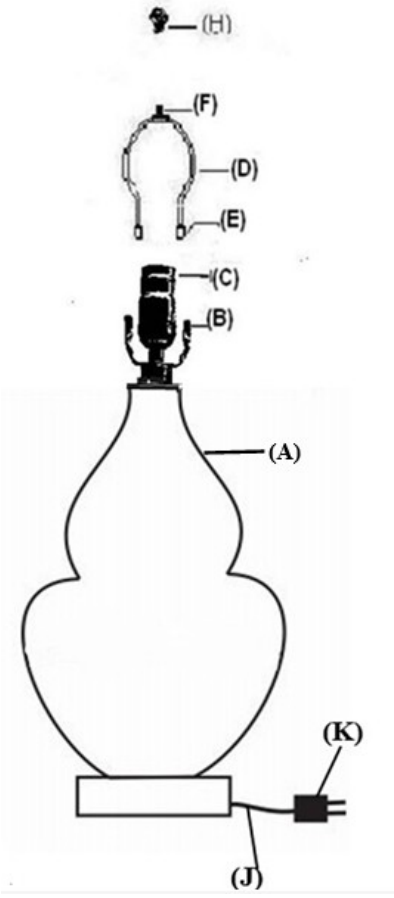

Parts Enclosed:

- (1) Lamp base (A) with pre-assembled:
  (1) Two-pronged saddle (B)
  (1) Threaded socket (C)
- (1) Harp (D)
- (2) Harp caps (E)
- (1) Harp nipple (F)
- (1) Finial (H)
- (1) Cord with plug (J)
- (1) Protective plug cover (K)

To Assemble:

1. Insert harp (D) with attached harp nipple (F) into two-pronged saddle (B).
2. Lower harp caps (E) so that they cover the two-pronged saddle (B).
3. Remove finial (H) from harp (D).
4. Place lampshade over the assembled harp and align the harp nipple (F) with the opening at the top of the shade so that the nipple protrudes through the opening.
5. Attach finial (H) and turn clockwise to secure.
6. Insert bulb (not included) into threaded socket (C).
7. Remove protective plug cover (K) from plug (J).
8. Plug into proper electrical outlet and test fixture.
9. Assembly is complete.

Care Instructions:

- Wipe with soft dry cloth only
- Always avoid the use of harsh chemicals or abrasives as they may damage the finish

www.jamieyoung.com

Thank you for your purchase