

AETHER - Adjustable

R3ARAT, R3ASAT

WAC LIGHTING

Responsible Lighting®



Fixture Type:

Catalog Number:

Project: _____

Location: _____

PRODUCT DESCRIPTION

Designed to fit in tight plenum space

FEATURES

- 0° - 30° adjustable range
- Designed to fit in tight plenum
- Damp location listed for trims
- 3.5" trim aperture, 3.5" housing height
- Universal input voltage (120V-277V)
- 5 year WAC Lighting product warranty

SPECIFICATIONS

Construction: Die-cast aluminum trim with extruded aluminum heat sink

Dimming: 100% - 0% with 0-10V dimmer (120V - 277V)

100% - 5% with Electronic Low Voltage (ELV) dimmer (120V only)

Input: 120V-277V AC

Power: 16.5W, power factor 0.98

Mounting: Retention clips firmly hold trim to housing.

Finish: Powder coated

Standards: ETL & cETL Listed, damp location listed trims

IC-rated airtight housing with available Chicago plenum version

Ceiling thickness: ½" - 1½"

TRIM (SEE NEXT PAGE FOR HOUSING)

	Beam	Color Temp	CRI	Lumen	CBCP	Finish	Interior/Trim							
R3ARAT Round 	S 15°	827 2700K 85 910 5680	927 2700K 90 740 4640	830 3000K 85 925 5795	930 3000K 90 760 4755	HZWT WT BKWT	Haze/White White Black/White							
		835 3500K 85 1045 6560	840 4000K 85 1035 6470											
		N 25°	827 2700K 85 890 3020	927 2700K 90 725 2465	830 3000K 85 905 3075			930 3000K 90 740 2525	HZWT WT BKWT	Haze/White White Black/White				
			835 3500K 85 1025 3485	840 4000K 85 1010 3440										
			F 50°	827 2700K 85 875 3020	927 2700K 90 715 2465			830 3000K 85 895 3075			930 3000K 90 735 2525	HZWT WT BKWT	Haze/White White Black/White	
				835 3500K 85 1010 3485	840 4000K 85 1000 3440									
	R3ASAT Square 			S 15°	827 2700K 85 910 5680	927 2700K 90 740 4640	830 3000K 85 925 5795	930 3000K 90 760 4755			HZWT WT BKWT			Haze/White White Black/White
					835 3500K 85 1045 6560	840 4000K 85 1035 6470								
		N 25°			827 2700K 85 890 3020	927 2700K 90 725 2465	830 3000K 85 905 3075	930 3000K 90 740 2525	HZWT WT BKWT	Haze/White White Black/White				
					835 3500K 85 1025 3485	840 4000K 85 1010 3440								
			F 50°		827 2700K 85 875 3020	927 2700K 90 715 2465	830 3000K 85 895 3075	930 3000K 90 735 2525				HZWT WT BKWT	Haze/White White Black/White	
					835 3500K 85 1010 3485	840 4000K 85 1000 3440								

R3A_AT- -

Example: R3ARAT-N930-HZ

wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760

AETHER - Housing

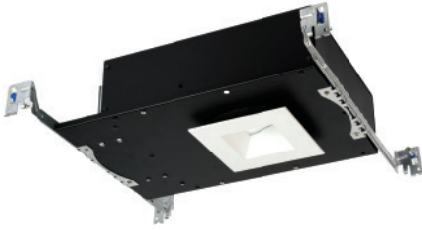

HR-3LED-H17A

WAC LIGHTING

Responsible Lighting®

HOUSING

Model

 <p>Shown with open square white trim</p>		HR-3LED-H17A	<i>New Construction IC-rated, Airtight</i>
		HR-3LED-H17AC	<i>New Construction IC-rated, Airtight Chicago Plenum</i>

HR-3LED-H17 _____

Example: **HR-3LED-H17A**

waclighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760