

# LED PLATTER SERIES

**New Construction and Remodel • Wet Location • Dimmable •**



## Specifications:

### Description:

The LED luminaire delivers a solution for fast flushmount application for both residential and commercial applications. In addition, it is wet location rated and is a cost effective solution. It provides a 120V alternating current source and eliminates the need for a traditional LED driver. This modular approach results in an encapsulated luminaire that unites performance, cost and safety benefits to make ceiling even flat.



### Features:

Polycarbonate lens controls direct glare from the LEDs.  
 Simple and installs directly to a standard 3 or 4 Inch J-Box  
 Durable metal construction with a polycarbonate lens  
 Using a mounting plate

### Performance:

Input Power	40W
Input Voltage	120V
Input Frequency	60Hz
Power Factor	≥0.90
Lumen	2400
CCT	3000K
CRI	90+
LPW	60
Dimmer	Leviton# 6672, 6633
Dimension	13"x13"x1"
Life	50,000 hrs
Warranty	5 years
Certification	cETLus Classified. Wet Locations FCC, Energy Star qualified

### Images:

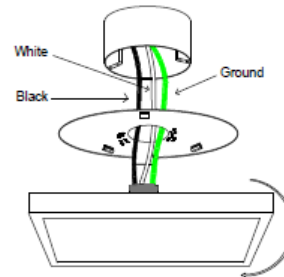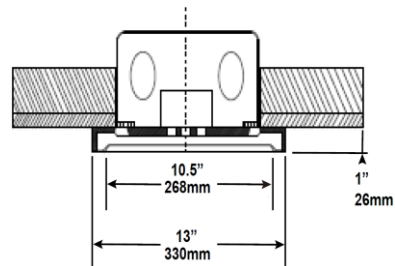

### Catalog Number:

Finish	Color Temp.	Watt	Voltage
White	3000K	40W	120V
Bronze	3000k	40W	120V
Brush Nickel	3000k	40W	120V
Black	3000k	40W	120V
White	4000K	40W	120V
Bronze	4000K	40W	120V
Brush Nickel	4000K	40W	120V
Black	4000K	40W	120V