


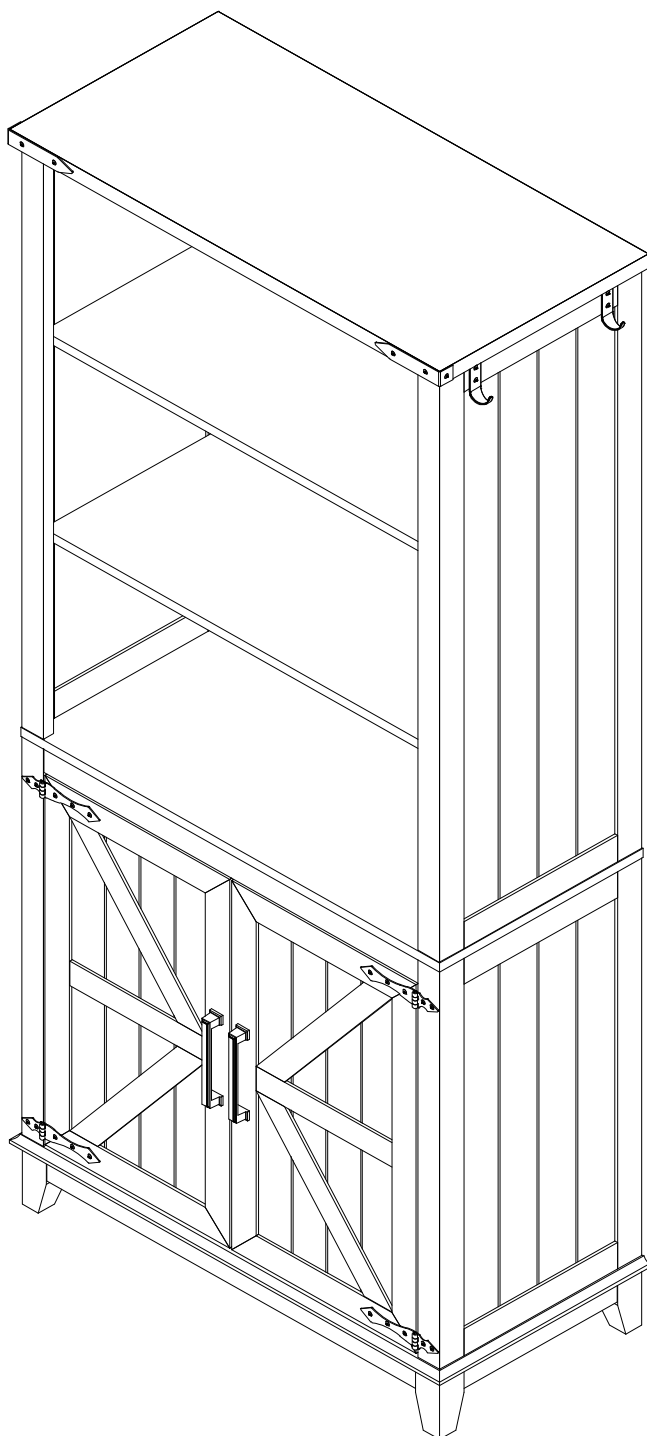

ATTENTION

If there is any missing, please kindly send us messages to let us know the part number of missing part regarding to the first page of instructions.

Please also provide your full address, recipient name and contact phone number so that we can send replacement to you as soon as possible.

Children have died from furniture tipover. To reduce the risk of furniture tipover. ALWAYS install tipover restraint provided.



BEFORE STARTING



Before Using Product

- Read each step carefully before starting. It is very important that each step is performed in the correct order. If these steps are not followed in sequence, assembly difficulties will occur.
- Make sure all parts are included.
- Work in a spacious area and near where the unit will be used, preferably on a carpet, or use a piece of the cardboard packaging to protect your floor and product.
- For a smooth assembly process, we suggest you keep a lite tightness for all the screws during assembly. After the whole product is assembled, firmly tighten all the screws.

WARNING


- Do not allow children to climb on unit.
- Avoid sharp objects or corrosive chemicals to prevent damage to the product.
- During assembly, keep parts and packaging materials away from children and pets as there could be potential injury and choking hazards.
- Please make sure that all objects are removed before moving the assembled unit.
- The unit must be team lifted, not dragged or pushed. Failure to do so could cause instability, product collapse, and/or serious injury.
- Be careful when using power tools to assemble your furniture. Power tools may strip or damage the parts.

QUICKFIT

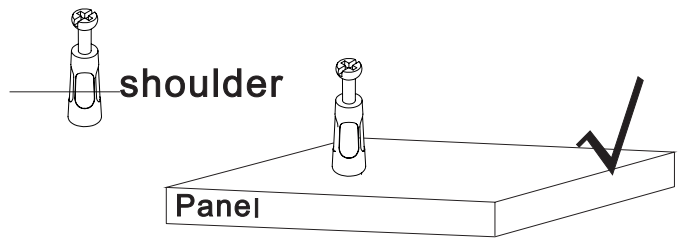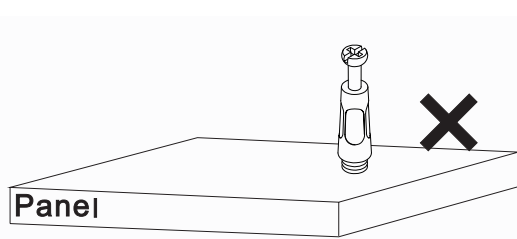


Tighten quickfit until shoulder is flush with panel. Do not overtighten or undertighten.

CAM LOCK

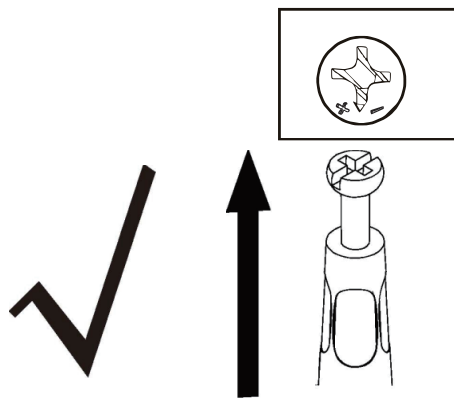


CORRECT

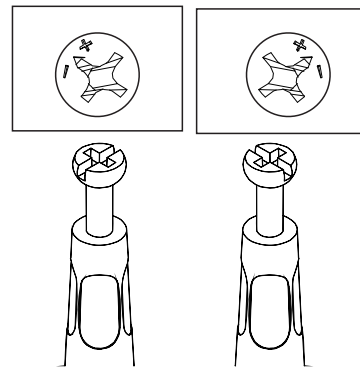


WRONG

When fitting cam lock, ensure starting position is correct before you insert cam lock to quickfit.

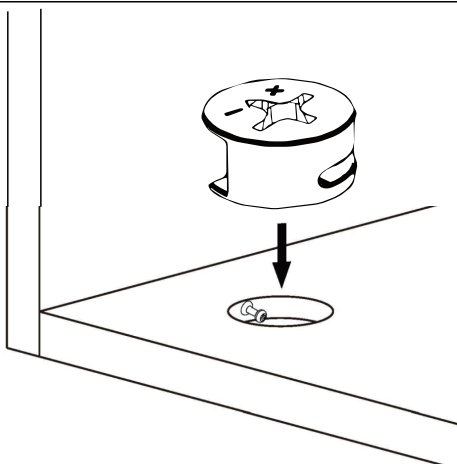


Quickfit head should be in the center of the cam lock. When the two panels are joined. Cam lock should be inserted before quickfit.



















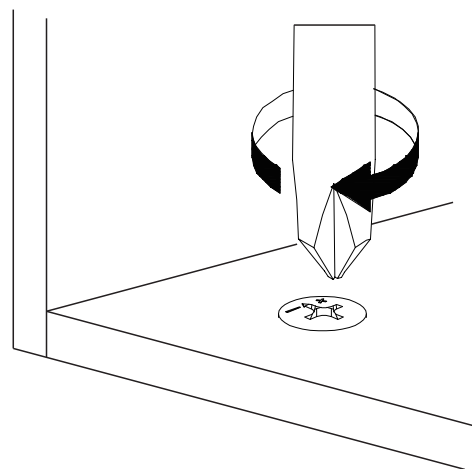


Turn cam lock clockwise to tighten.

















PART LIST

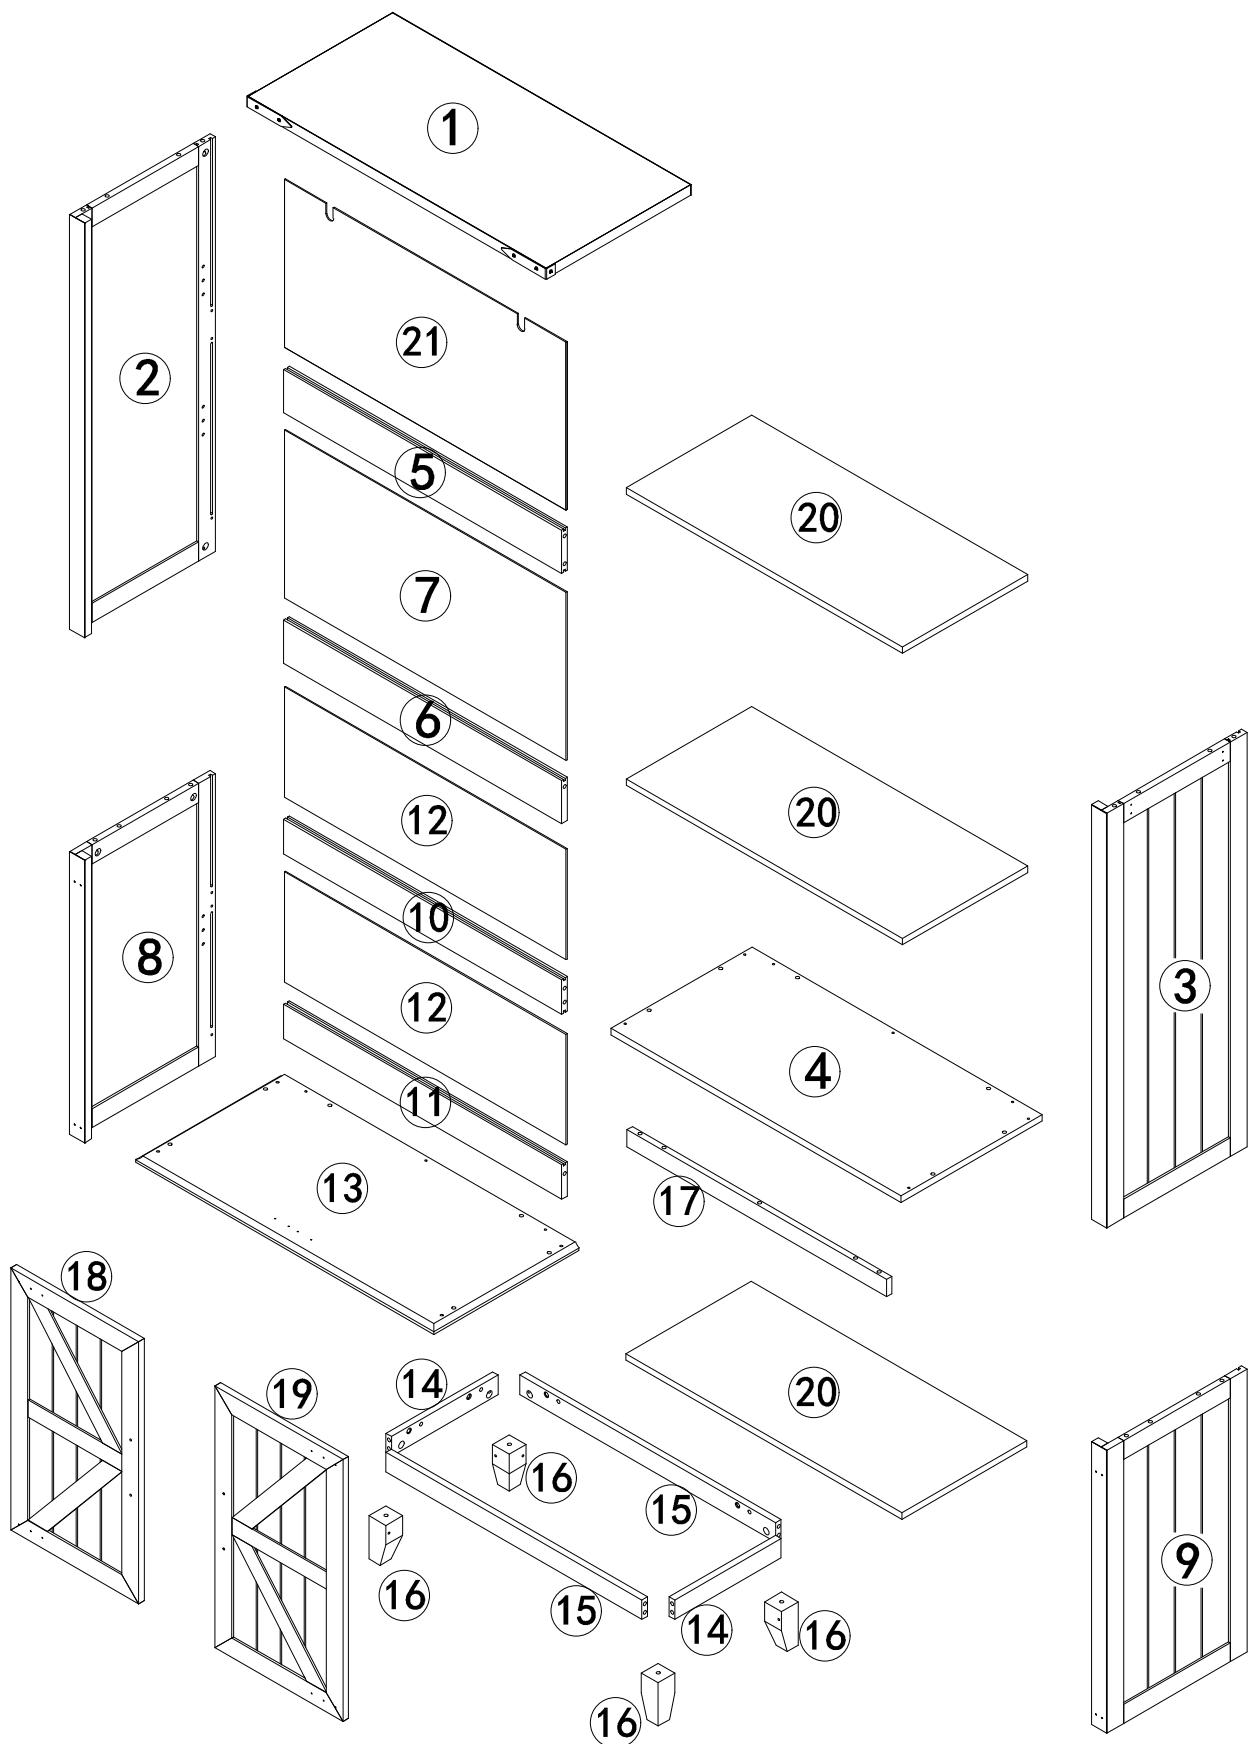



PART LIST

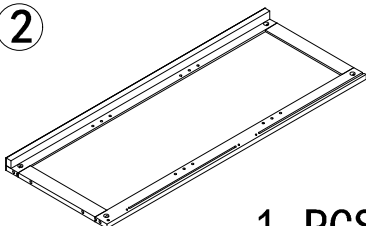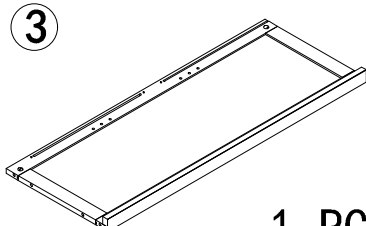①  1 PCS	②  1 PCS	③  1 PCS
④  1 PCS	⑤  1 PCS	⑥  1 PCS
⑦  1 PCS	⑧  1 PCS	⑨  1 PCS
⑩  1 PCS	⑪  1 PCS	⑫  2 PCS
⑬  1 PCS	⑭  2 PCS	⑮  2 PCS
⑯  4 PCS	⑰  1 PCS	⑱  1 PCS
⑲  1 PCS	⑳  3 PCS	㉑  1 PCS

HARDWARE LIST

A  ø6X35 (41+2)PCS	B  ø15X11.5 (41+2)PCS	C  ø8X30 (30+2)PCS
D  ø5X40 4 PCS	E  2 PCS	F  ø3X12 (4+1) PCS
G  (16+1) PCS	H  ø3X15 (20+2) PCS	I  2PCS
J  2 PCS	K  ø4X12 (24+2) PCS	L  (12+1) PCS
M  4 PCS	N  2 PCS	O  M4X20 4 PCS
P  ø4X38 2 SET	Q  ø6X38 2PCS	R  2PCS
S  ø3.5X14 4 SET	T  (8+1)PCS	U  1/4*12 (16+1) PCS
V  8 SET	W  1PCS	X  1PCS


STEP 1

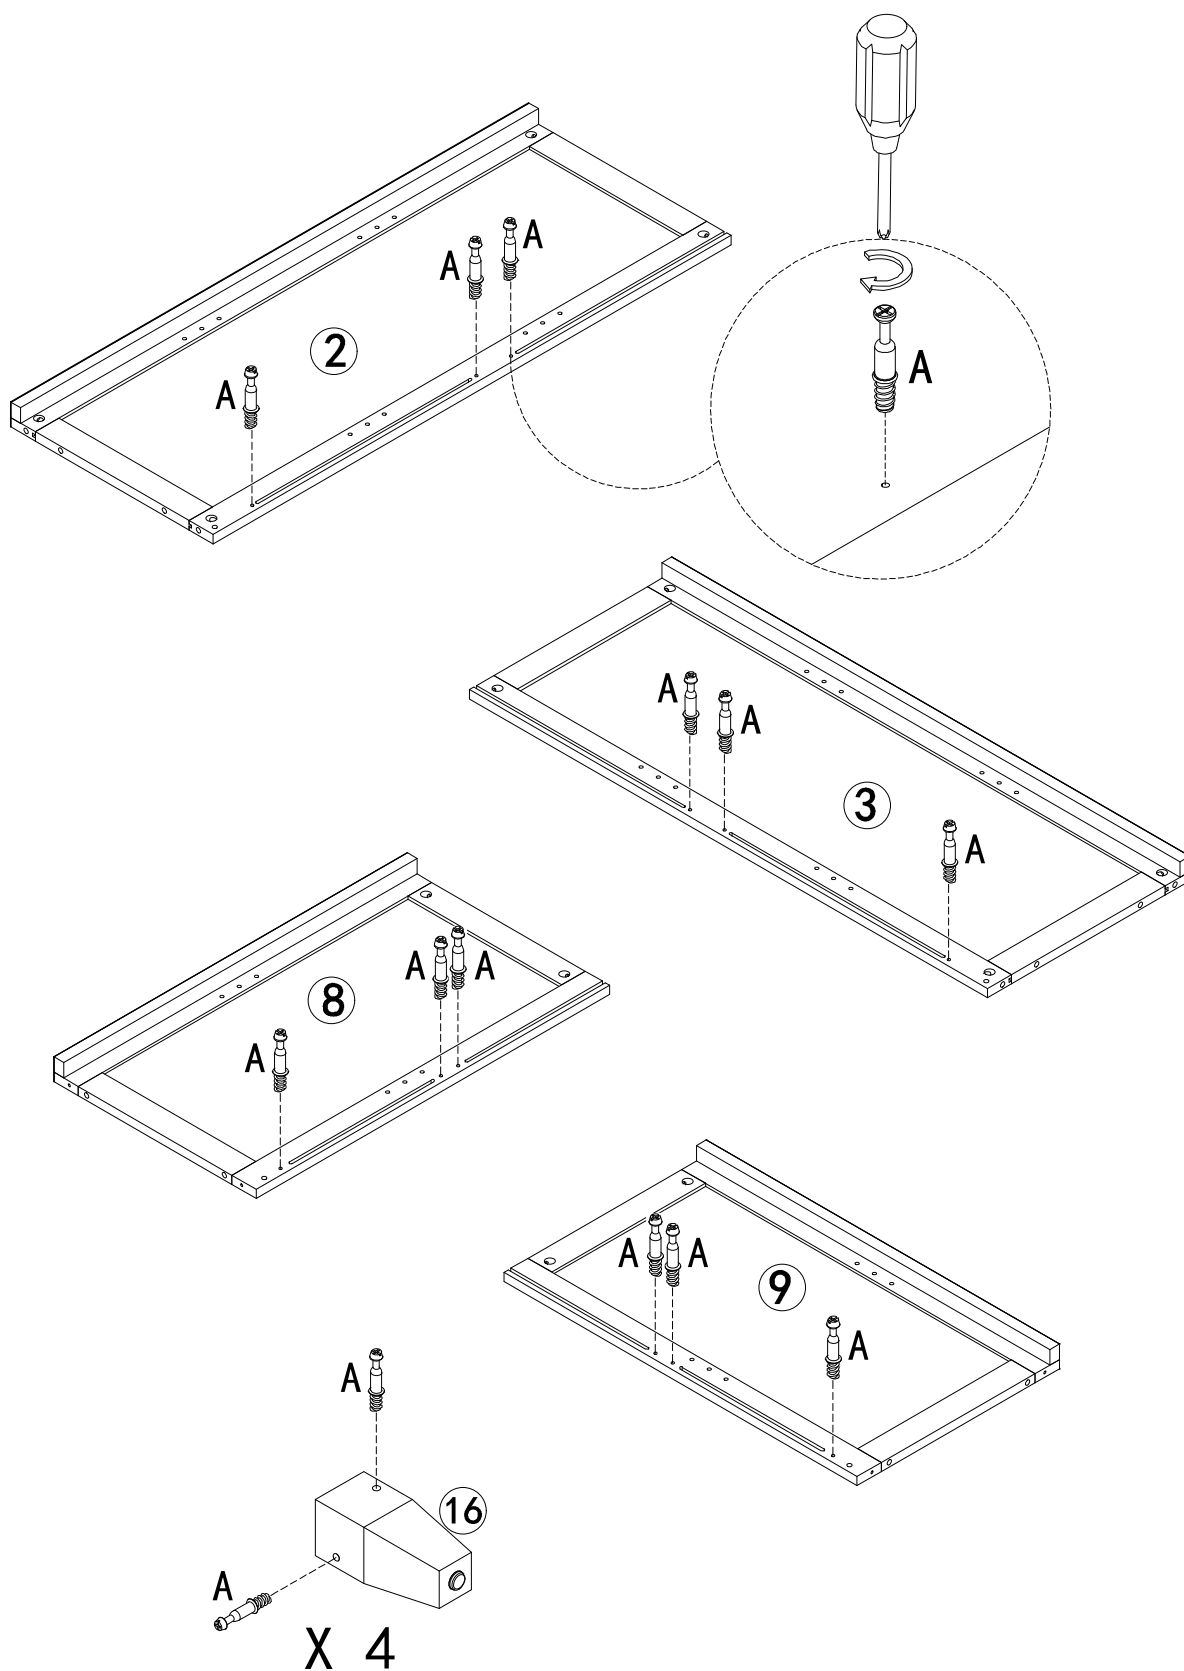

A X 20PCS


STEP 2

NOTE: Do not fully tighten the S screw on the R fitting of #1 board so you can adjust the distance when locking the wall

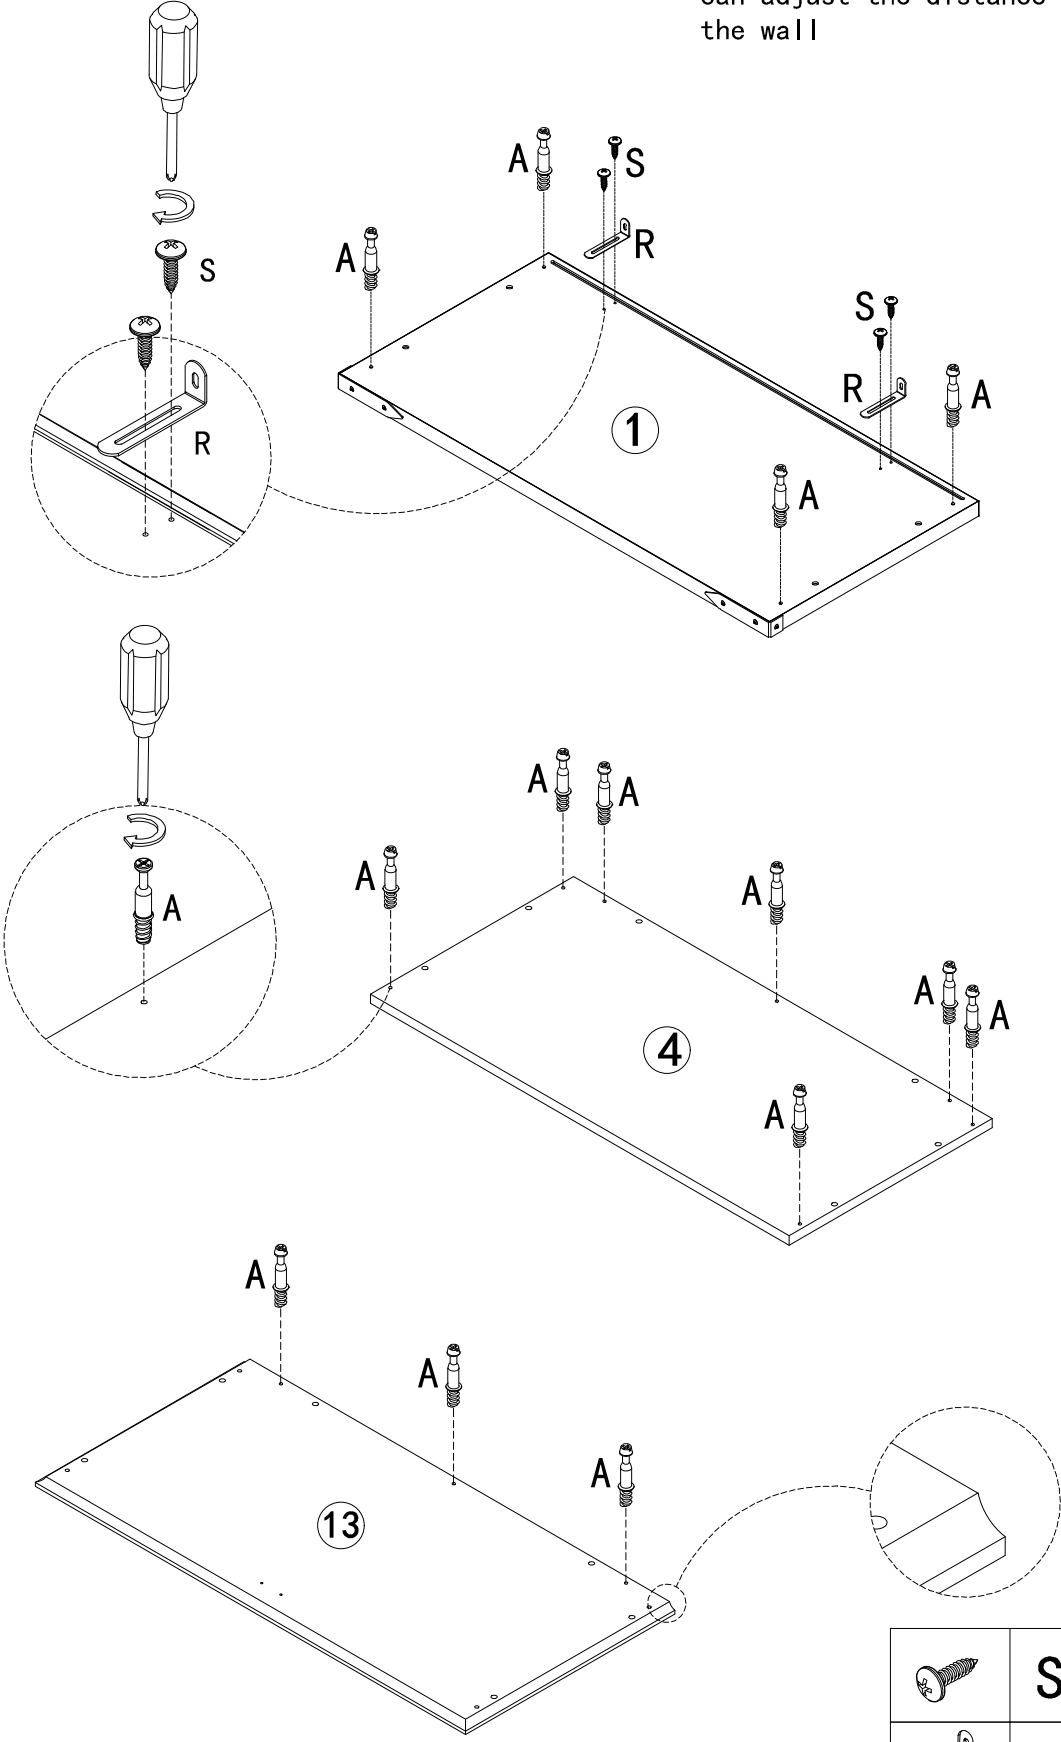


	S X 4 PCS
	R X 2 PCS
	A X 14 PCS


STEP 3

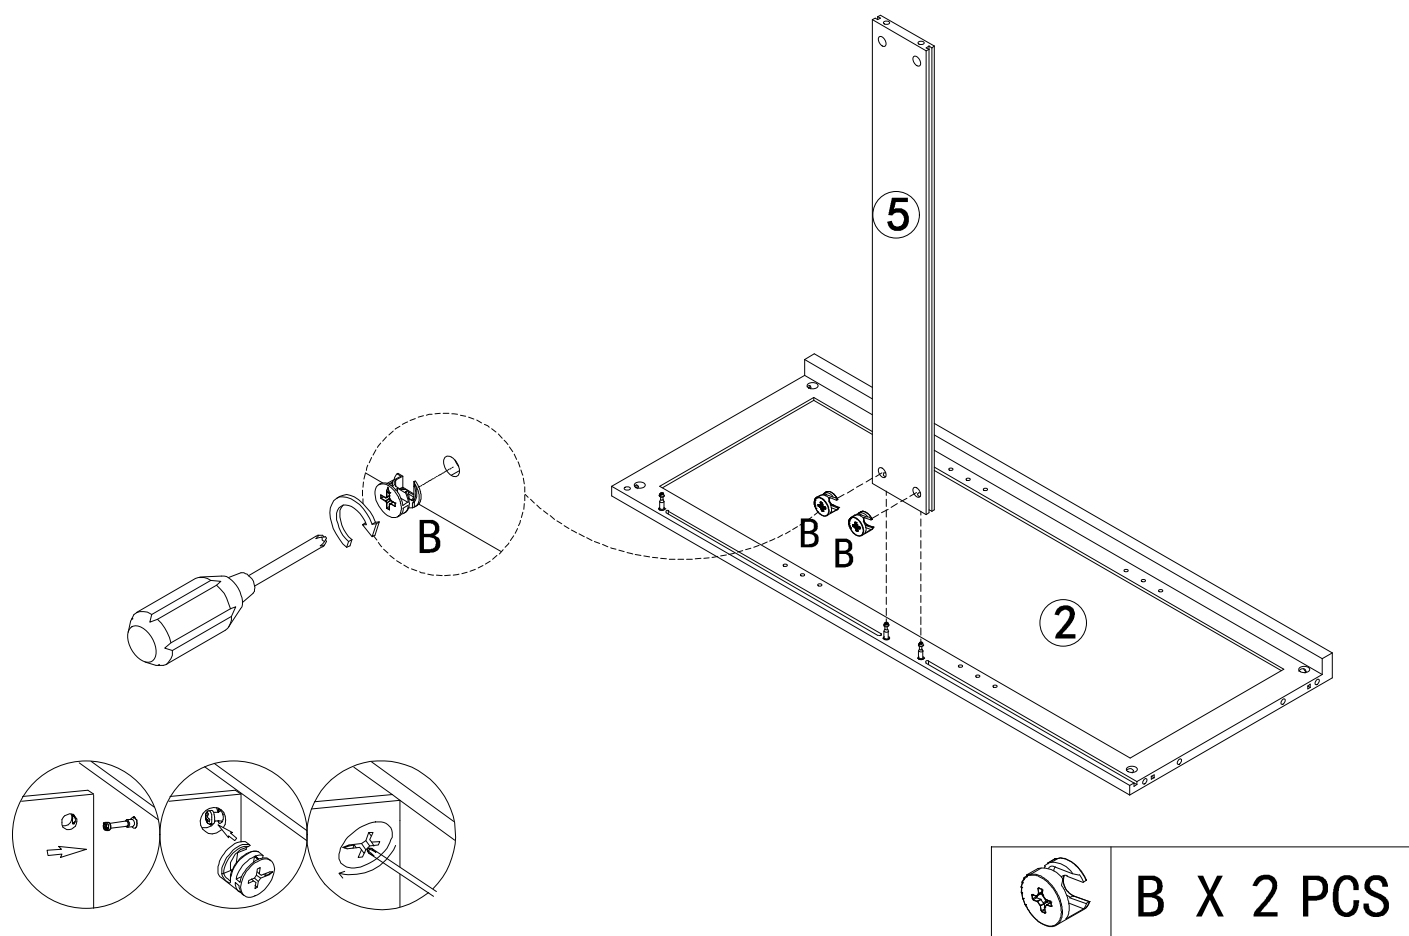


STEP 4

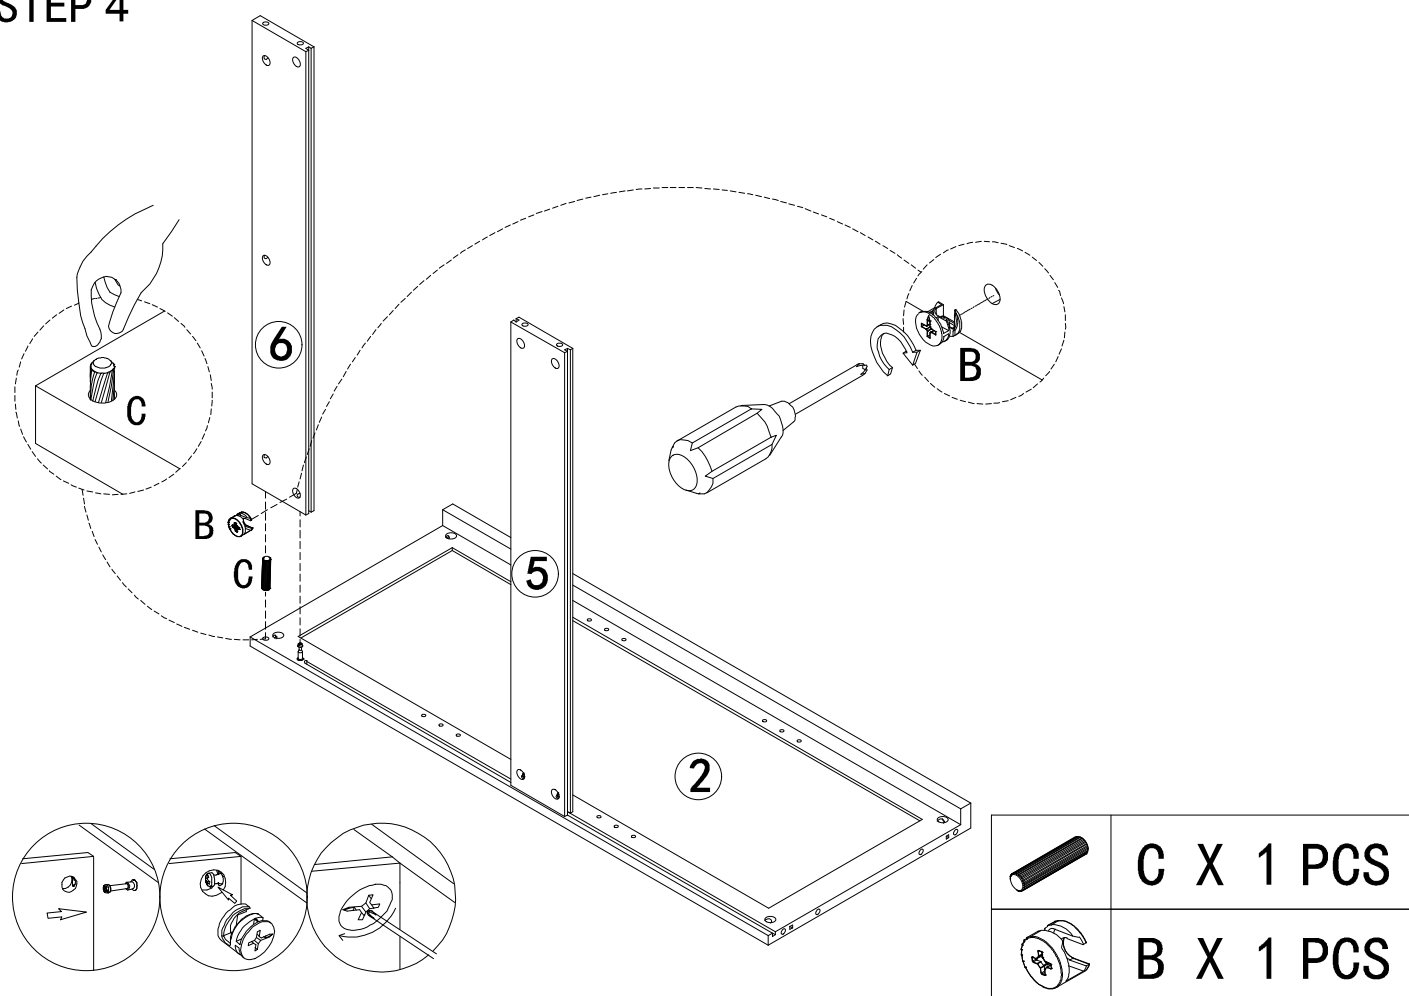


STEP 5

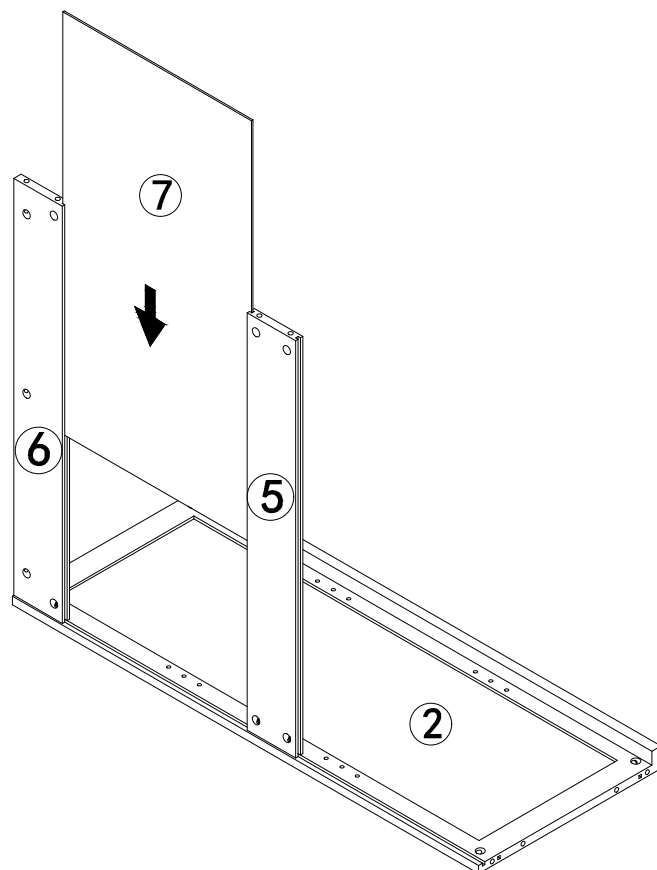


STEP 6

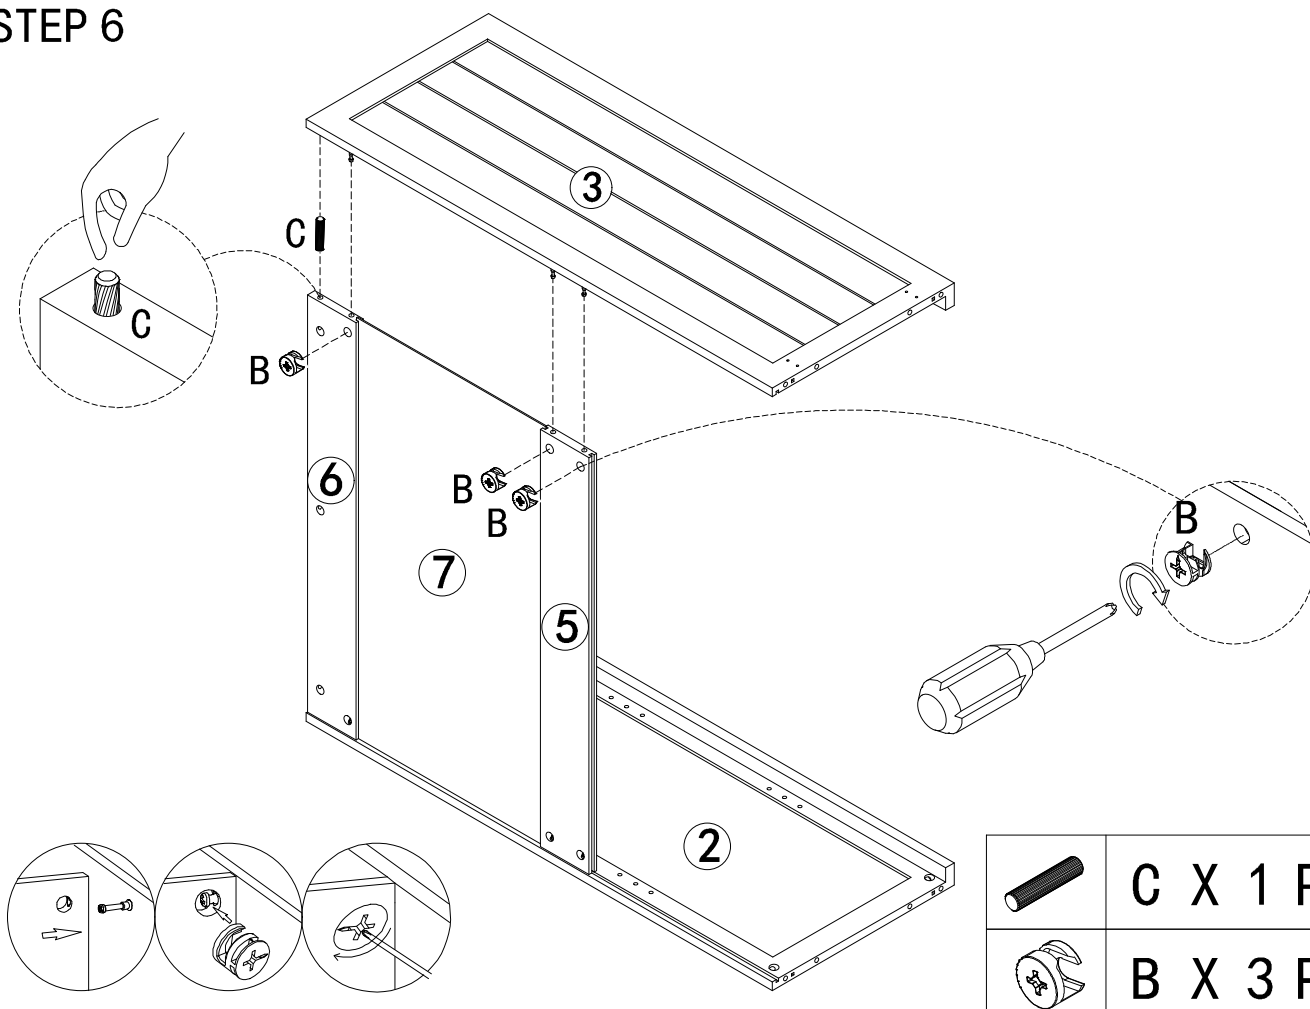

STEP 7

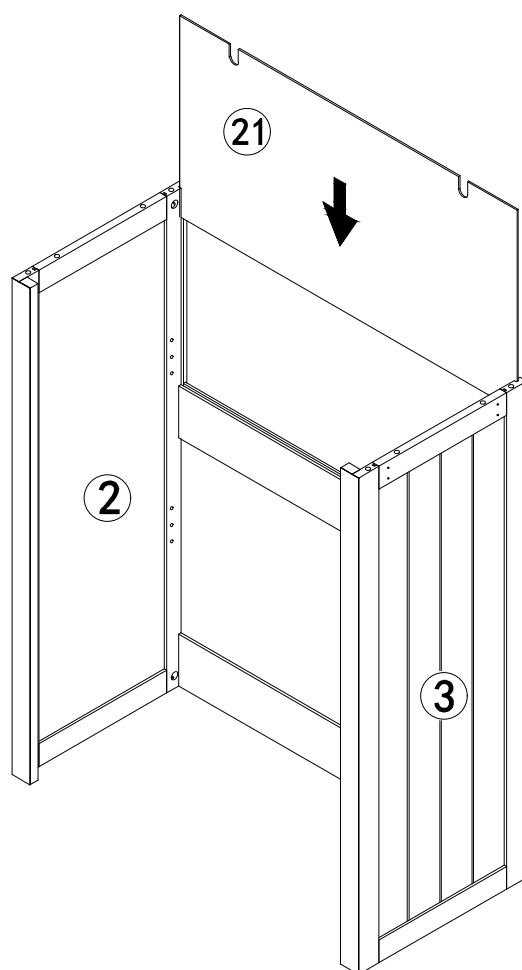



STEP 8

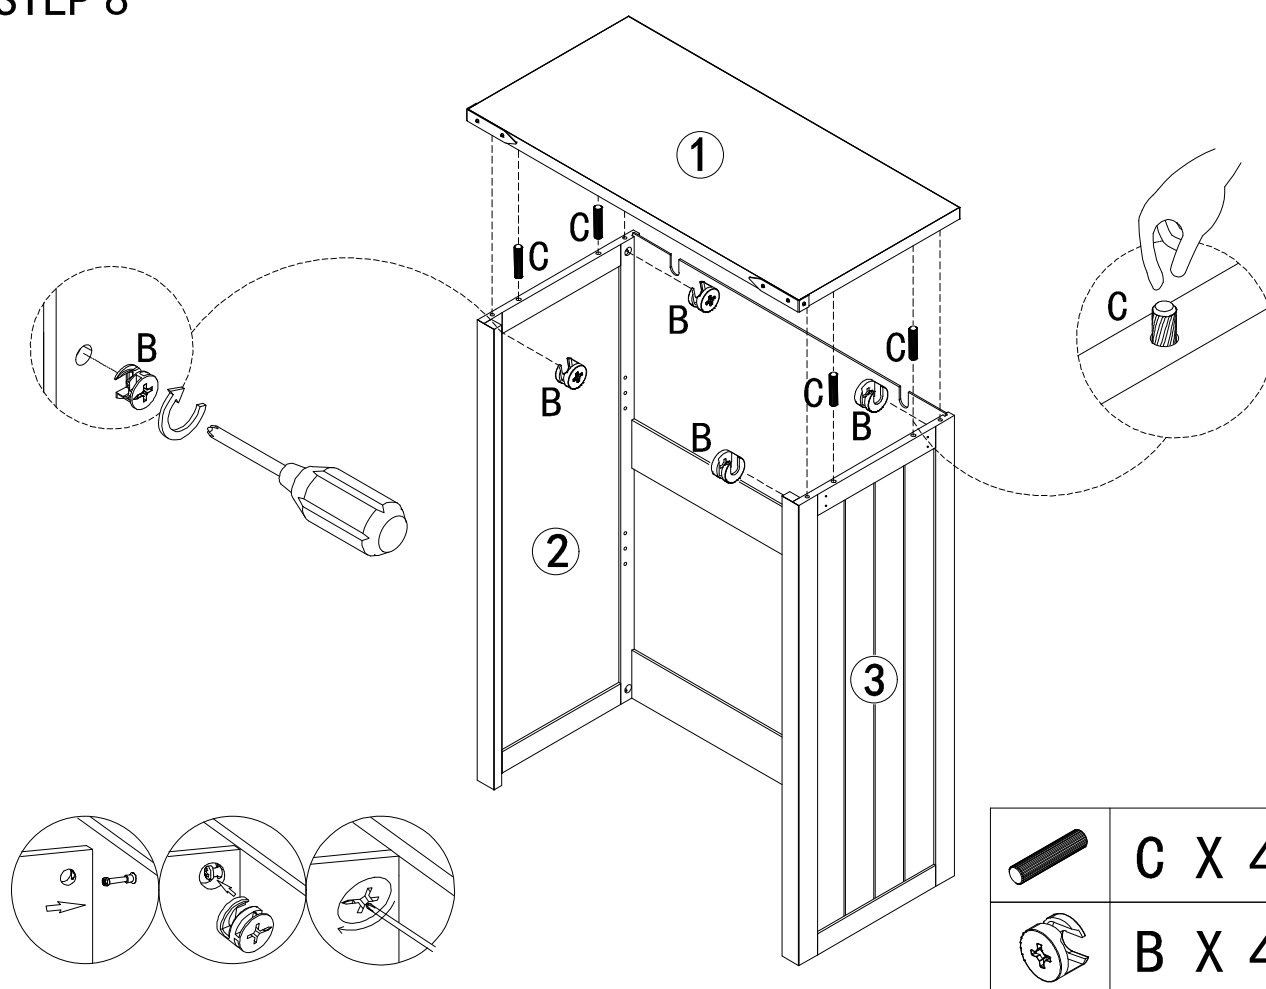

	C X 4 PCS
	B X 4 PCS


STEP 9

NOTE: The slot faces upward

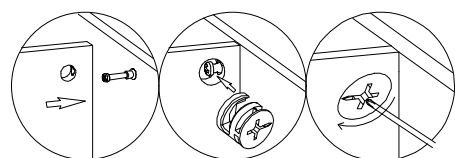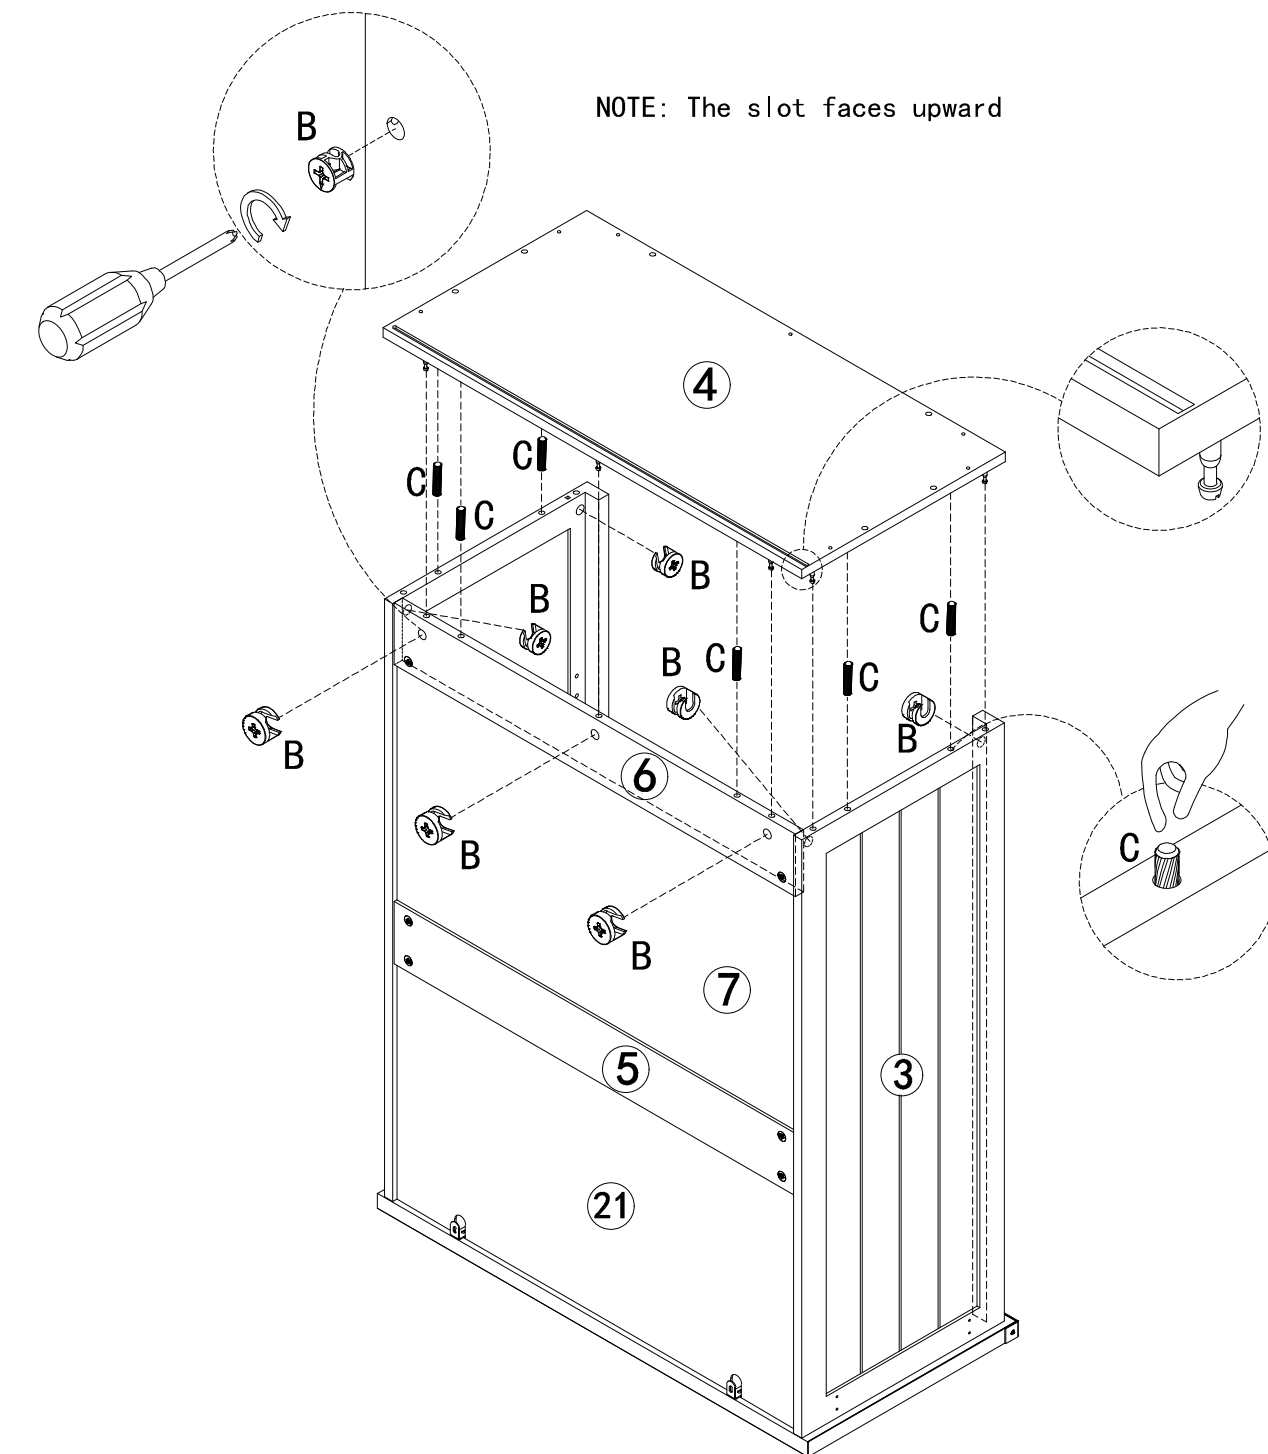



	C X 6 PCS
	B X 7 PCS

STEP 10

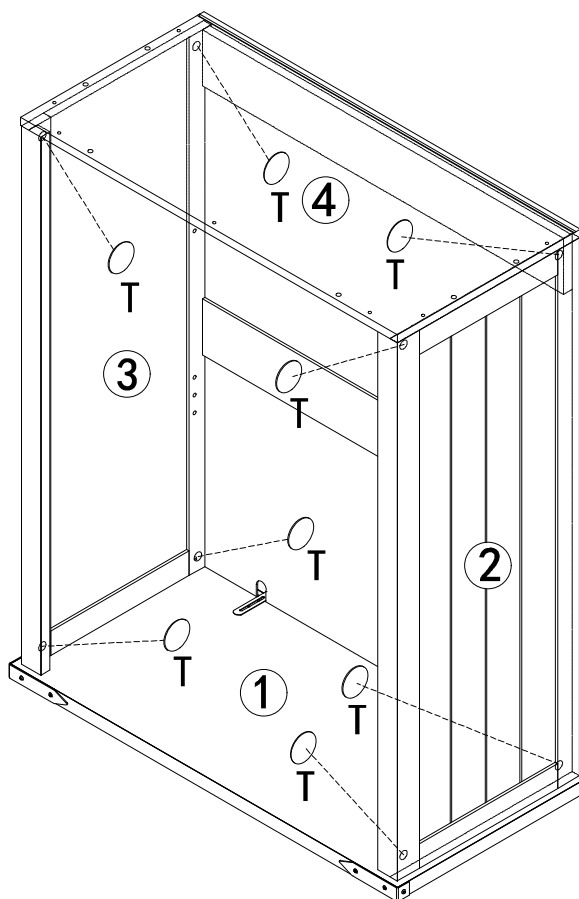



T X 8 PCS

STEP 11

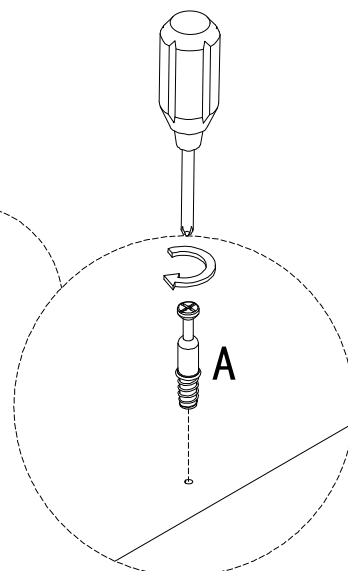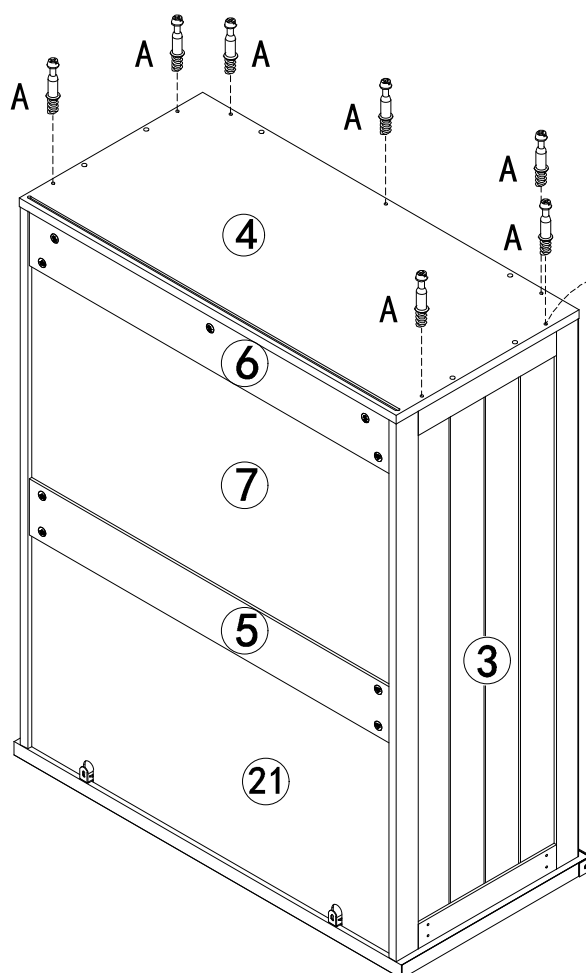


A X 7 PCS

STEP 12

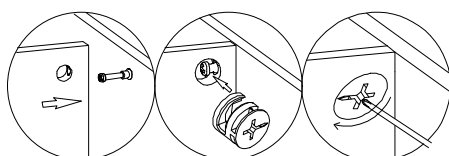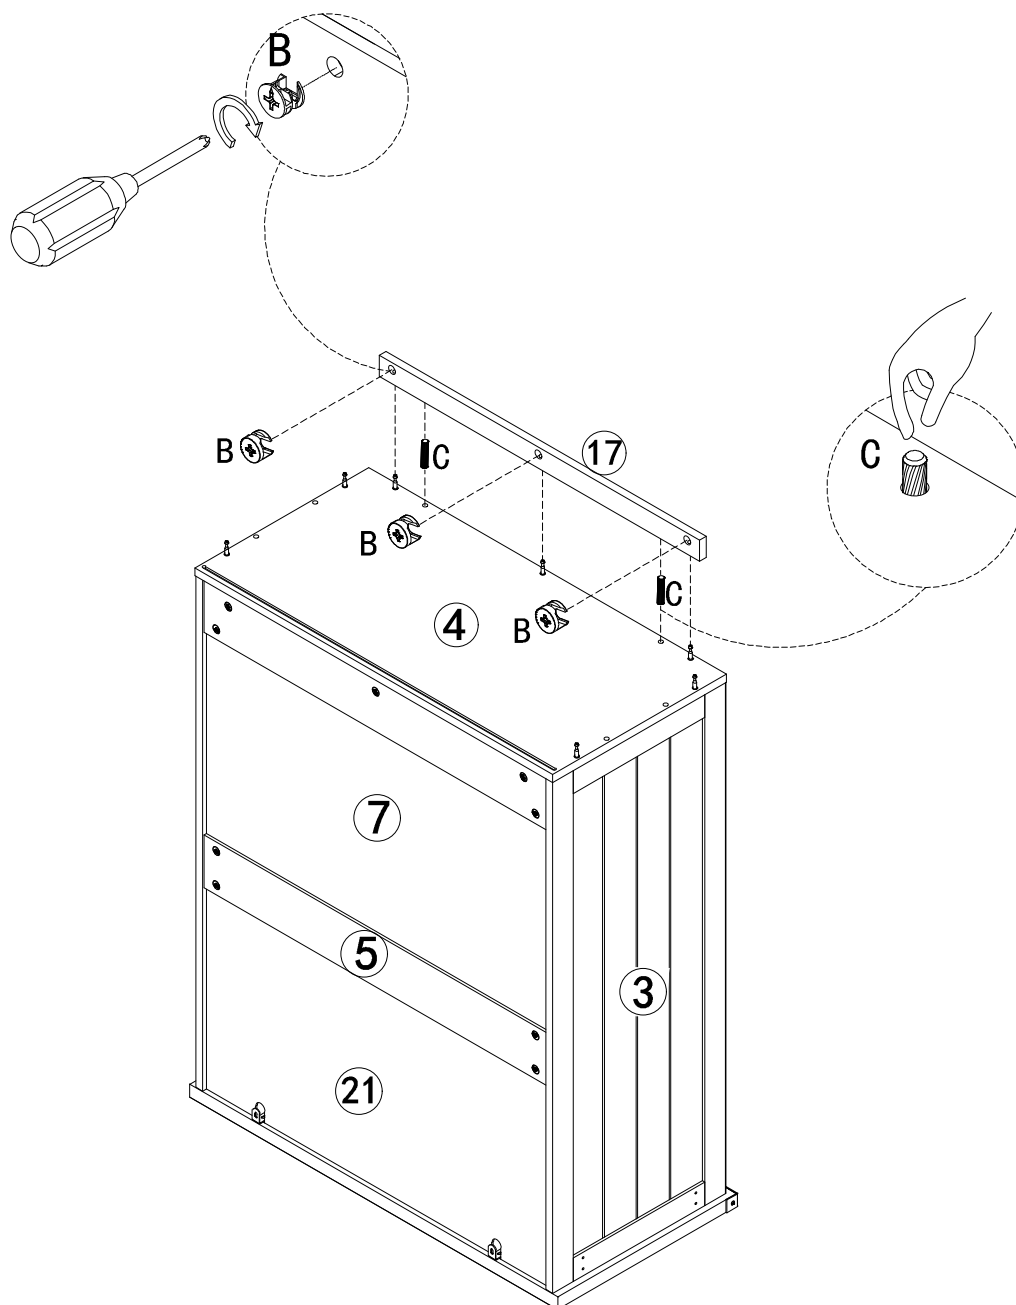


	C X 2 PCS
	B X 3 PCS


STEP 13

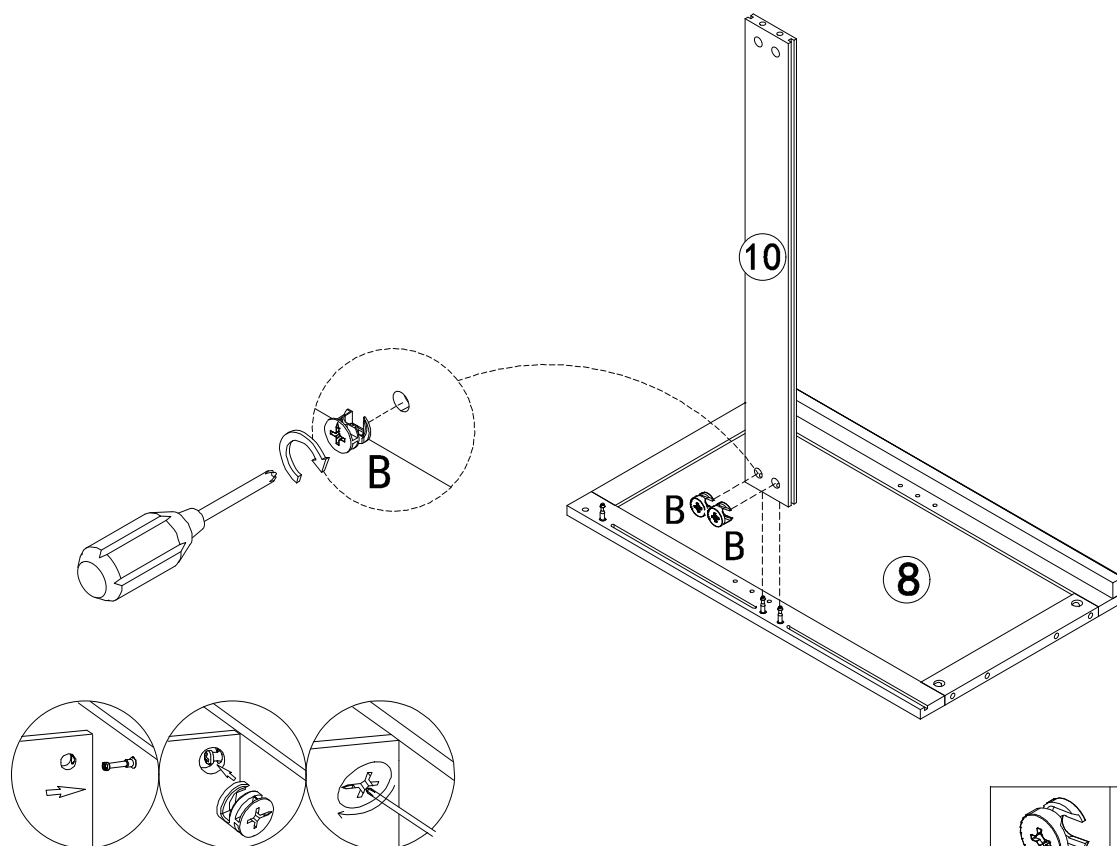


STEP 14

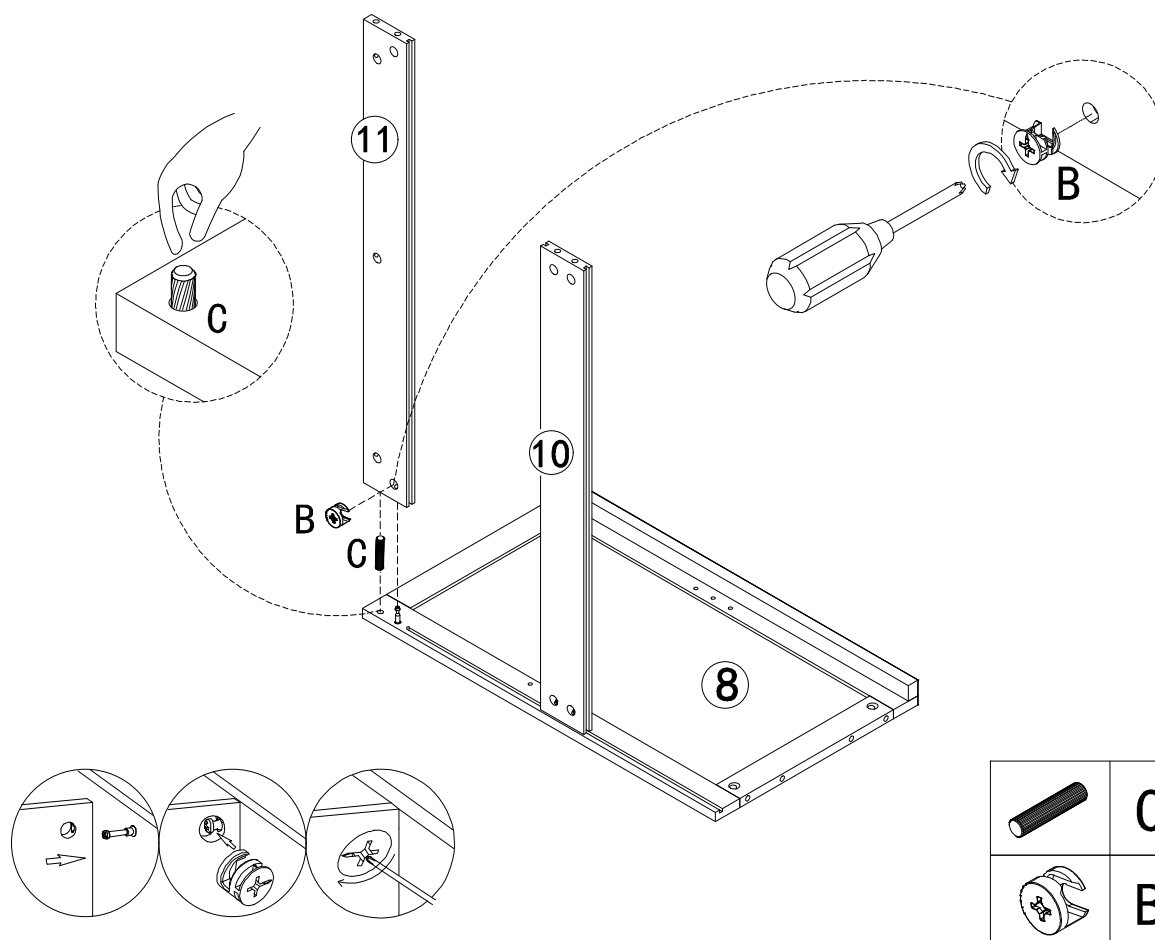


STEP 15

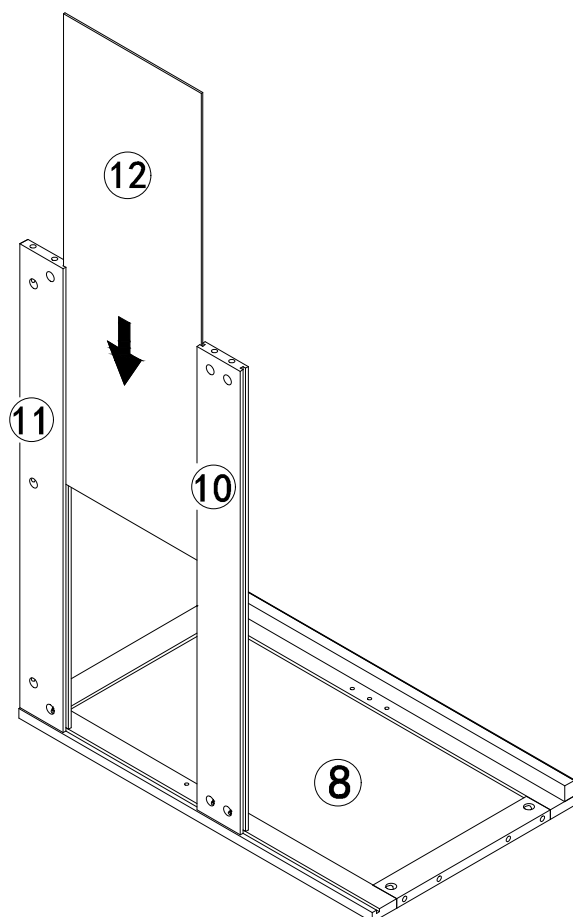


STEP 16

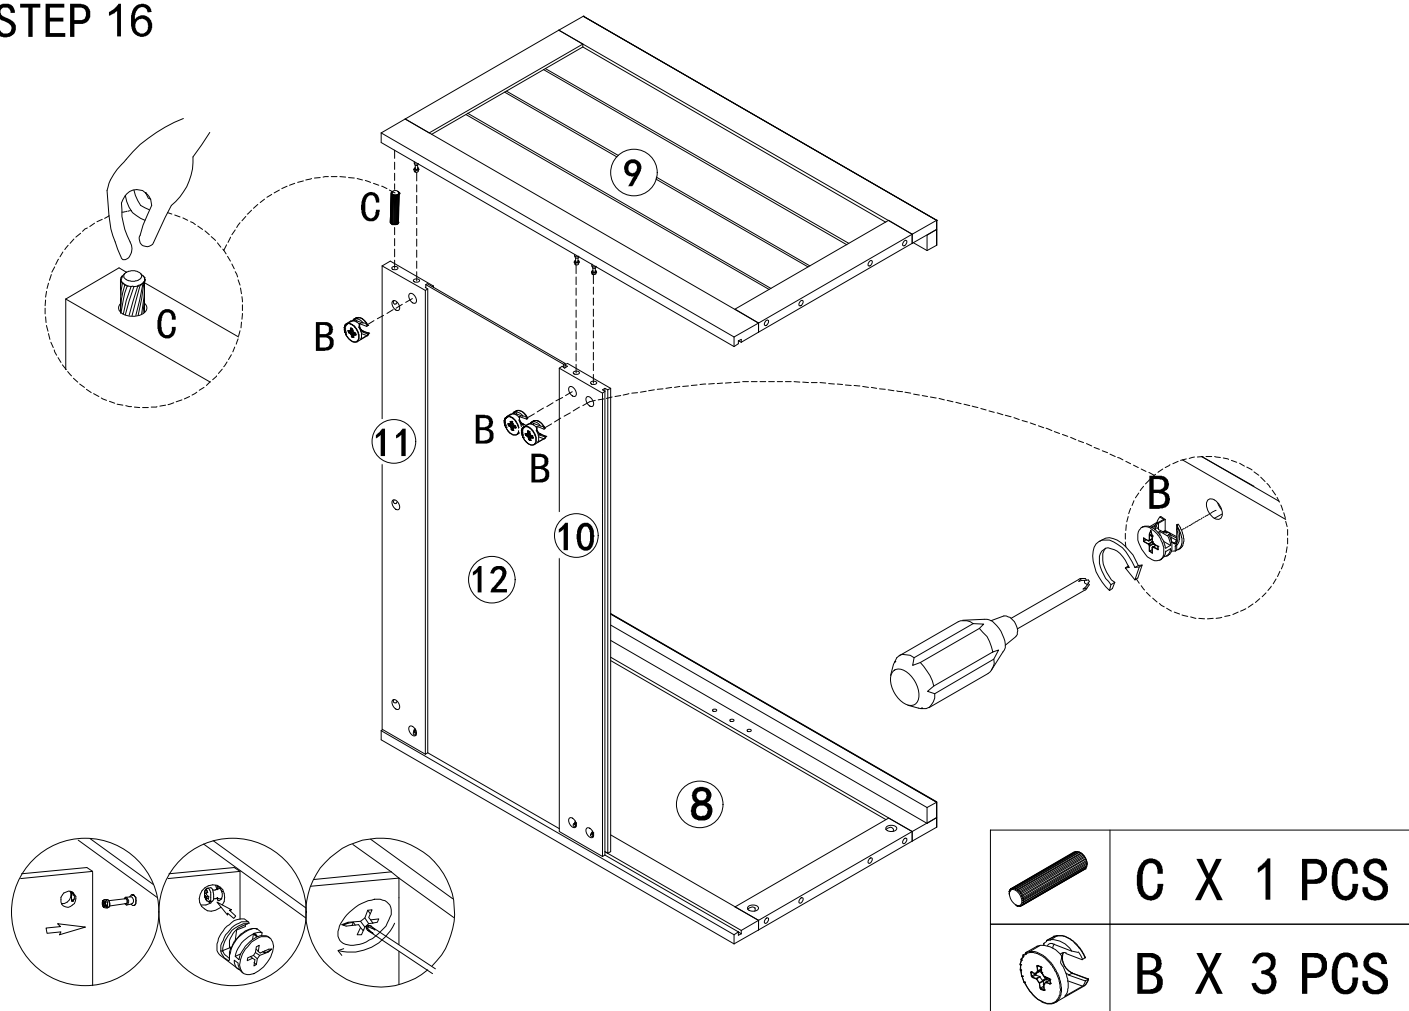


STEP 17

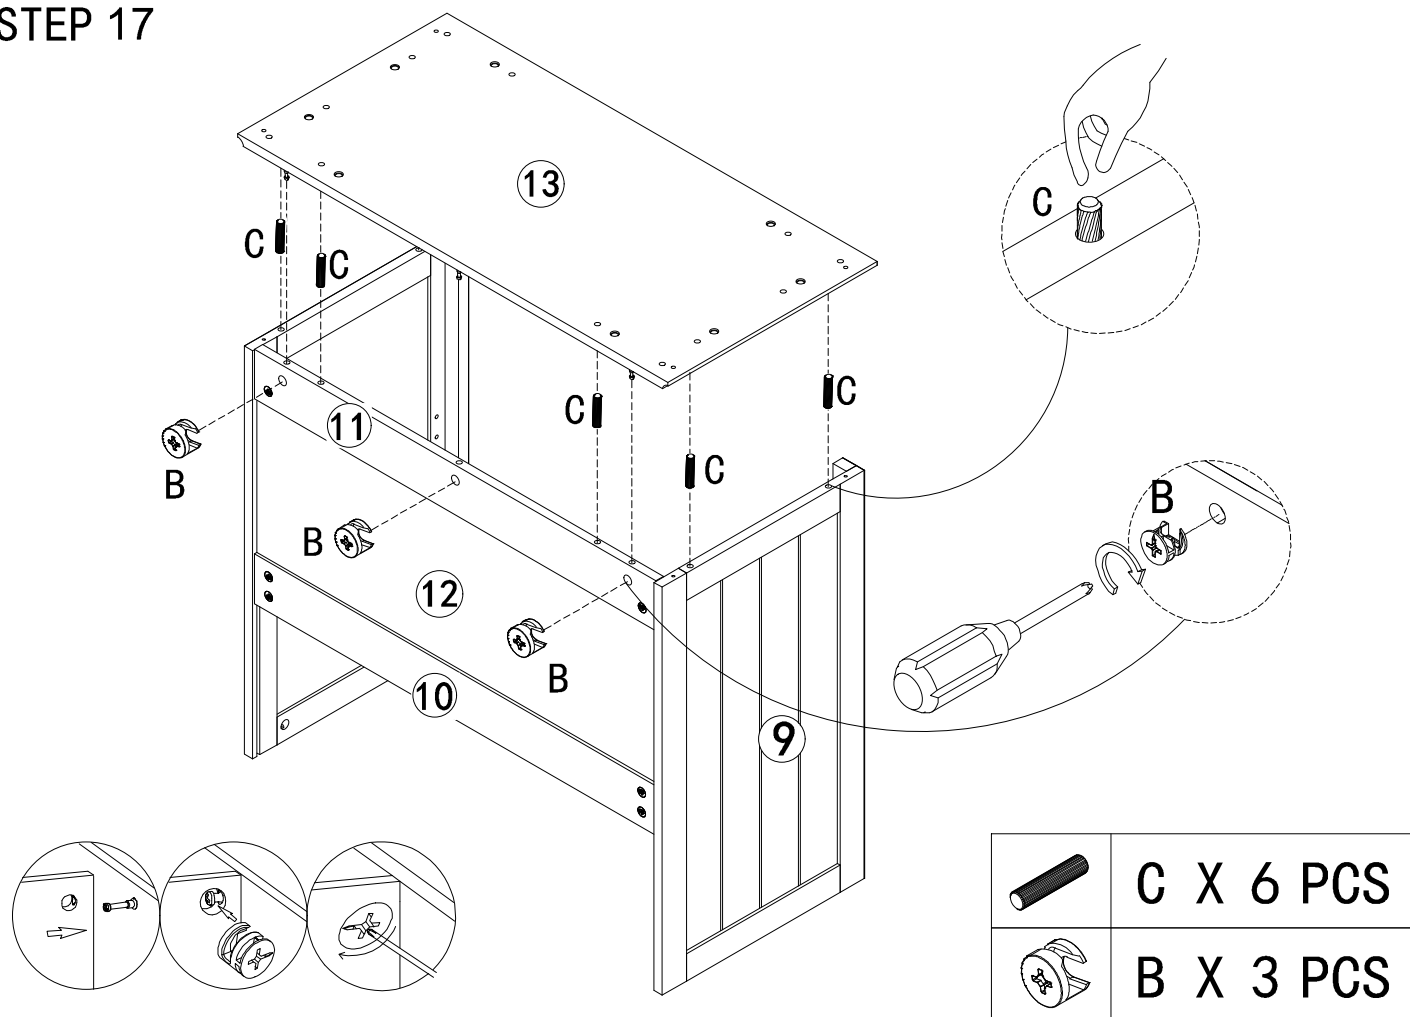

STEP 18


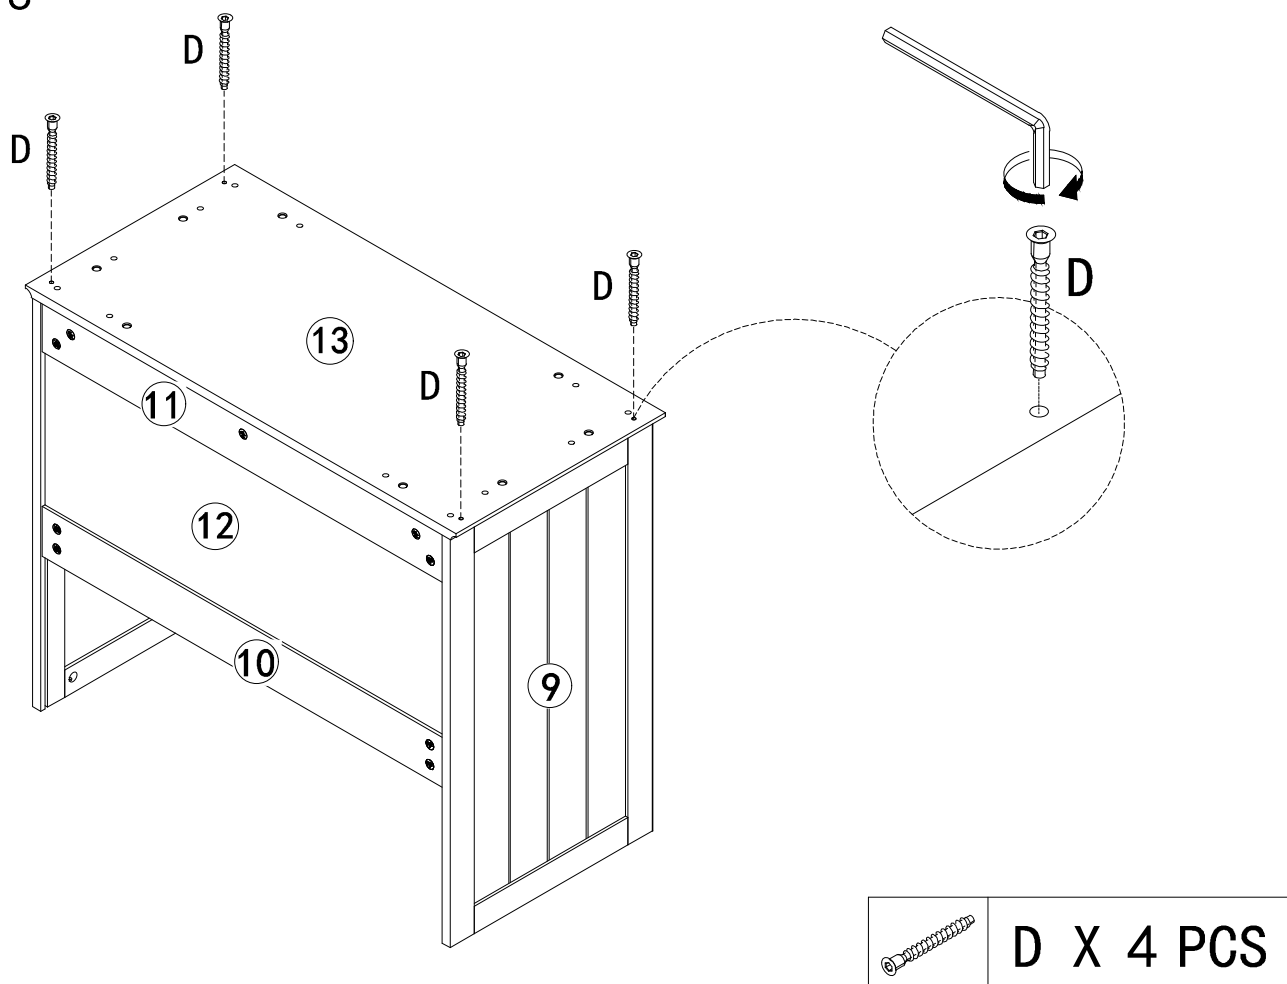


STEP 19

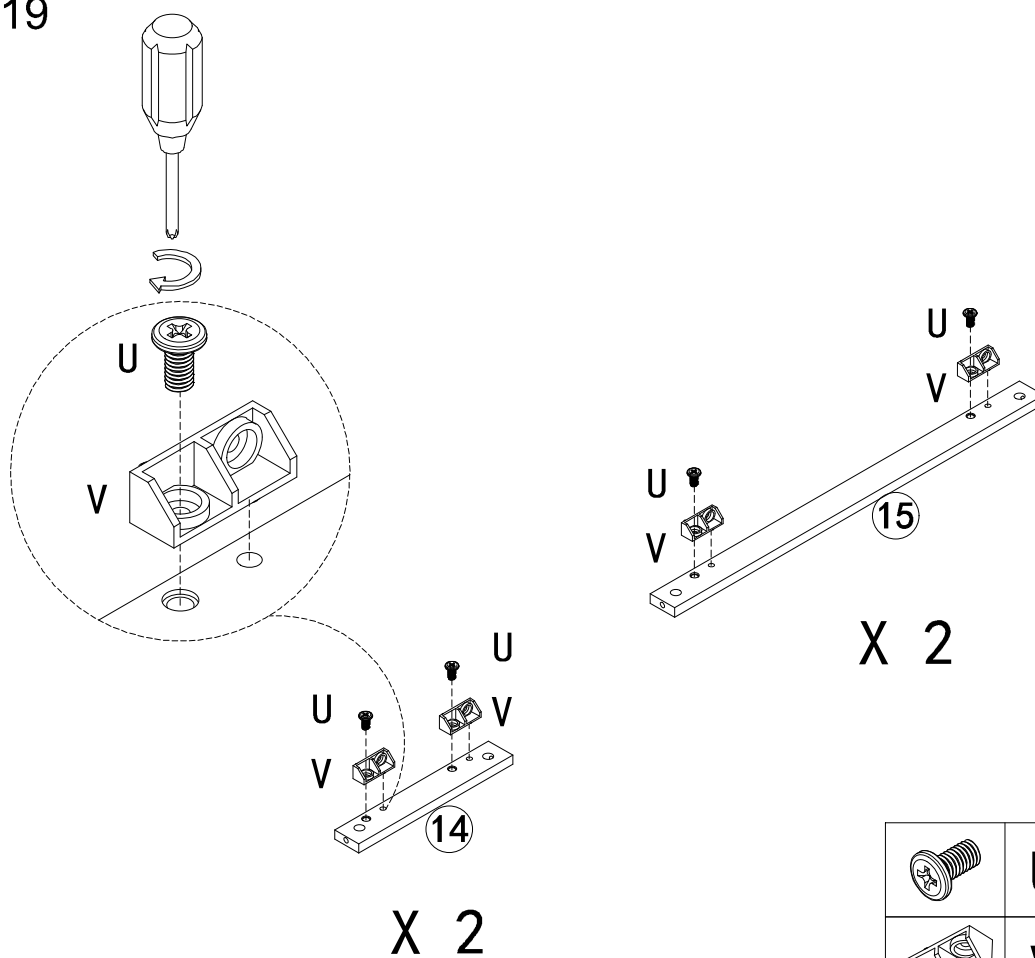



	U X 8 PCS
	V X 8 PCS

STEP 20

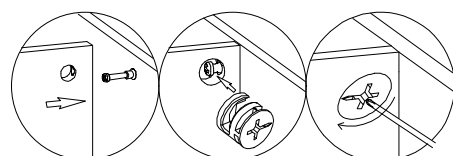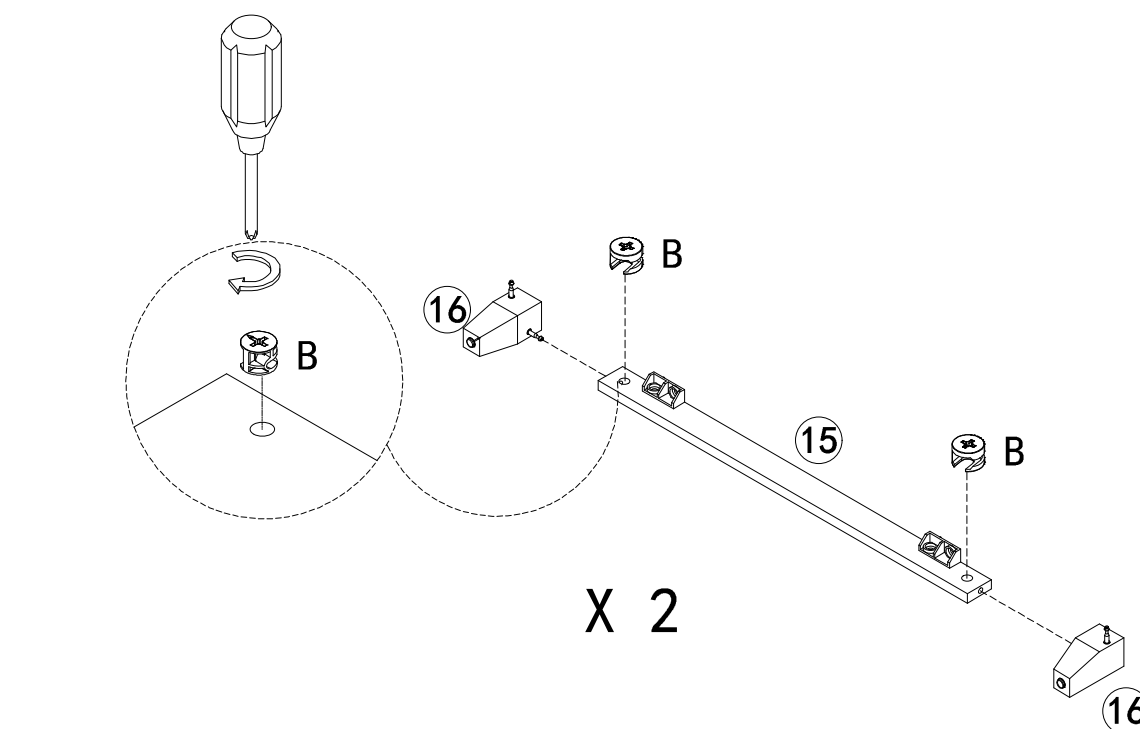


	B X 4 PCS
---	-----------

STEP 21

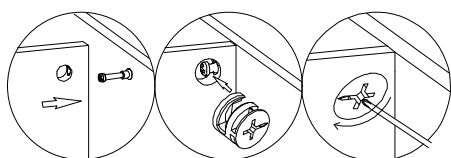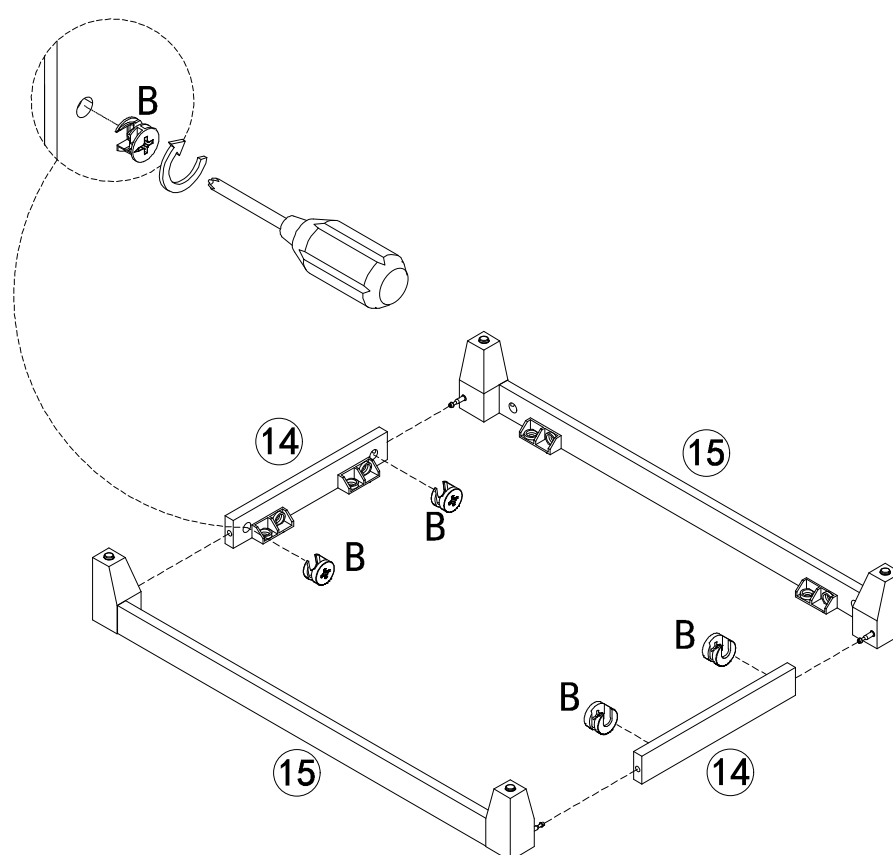


B X 4 PCS

STEP 22

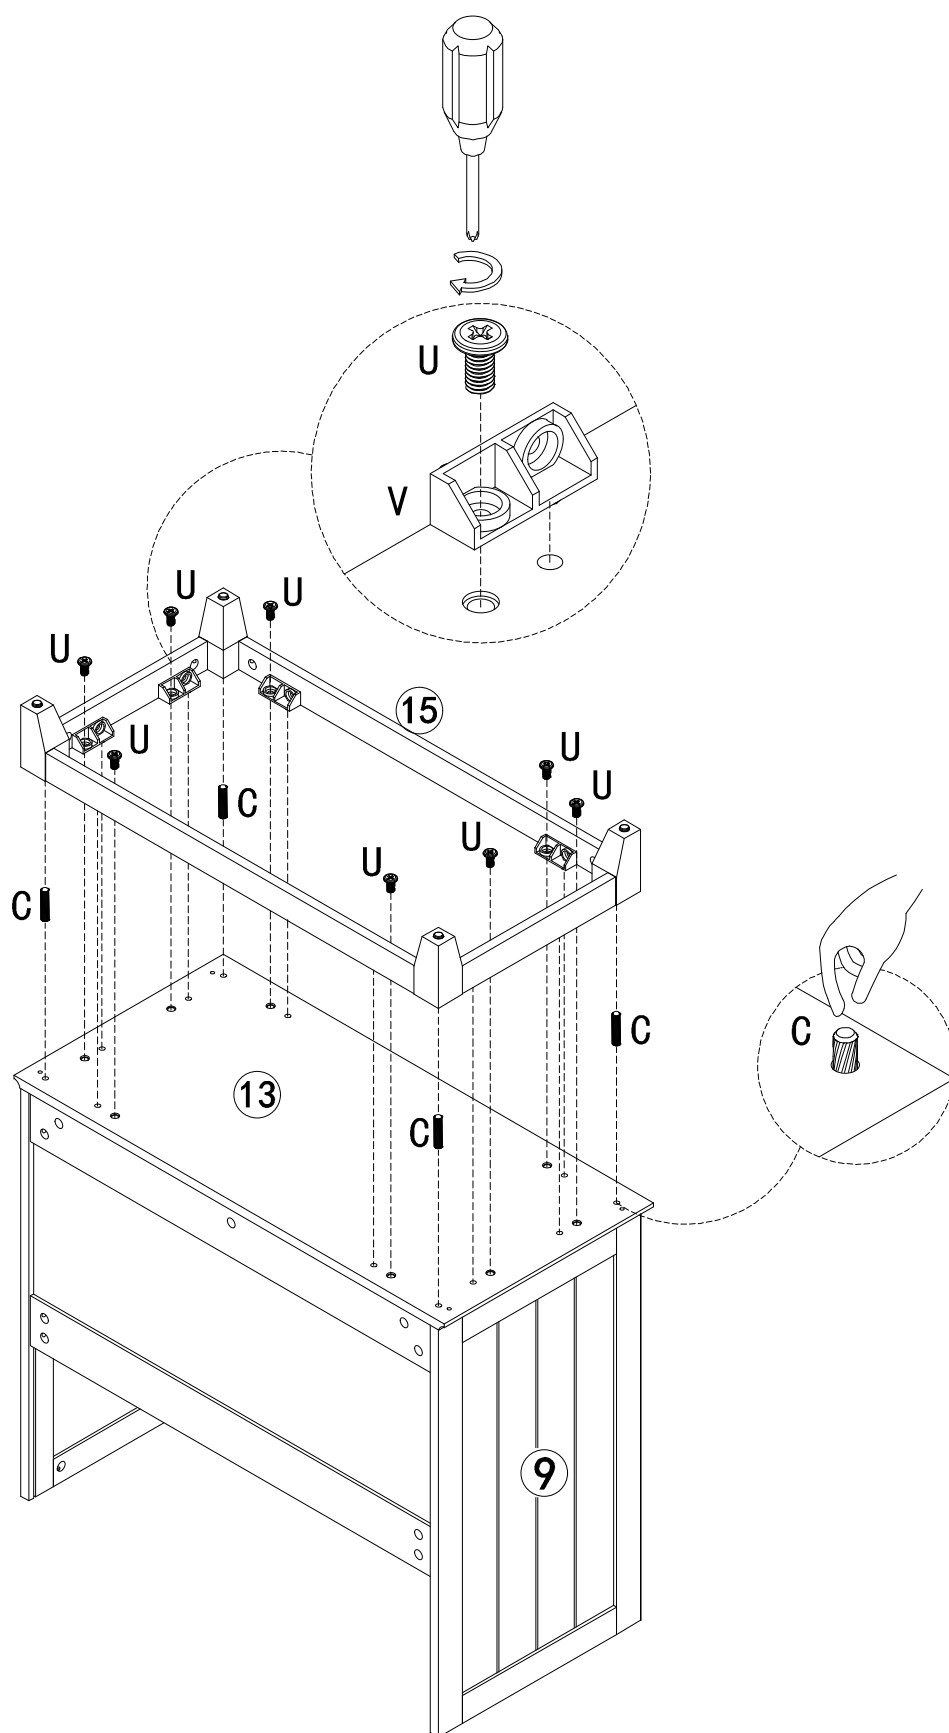



	U X 8 PCS
	C X 4 PCS

STEP 23

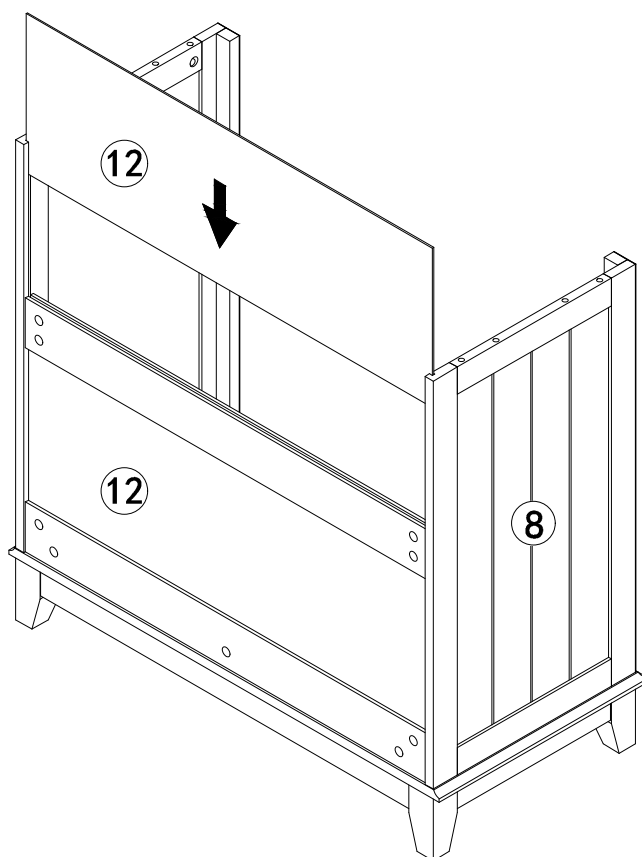


STEP 24

NOTE: require two people to assemble

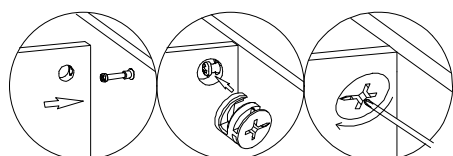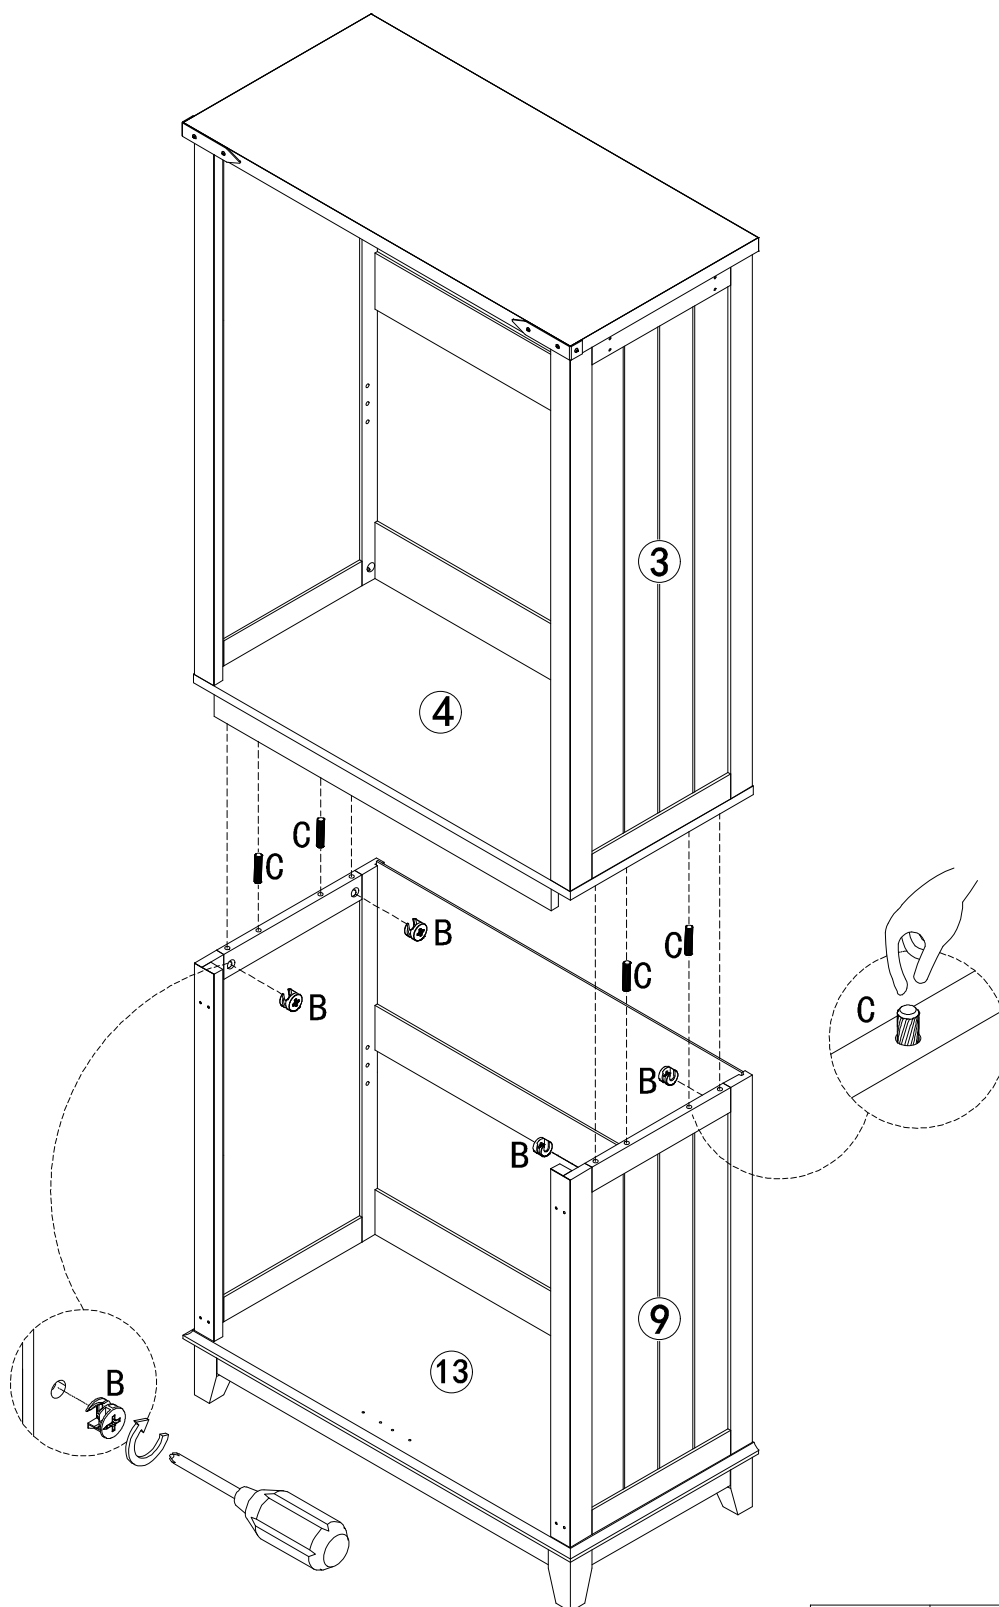

	C X 4 PCS
	B X 4 PCS

STEP 25

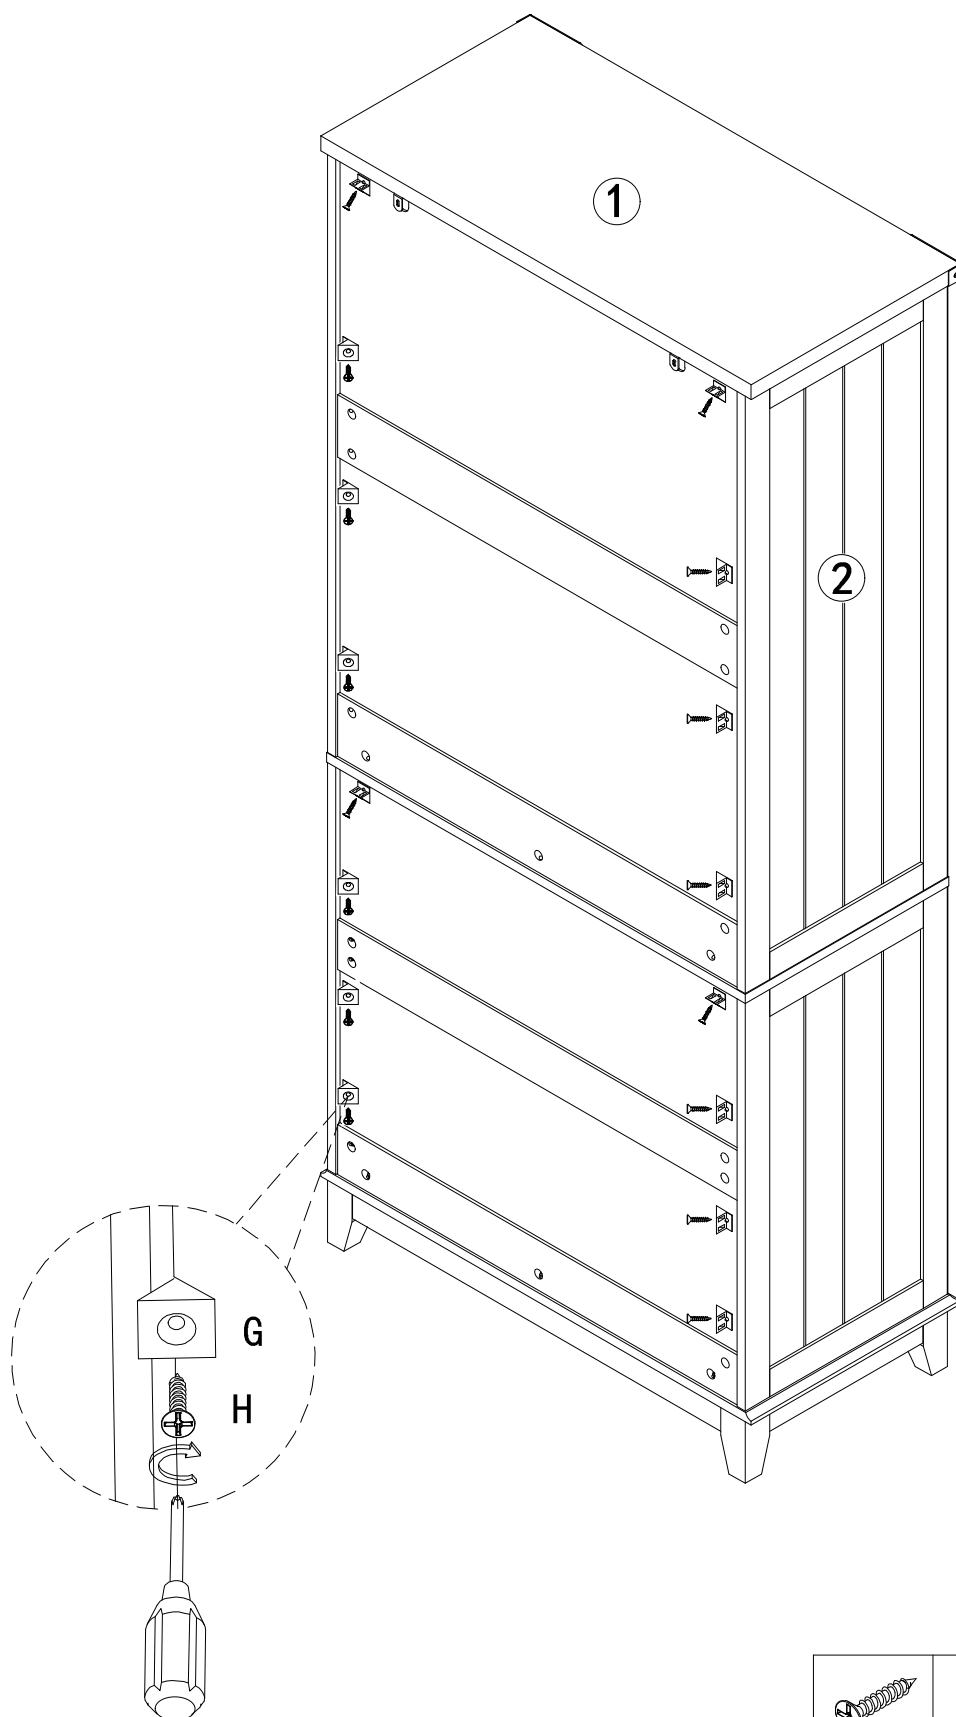


H X16PCS




G X16PCS

STEP 26

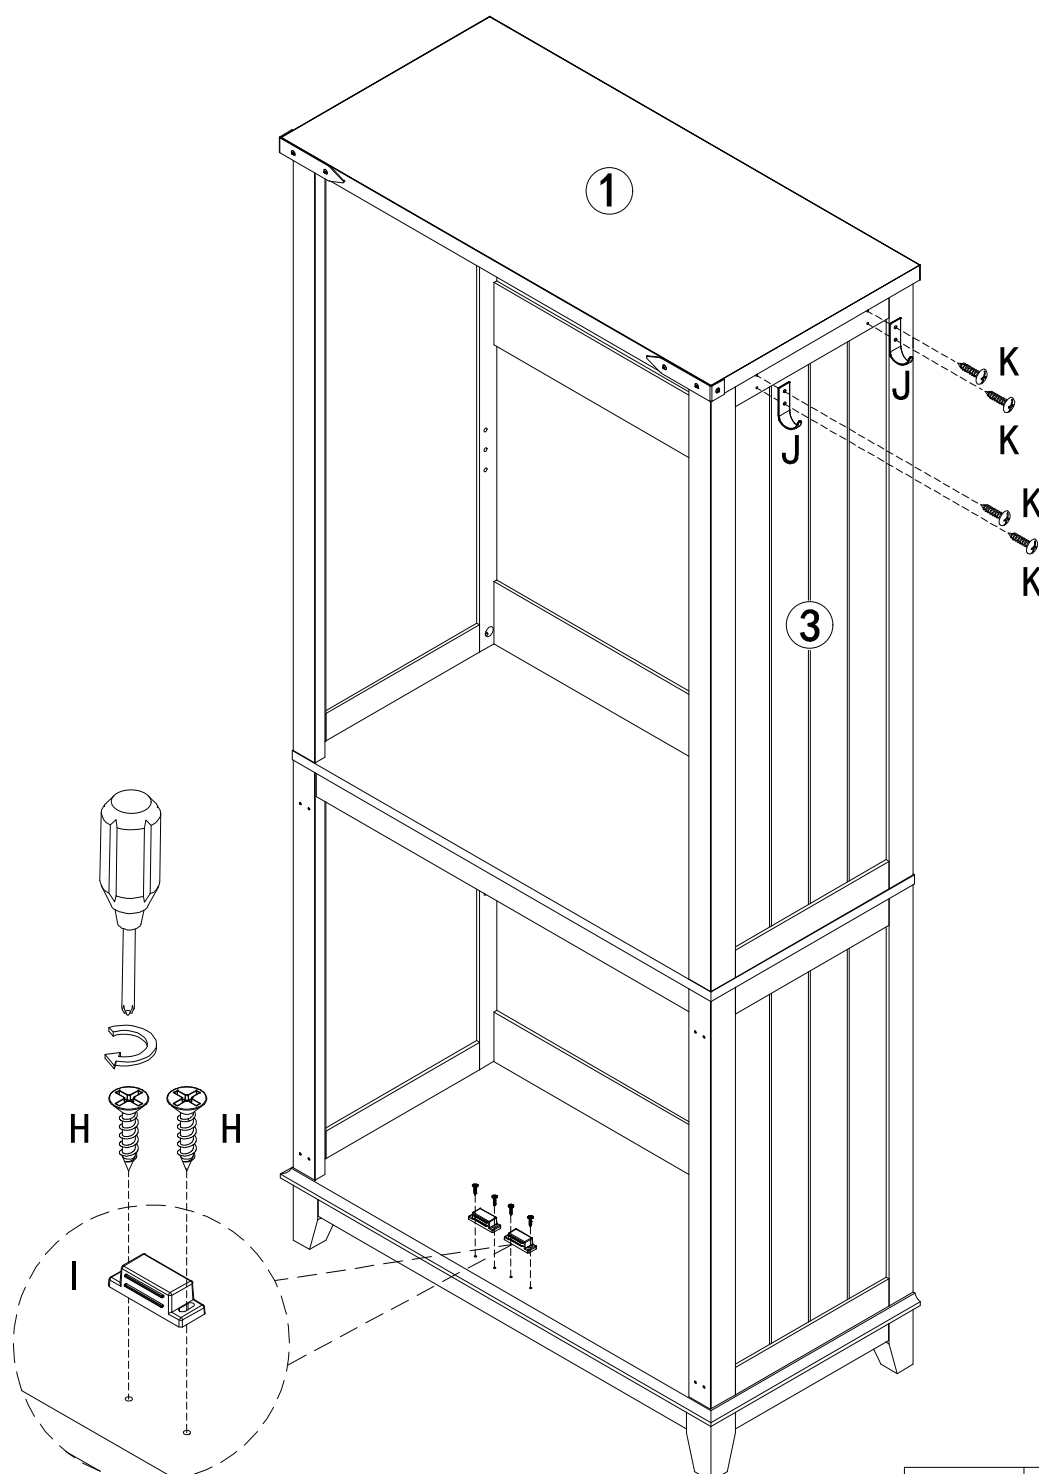


	K X 4 PCS
	J X 2 PCS
	I X 2 PCS
	H X 4 PCS

STEP 27

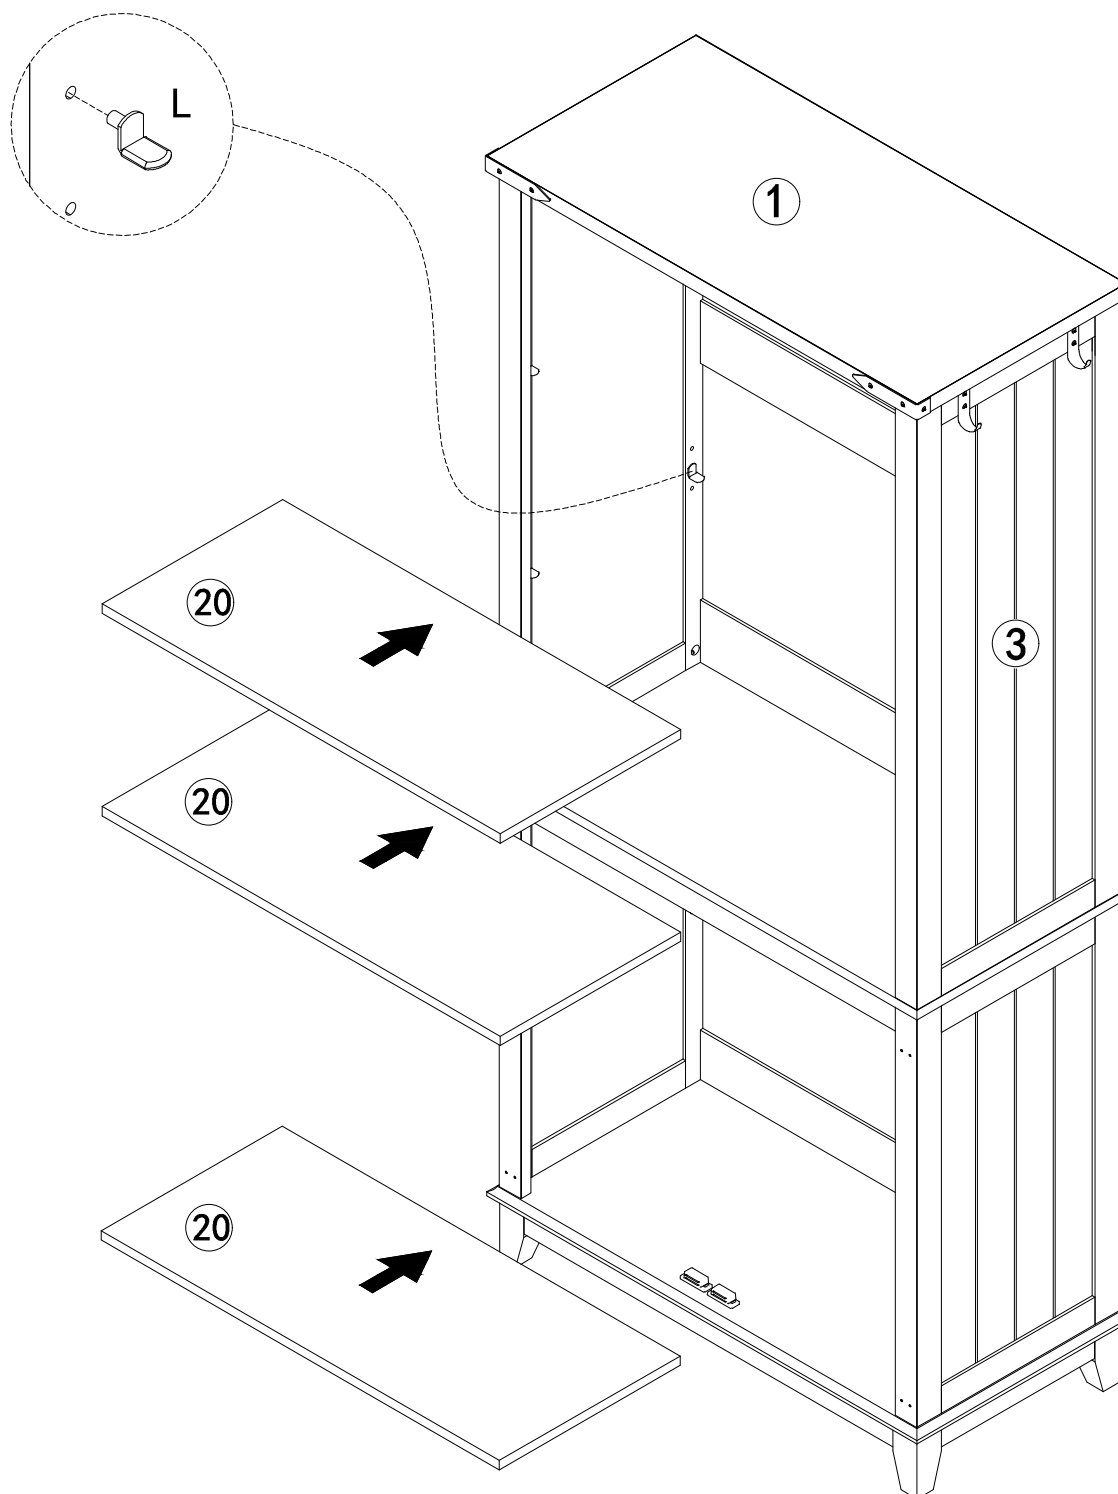

L X12PCS

STEP 28



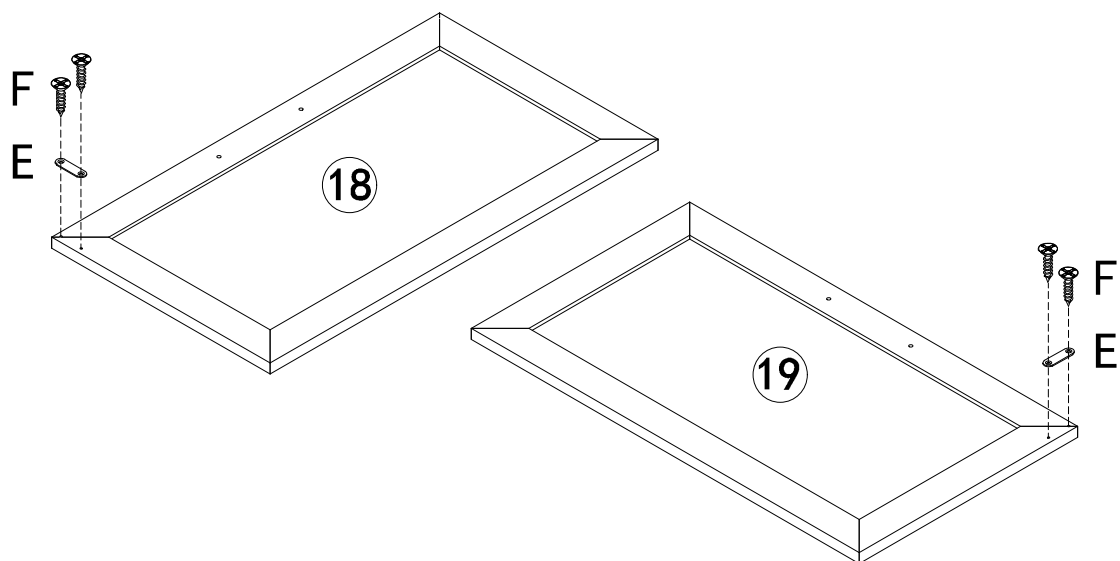


	E X 2 PCS
	F X 4 PCS

STEP 29



⚠ CAUTION

Pay attention to the direction of the hinge. place the hinge chain with the protruding side facing up.

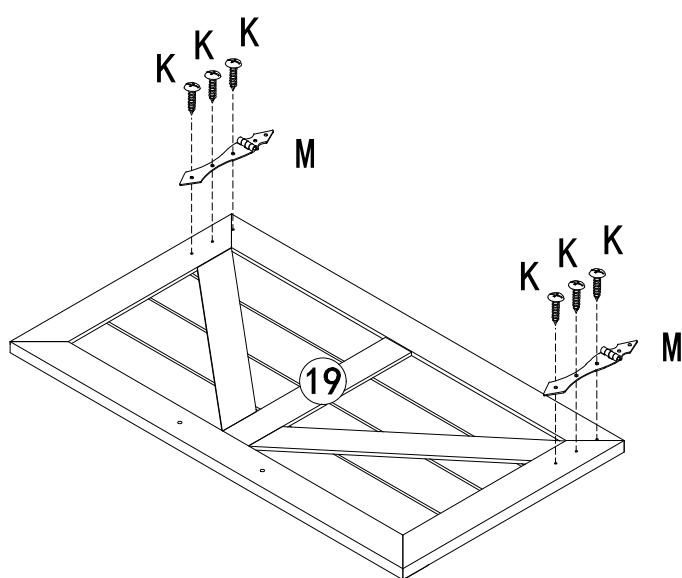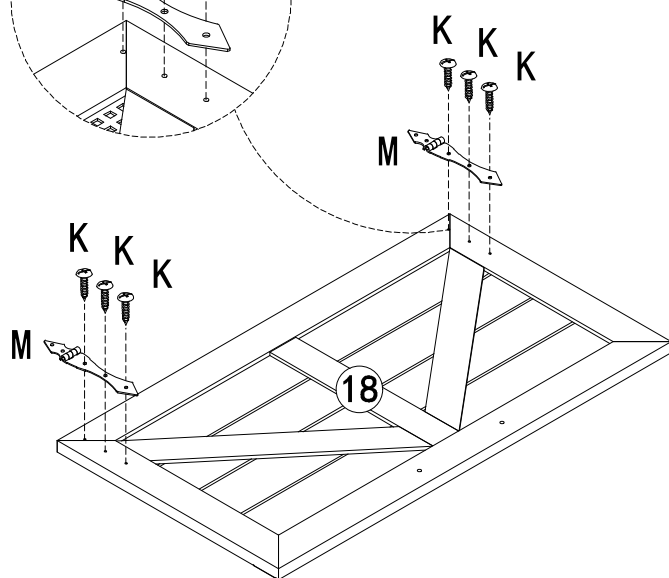


	M X 4 PCS
	K X 12 PCS

STEP 30

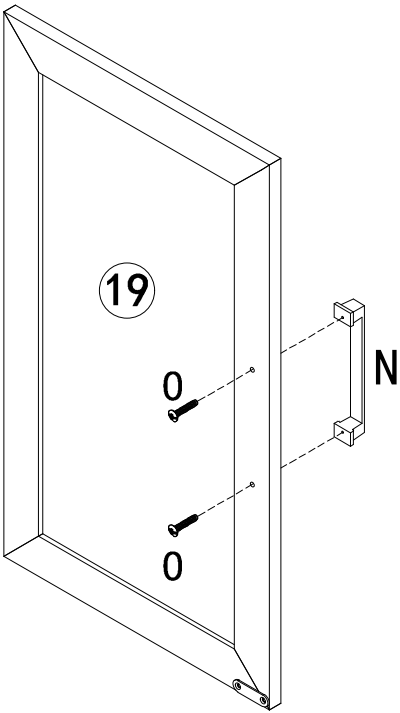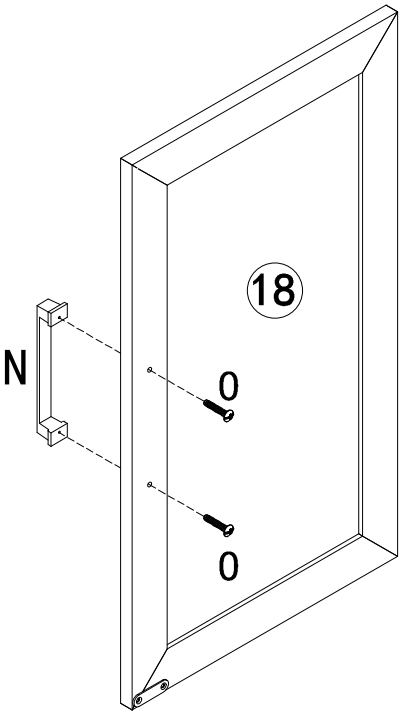

	0 X 4 PCS
	N X 2 PCS

STEP 31




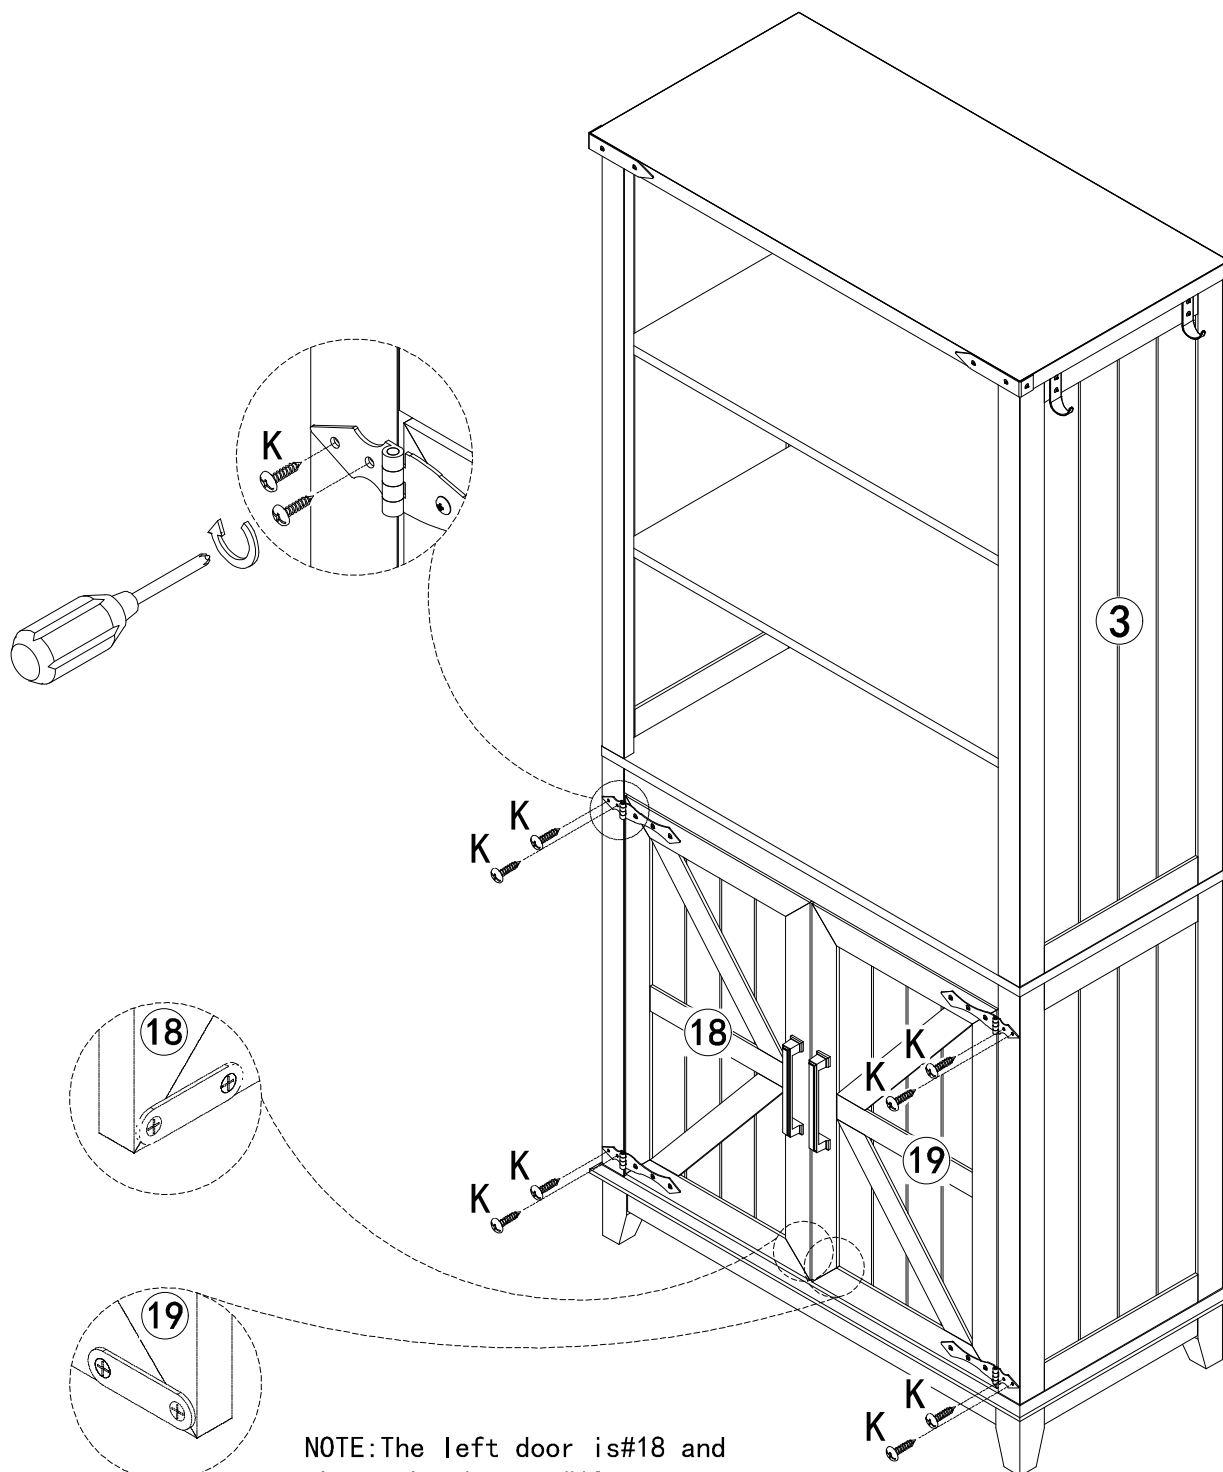


NOTE: The left door is #18 and the right door is #19,
The suction iron piece is located below the door




K X 8 PCS

STEP 32

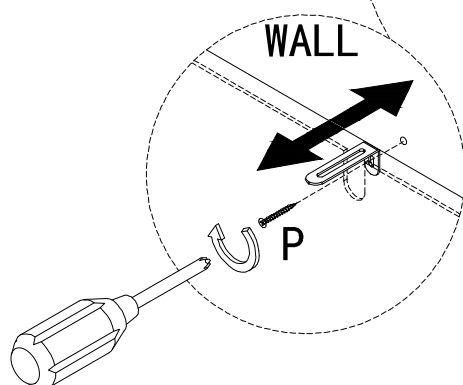

1. Mark the drill position on the wall with pencil.
2. Make 2 holes with a bit at the marked locations.
3. Tap the wall anchor (Q) into the drilled holes with a hammer.
4. Fixed the cabinet to the wall with screws (P)

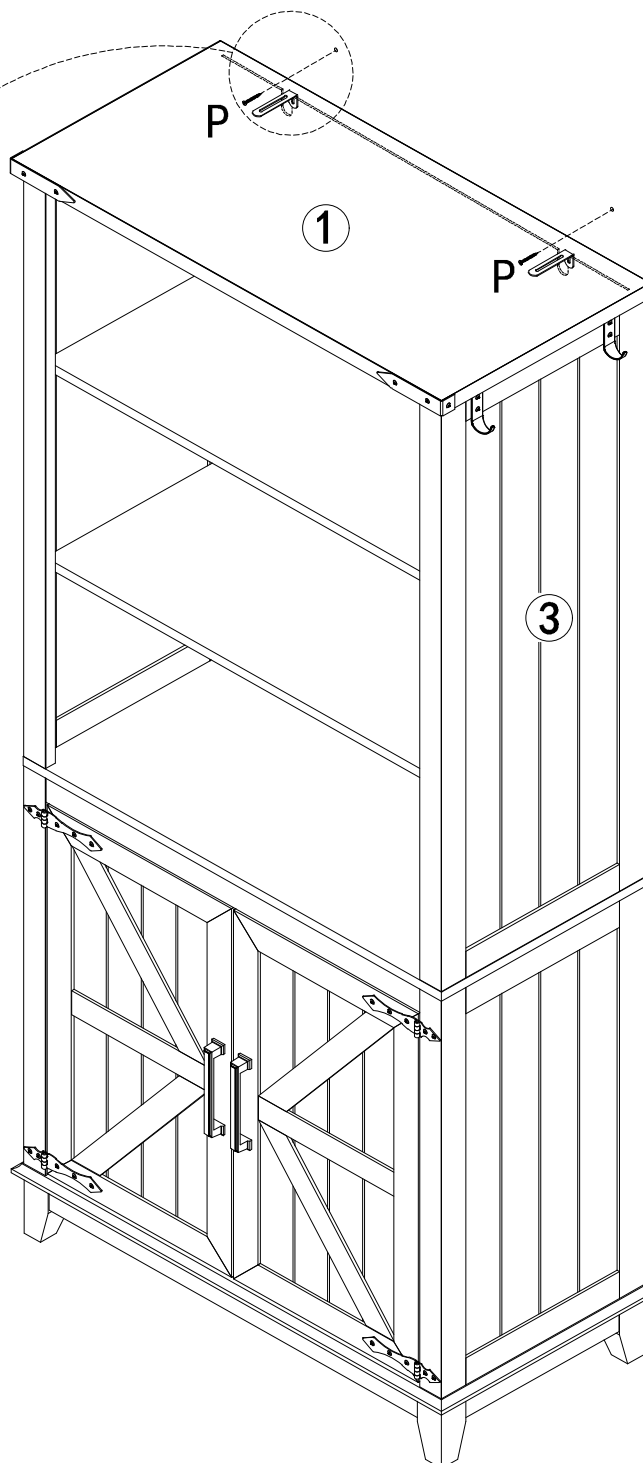

NOTE: According to the distance between the cabinet and the wall, adjust the #R fitting to the appropriate position, and then tighten all the screws on the #R fitting.



Q X 2 PCS



P X 2 PCS