INSTALLATION INSTRUCTION

LED Recessed

E-R4-0324

East Grove
• HOME •

CAUTION: To prevent electrical shock, ensure electricity has been turned off at the circuit breaker before beginning.

- Read all instructions before installing.
- System is intended for installation by a licensed electrician in accordance with the National Electrical Code (NEC) and local regulations.
- When handling the fixture, do not apply pressure to the LEDs. Hold the fixture by the base only.
- Retain installation instructions for future maintenance reference.

WARNING: All parts must be used as indicated in these instructions. This product is designed for use only with the supplied parts and/or accessories designated for use by **EastGroveHome**. Substitution of parts or accessories not designated for use with this product by **EastGroveHome** could result in personal injury or property damage, and will void the warranty. Contact an authorized dealer or the manufacturer if any parts are damaged or missing.

MAINTENANCE NOTE: Coastal conditions may cause mineral and residue build-up on the fixture. We recommend that customers in coastal areas clean all external surfaces of the fixture once every two weeks with a wet cloth.

MISE EN GARDE: Pour éviter tout choc électrique, assurez-vous que le disjoncteur soit mis hors tension avant de commencer.


- Lisez toutes les instructions avant l'installation.
- Le système doit être installé par un électricien licensié conformément au code national de l'électricité (NEC), et également aux règlements locaux.
- Lors de la manipulation du luminaire, n'appuyez pas sur les LED. Tenez-le uniquement par la base.

ATTENTION: Toutes les pièces doivent être utilisées comme indiqué dans ces instructions. Ce produit est conçu pour être utilisé seulement avec les pièces et/ou accessoires fournis pour être utilisés avec les produits **EastGroveHome**. Remplacer des pièces ou accessoires non conçus pour ce produit **EastGroveHome** pourrait causer des dommages corporels ou matériels et pourrait également causer l'annulation de la garantie. Veuillez contacter un revendeur autorisé ou le fabricant si des pièces manquent ou sont endommagées.

NOTE D'ENTRETIEN: Les conditions côtières peut causer une accumulation de minéraux et de résidue sur le luminaire. Nous recommendons aux clients qui resident dans les zones côtières de nettoyer toutes les surfaces externes du luminaire une fois toutes les deux semaines avec un chiffon humide.

HARDWARE

A



Wire Connector
Qty: 3 pcs

EastGroveHome.com
Phone: 888-602-0990

Corporate Headquarters
1000 N West Street, Suite 1200
Wilmington, DE 19801

*Corporate Address ONLY – Do not send returns here

INSTALLATION INSTRUCTION

LED Recessed

E-R4-0324

East Grove
• HOME •

INSTALLATION

1. At the point of installation, cut a round hole for the trim (See Fig.1).
   For E-R4-0324 cut the hole Ø4 1/4" diameter (Ø108mm).

2. Ceiling thickness range is ½" to 1½".

3. Take out fixture from packaging box.

4. Adjust to desired color temperature using switch on the side of the driver (See Fig.3).

5. Pull building supply wires through the ceiling cutout and
   open fixture junction box door(See Fig.2).
   Remove desired housing knockout and feed building wires
   into housing using appropriate connector.


6. Connect fixture wires to building wires (See Fig.4):
   Connect each supply wire with appropriate junction box wire connector.
   This fixture features electronic low voltage ELV or TRIAC dimming capabilities.
   To utilize ELV or TRIAC, wire black (line hot), white (line neutral) and
   green (ground) in accordance to dimmer specifications.
   When not using a dimmer, connect black fixture wire to hot,
   white fixture wire to neutral and green fixture wire to ground.
   Leave all other wires capped individually.

7. Place all wiring and connectors back in driver box and replace the box's cover.

8. Insert driver box through the mounting hole and secure to ceiling joist(See Fig.5).

9. Fold fixture torsion springs inward and insert trim assembly into ceiling cutout.
   Be sure once installed, trim assembly is flush and secure (see Fig.6).
   Press on the front of the rotatable lens and adjust to your desired beam direction.
   Turn on the power after installation,check the fixture can work well.

FIG. 1

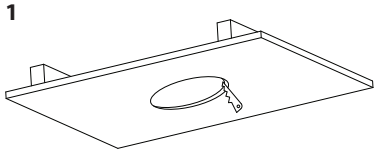

ROUND: CUT OUT
E-R4-0324: Ø4 1/4" (ø108mm)

FIG. 2

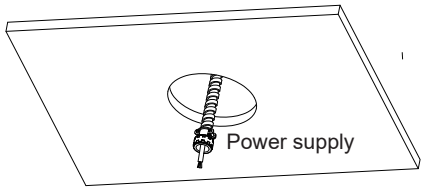


FIG.3




FIG.4

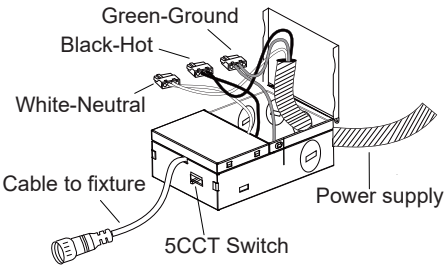


FIG.5


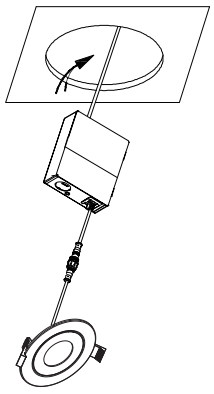


FIG.6



EastGroveHome.com
Phone: 888-602-0990

Corporate Headquarters
1000 N West Street, Suite 1200
Wilmington, DE 19801

*Corporate Address ONLY – Do not send returns here