




The photograph may not match the reference exactly. Please read the product description to identify the finish.

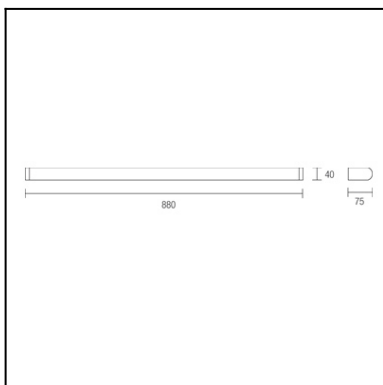

TECHNICAL CHARACTERISTICS

| | |
|------------------------|------------------|
| Type: | Wall fixture |
| IP Protection degrees: | IP44 |
| Light source 1: | 1 x G5 21W |
| Voltage / Frequency: | 220-240V/50-60Hz |
| Warranty (Years): | 2 |
| Units per box: | 8 |
| Net Weight (Kg): | 1.13 |



MATERIALS / FINISHES

Structure material: Extruded aluminium


Structure finish: Chrome

Diffuser material: Polycarbonate

Diffuser finish: Matt opal

GEAR

Gear included: Yes, electronic

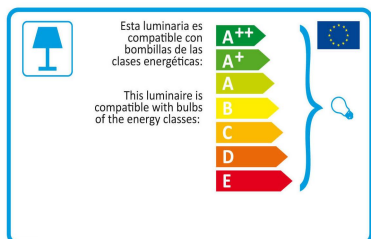


Click on image to download energy label

| Luminaire | | Measur. | | Lamp | | |
|----------------------------|-------------------------------|-----------------------------|-------------------------------|--------------------|----------------------|-------|
| Name | Aplique 1x21W T5 difusor opal | Name | Aplique 1x21W T5 difusor opal | Code | TL5 HE sup80 21W/840 | |
| Line | Eulumdat | | | Number | 1 | |
| | | | | Position | | |
| Efficiency | 43.37% | Coordinate system | CG | Total Flux | 1900.00 lm | |
| Maximum value | 131.99 cd | Position | C=0.00 G=60.00 | Double Symmetrical | | |
| Rectangular Luminaire | Length | 880 mm | Width | 38 mm | Height | 77 mm |
| Rectangular Luminous Area | Length | 865 mm | Width | 36 mm | Height | 36 mm |
| Horizontal Luminous Area | 0.031140 m2 | Emitting area on Plane 180° | | 0.031140 m2 | | |
| Emitting area on Plane 0° | 0.031140 m2 | Emitting area on Plane 270° | | 0.001296 m2 | | |
| Emitting area on Plane 90° | 0.001296 m2 | Glare area at 76° | | 0.037748 m2 | | |
| Symmetry Type | Double Symmetrical | Maximum Gamma Angle | | 180 | | |
| Measurement Distance | 0.00 | Measurement Flux | | 1900.00 lm | | |
| Operator | Asselum | Source voltage | | | | |
| Temperature | 25.00 °C | Source current | | | | |
| Humidity | 60.00 % | Photocell | | | | |
| Notes | | | | | | |

| Luminaire Lamps | | | | | |
|-----------------|----------------------|--------------------------------|-----------|----------|------|
| Line | Code | Name | Flux [lm] | Pow. [W] | Q.ty |
| Eulumdat | TL5 HE sup80 21W/840 | TL5 HE sup80 21W/840 - 21.00 W | 1900.00 | 21.00 | 1 |
| C.I.E. | 28 55 79 70 43 | D DIN 5040 | | B11 | |
| F UTE | 0.30 J + 0.13 T | B NBN | | BZ 7 | |

880mm x 38mm

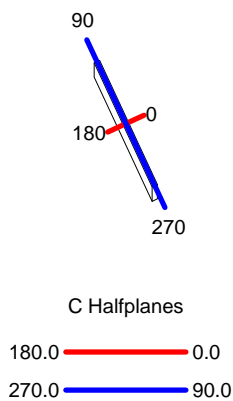

ULOR 12.95 %
 DLOR 30.42 %
 RN 29.86 %

