




Heavy Duty

Double Rabbit Hutch


Assembly
Instructions

Item #01551

Revised: 04.12.16



#902070
Left Side Panel

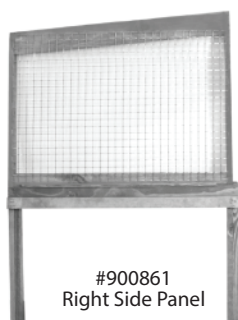

#900861
Right Side Panel




#900104
Roof Panel




#900588
Back Panel




#902071
Front Panel



#900202
Divider



#900264
Floor Panel



#900033
Pan



#900308
Pan Rails

PARTS DESCRIPTION:

14 - Wing Nuts



16 - 2" Bolts



6 - 1 1/2" Bolts



5 - 3/4" Bolts




#900129
Hardware

Tools Required:
Standard Screwdriver

All wire
must face
into the
cage

STEP 1


Install Pan Rails
on the Left "B"
and Right "B"
sides using
8- 2" Bolts



2" Bolts

1 of 2


STEP 2

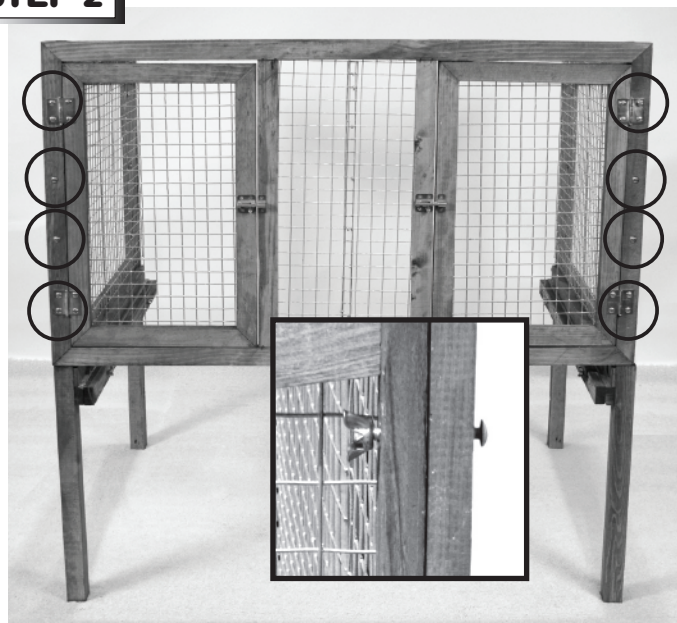


Fasten Side Panels (B) to Front Panel (C).
Use **8**- 2" Bolts and **8**- Wing Nuts.

Make Sure Door Faces Outward on Left Side
and that the Hutch Slants to the Back.

STEP 3

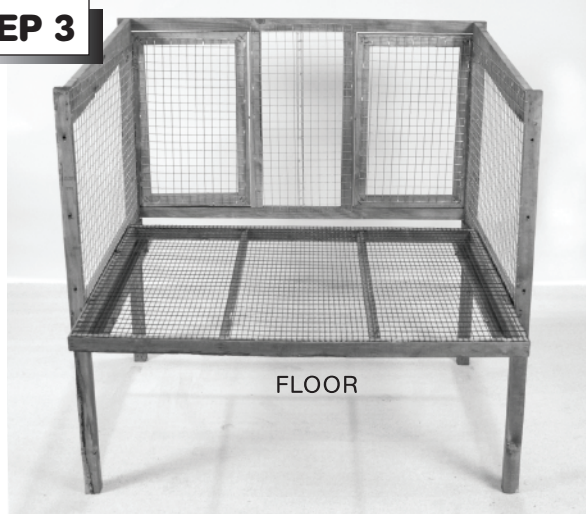

Slide Floor into Bottom of Hutch, Wire Side Up.
Align Side Holes and Fasten Back Panel (D)
to Side Panels using
8- 1 1/2" Bolts and **8- Wing Nuts**.

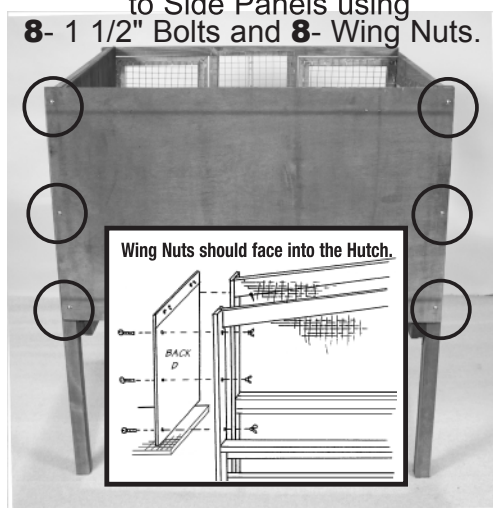


STEP 4

Insert the
Divider into the
grooves on the
front and back
panels of
Hutch and
slide down until
Divider lines up
with the floor.




STEP 5

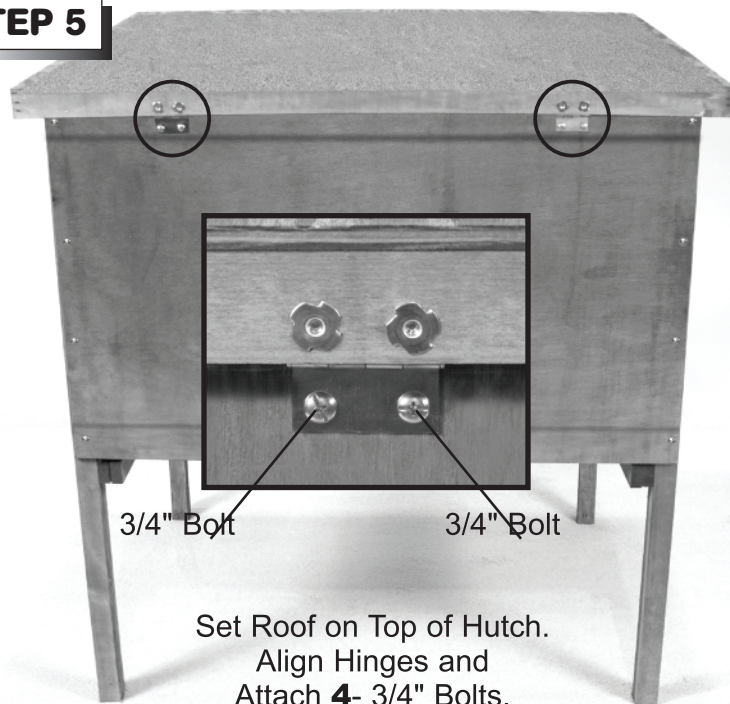


Set Roof on Top of Hutch.
Align Hinges and
Attach **4- 3/4" Bolts**.

Install "Stop Chain" as Shown Below using **1- 3/4" Bolt**.



STEP 6

Slide Pan in Front Below Floor on Pan Rails.
Assembly is Now Complete!

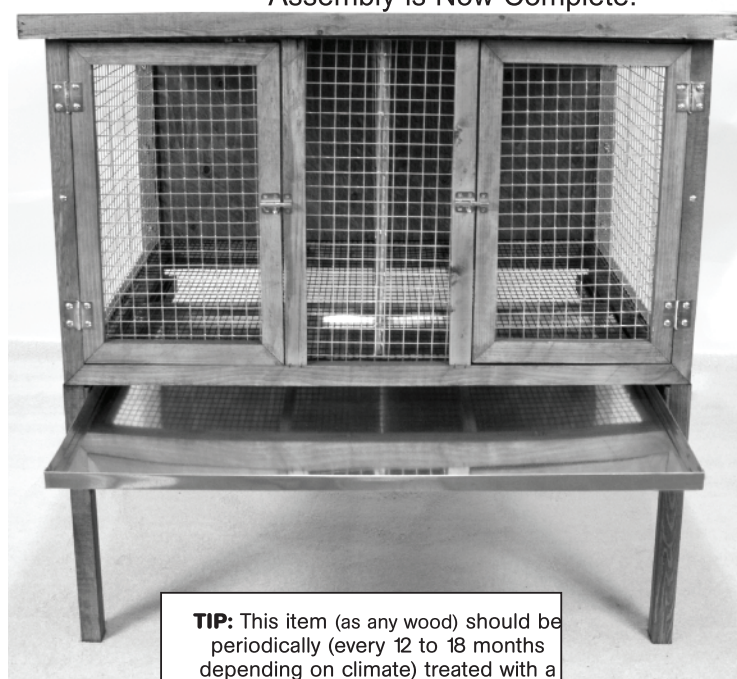

TIP: This item (as any wood) should be periodically (every 12 to 18 months depending on climate) treated with a non-toxic exterior grade stain.