



# Underscore®

## 6' VibrAcoustic® Bath with Bask™ Heated Surface

### K-1174-VBW

#### Features

- Six transducers and a control amplified with 25' (7.6 m) of wiring.
- User-friendly high-resolution color touch screen (in polished chrome).
- Slotted overflow for maximum bathing depth.
- Molded lumbar support for comfort.
- 72" (1829 mm) x 42" (1067 mm) x 23" (584 mm)

#### Material

- Acrylic

#### Hydrotherapy

- VibrAcoustic technology emits sound waves and offers a surround sound experience.
- Bask™ heated surface with three temperature settings.

#### Installation

- Drop-in or under-mount.



#### Codes/Standards











CSA B45.5/IAPMO Z124  
ASTM E162  
ASTM E662  
UL 1795  
CSA C22.2 No. 218.2

#### KOHLER® One-Year Limited Warranty


See website for detailed warranty information.

#### Available Color/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	Ice™ Grey
	G9	Sandbar
	33	Mexican Sand™
	K4	Cashmere
	58	Thunder™ Grey
	7	Black Black™

No change in measurements if connected with required drain illustrated. (K-7272)

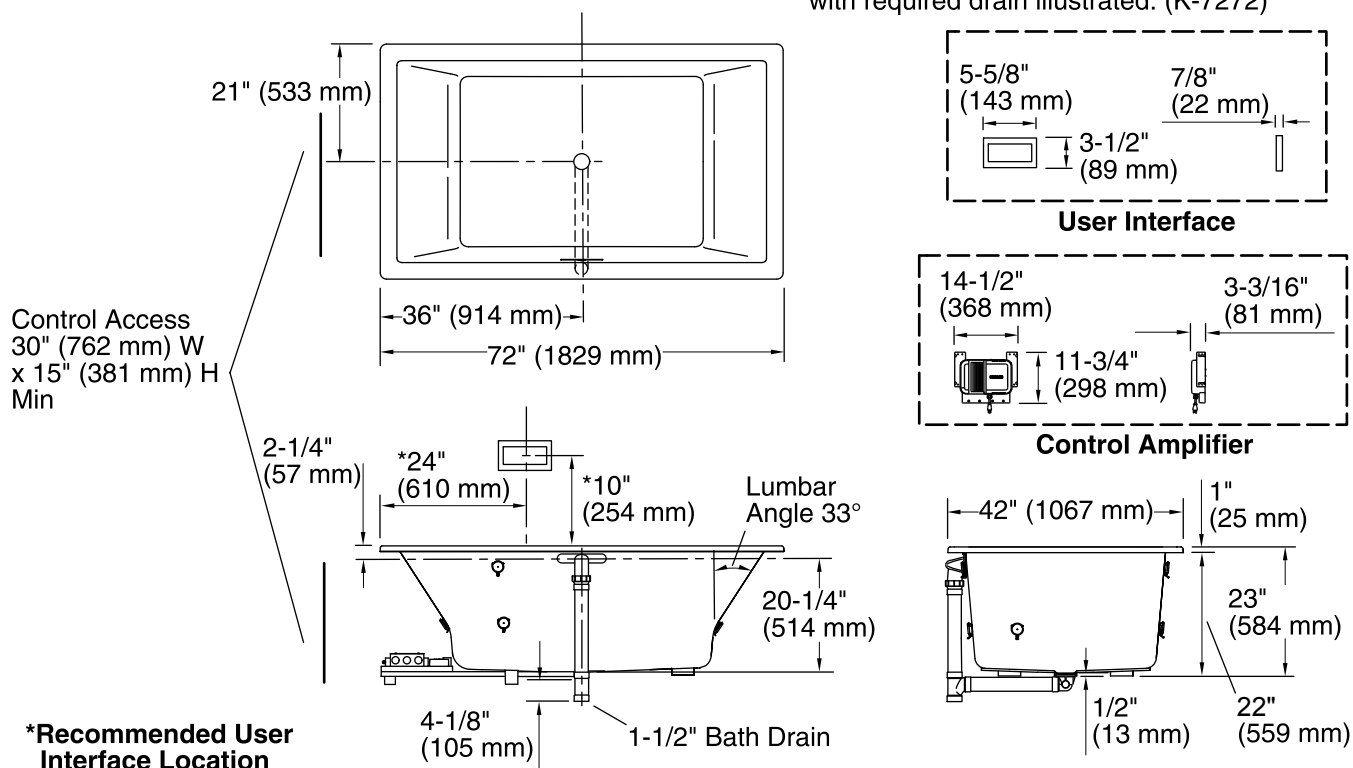

### Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Amplifier, Heater: 120 V, 15 A, 50/60 Hz

### Technical Information

All product dimensions are nominal.

Installation:	Drop-in/Undermount
Drain location:	Reversible
Basin area, bottom:	45-3/4" x 32" (1162 mm x 813 mm)
Basin area, top:	66" x 36" (1676 mm x 914 mm)
Weight:	95 lbs (43.1 kg)
Minimum floor load:	60.7 lbs/ft <sup>2</sup> (296.4 kg/m <sup>2</sup> )
Water depth:	19" (483 mm)
Water capacity:	139 gal (526.2 L)
Cutout:	Drop-in, 70-1/2" x 40-3/16" (1791 mm x 1021 mm)
Under-mount kit:	K-592
Electrical rating:	Amplifier: 120 V, 50/60 Hz, 15 W Heater: 120 V, 1.1 A, 60 Hz, 65 W

### Notes

Install this product according to the installation guide. Ensure that the bath, user interface, amplifier, and transducers are functional before completing the installation.

Control amplifier fits 16" (406 mm) center studs. 25' (7.6 m) cables are included.

Locate the bath within 24" (610 mm) of a GFCI-protected 120 V, 15 A grounded electrical outlet. A second grounded outlet within the wall framing must be within 24" (610 mm) of the planned control amplifier. One electrical service may be used for the entire bath and related electrical components.

Hot water supply should be 70% of capacity or greater. Installations will vary.