


Type _____

Catalog No.	Finish					Lamping	Dimensions (Inches)	
	Platinum Mist	Pearl Nickel	Brushed Nickel	Polished Brass	Polished Chrome		A	B
						1 (m) 60w	11-1/2	3-3/4
						2 (m) 60w	14	4-3/4

Catalog No.	Golden Umber	White	Cobble-Stone	Oxford Silver	Dimensions (Inches)	
					Lamping	A B
					1 (m) 60w	11-1/2 3-3/4
					2 (m) 60w	14 4-3/4

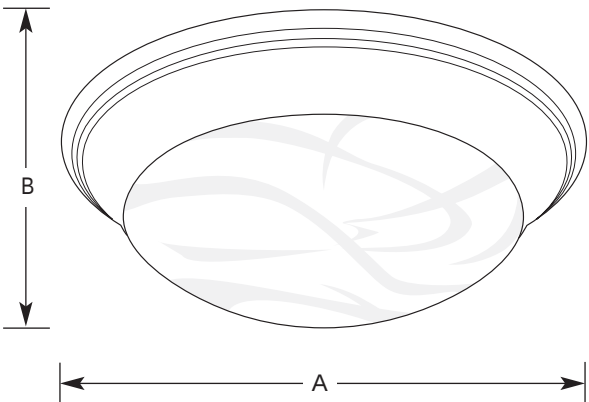

Specifications:

General

- Steel construction
- Hand-painted finish
- Brushed with clear lacquer finish
- Plated Polished Brass, Polished Chrome finish
- Etched alabaster style glass
- Glass twist-locks into pan for easy relamping
- No exposed fasteners
- Stamped ceiling pan with ribbed details
- Companion fixtures: any style with matching finishes

Mounting

- Flush ceiling mount
- Covers outlet box
- Mounting strap for outlet box included
- Twist-lock glass

Electrical

- Ceramic medium based sockets
- Pre-wired

Labeling

- UL CUL damp location listed

FLUSH MOUNT



Report No. 2000009

No. Lamps: 1 Type Lamp: 60A19-GE Total Lumens: 865


Fixture Efficiency: 54.3%

S/MH Ratio: 1.3

Quick Calculator Charts

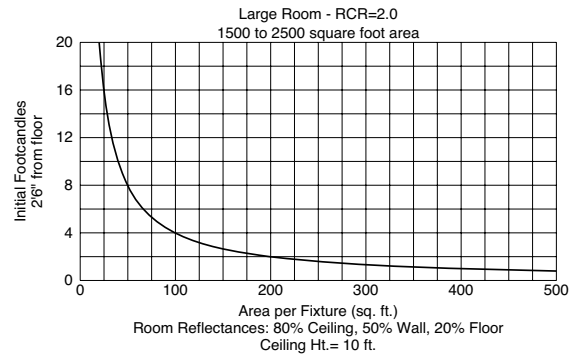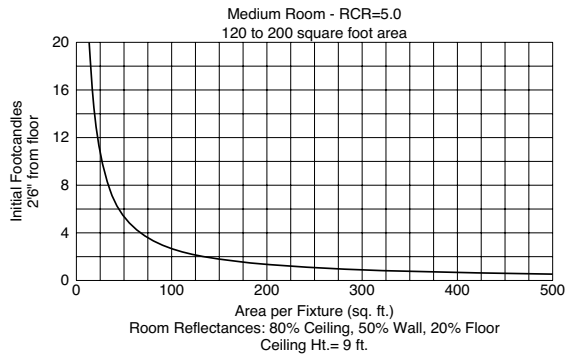

DISTRIBUTION CURVE

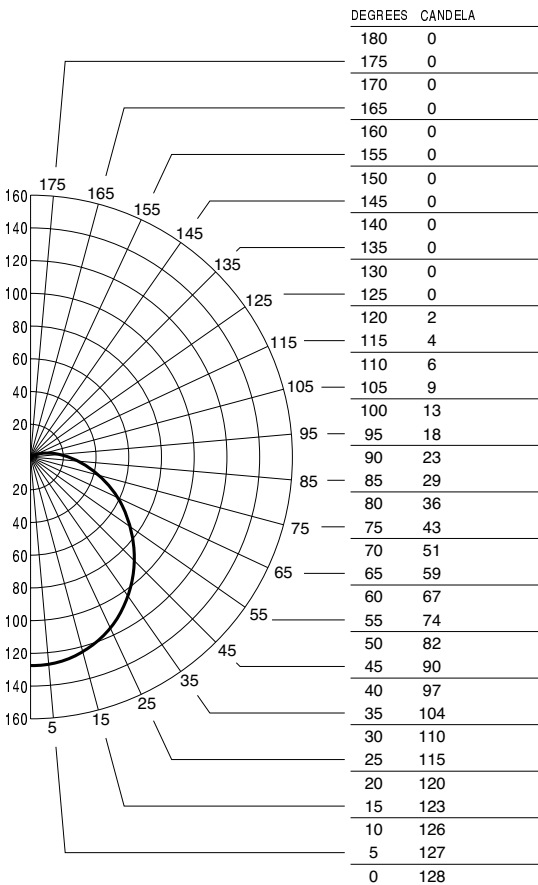

INTENSITY DATA

Single Fixture Data					
Ceiling Ht.(Ft.)	10% Values		Zero Degrees	50% Values	
	Beam Angle - 112			Beam Angle - 65	
	Ft.-C	Beam Dia.		Ft.-C	Beam Dia.
8	0.4	16	4.2	2.1	7
10	0.2	22	2.3	1.1	10
12	0.1	28	1.4	0.7	12
14	0.1	34	1.0	0.5	15
16	0.1	40	0.7	0.3	17

Ft.-C (Footcandles) are initial and measured 2'-6" from floor

Single Fixture Data

ZONAL CAVITY COEFFICIENTS OF UTILIZATION

Effective Floor Cavity Reflectance 0.20																						
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
0	64	64	64	64	62	62	62	62	58	58	58	55	55	55	52	52	52	50	50	50	50	
1	57	54	51	48	55	52	49	47	49	47	45	46	44	43	43	42	41	39	39	39	39	
2	51	46	42	38	49	45	41	37	42	39	36	40	37	34	37	35	33	32	32	32	32	
3	46	40	35	31	45	39	34	31	37	33	30	34	31	29	33	30	28	26	26	26	26	
4	42	35	30	26	41	34	29	26	32	28	25	31	27	24	29	26	23	22	22	22	22	
5	39	31	26	22	37	30	26	22	29	25	21	27	24	21	26	23	20	19	19	19	19	
6	36	28	23	19	34	27	23	19	26	22	19	25	21	18	23	20	18	16	16	16	16	
7	33	25	20	17	32	25	20	17	24	19	16	22	19	16	21	18	16	14	14	14	14	
8	31	23	18	15	30	23	18	15	22	17	15	21	17	14	20	16	14	13	13	13	13	
9	29	21	17	13	28	21	16	13	20	16	13	19	15	13	18	15	12	11	11	11	11	
10	27	20	15	12	26	19	15	12	18	14	12	17	14	12	17	14	11	10	10	10	10	

FLUSH MOUNT



Report No. 2000010

No. Lamps: 2 Type Lamp: 60A19-GE Total Lumens: 1730

Fixture Efficiency: 55.0%


S/MH Ratio: 1.3

Quick Calculator Charts

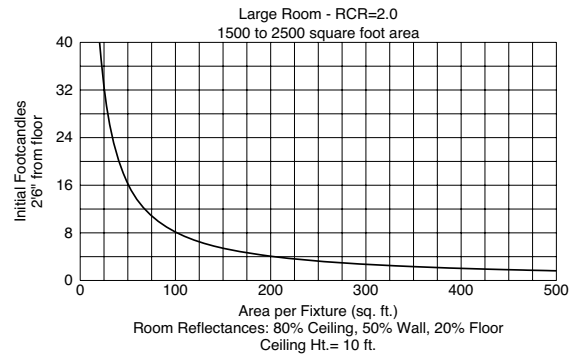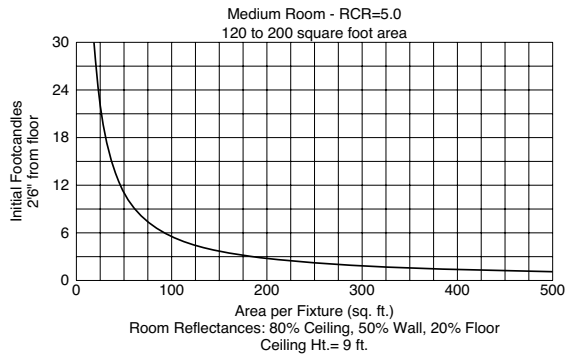

DISTRIBUTION CURVE

INTENSITY DATA

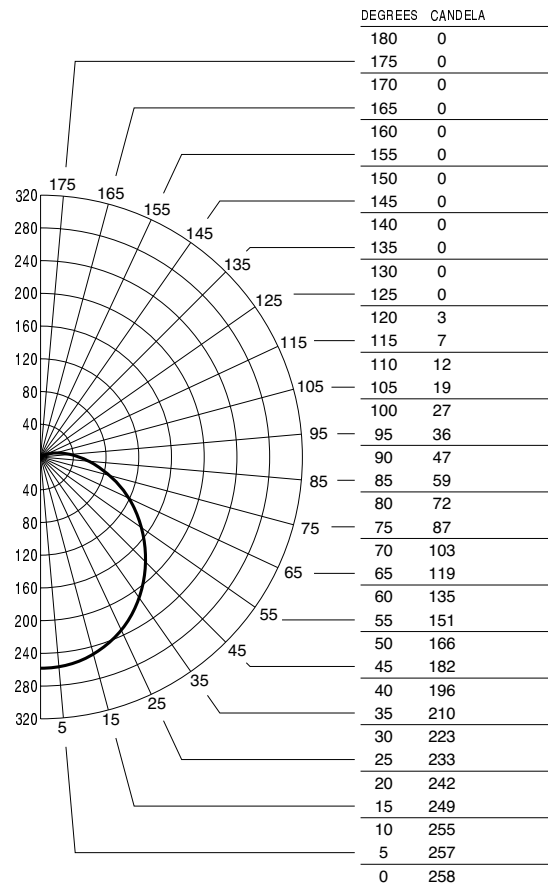

Single Fixture Data

	10% Values		Zero Degrees	50% Values	
Ceiling Ht.(Ft.)	Beam Angle - 112			Beam Angle - 65	
	Ft.-C	Beam Dia.		Ft.-C	Beam Dia.
8	0.9	16	8.5	4.3	7
10	0.5	22	4.6	2.3	10
12	0.3	28	2.9	1.4	12
14	0.2	34	2.0	1.0	15
16	0.1	40	1.4	0.7	17

Ft.-C (Footcandles) are initial and measured 2'-6" from floor

ZONAL CAVITY COEFFICIENTS OF UTILIZATION

		Effective Floor Cavity Reflectance 0.20																			
		80				70				50				30				10			
RC	RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
0	0	65	65	65	65	63	63	63	63	59	59	59	56	56	56	53	53	53	51		
1	1	57	54	51	49	56	53	50	48	49	47	45	47	45	43	44	43	41	40		
2	2	52	47	42	39	50	45	41	38	43	39	36	40	37	35	38	36	34	32		
3	3	47	40	36	32	45	39	35	31	37	33	30	35	32	29	33	30	28	26		
4	4	43	36	30	26	41	35	30	26	33	29	25	31	27	24	29	26	24	22		
5	5	39	32	26	23	38	31	26	22	29	25	22	28	24	21	26	23	20	19		
6	6	36	28	23	20	35	28	23	19	26	22	19	25	21	18	24	20	18	17		
7	7	33	26	21	17	32	25	20	17	24	20	17	23	19	16	22	18	16	15		
8	8	31	23	19	15	30	23	18	15	22	18	15	21	17	14	20	17	14	13		
9	9	29	21	17	14	28	21	17	13	20	16	13	19	16	13	18	15	13	12		
10	10	27	20	15	12	26	19	15	12	18	15	12	18	14	12	17	14	11	10		