




ASSEMBLY INSTRUCTION

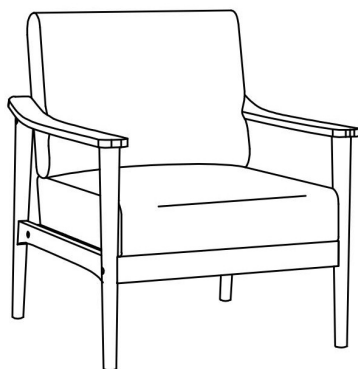


PARTS

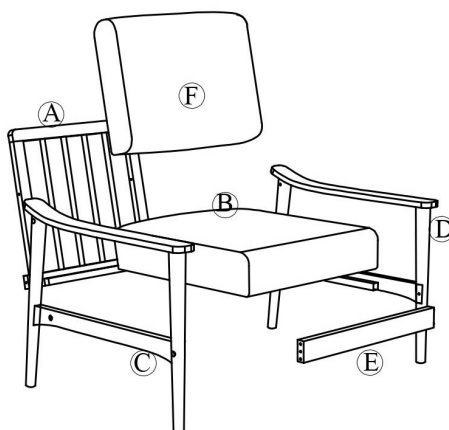


PARTS LIST



Back x 1




Seat cushion x 1




Left Arm frame x 1



Right Arm Frame x 1



Stretcher x 1




Back cushion x 1

HARDWARE LIST

①

Bolt x 6




②

Spring washer x 6




③

Flat washer x 6



④

Dowel x 4



⑤

Allenkey x 1





STEP 1:

Place all parts on a clean, smooth surface.

Insert Dowel (4) to part E

Attach C & D to A & E by using Bolt (1), Spring washer (2), Flat washer (3) and Allen key (5) as shown

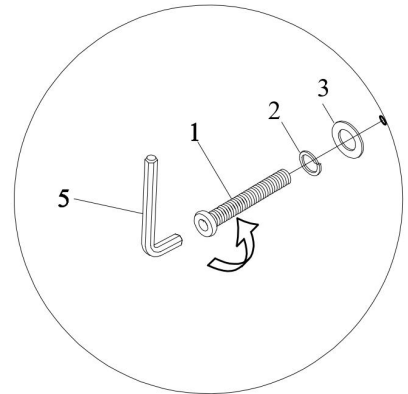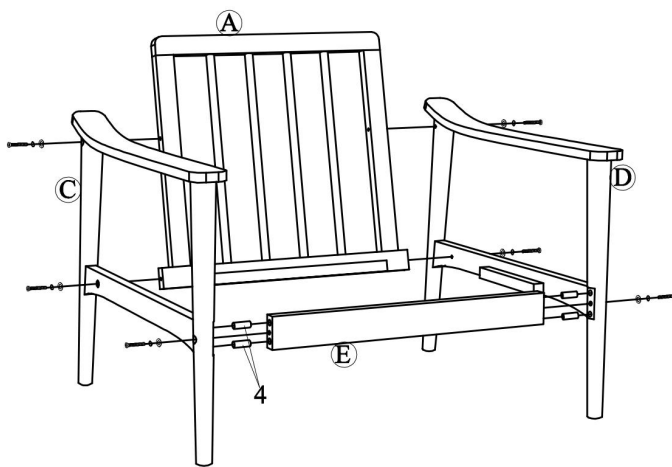

STEP 2:

Insert B to the seat frame as shown.

Place F on the chair back

