

Assembly Instructions






Assembly Method

Warning: Power must be disconnected before installation.


1. First, remove the screws and take out the metal bracket.



2. Drill holes in the ceiling and secure the bracket using expansion bolts.

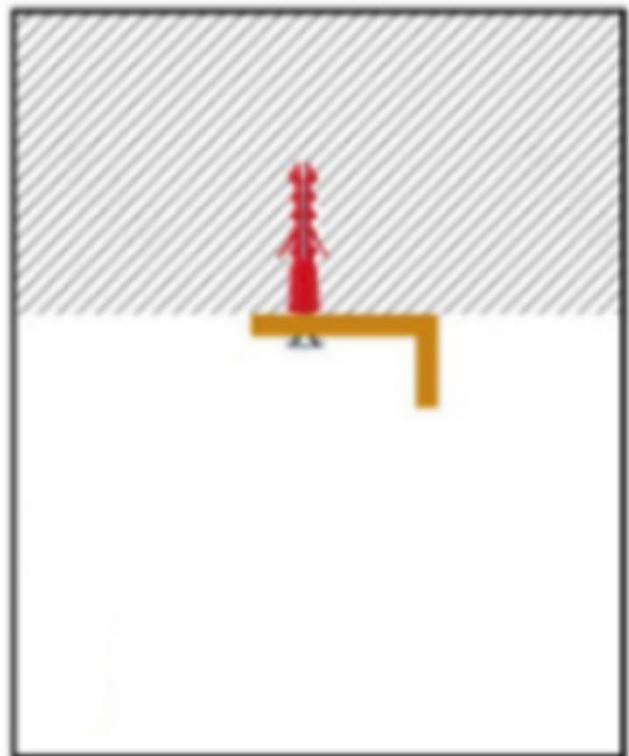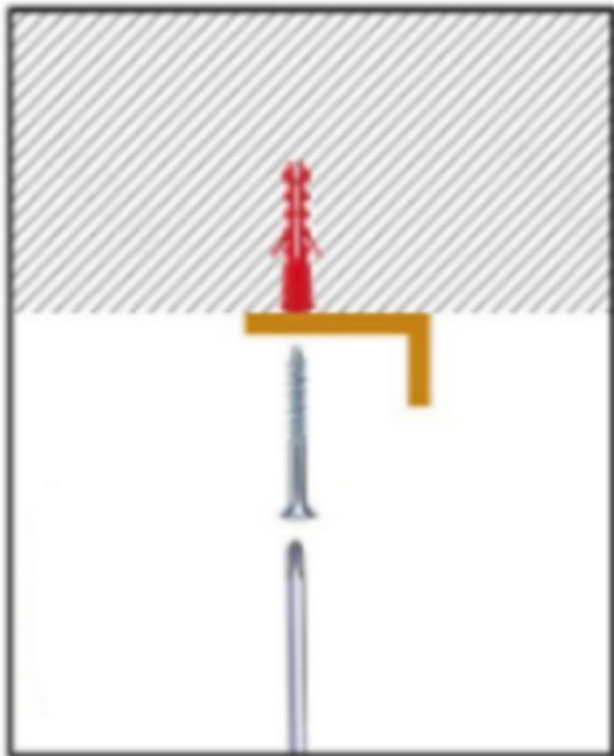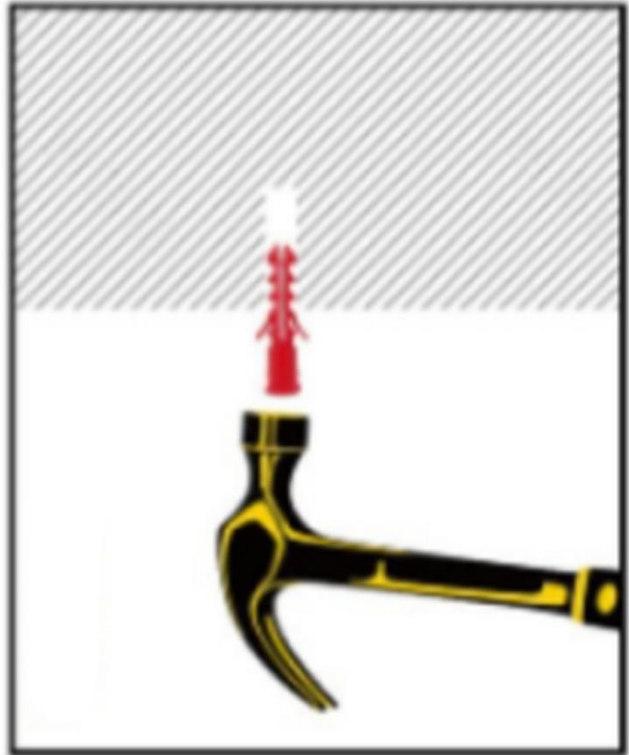


3. Install the bracket on the ceiling as shown, positioning it next to the pre-routed cables.

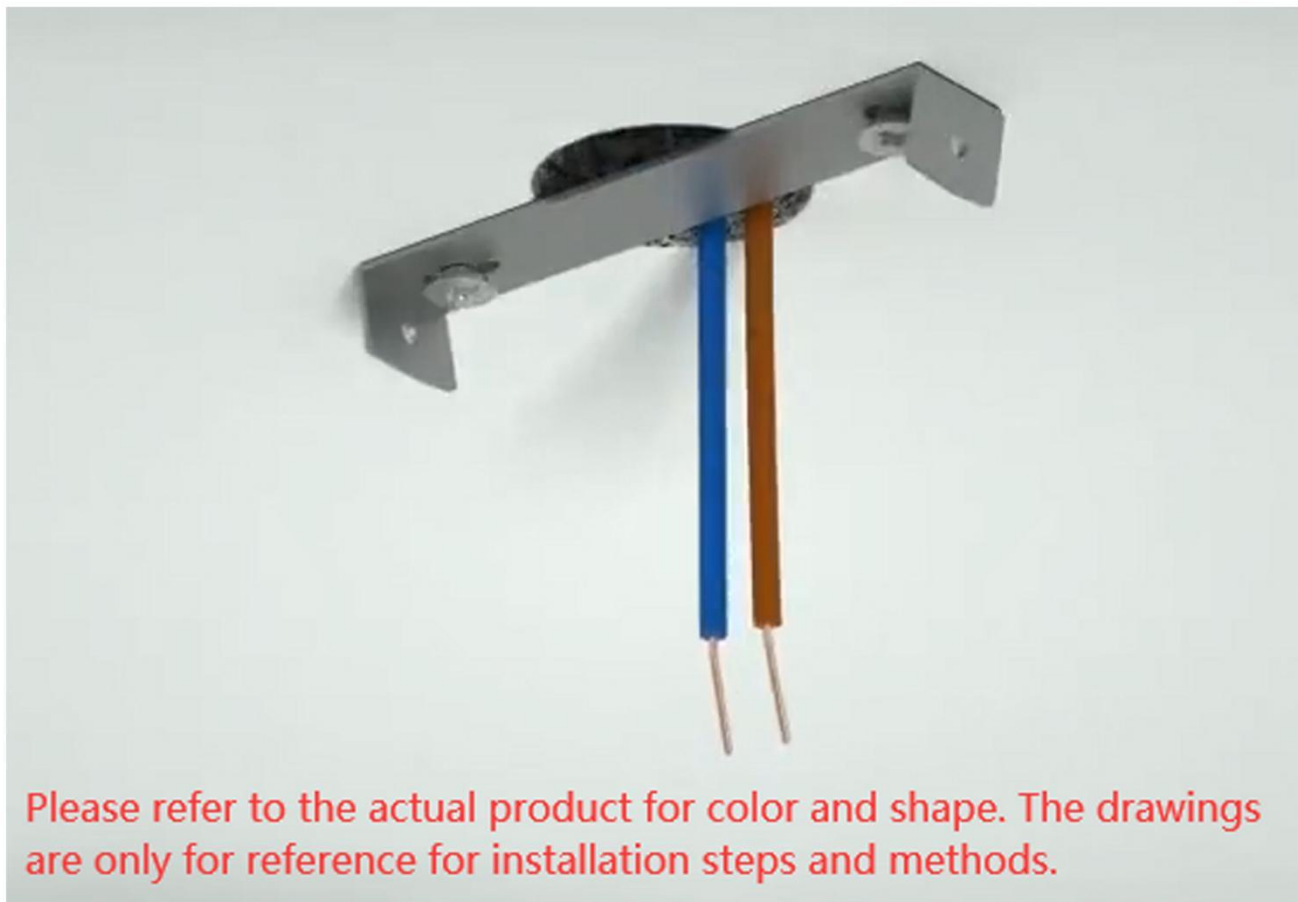


Please refer to the actual product for color and shape. The drawings are only for reference for installation steps and methods.

4. The yellow-green wire is the ground wire; connect it to the grounding terminal.

The two silvery-white wires are the power supply wires; connect them to the neutral and live wires, respectively.

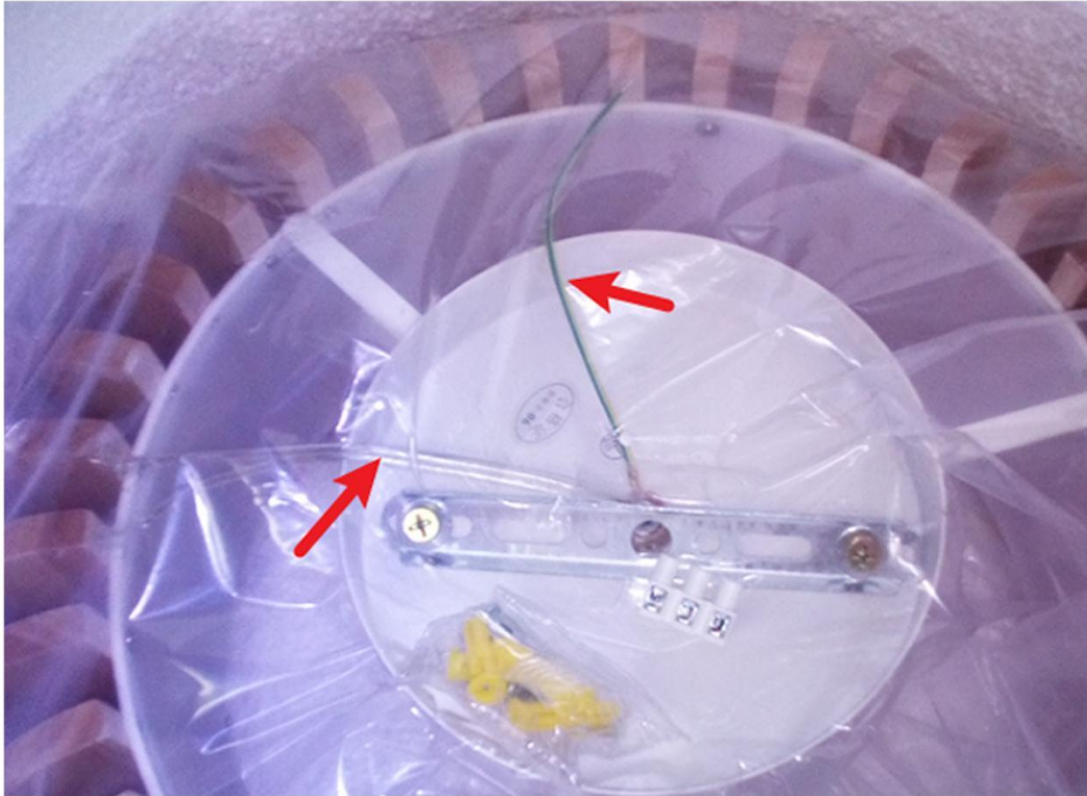

5. Insert the wires into the 3-port connector as shown.
Finally, secure the ceiling canopy.

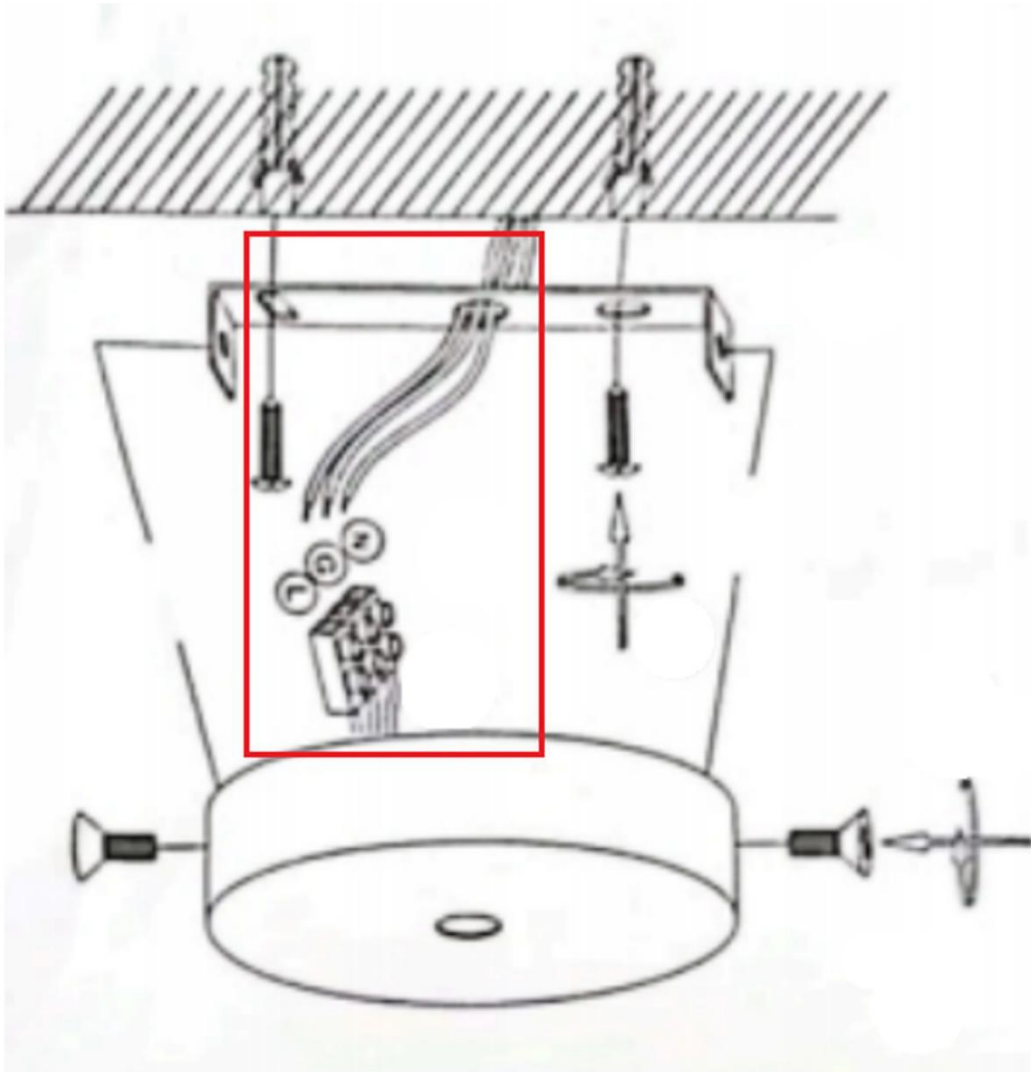

The installation is complete.

Your fixture is now assembled and ready to use.