



# Simplice® | K-27389-4

Single-handle bathroom sink faucet, 1.2 gpm

## Features

- A single handle controls both on/off activation and temperature setting
- 1.2 gpm (4.5 lpm) maximum flow rate at 60 psi (4.14 bar)
- KOHLER® ceramic disc valves exceed industry longevity standards for a lifetime of durable performance
- Clicker drain with tailpiece and overflow
- Coordinates with other products in the Simplicite collection
- This product can help a building earn Water Efficiency points in LEED® Green Building Rating System



## Sustainability



## Available Colors/Finishes

*Color tiles intended for reference only.*

- |    |                        |
|----|------------------------|
| CP | Polished Chrome        |
| BN | Vibrant Brushed Nickel |
| BL | Matte Black            |



1-800-4KOHLER (1-800-456-4537)  
Kohler Co. reserves the right to make revisions without notice to product specifications.  
For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.  
8-04-2026 13:00 - US-CA

THE BOLD LOOK  
OF **KOHLER**

## Codes/Standards

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.



ADA CSA B651 OBC

ASME A112.18.1/CSA B125.1  
NSF/ANSI/CAN 372  
NSF/ANSI/CAN 61  
DOE - Energy Policy Act 1992  
EPA WaterSense®  
California Energy Commission (CEC)  
ADA  
ICC/ANSI A117.1  
CSA B651  
OBC

## Recommended Products/Accessories

K-23726 Drain treatment  
K-27395 Robe hook  
K-27397 Pivoting toilet paper holder  
K-23723 Faucet cleaner  
K-27393 18" towel bar  
K-27394 24" towel bar  
K-27396 Towel arm

## Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty

## Technical Information

All product dimensions are nominal.

### Handle

Handle Style/Type: Lever

### Spout

Spout Reach: 5-1/8" (130 mm)

### Flow Rate

Faucet Flow Rate: 1.2 gpm (4.5 l/min)


## Valves

Included Valve: Ceramic disc

## Material

- Premium material construction for durability and reliability
- KOHLER finishes resist corrosion and tarnishing



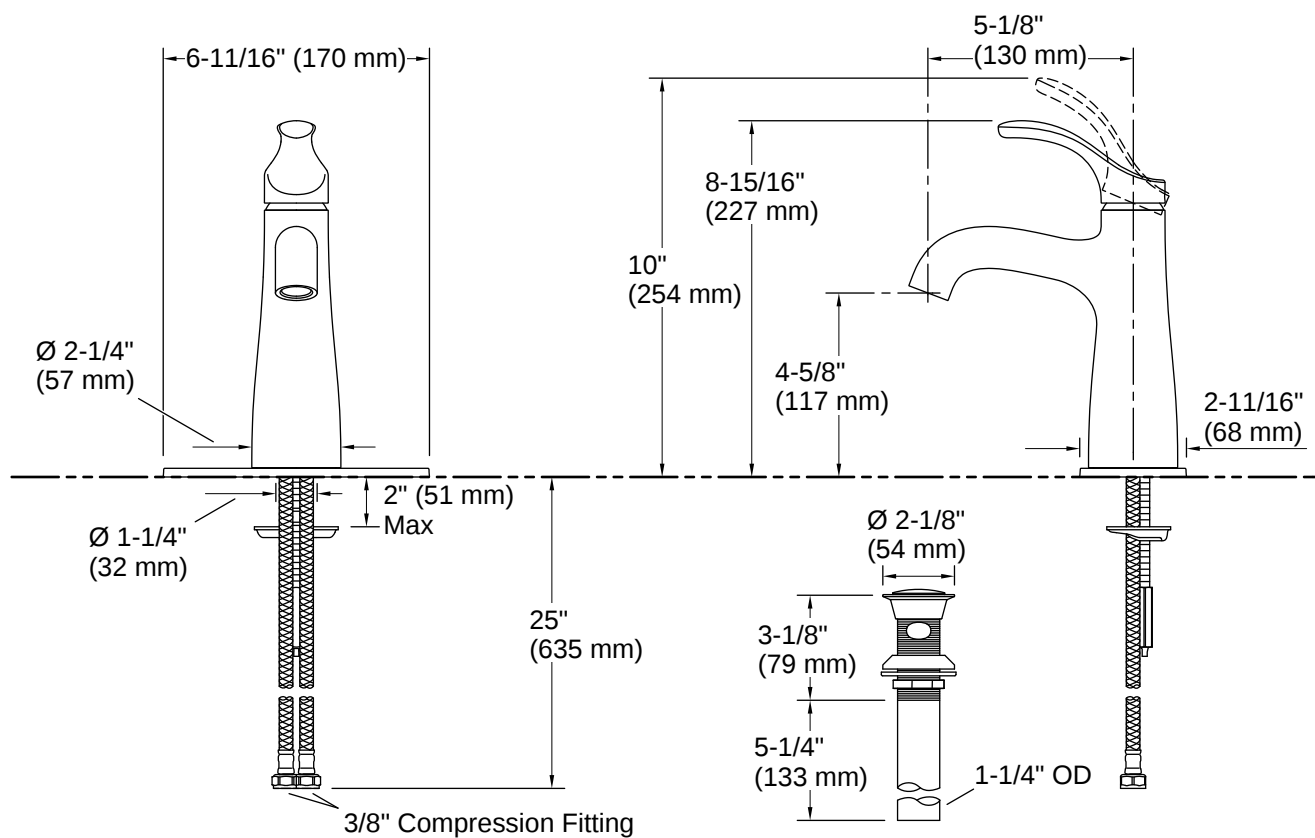

## Installation

- For single-hole or 4" (102 mm) centerset installation (escutcheon plate included)
- Deck-mount
- Preattached flexible supply lines simplify installation

## Installation Notes

*Install this product according to the installation instructions.*

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.



1-800-4KOHLER (1-800-456-4537)  
Kohler Co. reserves the right to make revisions without notice to product specifications.  
For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.  
8-04-2026 13:00 - US-CA