

MOSAIC

ARTEFINO™ ELEMENT
GLAZED PORCELAIN

ARTEFINO™ ELEMENT

GLAZED PORCELAIN

A curated selection within our Artefino collection, Artefino Element offers a versatile palette of matte-finished tiles. From refined neutrals to dark tones, this series adapts seamlessly into different environments. Unveil the hidden treasures of Artefino and transform your space into a masterpiece.

MOSAIC

USAGE



FLOOR



WALL



COUNTERTOP



SHOWER FLOOR



EXTERIOR FLOOR



STEPWISE™



TRU-EDGE™



REVEAL SYNC3D™



MADE IN THE U.S.A.



LARGE FORMAT



MOSAIC/DECO



ENCAUSTIC



TERRAZZO



PAVER



CUSTOMIZE




PG

GLAZED PORCELAIN

LOW HIGH

SPECIAL FEATURES

NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.



Cover and above photo features Artefino™ Element Charcoal, Capsule mosaic on the backsplash and ONE Quartz Surfaces® Chipped Ice on the desk.


SIZES:




Capsule
Mosaic

FINISHES: MATTE


1-1/2 X 6 CAPSULE MOSAIC

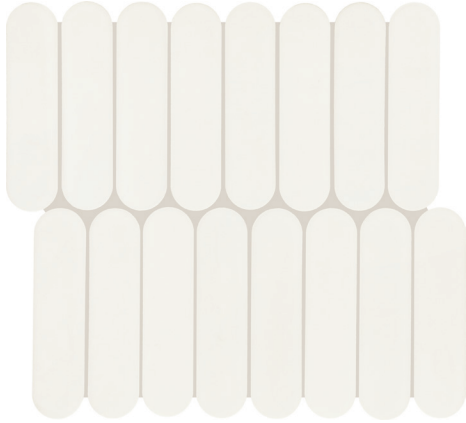


WHITE AR33

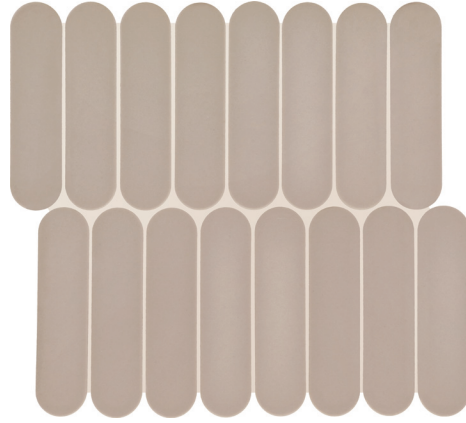


SAND AR34

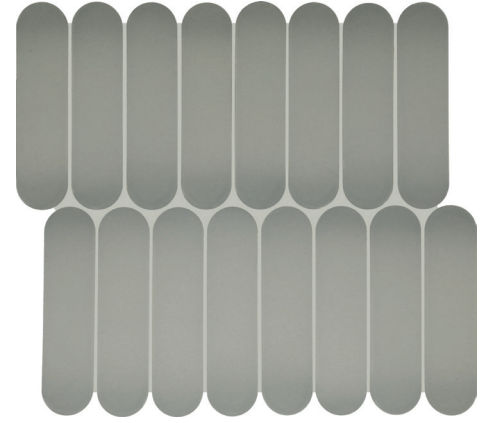


STONE AR35

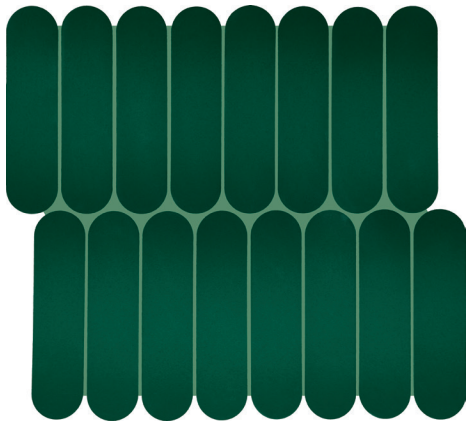

FOREST AR37

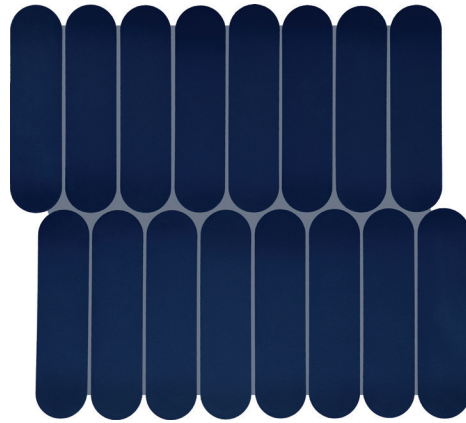

NAVY AR38

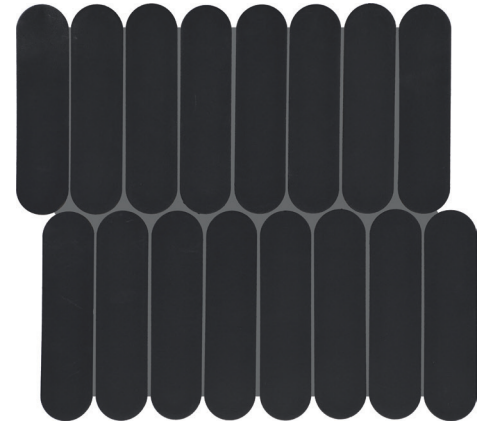

CHARCOAL AR36



SLIP RESISTANT



WATERPROOF



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT



CLIMATEPRO™





SIMPLICLEAN™

VISIT THE WHY TILE PAGE AT WWW.DAL TILE.COM FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

ARTEFINO™ ELEMENT

GLAZED PORCELAIN

SIZES

			Thickness	Finish
	1-1/2 x 6 Capsule Mosaic (Mesh-mounted)	(12-15/16" x 11-9/16" Sheet) (32.89 cm x 29.39 cm Sheet)	1/4"	

 Matte Finish

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	<5.0%
Breaking Strength	C648	> 250 lbf
Scratch Hardness	C1895	4.0 - 6.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at:
daltile.com/information/TestResults.

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓
Shower Floors – Standard Center Drain	≥ 0.42	✓
Shower Floors – Linear Drain	≥ 0.42 (Mosaic) ≥ 0.60 (Floor)	✓
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8"	 High (V2)

DURABILITY

Floor Surface Wear Resistance

1 Residential Bathrooms	3 All Residential / Light Commercial
2 All Residential Areas	4 All Residential / Commercial

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

For additional information refer to "Factors to Consider" at:
daltile.com/Factors.