

## Features

- 8 (203 mm) centers.
- 5-1/8" (130 mm) wall-to-spout outlet with pail hook.
- 1/4-turn full brass ceramic valve.
- 13.5 gal/min (51 l/min) flow rate at 60 psi (4.1 bar).
- 2-7/16" vandal-proof metal lever handles.
- Threaded spout for hose connection.
- Atmospheric vacuum breaker to prevent back flow (not intended for continuous pressure).
- Drain sold separately.

## Material

- Solid brass construction with thick chrome plating for rough commercial applications.

## Installation

- Eccentric inlet shanks for easy installation.

## Recommended Products/Accessories

K-23723 Faucet cleaner



ADA

CSA B651

OBC

## Codes/Standards

ASME A112.18.1/CSA B125.1

ADA

ICC/ANSI A117.1

CSA B651

OBC

## KOHLER® One-Year Limited Warranty

See website for detailed warranty information.


## Available Colors/Finishes

*Color tiles intended for reference only.*

### Color Code Description



CP Polished Chrome

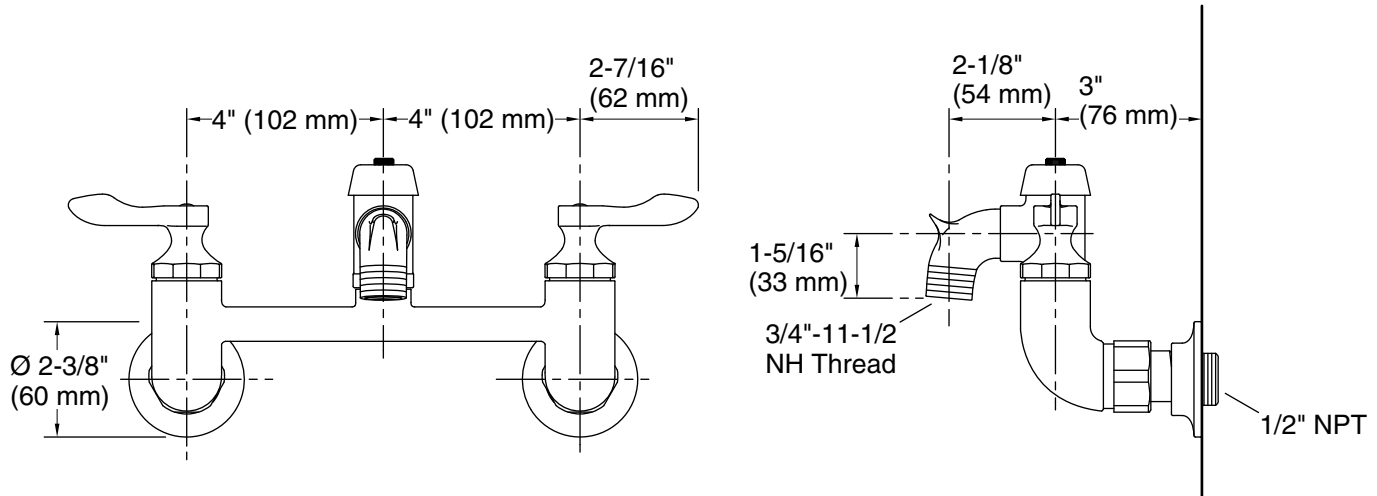

## Technical Information

All product dimensions are nominal.

### Faucet:

Flow rate: 13.5 gal/min (51.1 l/min)  
Pressure: 60 psi (4.1 bar)  
Valve body: Cast brass  
Drain included: No

### Spout:

Spout reach: 5-1/8" (130 mm)  
Handle clearance: 2-7/16" (62 mm)

## Notes

Install this product according to the installation instructions.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.