


Assembly Instructions for Lamps / English version

WARNING: the safety of this fixture is only guaranteed if the following instructions have been observed. Always disconnect power before working on fixture. Assembly and maintenance of fixture must be performed carefully so as not to damage components. Metal surfaces, glass or other parts of fixture may be cleaned with a soft damp cloth. We will replace merchandise with manufacturing defects only if it is returned to the manufacture. We will not provide a replacement until nature of defect has been determined.

Installation should be carried out by a qualified electrician

1. Carefully remove and unwrap each part from the box.
2. Attach the arm(s) to the central base, inserting the wire in the middle hole and the screws in the top and bottom holes. Two screws are provided for each arm.

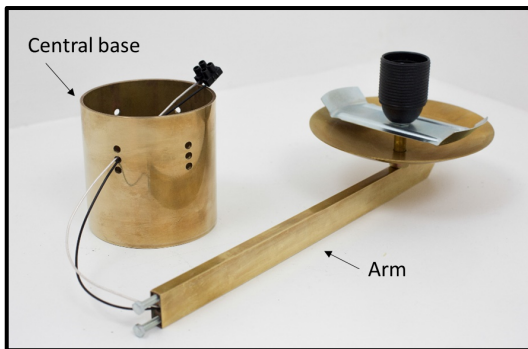

3. Twist the white wires together and attach them in the terminal block. Repeat with the black wires. The green (or green-yellow) ground wire should attach to the fixation support.



4. Attach the fixation support to the ceiling or wall with four screws (not provided). Choose screws appropriate for ceiling or wall's construction material and the weight of the lamp.

5. Lift and slide the central base, with the arm(s) attached, onto the long screw of the fixation structure.



6. Fasten the small horizontal cylinder.
7. Insert a light bulb (100W maximum, not provided) into the socket on each arm.
8. Slip the glass globe in between the brass top and the silver support.



9. Tighten the small screw above the globe.

