CARE AND MAINTENANCE

Wipe clean with a soft, dry cloth. Test the cleaning method on a hidden area before using them over the entire area.


NOTICE

- * Please make sure that you have all parts indicated before you begin assembly of this item.
- * This item should be assembled on a soft surface to prevent scratching the finished product during assembly.
- * This item may require periodic tightening.
- * Do not tighten bolts until completely assembled.

Product Dimensions: \$\phi19-5/8\text{"Dx17-3/4\text{"H}}\$

Part List and Hardware List

| PIECE | DESCRIPTION | PICTURE | QUANTITY |
|-------|-------------|---------------------|----------|
| А | Table top | | 1x |
| В | Table post | | 1x |
| С | Bottom base | | 1x |
| D | Mount plate | | 1x |
| H1 | Allen bolt | ⑥)))))))) 1/4"x5/8" | 8x |
| H2 | Flat washer | Ø 013*1.0 | 6x |
| Н3 | Allen key | M4 | 1x |






Weight capacity:25lbs
WARNING:DO NOT STAND ON TABLE
WARNING:DO NOT OVER TORQUE BOLTS

PREPARATION

Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product.

Estimated Assembly Time: 15 minutes.

Tools Required for Assembly (included): Allen Key

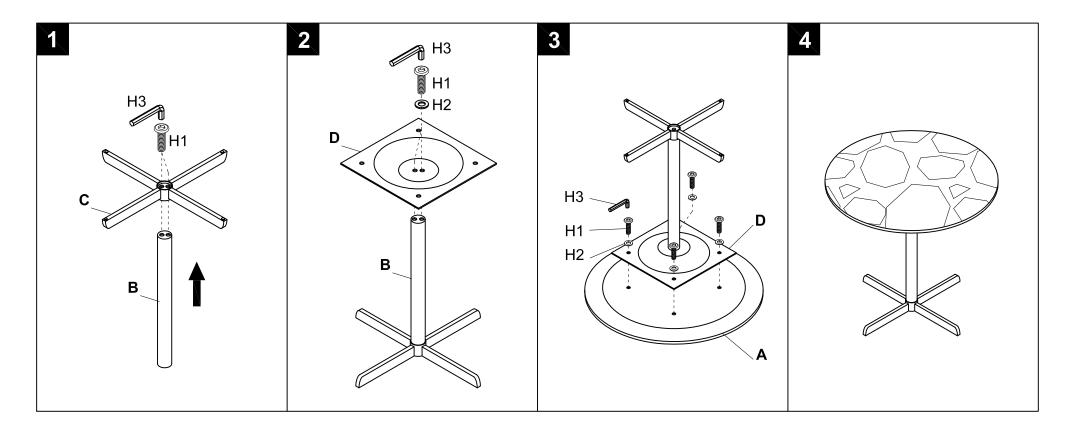

Step 1

Attach table post (B) to the bottom base (C), Use Allen Key (H3) to lock with 2*Allen bolts (H1).

Step 2

Then attach the mount plate (D) to top of table post (B), Use Allen Key (H3) to lock 2*flat washer (H2) with 2*Allen bolts (H1), as picture.

Step 3

Attach the assembled metal base to the underneath of table top (A), through the holes of mount plate and use Allen Key (H3) to lock 4*flat washer (H2) with 4*Allen bolts (H1), as picture.

Step 4

Straighten up the assembled table, Assembly is completed.