

LED SECURITY WALLPACK

Catalog No. : PRWX50-H-PC-4K-WH

Type : Wallpack Light

Project Name :

Location :

Qty :

Date :



Probrite Powerwall X 50-watt integrated LED wallpack is perfect for both commercial and residential outdoor security lighting applications as the fixture has precision forward throw optics, which prevents light escaping toward the sky. The fixture comes with dusk to dawn feature with both automatic and a manual switch-mode, giving consumers a choice and it is built to last with a die-cast aluminum construction and commercial-grade powder paint coat. This Probrite fixture can be mount quickly and easily on wall, with the help of mounting plate.

PRODUCT PERFORMANCE AT A GLANCE

SYSTEM WATTAGE	LUMENS	LPW	CRI	REPLACES (Incandescent)
50W	6500 lm	130 lm/w	>70	450W



DUSK-TO-DAWN

HOUSING

Die cast aluminum housing with corrosion resistant powder-coated paint finish. It is designed to ensure cooling by natural convection and passive airflow, to let driver perform efficiently

IP RATING & LISTINGS

LED light engine is weather proof and rated IP65, UL Listed, suitable for Wet Location and DLC Standard.

OPTICS

Prismatic polycarbonate lens, provides wide and even light coverage without visible "hot-spots" on the lens and gives superior lighting experience.

MOUNTING

It can be mount on wall with the wall mount plate.

FINISH

Fade, weather, and abrasion resistant, electrostatically applied, thermally cured, triglycidal isocyanurate (TGIC) textured polyester powdercoat white paint finish.

WARRANTY

Covered by a 5-year limited warranty. See probrite.com/warranty for details.


PRODUCT SPECIFICATION

Product Dimensions	: 11.41" x 7.94" x 5.42"
Weight	: 3.84 lbs
Lumens	: 6500
LED Wattage	: 50W
Efficacy	: 130W
CRI	: >70
Replaces (Incandescent)	: 450W
Mounting	: Wall Mount
Frequency	: 50-60Hz
THD (Total Harmonic Distortion)	: <20%
PF(Power Factor)	: >0.9
Ambient Operating Temperature	: (-30)-40°C
Input Voltage	: 120-277V
LED Chip	: -
Photocell	: Yes
Driver	: Dimming
Standard Lifetime	: 50,000 hrs
Standard Warranty	: 5 Years
Water Proofing Grade	: Suitable for wet location
CCT	: 4000K Bright White Light
Certifications	: IP65, Energy Star, FCC Certified, UL Certified, DLC Standard




SUGGESTED MOUNTING HEIGHT:
6-12 FT.(1.8-3.7 M)

3D PHOTOMETRIC VIEW

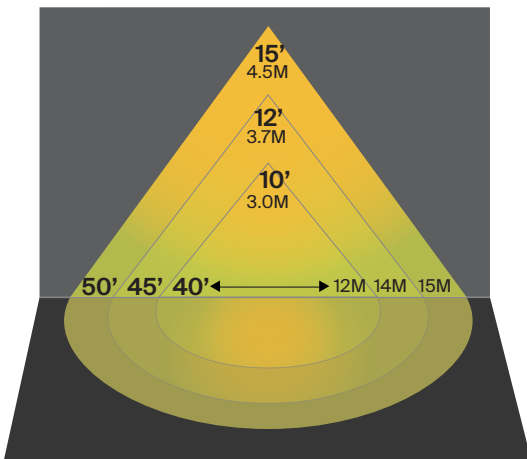

PRODUCT LINE DRAWING

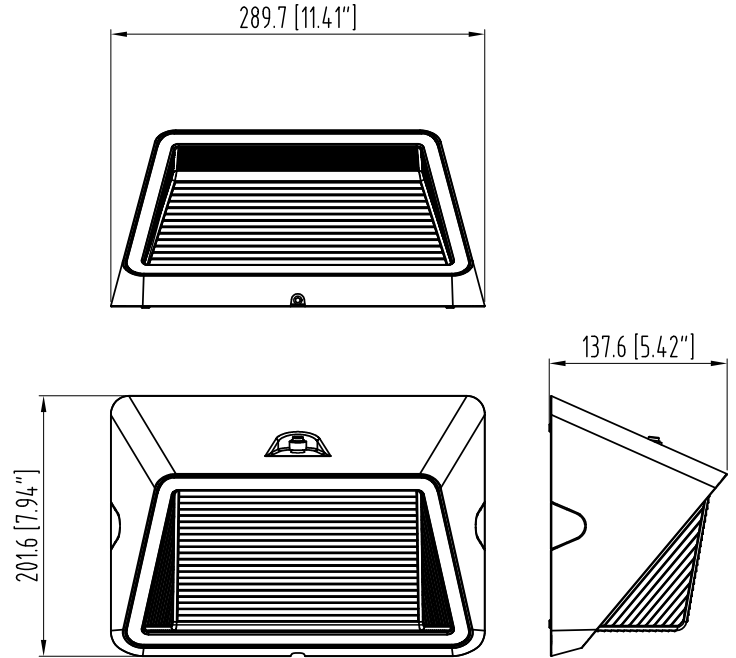

APPLICATION

SUITABLE FOR MULTIPLE APPLICATIONS

- WAREHOUSES • LOADING BAYS • PATIOS
- COMMERCIAL PARKS • APARTMENT COMPLEXES

