

Hardware

Take it out from the bottom of the seat



H1
8x



H2
8x



H3
8x




H4
1x


Tools Required

Power tools NOT recommended

Components

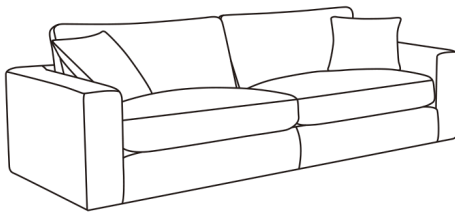

A
1x




B
4x




C
1x

Assembly

1

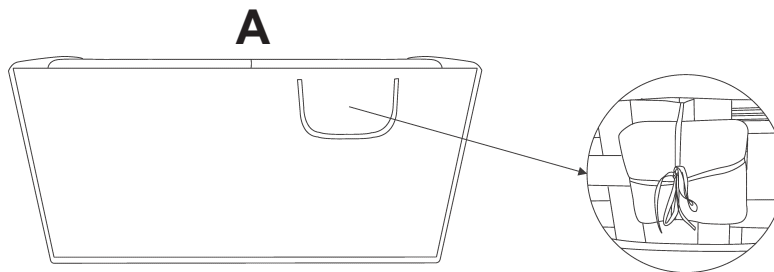

2

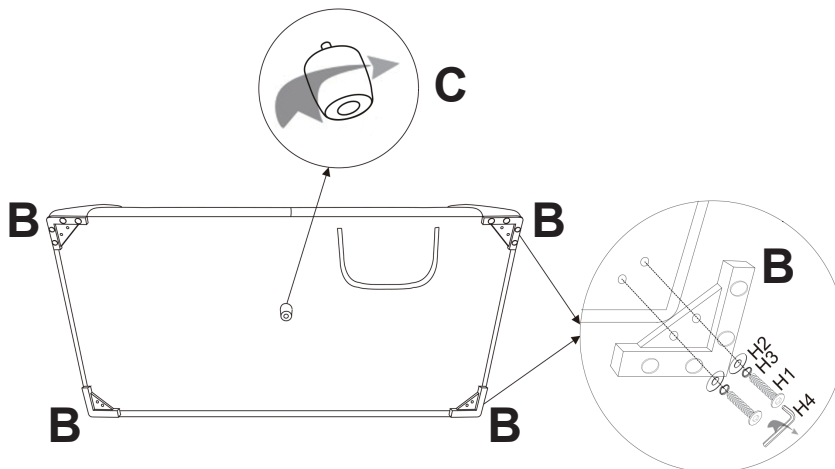

Place the sofa (A) on a soft smooth surface. Insert wood legs (B) and align holes on sofa (A). Connect wood legs (B) using hex bolt (H1), flat washer (H2) and spring washer (H3) as shown in the illustration. Tighten each chair leg with hexagon wrench (H4) firmly. Screw the center leg support (C) tightly.