

TOTO®

CT705EN(G)

Flushometer Toilet, 1.28GPF when used with High Efficiency Flushometer Valve

FEATURES

- Floor-mounted
- Elongated front bowl
- Optional SanaGloss® ceramic glaze - SanaGloss glaze prevents debris, mold and bacteria from sticking to ceramic surfaces, leading to fewer chemicals and less water in cleaning.
- 10"-12" rough-in

MODELS

- CT705ENG
Commercial floor-mounted toilet with SanaGloss ceramic glaze
- CT705EN
Commercial floor-mounted toilet

ADDITIONAL ITEMS (sold separately)

- SC534 seat
- SC134 seat

FLUSH VALVES			
EcoPower®		Manual	
TET1LN32#CP	1.28GPF	TMT1LN32#CP	1.28GPF
TET1GNC-32	1.6GPF	TMT1NNC-32	1.6GPF
TET6LN32#CP	1.28GPF		
TET6GNC-32	1.6GPF		
TET3LN32#SS	1.28GPF		
TET3GN32#SS	1.6GPF		
TET2GN32#SS	1.6GPF		
TET2LN32#SS	1.28GPF		

COLORS/FINISHES

- Standard
 - #01 Cotton
 - #03 Bone (not available in SanaGloss)
 - #12 Sedona Beige (not available in SanaGloss)

PRODUCT SPECIFICATION

The floor-mounted, low consumption siphon jet flushing toilet shall be 1.28GPF/4.8LPF when paired with a 1.28GPF flushometer valve and 1.6GPF/6.0LPF when paired with 1.6GPF/6.0LPF flushometer valve. Toilet shall be elongated front bowl and SanaGloss ceramic glaze (CT705ENG). Toilet shall be TOTO Model CT705E_____.



SanaGloss

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1, ASME A112.19.14
- Certifications: IAPMO (cUPC), State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance




CT705EN(G)

Flushometer Toilet, 1.28GPF when used with High Efficiency 1.28GPF Flushometer Valve)

SPECIFICATIONS

- Water Use 1.28GPF/4.8LPF
(or 1.6GPF/6.0LPF when used with 1.6GPF flush valve)
- Flush System Siphon jet flushing action
- Min. Water Pressure 35 psi (flowing)
- Min. Flow Rate 23 GPM
- Water Surface 10-1/4" x 9-5/8"
- Trap Diameter 1-7/8"
- Rough-in 12", or 10"
- Trap Seal 2-3/8"
- Warranty One Year Limited Warranty
- Material Vitreous china
- Shipping Weight CT705EN(G) - 52.5lbs
- Shipping Dimensions CT705EN(G)
26-1/2" L x 9-1/2" W¹ x 16-1/4" W² x 17" H

INSTALLATION NOTES

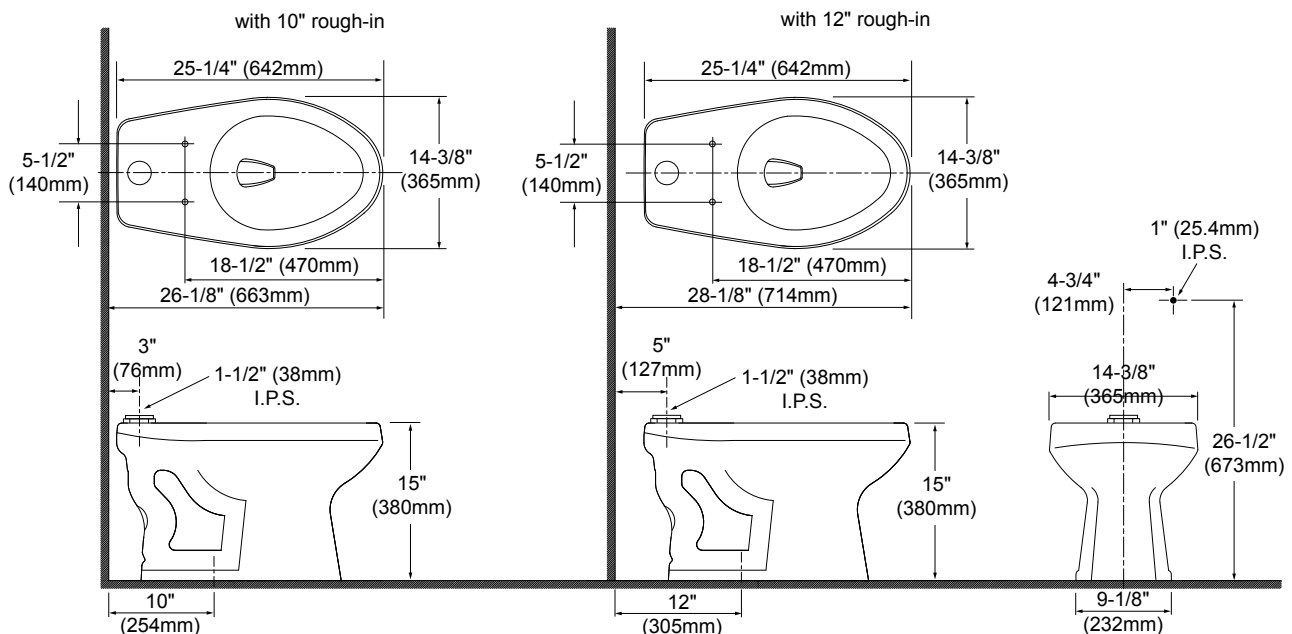

TOTO®

These dimensions and specifications are subject to change without notice